康揚企業股份有限公司
KANG YANG HARDWARE ENTERPRISES CO., LTD.



電子電腦塑膠五金零件

PLASTIC HARDWARE & ELECTRONIC COMPONENTS

EDITION 37

關於我們
About Us

Who we are

康揚企業股份有限公司成立於1987年，迄今已有38年製造塑膠零件的經驗。康揚的總公司於台北，擁有五座工廠，其中一間位於台中，兩間在中國，另外分別在泰國和越南各有一間。康揚已獲得ISO 9001、ISO 14001、QC 080000、IATF 16949等多項認證。

康揚企業是世界領先且享有盛譽的製造商之一。專業生產塑膠五金及電子元件，已開發產品萬餘種。 我們的工程團隊能夠在短短幾週內，使用自家工具車間中最先進的機械設備開發模具並提供量產。具有OEM/ODM能力，協助客戶設計產品。

康揚是一家真正的國際公司，在亞洲、美國、歐洲、泰國、越南和中國都設有據點。康揚自豪地為100多個國家的客戶提供服務，在IT、電腦、電子、汽車、醫療等衆多行業中擴大了其全球影響力。

Kang Yang Hardware Enterprises Co., Ltd was founded in 1987 and has been manufacturing plastic components for 38 years. Kang Yang's headquarters is located in Taipei, and has 5 factories, one in Taichung, two in China, and one each in Thailand and Vietnam. Kang Yang has obtained many certifications such as ISO 9001, ISO 14001, QC 080000, IATF 16949 and etc.

Kang Yang Hardware Enterprises is one of the leading and prestigious manufacturers in the world. Specializing in plastic hardware and electronic components with over ten thousand types of products developed. Our engineering team is capable of developing new products within few weeks using most state of the art machinery in our own in-house tool shops. Has OEM/ODM capability to help clients design products.

Kang Yang is a truly international corporation with premises in Asia, United States, Europe Thailand, Vietnam and China. KY is proudly serving our clients in more than 100 countries and has increased its global presence in the IT, computer, electronics, automotive, medical and many other industries.

全球銷售地區 Customer Locations

康揚的銷售地區遍及全球，亞洲有日本、南韓、印度、菲律賓、新加坡等；歐洲有英國、法國、西班牙、荷蘭、德國、義大利、以色列等等，美洲有加拿大、美國、墨西哥、巴西、阿根廷等數個國家。

Kang Yang's sales areas are all over the world, including Japan, South Korea, India, Philippines, Singapore, etc. in Asia; the United Kingdom, France, Spain, the Netherlands, Germany, Italy, Israel, etc. in Europe; and Canada, the United States, Mexico, Brazil, etc. in the Americas. Argentina and several other countries.



歷程
Milestones

2024
通過 ISO 14064-1 認證。
Achieved ISO 14064-1 Certification.

2023
8月設立越南廠。
Vietnam Factory established.

2022
9月設立泰國廠。
Thailand Factory established.

2020
通過 ISO 45001 認證。
Achieved ISO 45001 Certification.

2017
通過 IATF 16949 認證。
Achieved IATF 16949 Certification.

2014
所有生產線都已電腦化，在ERP系統中實施2D條碼標籤系統。
All production lines are computerized Implemented 2D Barcode Label System in ERP System.

2013
台北總公司規模擴大，成立康揚大樓。
Taipei Headquarters New Building completed.

2012
蘇州廠二期完工。
Suzhou Factory Phase 2 expansion completed.

2009
獲得 OHSAS 18001 以及 Sony Green partner 和 SA 8000 認證。
Achieved OHSAS 18001, SA 8000, and Sony Green Partner.

2008
配備了3D列印機可即時製作樣品。
Equipped with 3D printer for Prototyping and Mock-up Samples.

2007
4月通過 IECQ QC 080000 認證。
Achieved IECQ QC 080000 Certification.

2006
東莞廠與台灣廠，因應成長需求擴充廠房。
三各廠房都具備現代化的模具製造室。
All factories are capable of mold design and manufacture.

2003
1月在中國設立蘇州廠。
Suzhou Factory established in China.

1999
通過 ISO 9001 認證。
Achieved ISO 9001 Certification.

1994
5月在中國設立東莞廠。
Dong Guang Factory established in China.

1991
設立台中廠。
Taichung Factory established.

1987
康揚企業創立，開始生產塑膠電子零件，供應電腦及週邊設備產品，並通過 UL 安規認證。
Kang Yang Hardware Enterprises Co., Ltd. established in September 1987 in Taipei.

我們的優勢
Our strengths

製造專業

擁有高階的工作母機
從模具的設計、製造，
皆在廠內完成
Owns high-end working machines, in-house mold design and fabrication.

創新研發

持續創新，
每月會有50~70個
新產品進入市場當中
Continue to innovate that has 50~70 new products every month.

設計專業

具有OEM / ODM能力
滿足客戶確切的規格及要求
Has OEM/ODM capabilities that are able to fulfill customer's requirements.

問題解決

具有模流分析能力
提升產品品質，
有效排除模具開發問題
Have mold flow analysis capabilities to improve product quality and effectively resolve mold development issues.

全球供應鍊

全球五廠生產線
可快速排除產能問題
縮短交貨時間
Five production lines around the world, quick troubleshooting, minimizes lead time.

為了符合各業界高度競爭的生態需求，從設計開發階段、製造模具、射出成型量產、包裝出貨等，都能在工廠內一次完成。除了提供各業界在塑膠射出產品設計，以及材料運用上完整的整合外，我們更極力配合各廠商的交期等支援作業，以因應各業界的需求，讓品質及成本控制獲得最大的經濟效益。

合作目標與政策 Corporate Goals and Principles

- 高品質產品 High Quality Products
- 合理的價格 Reasonable Price
- 專業的服務 Professional Service
- 準確的交期 Delivery On Time

關鍵零組件分佈
Distribution of Components

產業區塊概括 Industry Classification Concepts

我們的產品為塑膠製品、矽橡膠、端子類，所生產的產品可運用在如下產業：
Our products are plastic products, silicone rubber, and terminals. The products can be used in the following industries:

電子、電腦產業 Electronic, Computers, and Peripheral Equipment Industry



通訊產業 Communication Equipment Industry



光電產業 Optoelectronic Materials and Components Industry



汽車零配件 Motor Vehicle Parts Industry



自動化設備產業 Automation Equipment Industry



家電、音響類 Home Appliances and Audio Industry



運動用品 Sporting Goods Industry



醫療器材零件 Medical Equipment and Parts Industry



康揚公司環保理念與政策實施

我們在環保減廢的層面上，做到了辦公室無紙化，部門間的訊息傳遞使用電子傳輸及閱讀，且工廠端製程管控已導入電腦化的數據登錄，可大幅降低紙張用量。

在節能減碳的層面上，做到了整棟大樓採用LED照明以及感測器開關，暫時無人使用的區域可以感應電源開與關，相較傳統燈泡、燈管...等節省了40%~50%的電能耗用。另外，主要的製造設備：塑膠射出成型機逐步更新使用電動機，相較於傳統的油壓機更可節能50%以上，同時並倡導全體員工隨手關燈節水，善盡環保節能愛地球的企業責任。

在控制與降低環保衝擊的層面上，我們選用了符合EU RoHS及ECHA REACH法規，並遵循各國際大廠環保材料規範及國際衝突礦產錫(Sn)、鉭(Ta)、鎢(W)、金(Au)、鈷(Co)不使用法規，持續並依據ISO 14001系統的管理要求，確保環保法令及法規的更新與管控，內部先期導入X射線螢光分析儀檢測管控，外部主動要求原料及合格供應商提供環境管理物質的檢測報告，以監測、監控產品實現的過程有效運作。

Kang Yang's Environmental Policy and Practice

Kang Yang has been practicing environmental policies in perspective of conservation, energy saving, and controlling and reducing environment impact.

In conservation perspective, we are paperless office that communicates information by e-documentations between departments. A great portion of paper has been reduced by using computerized data input in production control in factories.

In energy saving perspective, the Kang Yang building is equipped with LED and light sensors that save electricity in the area that is temporarily not in use. This saved 40%~50% electricity consumption comparing with traditional lightning. Furthermore, our manufacturing machines use electric generators instead of traditional hydraulic cylinder which save 50% energy. In Addition, we advocate all Kang Yang employees to turn off light when not in use and save water to fulfill our corporate social responsibility.

In controlling and reducing environmental impact perspective, all of Kang Yang products are EU RoHS, ECHA REACH compliant and we use materials that are compliant to EU RoHS, ECHA REACH and follow International Companies' Regulations and Conflict Minerals (Tin, Tantalum, Tungsten, and Gold) Non-Using Law. Based on QC 080000 and ISO 14001's requirement, we ensure all environmental law and regulation are updated and controlled in company. From the internal perspective, we use many different testing instruments to ensure our products are EU RoHS, ECHA REACH compliant. From the external perspective, we request our material suppliers to provide environmental test reports in order to ensure their production process are environmental friendly as well.

公司簡介
Company Profile

台北總公司 Taipei Headquarters



■ UL QMMY2 工廠認證 UL E336444

■ 設立日期 Established

1987年9月 September, 1987

■ 面積 Area 9,570 m²

■ 部門 Departments

國內業務部 Local Sales Dept.,
國外業務部 Export Sales Dept.,
會計部 Accounting Dept.,
資材管理部 Procurement Dept.,
人事部 HR Dept.,
研發部 R & D Dept.,
工程部 Engineering Dept.,
品保部 Q.C. Dept.,
倉庫 Warehouse.

■ 產品專利 Patents Acquired

擁有多國專利 Holding multi-national patents

■ 認證 Certifications

ISO 9001, ISO 14001, ISO 14064-1,
QC 080000, IATF 16949

■ UL 成品認證 UL Product

NZMT2 E127489, ZODZ2 E217732,
QCRV2/QCRV8 E530317

聯絡資訊
Contact Information

Tel：+886-2-2692-1498 (代表號)
E-mail：kangyang@kangyang.com.tw

Fax：+886-2-2692-2498

台中廠 Taichung Factory



■ UL QMMY2 工廠認證 UL E336444

■ 設立日期 Established

1991年 1991

■ 面積 Area 12,850 m²

■ 部門 Departments

射出成型部 Injection Molding Dept.,
模具部 Mold Dept.,
品管部 Q.C Dept.,
加工部 Processing Dept.,
包裝部 Packaging Dept.,
倉庫 Warehouse.

■ 認證 Certifications

ISO 9001, ISO 14001, ISO 14064-1,
QC 080000, IATF 16949

公司簡介
Company Profile

東莞廠 Dong Guan Factory



- **設立日期 Established**
  1994年5月 May, 1994
- **面積 Area** 22,800 m²
- **部門 Departments**
  業務部 Sales Dept.,
  會計部 Accounting Dept.,
  資材管理部 Procurement Dept.,
  射出成型部 Injection Molding Dept.,
  模具部 Mold Dept.,
  品管部 Q.C. Dept.,
  加工部 Process Dept.,
  包裝部 Packaging Dept.,
  倉庫 Warehouse.
- **認證 Certifications**
  ISO 9001, ISO 14001, ISO 45001,
  QC 080000, IATF 16949

- **UL QMMY2 工廠認證** UL E336444

聯絡資訊 Contact Information	Tel：+86-769-85305187	Fax：+86-769-85411815
	E-mail：kysales@dg-kangyang.com	

蘇州廠 Suzhou Factory



- **設立日期 Established**
  2003年1月 January, 2003
- **面積 Area** 39,805 m²
- **部門 Departments**
  業務部 Sales Dept.,
  會計部 Accounting Dept.,
  資材管理部 Procurement Dept.,
  射出成型部 Injection Molding Dept.,
  模具部 Mold Dept.,
  品管部 Q.C. Dept.,
  加工部 Process Dept.,
  包裝部 Packaging Dept.,
  倉庫 Warehouse.
- **認證 Certifications**
  ISO 9001, ISO 14001, ISO 45001,
  QC 080000, IATF 16949

- **UL QMMY2 工廠認證** UL E336444

聯絡資訊 Contact Information	Tel：+86-512-80670100	Fax：+86-512-63434598~9
	E-mail：kywj@kangyang.net.cn	

公司簡介
Company Profile

泰國廠 Thailand Factory



- **設立日期 Established**
  2022年9月 September 2022
- **面積 Area** 6,200 m²
- **部門 Departments**
  業務部 Sales Dept.,
  會計部 Accounting Dept.,
  資材管理部 Procurement Dept.,
  射出成型部 Injection Molding Dept.,
  模具部 Mold Dept.,
  品管部 Q.C. Dept.,
  加工部 Process Dept.,
  包裝部 Packaging Dept.,
  倉庫 Warehouse.
- **UL QMMY2 工廠認證** UL E336444
- **認證 Certifications**
  ISO 9001, ISO 14001, IATF 16949

聯絡資訊 Contact Information	Tel：+66-2-323-0588 E-mail：service@th.kangyang.com

越南廠 Vietnam Factory



- **設立日期 Established**
  2023年8月 August 2023
- **面積 Area** 18,600 m²
- **部門 Departments**
  業務部 Sales Dept.,
  會計部 Accounting Dept.,
  資材管理部 Procurement Dept.,
  射出成型部 Injection Molding Dept.,
  模具部 Mold Dept.,
  品管部 Q.C. Dept.,
  加工部 Process Dept.,
  包裝部 Packaging Dept.,
  倉庫 Warehouse.
- **UL QMMY2 工廠認證** UL E336444
- **認證 Certifications**
  ISO 9001, ISO 14001, QC 080000

聯絡資訊 Contact Information	Tel：+84-222-222-0598 E-mail：service@vn.kangyang.com

公司總產能
Manufacturing Capacity

射出車間 / 攪拌區 / 碎料室 / 倉庫 / 辦公室
Injection Work Shop / Material Mixing and Drying Area / Material Scrapping Room / Warehouses / Offices

各廠產能一覽 Production Capacity

廠區 Factory	台中 Taichung	東莞 Dong Guan	蘇州 Suzhou	泰國 Thailand	越南 Vietnam	總共 Total
射出機台數量 Injection Machines	64	78	72	16	38	268

※ 射出機最大噸數至450噸
* The biggest Injection Machine is 450 tons

各廠車間展示 Workshops

射出車間 Injection Workshop


















辦公區域, 旋臂鑽床, 磨床, 攪拌區, 碎料室, 倉庫
Offices, Grinding Machine, Radial Drilling Machine, Material Mixing and Drying Area, Material Scrapping Room, Warehouses







製造生產設備 Manufacturing Equipments

射出成型機 Injection Machine

發那科 Fanuc　東洋 Toyo　日鋼 JSW









放電加工機 EDM Machine

蘇比克 Sodick　夏米爾 Charmilles　牧野 Makino










線切割機 Wire EDM Machine

蘇比克 Sodick







CNC加工機 CNC Machine

發那科 Fanuc　夏米爾 Charmilles　牧野 Makino　永進 YCM







機器設備
Machine Equipments

機械手臂 / MI測試儀 / 模溫機 / 裁切機 / 攪拌機 / 粉碎機 / 除濕乾燥機
Take-out Robots / Melt Flow Indexer / Temperature Controller /
Plastic Mill/Vertical Mixer/Dehumidification Dryer

輔助生產設備 Auxiliary Production Equipments

機械手臂 Take-out Robots






MI測試儀 Melt Flow Indexer，模溫機 Temperature Controller，溫度測試儀 Thermometer







粉碎機 Plastic Mill，攪拌機 Vertical Mixer







除濕乾燥機 Dehumidification Dryer，裁切機 Cutting machine









機器設備
Machine Equipments

影像式量測儀 / 三次元量測儀 / 推拉力計 / X射線螢光分析儀 / 恆濕恆溫試驗機
Image Measuring Instrument / 3D Coordinate Measuring Machine /
Force Gauge / X-Ray / Temperature & Humidity Chamber

尺寸量測設備 Dimensional Measuring Equipments

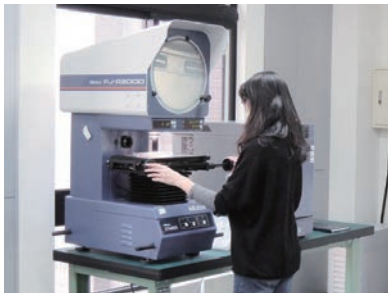

2D投影機影像量測儀
Image Measuring System

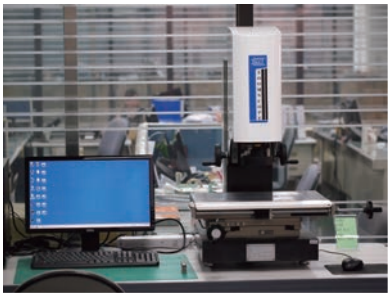




2.5次元影像式量測儀
2.5D Image Measuring Instrument



日製自動影像測試機
Image Measuring System








三次元量測儀
3D Coordinate Measuring Machine


材料檢驗設備 Material Inspection Equipments

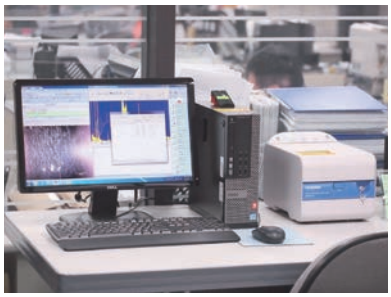

堀場 X射線螢光分析儀(XRF)
Horiba X-Ray
Fluorescence Analyzer




推拉力計
Force Gauge



硬度計
Durometer



MI測試儀
Melt Flow Indexer

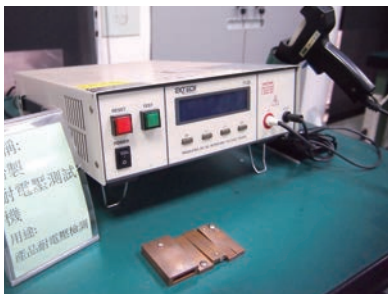

AC/DC高壓絕緣測試機
AC/DC High-Voltage
Insulator Tester



分光式色差儀
Spectrophotometer





小型恆濕恆溫試驗機
Temperature & Humidity Chamber

設計專用設備 Design and Development Equipments



3D模型機 3D Printer




光固化RP模型機 LC-3D Printer




UV光固化箱 LC-3D Print Box




3D模具設計 3D Tooling Design

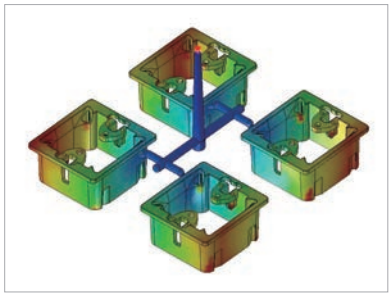



3D Mold Flow

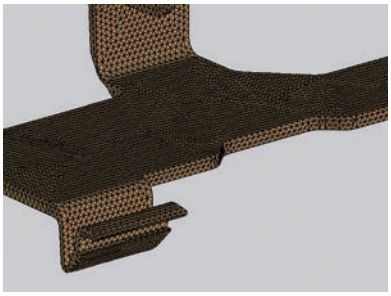

FEM有限元素架構
Finite Element Method

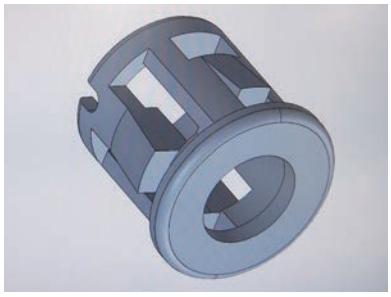

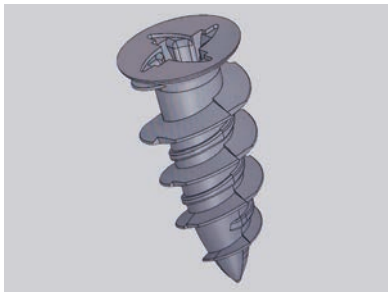

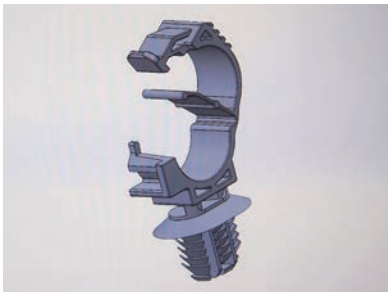

3D零件設計 3D Part Design

注意事項 Notice

- 產品尺寸、規格以本公司製作之承認書為主，目錄為輔。
- 因手感不同，建議裝配孔及裝配件尺寸，僅供參考。
- 本目錄之包裝數量僅供參考，實際數量以本公司之產品包裝標示為主。
- 標★與 NEW，則為新產品。
- 如要開發新產品，歡迎來電詢問。
- 2024.12.1編輯・發行。
- Specifications are subject to change without prior notice.
- Suggested mounting holes and assembly parts are for reference only.
- Catalogue standard package Q'ty are served as reference only.
- Items marked in ★ and NEW are new products.
- Custom-made and OEM services are also available.
- Issued on 2024.12.1

10大產品類別
Standard Products Category

01 PCB間隔柱、M.2間隔柱、導電間隔柱、Wi-Fi固定扣、PCB固定座/扣、導光板間隔柱、圓體間隔柱、螺柱
PCB Spacers, M.2 SSD Spacers, Conductive Spacers, Wi-Fi Lock, PCB Mounting Block, PCB Hinge & Bracket, Pillar Supports, Round Spacers, Standoffs
J1~J6

02 LED間隔柱、LED座/套、LED導光罩、LED導光柱、LED遮光罩、LED導光座、光纖座
LED Spacers, LED Mounts & Sleeves, LED Lens Caps, Light Pipes, Light Pipe Masks, Light Pipe Mounts, Optical Fiber Mounts
J7~J9

03 PCB導槽、PCB拉柄、拉柄蓋、拉柄、把手、外箱把手、紙箱配件
PCB Card Guide, PCB Card Puller, Latch Cap, Latch, Handle, Box Handle, Packaging Accessories
J10~J11

04 電線/排線固定座、隔離束線座、扭式固定座/環、束線帶固定座、固定扣、線夾、電源線/插座固定座、軌道式線扣組、其它固定產品
Wire Saddles, Standoff Cable Clip, Twist Locks, Cable Tie Mounts, Cable Clamps, Clips, Power Cord/Socket Fasteners, Cable Carriers, Other Mounts & Fasteners
J12~J17

05 護線環、橡膠線環、抗震線環、扣式塞頭、電源線扣、束線帶/黏扣帶、PVC套管、熱縮套管、黏貼標誌貼紙、工具
Snap Bushing, Grommet, Anti-Vibration Grommet, Hole Plug, Strain Relief Bushing, Cable Tie/Velcro, PVC Tube, Heat Shrink Tubing, Wire Label, Tool
J18~J20

06 電晶體座、電晶體墊片、零件墊座、矽膠帽套、軟質端子保護套、末端套管、保護蓋、開關蓋、麥克風套
Transistor Housing, Transistor Washer, Parts Housing, Silicon Insulator Cover, Terminal Soft Sleeves, VCP Cap, Insulated Cap, Tact Switch Cap, Mic Holder
J20~J23

07 USB座護蓋、防塵蓋、光纖連接器護套、電源插座防塵蓋、螺絲固定座、鉚釘、風扇鉚釘、散熱片扣件、門扣
USB Housing, Connector Cover, Fiber Optic Connector Cover, Power Connector Cover, Plastic Conical Anchors, Snap Rivet, Fan Mount Rivet, Heat Sink Rivet, Door Lock
J24~J27

08 塑膠螺絲、螺絲帽蓋、塑膠螺帽、止付/內牙螺絲、手轉螺絲、螺絲墊片/華司
Plastic Screws, Screw Caps & Bonnets, Plastic Nuts, Set Screws & Threaded Rods, Thumb Screws & Knob Scews, Screw Washer, Washer
J28~J29

09 腳墊、抗震腳墊、磁鐵腳墊、橡膠腳墊、金框/銀框腳墊、矽橡膠墊圈/華司、泡棉、功率晶體導熱矽膠片
Plastic Foots, Anti-Vibration Foots, Magnet Plastic Foots, Rubber Foots, Gold/Silver Covering Plastic Foots, Rubber O-rings & Washers, Forms, Transistor Thermal Conductive Pads
J30

10 阻尼齒輪、PC板焊接端子、測試針/測試點、測試座/保險絲座、接地片、端子台、接線夾/跳線
Damper Gears, PCB Terminals, Test Pins, Fuse & Test Holders, Ground Terminals, Terminal Blocks & Connectors, Quick Splices & Jumper Wires
J31~J32

10大產品類別
Standard Products Category

01



J1~J6

02



J7~J9

03



J10~J11

04



J12~J17

05



J18~J20

06



J20~J23

07



J24~J27

08



J28~J29

09



J30


10





J31~J32


PCB Spacers, M.2 SSD Spacers, Conductive Spacers, Wi-Fi Lock, PCB Mounting Block, PCB Hinge & Bracket, Pillar Supports, Round Spacers, Plastic & Metal Standoffs


PCB間隔柱、M.2間隔柱、導電間隔柱、Wi-Fi固定扣、PCB固定座、PCB固定扣、導光板間隔柱、圓體間隔柱、塑膠螺柱、金屬柱



1-1



1-2



1-3



1-4



1-5



1-6



1-7



1-8



1-9


1-10



1-11



1-12



1-13



1-14



1-15



1-16



1-17



1-18



1-19



1-20



1-21



1-22



1-23


1-24


1-25


1-26



1-27



1-28


1


PCB Spacers, M.2 SSD Spacers, Conductive Spacers, Wi-Fi Lock, PCB Mounting Block, PCB Hinge & Bracket, Pillar Supports, Round Spacers, Plastic & Metal Standoffs


PCB間隔柱、M.2間隔柱、導電間隔柱、Wi-Fi固定扣、PCB固定座、PCB固定扣、導光板間隔柱、圓體間隔柱、塑膠螺柱、金屬柱



1-29



1-30



1-31



1-32



1-33



1-34



1-35



1-36



1-37



1-38



1-39



1-40



1-41



1-42


1-43


1-44


1-45


1-46


1-47


1-48


1-49


1-50


1-51


1-52


1-53


1-54


1-55


1-56

PCB Spacers, M.2 SSD Spacers, Conductive Spacers, Wi-Fi Lock, PCB Mounting Block, PCB Hinge & Bracket, Pillar Supports, Round Spacers, Plastic & Metal Standoffs


PCB間隔柱、M.2間隔柱、導電間隔柱、Wi-Fi固定扣、PCB固定座、PCB固定扣、導光板間隔柱、圓體間隔柱、塑膠螺柱、金屬柱



1-57



1-58



1-59


1-60


1-61



1-62



1-63



1-64


1-65


1-66


1-67


1-68



1-69



1-70



1-71



1-72



1-73



1-74


1-75



1-76



1-77



1-78



1-79


1-80


1-81


1-82



1-83


1-84

1


PCB Spacers, M.2 SSD Spacers, Conductive Spacers, Wi-Fi Lock, PCB Mounting Block, PCB Hinge & Bracket, Pillar Supports, Round Spacers, Plastic & Metal Standoffs


PCB間隔柱、M.2間隔柱、導電間隔柱、Wi-Fi固定扣、PCB固定座、PCB固定扣、導光板間隔柱、圓體間隔柱、塑膠螺柱、金屬柱



1-85



1-86



1-87


1-88


1-89


1-90


1-91



1-92


1-93


1-94


1-95



1-96



1-97


1-98


1-99


1-100


1-101


1-102


1-103


1-104



1-105


1-106


1-107



1-108



1-109


1-110


1-111


1-112


1-113


1-114


1-115


1-116


1-117


1-118



1-119


1-120


1-121


1-122


1-123



1-124



1-125


1-126



1-127



1-128



1-129



1-130



1-131


1-132


1-133


1-134


1-135


1-136


1-137


1-138


1-139


1-140

1


PCB Spacers, M.2 SSD Spacers, Conductive Spacers, Wi-Fi Lock, PCB Mounting Block, PCB Hinge & Bracket, Pillar Supports, Round Spacers, Plastic & Metal Standoffs

PCB間隔柱、M.2間隔柱、導電間隔柱、Wi-Fi固定扣、PCB固定座、PCB固定扣、導光板間隔柱、圓體間隔柱、塑膠螺柱、金屬柱


1-141


1-142


1-143



1-144


1-145


1-146



1-147


1-148


1-149


LED Spacers, LED Mounts, 90° LED Mounts, 45° LED Mounts, LED Sleeves, LED Lens Caps, Light Pipe Masks, Light Pipes, Light Pipe Mounts, Optical Fiber Mounts

LED間隔柱、LED座、90° LED座、45° LED座、LED套、LED導光罩、LED遮光罩、LED導光柱、LED導光座、光纖座


2-1



2-2


2-3


2-4


2-5



2-6


2-7



2-8



2-9


2-10


2-11


2-12



2-13



2-14



2-15



2-16


2-17


2-18


2-19


2-20


2-21


2-22


2-23


2-24


2-25


2-26


2-27



2-28

2

LED Spacers, LED Mounts, 90° LED Mounts, 45° LED Mounts, LED Sleeves, LED Lens Caps, Light Pipe Masks, Light Pipes, Light Pipe Mounts, Optical Fiber Mounts


LED間隔柱、LED座、90° LED座、45° LED座、LED套、LED導光罩、LED遮光罩、LED導光柱、LED導光座、光纖座


2-29


2-30



2-31


2-32


2-33


2-34


2-35

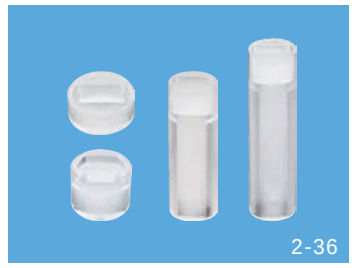
2-36



2-37


2-38



2-39


2-40


2-41



2-42


2-43

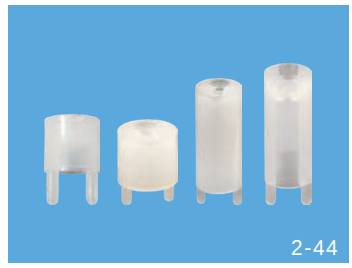
2-44



2-45



2-46

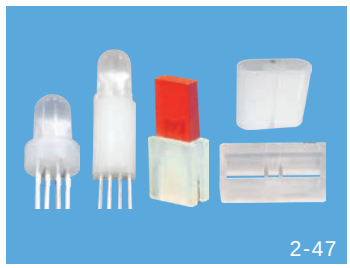

2-47


2-48



2-49


2-50

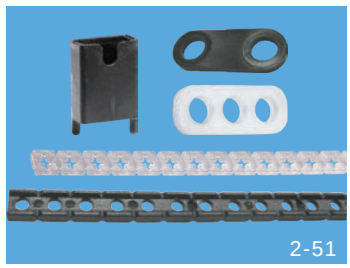
2-51

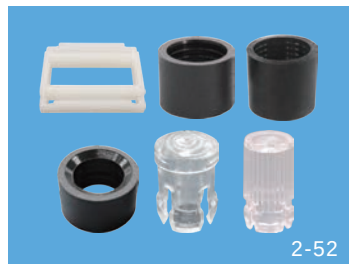
2-52


2-53


2-54



2-55



2-56


LED Spacers, LED Mounts, 90° LED Mounts, 45° LED Mounts, LED Sleeves, LED Lens Caps, Light Pipe Masks, Light Pipes, Light Pipe Mounts, Optical Fiber Mounts

LED間隔柱、LED座、90° LED座、45° LED座、LED套、LED導光罩、LED遮光罩、LED導光柱、LED導光座、光纖座



2-57


2-58



2-59


2-60



2-61


2-62


2-63



2-64



2-65



2-66



2-67



2-68



2-69



2-70



2-71



2-72



2-73



2-74


2-75



2-76


2-77


2-78


2-79


2-80


2-81


2-82



2-83


3


PCB Card Guides, PCB Card Pullers, Latch Caps, Latchs, Handles, Box Handles, Packaging Accessories


PCB導槽、PCB拉柄、拉柄蓋、拉柄、把手、外箱把手、紙箱配件


3-1



3-2



3-3



3-4



3-5



3-6


3-7



3-8



3-9



3-10


3-11



3-12


3-13



3-14


3-15



3-16


3-17



3-18



3-19



3-20



3-21



3-22



3-23


3-24


3-25



3-26


3-27


3-28


3-29


3-30


3-31


3-32


3-33


3-34


3-35



3-36


3-37


3-38



3-39



3-40



3-41


3-42


3-43


3-44


3-45



3-46



3-47

4


Wire Saddles, Standoff Cable Clip, Twist Locks, Cable Tie Mounts, Cable Clamps, Clips, Power Cord/Socket Fasteners, Cable Carriers, Other Mounts & Fasteners

電線/排線固定座、隔離束線座、扭式固定座/環、束線帶固定座、固定扣、線夾、電源線/插座固定座、軌道式線扣組、其它固定產品














































































4-29



4-30



4-31



4-32


4-33



4-34



4-35


4-36


4-37



4-38



4-39



4-40



4-41



4-42



4-43



4-44



4-45



4-46



4-47



4-48


4-49



4-50


4-51


4-52


4-53


4-54


4-55


4-56

4


Wire Saddles, Standoff Cable Clip, Twist Locks, Cable Tie Mounts, Cable Clamps, Clips, Power Cord/Socket Fasteners, Cable Carriers, Other Mounts & Fasteners


電線/排線固定座、隔離束線座、扭式固定座/環、束線帶固定座、固定扣、線夾、電源線/插座固定座、軌道式線扣組、其它固定產品



4-57



4-58



4-59



4-60



4-61


4-62



4-63



4-64



4-65



4-66



4-67



4-68



4-69



4-70



4-71



4-72



4-73


4-74


4-75



4-76


4-77


4-78



4-79



4-80



4-81



4-82



4-83



4-84



4-85



4-86


4-87



4-88



4-89



4-90



4-91


4-92


4-93



4-94


4-95


4-96


4-97


4-98


4-99


4-100


4-101


4-102


4-103


4-104



4-105



4-106



4-107


4-108


4-109


4-110



4-111



4-112


4


Wire Saddles, Standoff Cable Clip, Twist Locks, Cable Tie Mounts, Cable Clamps, Clips, Power Cord/Socket Fasteners, Cable Carriers, Other Mounts & Fasteners


電線/排線固定座、隔離束線座、扭式固定座/環、束線帶固定座、固定扣、線夾、電源線/插座固定座、軌道式線扣組、其它固定產品



4-113



4-114



4-115


4-116


4-117


4-118



4-119



4-120


4-121


4-122


4-123


4-124


4-125


4-126



4-127



4-128


4-129


4-130


4-131


4-132



4-133


4-134



4-135



4-136



4-137



4-138


4-139



4-140



4-141



4-142


4-143


4-144


4-145


4-146



4-147


5

Snap Bushing, Grommet, Anti-Vibration Grommet, Hole Plug, Strain Relief Bushing, Cable Tie/Velcro, PVC Tube, Heat Shrink Tubing, Wire Label, Tool


護線環、橡膠線環、抗震線環、扣式塞頭、電源線扣、束線帶/黏扣帶、PVC套管、熱縮套管、黏貼標誌貼紙、工具


5-1


5-2



5-3


5-4



5-5



5-6



5-7


5-8


5-9


5-10



5-11


5-12


5-13


5-14


5-15


5-16


5-17



5-18



5-19


5-20


5-21


5-22


5-23


5-24



5-25



5-26


5-27


5-28



5-29


5-30


5-31



5-32



5-33



5-34


5-35


5-36



5-37


5-38



5-39



5-40



5-41



5-42


5-43


5-44



5-45



5-46



5-47



5-48



5-49



5-50



5-51


5-52


5-53



5-54



5-55



5-56

5 Snap Bushing, Grommet, Anti-Vibration Grommet, Hole Plug, Strain Relief Bushing, Cable Tie/Velcro, PVC Tube, Heat Shrink Tubing, Wire Label, Tool


護線環、橡膠線環、抗震線環、扣式塞頭、電源線扣、束線帶/黏扣帶、PVC套管、熱縮套管、黏貼標誌貼紙、工具



5-57



5-58



5-59



5-60


5-61



5-62


5-63


5-64



5-65


5-66


5-67

6 Transistor Housing, Transistor Washer, Parts Housing, Silicon Insulator Cover, Terminal Soft Sleeves, VCP Cap, Insulated Cap, Tact Switch Cap, Mic Holder

電晶體座、電晶體墊片、零件墊座、矽膠帽套、軟質端子保護套、末端套管、保護蓋、開關蓋、麥克風套


6-1


6-2



6-3



6-4


Transistor Housing, Transistor Washer, Parts Housing, Silicon Insulator Cover, Terminal Soft Sleeves, VCP Cap, Insulated Cap, Tact Switch Cap, Mic Holder

電晶體座、電晶體墊片、零件墊座、矽膠帽套、軟質端子保護套、末端套管、保護蓋、開關蓋、麥克風套


6-5



6-6



6-7



6-8



6-9



6-10



6-11



6-12



6-13



6-14



6-15



6-16



6-17


6-18



6-19



6-20



6-21


6-22



6-23



6-24



6-25


6-26


6-27


6-28


6-29


6-30



6-31


6-32

6


Transistor Housing, Transistor Washer, Parts Housing, Silicon Insulator Cover, Terminal Soft Sleeves, VCP Cap, Insulated Cap, Tact Switch Cap, Mic Holder


電晶體座、電晶體墊片、零件墊座、矽膠帽套、軟質端子保護套、末端套管、保護蓋、開關蓋、麥克風套



6-33



6-34



6-35



6-36



6-37



6-38



6-39



6-40



6-41



6-42



6-43


6-44



6-45



6-46


6-47



6-48



6-49



6-50


6-51



6-52


6-53



6-54



6-55


6-56


6-57



6-58



6-59


6-60


Transistor Housing, Transistor Washer, Parts Housing, Silicon Insulator Cover, Terminal Soft Sleeves, VCP Cap, Insulated Cap, Tact Switch Cap, Mic Holder


電晶體座、電晶體墊片、零件墊座、矽膠帽套、軟質端子保護套、末端套管、保護蓋、開關蓋、麥克風套


































































7


USB Housing, Connector Cover, Fiber Optic Connector Cover, Power Connector Cover, Plastic Conical Anchors, Snap Rivet, Fan Mount Rivet, Heat Sink Rivet, Door Lock


USB座護蓋、防塵蓋、光纖連接器護套、電源插座防塵蓋、螺絲固定座、鉚釘、風扇鉚釘、散熱片扣件、門扣



7-1



7-2



7-3



7-4



7-5


7-6


7-7


7-8



7-9



7-10


7-11



7-12


7-13



7-14



7-15



7-16



7-17



7-18



7-19



7-20



7-21



7-22



7-23


7-24


7-25


7-26



7-27


7-28


USB Housing, Connector Cover, Fiber Optic Connector Cover, Power Connector Cover, Plastic Conical Anchors, Snap Rivet, Fan Mount Rivet, Heat Sink Rivet, Door Lock

USB座護蓋、防塵蓋、光纖連接器護套、電源插座防塵蓋、螺絲固定座、鉚釘、風扇鉚釘、散熱片扣件、門扣



7-29



7-30


7-31




7-32


7-33



7-34



7-35



7-36


7-37



7-38



7-39



7-40



7-41



7-42



7-43



7-44


7-45


7-46


7-47


7-48


7-49


7-50


7-51


7-52


7-53


7-54


7-55


7-56

7


USB Housing, Connector Cover, Fiber Optic Connector Cover, Power Connector Cover, Plastic Conical Anchors, Snap Rivet, Fan Mount Rivet, Heat Sink Rivet, Door Lock


USB座護蓋、防塵蓋、光纖連接器護套、電源插座防塵蓋、螺絲固定座、鉚釘、風扇鉚釘、散熱片扣件、門扣


7-57



7-58


7-59


7-60


7-61


7-62


7-63


7-64


7-65


7-66


7-67


7-68



7-69



7-70


7-71



7-72



7-73


7-74


7-75


7-76


7-77


7-78


7-79


7-80


7-81


7-82


7-83


7-84

USB Housing, Connector Cover, Fiber Optic Connector Cover, Power Connector Cover, Plastic Conical Anchors, Snap Rivet, Fan Mount Rivet, Heat Sink Rivet, Door Lock

USB座護蓋、防塵蓋、光纖連接器護套、電源插座防塵蓋、螺絲固定座、鉚釘、風扇鉚釘、散熱片扣件、門扣



7-85



7-86



7-87


7-88



7-89


7-90



7-91



7-92



7-93



7-94


7-95


7-96


7-97



7-98


7-99



7-100



7-101



7-102


7-103


7-104


7-105


7-106


7-107

8


Plastic Screws, Screw Caps & Bonnets, Plastic Nuts, Set Screws & Threaded Rods, Thumb Screws & Knob Scews, Screw Washer, Washer


塑膠螺絲、螺絲帽蓋、塑膠螺帽、止付/內牙螺絲、手轉螺絲、螺絲墊片、墊片/華司


8-1


8-2


8-3


8-4


8-5


8-6


8-7


8-8


8-9


8-10


8-11



8-12


8-13



8-14



8-15



8-16



8-17


8-18


8-19



8-20


8-21



8-22



8-23



8-24


8-25



8-26


8-27


8-28


8-29



8-30


8-31

9


Plastic Foots, Anti-Vibration Foots, Magnet Plastic Foots, Rubber Foots, Gold/Silver Covering Plastic Foots, Rubber O-rings & Washers, Forms, Transistor Thermal Conductive Pads


腳墊、抗震腳墊、磁鐵腳墊、橡膠腳墊、金框/銀框腳墊、矽橡膠墊圈/華司、泡棉、功率晶體導熱矽膠片



9-1



9-2


9-3



9-4



9-5


9-6


9-7


9-8


9-9



9-10


9-11


9-12



9-13



9-14



9-15



9-16



9-17



9-18



9-19



9-20


9-21


9-22



9-23



9-24



9-25

Damper Gears, PCB Terminals, Test Pins, Fuse & Test Holders, Ground Terminals, Terminal Blocks & Connectors, Quick Splices & Jumper Wires


阻尼齒輪、PC板焊接端子、測試針/測試點、測試座/保險絲座、接地片、端子台、接線夾/跳線



10-1


10-2


10-3



10-4



10-5



10-6



10-7



10-8



10-9



10-10



10-11


10-12



10-13



10-14


10-15





10-16


10-17



10-18



10-19



10-20



10-21



10-22



10-23


10-24


10-25



10-26



10-27



10-28


Damper Gears, PCB Terminals, Test Pins, Fuse & Test Holders, Ground Terminals, Terminal Blocks & Connectors, Quick Splices & Jumper Wires


阻尼齒輪、PC板焊接端子、測試針/測試點、測試座/保險絲座、接地片、端子台、接線夾/跳線



10-29



10-30


10-31


10-32



10-33


10-34



10-35


10-36


10-37


10-38


10-39


10-40


10-41


10-42



10-43



10-44


10-45


車用產品
Automotive Products


1 Category

RAMA- 1-1



RCAB- 1-12



MAHC- 1-17



MSP3- 1-24



LCVA- 1-29



LCJ- 1-29



LCI- 1-29



LCF- 1-33



LAS- 1-47



MA- 1-49



MAM- 1-50



MAE4- 1-55



TCBS- 1-62


3.5- 1-100



HP632- 1-113



TP632- 1-119



MSPA3-9.7 1-126



SCB4- 1-128


2 Category


LED- 2-34



LEDEW- 2-35



LEDS- 2-36



LEM-88 2-66



4 Category


FCN- 4-1



FCAB-1 4-2



CWK-1 4-4



FCD-2 4-19



CHO- 4-23



WCL- 4-29



MWS-60 4-60



MWS- 4-61



MWSC- 4-64



MWSG-1 4-66



MWC- 4-67



CCMK- 4-85



FWT- 4-86



CKS- 4-86



CKSA-20-L 4-86



CH-1 4-101



THV-6 4-109



THV-9 4-109



SLCPA- 4-111



THA- 4-113



THD- 4-114



WTL- 4-116



TL- 4-118



2L- 4-118



CCMF- 4-123



CCMF-1 4-123



CCMF-9 4-123



CCM-1 4-124



CCMT-2 4-124



CHUK-1 4-125


CC- 4-127



CLI-4 4-133


CLK- 4-133



CCMN-1-C 4-147


CCMO-1-CF 4-147



5 Category


MHD- 5-18



STCB-110 5-56


SWPK-15F 5-57


7 Category


DCVER-1 7-5


CVA-5 7-33



SR 7-51


車用產品
Automotive Products


DL- 7-55




PR-2 7-58




DLB-1 7-59




PR-1 7-59




CAPR-10 7-59




PSR- 7-60




PSR5.5- 7-60




PSRB-1 7-62




MB- 7-64




MB-10 7-67




MBW- 7-70




MBW5-12 7-71




MBW-27 7-71




MBW-71 7-71




MBW 7-72




BUB- 7-80




DTTL-7 7-92



DT- 7-94~95




DT-12 7-96



DT-14 7-97




TF-1 7-100



8 Category


M5- 8-9




MI420-25.4 8-10



STM6-12 8-10




M5A-65 8-11




ATFF-1 8-12




MIA 8-13



GPE8- 8-16




WS 8-29



9 Category

SF 9-21




RWF 9-23




10 Category


FUSCV- 10-12




FUC-5A 10-12




FUA-1 10-12




PCFS156A 10-24




PCFS 10-25




DP023A 10-41




DP013A 10-41




DP038A 10-41




DP016A 10-42




DP028A 10-42




DP037A 10-42




DP025A 10-42




DP026A 10-42




DP006A 10-43




DP008A 10-43




DP018A 10-43




DP030A 10-44




DP034A 10-44




DP007A 10-44




DP017A 10-44



DP010A 10-44




DP036A 10-44






1

- PCB間隔柱
  PCB Spacer
- M.2間隔柱
  M.2 SSD Spacer
- 導電間隔柱
  Conductive Spacer
- Wi-Fi固定扣
  Wi-Fi Lock
- PCB固定座
  PCB Mounting Block
- PCB固定扣
  PCB Hinge & Bracket
- 導光板間隔柱
  Pillar Support
- 圓體間隔柱
  Round Spacer
- 螺柱
  Standoff

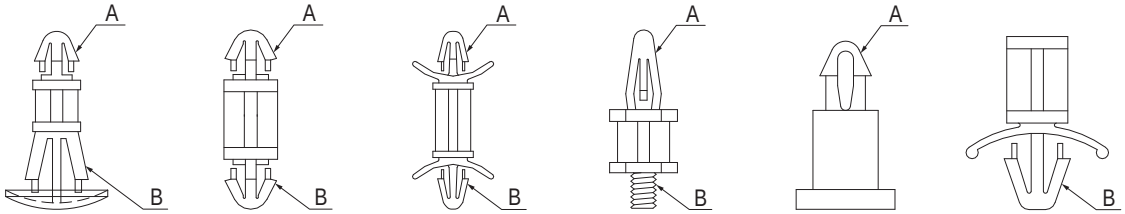


Part No.	A	B	Page	Note
MCIA-		3.2x4.8	1-59	橢圓孔
SOR-3		3.2x6.0	1-73	M2.5 or M2.6 Screw
TCBE-		4.0x5.41	1-60	
KVLMA-10		5.5x7.1	1-58	
KVLM3-		5.5x7.1	1-59	M3x0.5P
KVLM4-10		5.5x7.1	1-59	M4x0.7P
PAA-11		6.0x7.0	1-68	
LIJ-4		Ø2.5	1-69	
LBS-		Ø3.0	1-46	
MSA-		Ø3.0	1-48	
TCBA-		Ø3.0	1-51	
LIO-		Ø3.0	1-69	
LIO-8		Ø3.0	1-69	
DCCB-4.1		Ø3.0~Ø3.18	1-51	
MSPE-7		Ø3.2	1-28	
LCUA-11		Ø3.4	1-84	
EDC-		Ø3.5	1-2	
LASE-		Ø3.5	1-47	
LASH-22		Ø3.5	1-47	
LASJ-		Ø3.5	1-47	
SSUL-8		Ø3.5	1-73	
LIES-1		Ø3.8	1-69	
RAMA-		Ø4.0	1-1	
RAMC-		Ø4.0	1-2	
LASB-3.7		Ø4.0	1-46	
LASF-18		Ø4.0	1-48	
TCBC-		Ø4.0	1-59	
TCBH-17F		Ø4.0	1-60	
SOR-2		Ø4.0	1-73	
TCEB3-		Ø4.1	1-65	M3x0.5P
TCEB4-		Ø4.1	1-65	M4x0.7P
TCEB632-		Ø4.1	1-65	6-32 UNC
LCU-18		Ø4.3	1-88	
LASD-8.3		Ø4.5	1-46	
RAD-		Ø4.8	1-1	
RAMD-15.5		Ø4.8	1-3	
LCDS3-		Ø4.8	1-45	M3x0.5P
LCDS4-		Ø4.8	1-46	M4x0.7P
LAS-		Ø4.8	1-47	
LASL-4.8		Ø4.8	1-47	
LASY-		Ø4.8	1-47	
ULCF-		Ø4.8	1-76	
WLCF-		Ø4.8	1-76	
ULCBB-		Ø4.8	1-84	
LASA-9.5		Ø4.8~Ø5.0	1-47	
TCBD-4.8		Ø4.8~Ø5.0	1-60	
CUS-5		Ø5.0	1-72	
RAM-		Ø5.5	1-1	
RAM-13.5L		Ø5.5	1-1	
RAML-		Ø5.5	1-1	
RAS-		Ø5.5	1-2	
SOR-1		Ø5.5	1-73	
RAMB-9		Ø5.6	1-3	
LDD-		Ø6.0	1-69	

Part No.	A	B	Page	Note
MCSH-7.2	2.0x3.0		1-55	
KVD-	4.0x5.5	5.0x6.5	1-20	
MASD-	Ø1.5		1-48	
MASS-	Ø1.5		1-48	
MASSD-	Ø1.5	Ø1.5	1-13	
MAEB-3.2	Ø1.5	Ø3.0	1-19	
LCMB-8	Ø1.5	Ø3.0	1-20	
MADSA-3	Ø1.6	Ø1.6	1-13	
MADSB-3	Ø1.6	Ø1.6	1-13	
MADS-	Ø1.6	Ø2.0	1-13	
MAS-9	Ø1.6	Ø2.0	1-13	
MAD1.7-9.8	Ø1.7	Ø1.7	1-13	
MAL-8	Ø2.0		1-48	
MASL-5.4	Ø2.0		1-48	
MAST-	Ø2.0		1-48	
MA-	Ø2.0		1-49	
MAB-4	Ø2.0		1-49	
MABA-2.6	Ø2.0		1-49	
MA-XXDL	Ø2.0		1-49	
MS-	Ø2.0		1-52	
ISS-	Ø2.0		1-77	Double Adhesive Tape
MAD1-	Ø2.0	Ø2.0	1-13	
MAD1.2-12.9	Ø2.0	Ø2.0	1-13	
MAD-	Ø2.0	Ø2.0	1-14	
MAD1.2-	Ø2.0	Ø2.0	1-14	
MADB-	Ø2.0	Ø2.0	1-14	
MADX-9.5	Ø2.0	Ø2.0	1-14	
MADG-5.4	Ø2.0	Ø2.0	1-36	
MAMDA-	Ø2.0	Ø2.5	1-15	
LCMA-	Ø2.0	Ø3.0~Ø3.2	1-40	
RCAB-	Ø2.0	Ø4.0	1-12	
PCLS-25	Ø2.2		1-52	
MAHA-7	Ø2.2	Ø2.2	1-15	
MSB-2.8	Ø2.3		1-52	
ULCBA-5	Ø2.35	Ø4.0	1-82	
ULCSD-5	Ø2.4	Ø2.8	1-82	
MAMS-	Ø2.5		1-49	
MAMS-7.5	Ø2.5		1-49	
MAM-	Ø2.5		1-50	
MSM-2.5	Ø2.5		1-52	
MAE2.5-6.5	Ø2.5		1-53	
MAE2.5-6.5T	Ø2.5		1-53	M2x0.4P
GSS-	Ø2.5		1-77	Double Adhesive Tape
ULCI-11	Ø2.5		1-80	
ULCIJ-4	Ø2.5		1-80	
SCBS632-	Ø2.5		1-126	6-32 UNC
MADA-18S	Ø2.5	Ø2.5	1-15	
MADAA-14	Ø2.5	Ø2.5	1-15	
MADJ-6	Ø2.5	Ø2.5	1-15	
MADA-	Ø2.5	Ø2.5	1-16	
MADA-XXL	Ø2.5	Ø2.5	1-16	
MADM-	Ø2.5	Ø2.5	1-16	
MAMDF-7	Ø2.5	Ø2.5	1-16	
MAMDL-9	Ø2.5	Ø2.5	1-16	

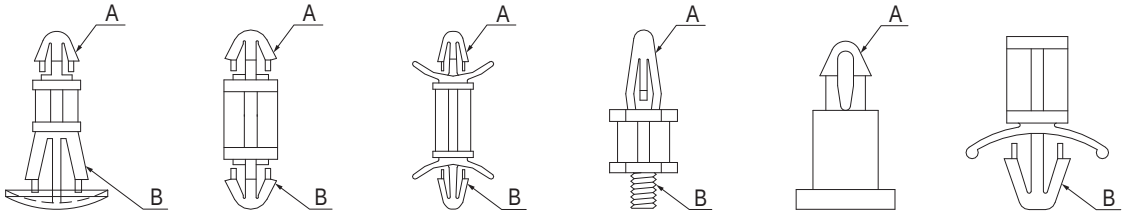


Part No.	A	B	Page	Note
MAC-	Ø2.5	Ø2.5	1-17	
MADE-2.8	Ø2.5	Ø2.5	1-17	
MAHC-14.3	Ø2.5	Ø2.5	1-17	
MADMK-5	Ø2.5	Ø2.5	1-20	
LCMC-7	Ø2.5	Ø3.0	1-20	
LCAB-	Ø2.5	Ø3.0	1-40	
LCMD-	Ø2.5	Ø3.0~Ø3.2	1-40	
RCAC-	Ø2.5	Ø4.0	1-12	
MAEE-4.5	Ø2.5	Ø4.0	1-19	
MAM-6.35L	Ø2.6		1-50	
MADAB-4.3	Ø2.6	Ø2.5	1-17	
MADM1-2.2	Ø2.6	Ø2.6	1-17	
MAHC-XXS	Ø2.6	Ø2.6	1-17	
MSPA-1.6	Ø2.6	Ø2.8	1-31	
LCUE-3.3	Ø2.6	Ø3.2	1-83	
MAMA-3.5	Ø2.7		1-50	
LCUAE-16LA	Ø2.8	3.2x4.8	1-87	
MSPA-6.3L	Ø2.8	Ø2.8	1-31	
SCBA-	Ø3.0		1-125	M3x0.5P
SCBD-8	Ø3.0		1-126	M3x0.5P
MSPA3-9.7	Ø3.0		1-126	M3x0.5P
DCC-	Ø3.0		1-50	
MAL-34	Ø3.0		1-50	
DCE-4	Ø3.0		1-51	
MAE-	Ø3.0		1-53	
MAE-XXT	Ø3.0		1-53	M3x0.5P
MAE-7-440	Ø3.0		1-54	
MAE-7-440T	Ø3.0		1-54	4-40 UNC
DCB-	Ø3.0		1-56	
DCBA-3.5	Ø3.0		1-56	
SS1-	Ø3.0		1-73	M2 Screw
SS3-7(1.3)	Ø3.0		1-73	M2 Screw
BSS-	Ø3.0		1-77	Double Adhesive Tape
CSS-	Ø3.0		1-78	Double Adhesive Tape
CSSA-2	Ø3.0		1-78	Double Adhesive Tape
LCUAC-7	Ø3.0	3.2x4.8	1-86	
LCUAE-12	Ø3.0	3.2x4.8	1-87	橢圓孔
MADL-27.8	Ø3.0	Ø3.0	1-18	
MAMDC-12	Ø3.0	Ø3.0	1-18	
MSPC3-	Ø3.0	Ø3.0	1-21	
MSPC3-3.2L	Ø3.0	Ø3.0	1-21	
MSPF3-	Ø3.0	Ø3.0	1-21	
SSDU1-3.5	Ø3.0	Ø3.0	1-28	
LCJ-	Ø3.0	Ø3.0	1-29	
LCV-	Ø3.0	Ø3.0	1-29	
LCVA-	Ø3.0	Ø3.0	1-29	
LCVU-	Ø3.0	Ø3.0	1-29	
LMSA-6	Ø3.0	Ø3.0	1-31	
CBSA-13	Ø3.0	Ø3.0	1-33	
LCF-	Ø3.0	Ø3.0	1-33	
LCGA-	Ø3.0	Ø3.0	1-33	
MADP-17.5	Ø3.0	Ø3.0	1-36	
LCA-	Ø3.0	Ø3.0	1-37	
LCG-	Ø3.0	Ø3.0	1-41	

Part No.	A	B	Page	Note
LCFO-	Ø3.0	Ø3.5	1-33	
RCI-2.6	Ø3.0	Ø4.0	1-3	
RCO-	Ø3.0	Ø4.0	1-3	
RCA-	Ø3.0	Ø4.0	1-4	
MAEA-3.5	Ø3.0	Ø4.0	1-19	
LCX-31	Ø3.0	Ø4.0	1-29	
MADP-20S	Ø3.0	Ø4.0	1-36	
LCH-	Ø3.0	Ø4.0	1-37	
LCH-XXS	Ø3.0	Ø4.0	1-37	
RCC-	Ø3.0	Ø4.8	1-4	
LCBT-	Ø3.0	Ø4.8	1-41	
KLCBS-	Ø3.0	Ø4.8	1-42	
LCBUA-13.9	Ø3.0	Ø4.8~Ø5.0	1-41	
RCG-	Ø3.0	Ø5.5	1-5	
LCHA-2.3	Ø3.0	3.0x4.0	1-37	橢圓孔
DCBA-8	Ø3.1		1-56	
LCUAC-11	Ø3.1	3.2x4.8	1-86	橢圓孔
LCUAE-8	Ø3.1	3.2x4.8	1-86	橢圓孔
MADD-2	Ø3.1	Ø3.0	1-18	
JSS-	Ø3.2		1-78	Double Adhesive Tape
SCB3-	Ø3.2		1-127	M3x0.5P
ULCSE-	Ø3.2	3.2x4.8	1-83	橢圓孔
LCUAC-	Ø3.2	3.2x4.8	1-85	橢圓孔
LCUAC-	Ø3.2	3.2x4.8	1-86	橢圓孔
LCPL-6.4	Ø3.2	Ø2.0	1-32	
LCSE-	Ø3.2	Ø3.0~Ø3.2	1-43	
MADN-24	Ø3.2	Ø3.2	1-18	
MSPB3.2-6.4	Ø3.2	Ø3.2	1-21	
MSPP-	Ø3.2	Ø3.2	1-21	
DMSB-	Ø3.2	Ø3.2	1-23	
DMSS-	Ø3.2	Ø3.2	1-23	
MSPS3S-7.5	Ø3.2	Ø3.2	1-23	
MSP3-	Ø3.2	Ø3.2	1-24	
MSPL-11	Ø3.2	Ø3.2	1-24	
MSPS3-	Ø3.2	Ø3.2	1-24	
MSPMA-12	Ø3.2	Ø3.2	1-25	
LCJ-15	Ø3.2	Ø3.2	1-29	
LMSE-4.8	Ø3.2	Ø3.2	1-31	
LMSB-4	Ø3.2	Ø3.2	1-32	
LMSP-	Ø3.2	Ø3.2	1-32	
RCMB-2.8	Ø3.2	Ø4.0	1-5	
LCUAD-1	Ø3.2	Ø4.1	1-84	
ULCSF-	Ø3.2	Ø4.2	1-82	
RCBS-	Ø3.2	Ø4.8	1-8	
RCR-3.2	Ø3.2	Ø4.8	1-8	
RCV-11.1	Ø3.2	Ø4.8	1-8	
RCW-	Ø3.2	Ø4.8	1-8	
ULCD-7.8	Ø3.3		1-80	M3x0.5P
MSPD-	Ø3.3	3.2x4.8	1-25	橢圓孔
MSPN-	Ø3.3	3.2x4.8	1-25	橢圓孔
MSPQ-16	Ø3.3	3.2x4.8	1-26	橢圓孔
LMSD-	Ø3.3	3.2x4.8	1-45	橢圓孔
ULCH-2	Ø3.3	3.2x4.8	1-80	M2.5 Screw
ULCSA-	Ø3.3	3.2x4.8	1-81	

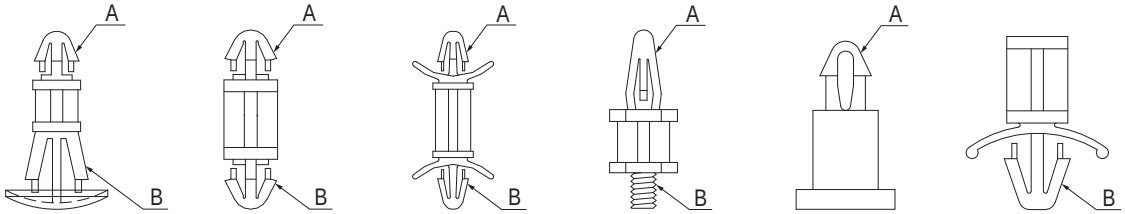

Part No.	A	B	Page	Note
ULCSA-28.8S	Ø3.3	3.2x4.8	1-82	
KEMS-11.3	Ø3.3	5.5x5.5	1-88	
MSPB-	Ø3.3	Ø3.2	1-22	
MSPH-7.5	Ø3.3	Ø3.2	1-26	
MSPCA-16	Ø3.3	Ø3.3	1-22	
MSPCA3.3-	Ø3.3	Ø3.3	1-22	
MSPF3.3-	Ø3.3	Ø3.3	1-22	
MSPF3.3-8L	Ø3.3	Ø3.3	1-22	
DMSC-4.5	Ø3.3	Ø3.3	1-25	
LCOA-28.8	Ø3.3	Ø3.3	1-32	
SCB3-38	Ø3.4		1-127	M3x0.5P
LCIA-3.5	Ø3.4	Ø3.7	1-30	
RCCA-8	Ø3.4	Ø4.8	1-5	
ULCBA-7.8	Ø3.4	Ø4.8	1-83	
SCBB-3	Ø3.5		1-126	M3x0.5P
SCBC-	Ø3.5		1-126	M3x0.5P
MCM-	Ø3.5		1-51	
PDC-	Ø3.5		1-56	
MCN-10	Ø3.5		1-57	
PDC-	Ø3.5		1-57	
PDC-XXD	Ø3.5		1-57	
FSL-25	Ø3.5		1-78	Double Adhesive Tape
FSS-	Ø3.5		1-78	Double Adhesive Tape
FSSA-15	Ø3.5		1-78	
LCPLB-11	Ø3.5	Ø2.6	1-32	
MAF-	Ø3.5	Ø3.5	1-18	
MAD3.5-12	Ø3.5	Ø3.5	1-19	
MAFA-6	Ø3.5	Ø3.5	1-19	
MDLS-4.5	Ø3.5	Ø3.5	1-19	
MAMDD-6	Ø3.5	Ø3.5	1-20	
LCI-	Ø3.5	Ø3.5	1-29	
LDE-33	Ø3.5	Ø3.5	1-30	
CBCS-14	Ø3.5	Ø3.5	1-34	
LCD-	Ø3.5	Ø3.5	1-34	
LCO-	Ø3.5	Ø3.5	1-34	
CBSS-	Ø3.5	Ø3.5	1-37	
LCPA-8.2	Ø3.5	Ø4.0	1-44	
LCBU-	Ø3.5	Ø4.8	1-41	
KLCBM-	Ø3.5	Ø4.8	1-42	
RCT-	Ø3.5	Ø4.8~Ø5.0	1-10	
RCH-	Ø3.5	Ø5.5	1-5	
RCTA-4.5	Ø3.5	Ø5.5	1-10	
DCCA-4.3	Ø3.7		1-51	
UCBS-5A	Ø3.8	Ø4.8	1-44	
MSMA-3.5	Ø3.9		1-52	
MSP-15.9S	Ø3.9	Ø3.9	1-26	
MSPV-3	Ø3.9	Ø3.9	1-27	
MSPY-12.7	Ø3.96	Ø3.96	1-27	
MSPG3-	Ø3.9~Ø4.0		1-127	M3x0.5P
MSPG4-	Ø3.9~Ø4.0		1-127	M4x0.7P
MSPS-	Ø3.9~Ø4.0		1-127	6-32 UNC
MSPS-	Ø4.0		1-127	6-32 UNC
SCB-	Ø4.0		1-128	6-32 UNC
SCB-6SM3	Ø4.0		1-128	M3x0.5P

Part No.	A	B	Page	Note
SCB4-	Ø4.0		1-128	M4x0.7P
SCB832-	Ø4.0		1-128	8-32 UNC
MCO-16	Ø4.0		1-51	
MAE43-	Ø4.0		1-54	M3x0.5P
MAE43-4.8LT	Ø4.0		1-54	
MAE43-XXT	Ø4.0		1-54	M3x0.5P
MAE4D-6	Ø4.0		1-54	
MAE4D-6T	Ø4.0		1-54	M3x0.5P
MAE4-	Ø4.0		1-55	
MAE4-XXT	Ø4.0		1-55	M4x0.7P
MCI-4.7	Ø4.0		1-55	
MC-	Ø4.0		1-57	
MC-	Ø4.0		1-58	
MCE-1.9	Ø4.0		1-58	
MCEA-1.9	Ø4.0		1-58	
MCH-	Ø4.0		1-58	
TCBS-	Ø4.0		1-62	M3 Screw
TCBS-18	Ø4.0		1-62	M3 Screw
TCBT-	Ø4.0		1-62	M3 Screw
TCBT-16	Ø4.0		1-62	4-40 UNC
TCBT-3.6	Ø4.0		1-62	
TCBT-7	Ø4.0		1-62	4-40 UNC
BS-	Ø4.0		1-63	
BS-10-1	Ø4.0		1-63	M3.5~M4 Screw
BS-20-1	Ø4.0		1-63	M3.5~M4 Screw
BS-35.7	Ø4.0		1-63	M3.5 Screw
MBS-	Ø4.0		1-63	
BSB-6	Ø4.0		1-64	
BSCL-9.5	Ø4.0		1-64	
SRLCB-	Ø4.0		1-64	
BSB632-15.9	Ø4.0		1-66	6-32 UNC
BSC632-	Ø4.0		1-66	6-32 UNC
BSCB-	Ø4.0		1-66	M3x0.5P
BSCB-20	Ø4.0		1-66	M3x0.5P
BSCB4-	Ø4.0		1-66	M4x0.7P
BSCM4-	Ø4.0		1-67	M4x0.7P
BSD632-	Ø4.0		1-67	6-32 UNC
BSDM4-	Ø4.0		1-67	M4x0.7P
SS2-	Ø4.0		1-74	M2.6 Screw
SS2-2.5U	Ø4.0		1-74	M2 Screw
ASS-	Ø4.0		1-79	Double Adhesive Tape
LCBL-8	Ø4.0		1-79	
ULCC-	Ø4.0		1-80	M3 Screw
ULCBM4-9.5	Ø4.0		1-81	M4x0.7P
LCBA-	Ø4.0	2.7x7.2	1-42	
ULCH-1	Ø4.0	4.0x6.8	1-81	
LCSI-10	Ø4.0	5.5x5.5	1-45	
KEML-	Ø4.0	5.5x5.5	1-88	
PCC-6	Ø4.0	6.0x7.0	1-68	
PCC-11	Ø4.0	6.0x7.0	1-68	
RCFA-7	Ø4.0	6.3x6.3	1-10	
KES-15	Ø4.0	6.5x7.0	1-84	
DMSP-	Ø4.0	Ø4.0	1-26	
DMSPS-	Ø4.0	Ø4.0	1-26	

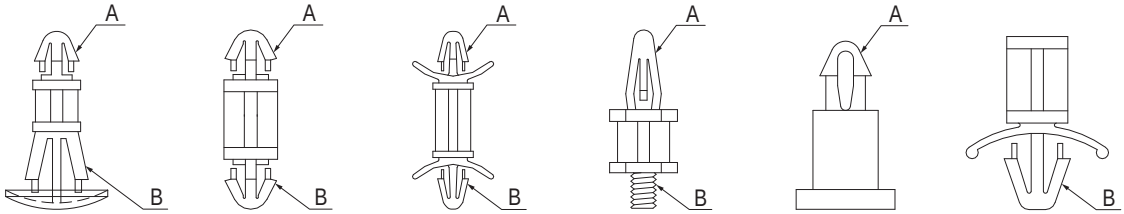


Part No.	A	B	Page	Note
MSP-	Ø4.0	Ø4.0	1-26	
MSP1-	Ø4.0	Ø4.0	1-27	
MSPM-	Ø4.0	Ø4.0	1-27	
SP1-4.8	Ø4.0	Ø4.0	1-27	
DMSA-9	Ø4.0	Ø4.0	1-28	
SSDUA-16.5	Ø4.0	Ø4.0	1-28	
LCK-1	Ø4.0	Ø4.0	1-30	
LCC-	Ø4.0	Ø4.0	1-31	
LCSF-15	Ø4.0	Ø4.0	1-33	
LCBJ-9	Ø4.0	Ø4.0	1-35	
LCFB-8	Ø4.0	Ø4.0	1-35	
LCTA-	Ø4.0	Ø4.0	1-35	
LCEO-	Ø4.0	Ø4.0	1-36	
CBLSS-	Ø4.0	Ø4.0	1-37	
CBSB-45	Ø4.0	Ø4.0	1-38	
LCL-3.2	Ø4.0	Ø4.0	1-38	
LCGB-17.5	Ø4.0	Ø4.0	1-41	
LCSJ-16	Ø4.0	Ø4.0	1-43	
WBHB-1.8	Ø4.0	Ø4.0	1-68	
ULCE-9	Ø4.0	Ø4.0	1-83	
MSPR-3	Ø4.0	Ø4.0	1-90	
LCT-9	Ø4.0	Ø4.5	1-35	
DRCB-18	Ø4.0	Ø4.5~Ø5.0	1-11	
LCSH-9.5	Ø4.0	Ø4.7	1-43	
LCSA-	Ø4.0	Ø4.75	1-43	
RCD-	Ø4.0	Ø4.8	1-6	
MSPK45-	Ø4.0	Ø4.8	1-27	
LCBM-	Ø4.0	Ø4.8	1-31	
LCBD-12.7	Ø4.0	Ø4.8	1-35	
LCBZ-	Ø4.0	Ø4.8	1-36	
CBS-	Ø4.0	Ø4.8	1-38	
LCB-	Ø4.0	Ø4.8	1-38	
LCBSA-	Ø4.0	Ø4.8	1-38	
LCBB-	Ø4.0	Ø4.8	1-39	
LCBS-	Ø4.0	Ø4.8	1-39	
VCBS-	Ø4.0	Ø4.8	1-39	
VCBSL-	Ø4.0	Ø4.8	1-39	
VCBA-14.4F	Ø4.0	Ø4.8	1-40	
KLCBL-	Ø4.0	Ø4.8	1-42	
LCBC-8	Ø4.0	Ø4.8	1-42	
HLCS-	Ø4.0	Ø4.8	1-43	
LCS-	Ø4.0	Ø4.8	1-43	
LCSD-	Ø4.0	Ø4.8	1-44	
LCSL-4.8	Ø4.0	Ø4.8	1-44	
LCSLR-9.5	Ø4.0	Ø4.8	1-44	
LCP-	Ø4.0	Ø4.8	1-44	
LCPD-	Ø4.0	Ø4.8	1-44	
LCY-4.8	Ø4.0	Ø4.8	1-44	
UCBS-	Ø4.0	Ø4.8	1-44	
ULCB-	Ø4.0	Ø4.8	1-85	
RCS-	Ø4.0	Ø5.0	1-6	
RCWA-	Ø4.0	Ø5.4	1-8	
PCBS-6.4	Ø4.0	Ø5.4	1-9	
RCJ-	Ø4.0	Ø5.4	1-11	


Part No.	A	B	Page	Note
RCTL-	Ø4.0	Ø5.4	1-11	
UCBSL-	Ø4.0	Ø5.4	1-45	
RCMA-3	Ø4.0	Ø5.5	1-5	
RCB-	Ø4.0	Ø5.5	1-6	
RCB-11.5	Ø4.0	Ø5.5	1-6	
RCBL-6	Ø4.0	Ø5.5	1-6	
RCI-5	Ø4.0	Ø5.5	1-6	
RCM-	Ø4.0	Ø5.5	1-7	
RCMD-6	Ø4.0	Ø5.5	1-7	
PCBS-	Ø4.0	Ø5.5	1-9	
PCBS-3	Ø4.0	Ø5.5	1-9	
PCBT-	Ø4.0	Ø5.5	1-9	
RCR-12.7	Ø4.0	Ø5.5	1-9	
RBS-	Ø4.0	Ø5.5	1-11	
RBT-	Ø4.0	Ø5.5	1-11	
RCF-	Ø4.0	Ø6.0	1-7	
PCBTA-4.8	Ø4.0	Ø6.0	1-9	
RCFL-	Ø4.0	Ø6.0	1-10	
ACBW-6.8	Ø4.0	Ø6.0	1-67	
ACBR-6	Ø4.0	Ø6.1~Ø6.4	1-60	
RCRA-9.5	Ø4.0	Ø6.35	1-9	
RCFB-10	Ø4.0	Ø6.5	1-10	
ACB-	Ø4.0	Ø6.5	1-61	
MCB-6	Ø4.0	Ø6.5	1-61	
RCQC-7	Ø4.0	Ø7.0	1-24	
WBHC-6.4	Ø4.0	Ø7.9	1-67	
WBH-	Ø4.0	Ø7.9	1-68	
SRLA-	Ø4.1	Ø4.75~Ø4.8	1-65	
BSB-8.5	Ø4.2		1-64	
TCBT-19	Ø4.5		1-62	M3 Screw
MTD-11	Ø4.5		1-63	
MBC-11	Ø4.5	Ø6.5	1-61	
MBD-10	Ø4.5~Ø4.8	Ø16.5	1-61	
LCBF-7.4	Ø4.75	Ø4.75	1-36	
MCL-	Ø4.8		1-58	
SS-	Ø4.8		1-73	M3 Screw
SSA-12.7	Ø4.8		1-74	M3 Screw
MSPK4.8-	Ø4.8	Ø4.8	1-28	
LCBY-	Ø4.8	Ø4.8	1-36	
LCBYR-4.8	Ø4.8	Ø4.8	1-36	
MAFB5-	Ø5.0	Ø5.0	1-19	
SSDU-	Ø5.2	Ø5.2	1-28	
RCWB-21	Ø5.3	Ø9.0	1-8	
SSA4-5.5	Ø5.8		1-74	M3.5 or M4 Screw
SSU4-	Ø5.9		1-74	M3.5 Screw
SS3.5-	Ø5.9		1-75	M3.5 or M4 Screw
SS4-	Ø5.9		1-75	M4 Screw
SSUA4-6.3L	Ø6.0		1-75	M4 Screw
RCBC-12	Ø6.2	Ø9.0	1-8	

PCB間隔柱 PCB SPACER

用途：一端固定於機板上，另一端支撐PC板，避免下陷造成短路，PC板免鑽孔。

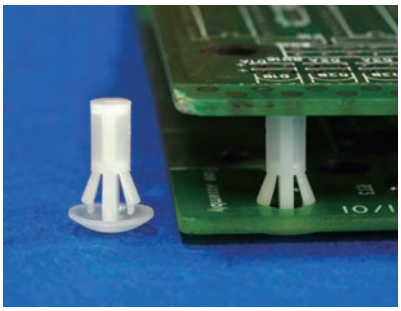


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




MOUNTING HOLE Ø4.0
THICKNESS 0.8~1.6


Part No.	A	Package
RAMA-3	3.2	1000
RAMA-4.5	4.5	
RAMA-5.5	5.5	



MOUNTING HOLE Ø4.0
THICKNESS 0.8~1.6


Part No.	A	Package
RAMA-6.4	6.4	1000
RAMA-7	7.0	
RAMA-7.5	7.5	
RAMA-9.5	9.5	
RAMA-11.1	11.1	
RAMA-12.7	12.7	

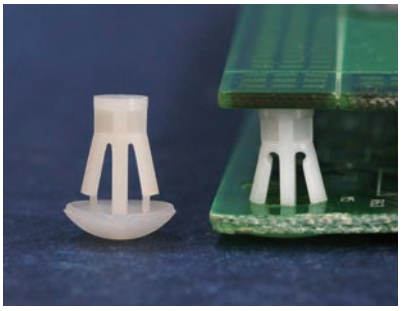




MOUNTING HOLE Ø4.8
THICKNESS 0.8~1.2

Part No.	A	Package
RAD-3	3.0	1000
RAD-4	4.0	




MOUNTING HOLE Ø4.8
THICKNESS 0.8~1.2

Part No.	A	Package
RAD-6	6.3	1000
RAD-8	8.0	
RAD-10	10.0	
RAD-11	11.0	




MOUNTING HOLE Ø5.5
THICKNESS 0.8~1.6

Part No.	A	Package
RAM-6	6.35	1000
RAM-7	7.0	
RAM-8	8.0	
RAM-8.5	8.5	
RAM-10	10.0	
RAM-12A	12.0	
RAM-12	12.7	
RAM-13.5	13.5	
RAM-14	14.0	
RAM-15	15.2	
RAM-16	15.9	
RAM-18	18.0	
RAM-19	19.0	
RAM-20	20.0	
RAM-22	21.7	500
RAM-24	24.0	
RAM-25	25.4	
RAM-30	30.0	




MOUNTING HOLE Ø5.5
THICKNESS 1.2~1.8

Part No.	Package
RAM-13.5L	1000



MOUNTING HOLE Ø5.5
THICKNESS 0.8~1.6

Part No.	A	Package
RAM-3	3.5	1000
RAM-5	5.0	




MOUNTING HOLE Ø5.5
THICKNESS 1.6~2.5


Part No.	A	B	Package
RAML-11	11.0	3.0	1000
RAML-12	12.0	2.45	

PCB間隔柱 PCB SPACER

用途：一端固定於機板上，另一端支撐PC板，避免下陷造成短路，PC板免鑽孔。

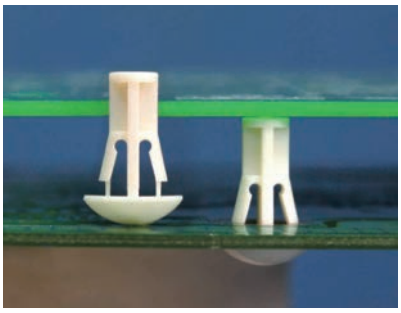


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




MOUNTING HOLE Ø5.5
THICKNESS 1.2~1.8

Part No.	A	Package
RAS-6	6.0	1000
RAS-8	8.0	
RAS-10	10.0	
RAS-12	12.0	
RAS-14	14.0	
RAS-18	18.0	
RAS-20	20.0	




MOUNTING HOLE Ø5.5
THICKNESS 0.8~1.6

Part No.	Package
RAS-7	1000




MOUNTING HOLE Ø5.5
THICKNESS 1.5~2.0


Part No.	Package
RAS-7.2	1000



MOUNTING HOLE Ø5.5
THICKNESS 1.2~1.8


Part No.	Package
RAS-5	1000

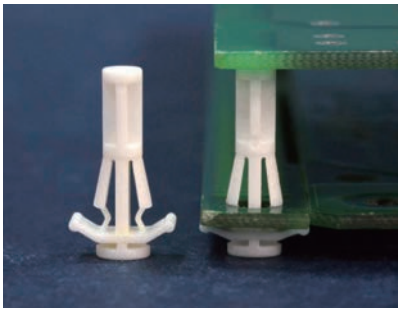




MOUNTING HOLE Ø4.0
THICKNESS 1.2~1.6

Part No.	A	B	Package
RAMC-12.5	12.5	2.5	1000
RAMC-15.5	15.5	2.5	
RAMC-18-4	18.0	4.0	
RAMC-18-8.5	18.0	8.5	
RAMC-19	19.0	2.5	
RAMC-24	24.0	2.5	

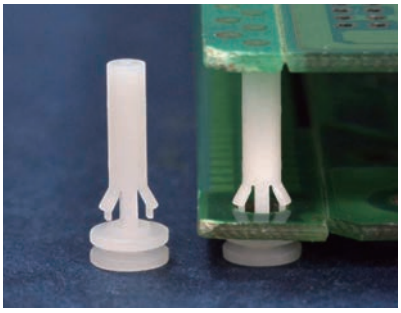

用途：用於PCB之架高間隔，體積小，不佔空間。

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




MOUNTING HOLE Ø3.5
THICKNESS 1.6


Part No.	A	B	Package
EDC-4	4.0	2.5	1000
EDC-5	5.0	2.5	
EDC-6	6.0	2.5	
EDC-7	7.0	2.5	
EDC-8	8.0	2.5	
EDC-9	9.0	2.5	
EDC-10	10.0	2.5	
EDC-11.4	11.4	2.5	
EDC-12.7	12.7	2.5	
EDC-13.5	13.5	2.5	
EDC-14.5	14.5	2.5	
EDC-15	15.0	2.5	
EDC-15-4	15.0	4.0	
EDC-15.9	15.9	2.5	

PCB間隔柱 PCB SPACER

用途：一端固定於機板上，另一端支撐PC板，避免下陷造成短路，PC板免鑽孔。

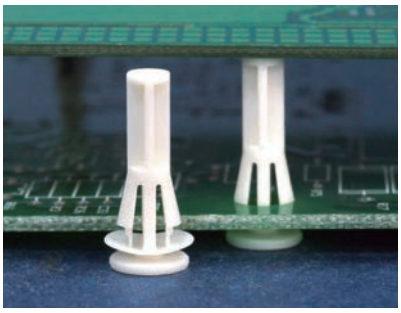



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



MOUNTING HOLE Ø4.8
THICKNESS 1.6


Part No.	Package
RAMD-15.5	1000

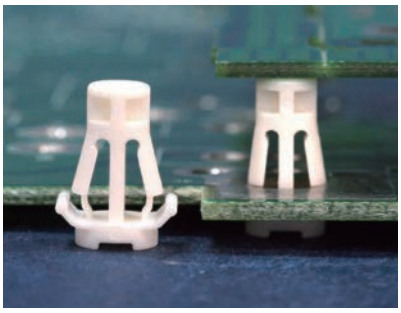



MOUNTING HOLE Ø5.6
THICKNESS 0.8~1.6


Part No.	Package
RAMB-9	1000

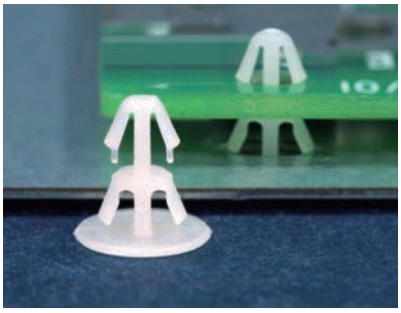

用途：固定PC板於機板上，不會突出機板底部，外觀美麗。


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

MOUNTING HOLE Ø3.0
THICKNESS 1.6




MOUNTING HOLE Ø4.0
THICKNESS 0.5

Part No.	Package
RCI-2.6	2000

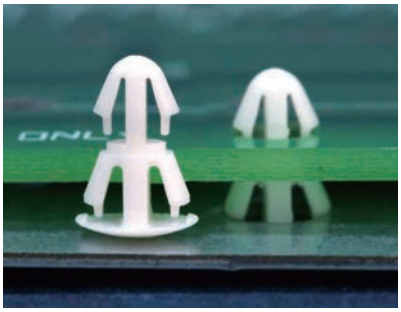


MOUNTING HOLE Ø3.0
THICKNESS 1.6



MOUNTING HOLE Ø4.0
THICKNESS 0.6~0.8

Part No.	Package
RCO-2.5	2000

MOUNTING HOLE Ø3.0
THICKNESS 1.6~2.0




MOUNTING HOLE Ø4.0
THICKNESS 0.8~1.2

Part No.	Package
RCO-2.5L	2000


PCB間隔柱 PCB SPACER

用途：固定PC板於機板上，不會突出機板底部，外觀美麗。

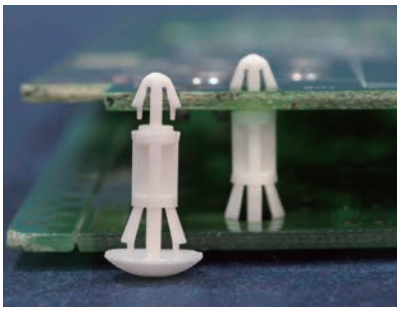

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


MOUNTING HOLE Ø3.0
THICKNESS 1.6



MOUNTING HOLE Ø4.0
THICKNESS 0.8~1.6

【 RCA-2.5, RCA-2.5U 】


MOUNTING HOLE Ø3.0
THICKNESS 1.6



MOUNTING HOLE Ø4.0
THICKNESS 0.8~1.6

Part No.	A	B	Package
RCA-2.5U	2.5	1.8	2000
RCA-2.5	2.5	2.0	
RCA-3	3.2	2.0	
RCA-4	4.0	2.0	
RCA-4.5	4.5	2.0	
RCA-5	5.0	2.0	
RCA-5.5	5.5	2.0	


MOUNTING HOLE Ø3.0
THICKNESS: T



MOUNTING HOLE Ø4.0
THICKNESS 1.6~2.2


【 RCA-65.5 】

MOUNTING HOLE Ø3.0
THICKNESS: T




MOUNTING HOLE Ø4.0
THICKNESS 0.8~1.6

Part No.	A	T	Package
RCA-6	6.0	1.6	2000
RCA-6.4	6.4	1.6	
RCA-7	7.0	1.6	1000
RCA-7.5	7.5	1.6	
RCA-8	8.0	1.6	
RCA-8L	8.0	1.83	
RCA-9	9.0	1.6	
RCA-9.5	9.5	1.6	
RCA-10	10.0	1.6	
RCA-11.1	11.1	1.6	
RCA-12	12.0	1.6	
RCA-12.7	12.7	1.6	
RCA-14	14.0	1.6	
RCA-15.5	15.5	1.6	
RCA-16	16.0	1.6	
RCA-65.5	65.5	1.6	

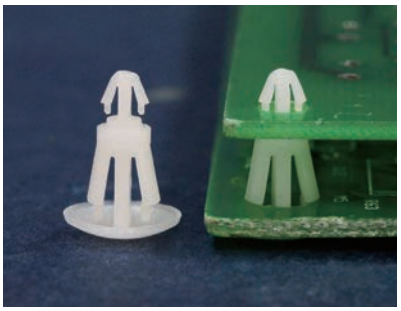


MOUNTING HOLE Ø3.0
THICKNESS 1.6



MOUNTING HOLE Ø4.8
THICKNESS 0.8~2.0

Part No.	A	Package
RCC-5	5.0	2000
RCC-6	6.3	

MOUNTING HOLE Ø3.0
THICKNESS 1.6




MOUNTING HOLE Ø4.8
THICKNESS 0.8~2.0

Part No.	A	Package
RCC-8	8.0	1000
RCC-10	10.0	
RCC-12	12.7	


PCB間隔柱 PCB SPACER

用途：固定PC板於機板上，不會突出機板底部，外觀美麗。

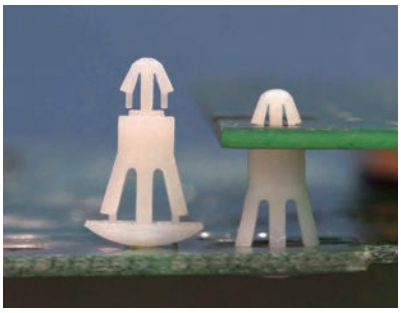


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

MOUNTING HOLE Ø3.0
THICKNESS 1.2~1.7




MOUNTING HOLE Ø5.5
THICKNESS 0.6~1.2

Part No.	A	Package
RCG-3.5	3.5	1000
RCG-5	4.8	
RCG-6.35	6.35	
RCG-7	7.0	
RCG-8	8.0	
RCG-10	10.0	
RCG-11	11.0	
RCG-12.7	12.7	
RCG-15.9	15.9	

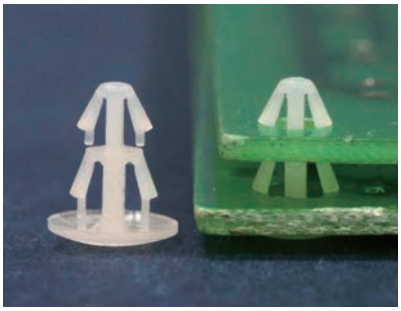


MOUNTING HOLE Ø3.2
THICKNESS 0.8~1.0



MOUNTING HOLE Ø4.0
THICKNESS 1.8


Part No.	Package
RCMB-2.8	1000

MOUNTING HOLE Ø3.2
THICKNESS 1.6




MOUNTING HOLE Ø4.8
THICKNESS 1.2~1.4

Part No.	Package
RCCA-8	1000

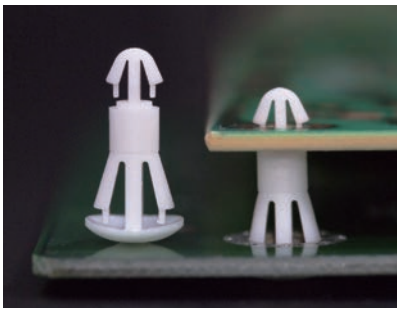


MOUNTING HOLE Ø3.5
THICKNESS 1.6



MOUNTING HOLE Ø5.5
THICKNESS 0.8~1.2

【 RCH-3.5~RCH-8 】


MOUNTING HOLE Ø3.5
THICKNESS 1.6




MOUNTING HOLE Ø5.5
THICKNESS 0.8~1.2

【 RCH-10~RCH-15.9 】

Part No.	A	Package
RCH-3.5	3.5	1000
RCH-5	4.8	
RCH-6.35	6.35	
RCH-7	7.0	
RCH-8	8.0	
RCH-10	10.0	
RCH-11	11.0	
RCH-12.7	12.7	
RCH-15.9	15.9	

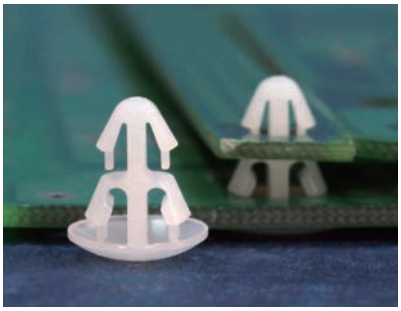

MOUNTING HOLE Ø4.0
THICKNESS 1.2~1.6




MOUNTING HOLE Ø5.5
THICKNESS 0.8~1.6

Part No.	Package
RCMA-3	1000


PCB間隔柱 PCB SPACER

用途：固定PC板於機板上，不會突出機板底部，外觀美麗。

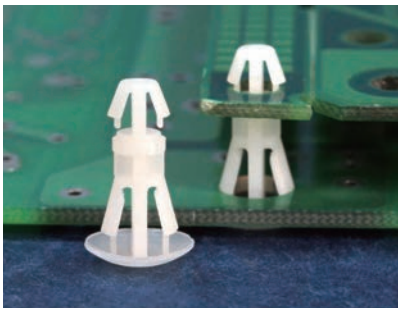

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


MOUNTING HOLE Ø4.0
THICKNESS 1.7



MOUNTING HOLE Ø5.0
THICKNESS 0.8~1.8

Part No.	A	B	C	Package
RCS-6	6.0	2.3	9.7	1000
RCS-13.8	13.8	2.2	10.0	
RCS-16	16.0	2.3	9.7	


MOUNTING HOLE Ø4.0
THICKNESS 1.0~1.8



MOUNTING HOLE Ø4.8
THICKNESS 0.8~1.2


【 RCD-3, RCD-4 】

MOUNTING HOLE Ø4.0
THICKNESS 1.0~1.8




MOUNTING HOLE Ø4.8
THICKNESS 0.8~1.2

Part No.	A	Package
RCD-3	3.0	1000
RCD-4	4.0	
RCD-6	6.3	
RCD-8	8.0	
RCD-10	10.0	
RCD-11	11.0	

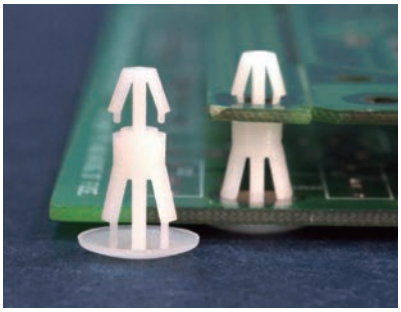


MOUNTING HOLE Ø4.0
THICKNESS 1.6



MOUNTING HOLE Ø5.5
THICKNESS 1.5~2.2


【 RCB-3~RCB-8 】

MOUNTING HOLE Ø4.0
THICKNESS 1.6



MOUNTING HOLE Ø5.5
THICKNESS 1.5~2.2

MOUNTING HOLE Ø4.0
THICKNESS 1.6




MOUNTING HOLE Ø5.5
THICKNESS 1.5~2.2


Part No.	A	Package
RCB-3	3.5	1000
RCB-5	5.0	
RCB-6	6.35	
RCB-8	8.0	
RCB-10	10.0	

Part No.	A	Package
RCB-12	12.7	1000
RCB-15	15.9	
RCB-19	19.0	
RCB-25	25.4	500
RCB-35	35.5	


- Material: Nylon 46 (UL)
- Flame Class: 94V-2
- Color: Black

Part No.	Package
RCB-11.5	1000

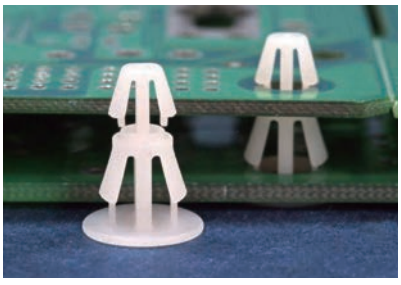

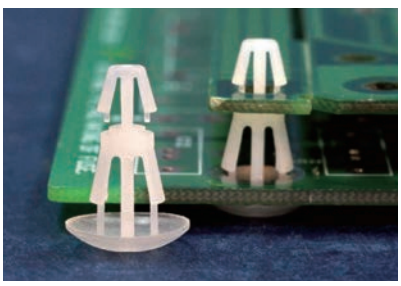


MOUNTING HOLE Ø4.0
THICKNESS 1.6



MOUNTING HOLE Ø5.5
THICKNESS 1.5~2.2

Part No.	Package
RCI-5	1000

MOUNTING HOLE Ø4.0
THICKNESS 1.6




MOUNTING HOLE Ø5.5
THICKNESS 2.0~3.0

Part No.	Package
RCBL-6	1000


PCB間隔柱 PCB SPACER

用途：固定PC板於機板上，不會突出機板底部，外觀美麗。

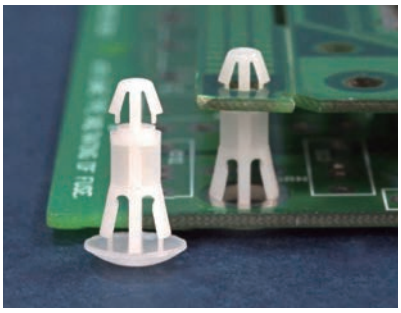

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


MOUNTING HOLE Ø4.0
THICKNESS 1.2~1.7



MOUNTING HOLE Ø5.5
THICKNESS 0.8~1.6


Part No.	A	B	C	Package
RCM-3	3.5	2.2	10.0	1000
RCM-5	5.0	2.2	10.0	
RCM-5SP	5.0	1.5	8.0	

MOUNTING HOLE Ø4.0
THICKNESS 1.2~1.7




MOUNTING HOLE Ø5.5
THICKNESS: T

Part No.	A	T	Package
RCM-6	6.35	0.8~1.6	1000
RCM-6L	6.35	1.6~2.0	
RCM-7	7.0	0.8~1.6	
RCM-8	8.0	0.8~1.6	
RCM-8.5	8.5	0.8~1.6	
RCM-10	10.0	0.8~1.6	
RCM-12A	12.0	0.8~1.6	
RCM-12	12.7	0.8~1.6	
RCM-13.5	13.5	0.8~1.6	
RCM-14	14.0	0.8~1.6	
RCM-15	15.2	0.8~1.6	
RCM-16	15.9	0.8~1.6	
RCM-18	18.0	0.8~1.6	
RCM-19	19.0	0.8~1.6	
RCM-20	20.0	0.8~1.6	
RCM-22	21.7	0.8~1.6	
RCM-24	24.0	0.8~1.6	
RCM-25	25.4	0.8~1.6	
RCM-30	30.0	0.8~1.6	

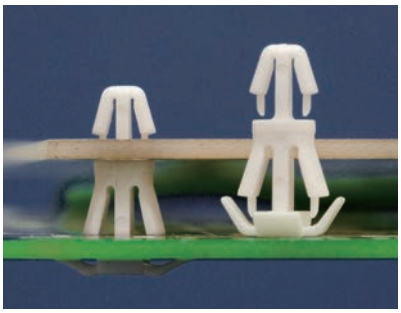


MOUNTING HOLE Ø4.0
THICKNESS 1.8




MOUNTING HOLE Ø5.5
THICKNESS 0.5~2.0

Part No.	Package
RCMD-6	1000

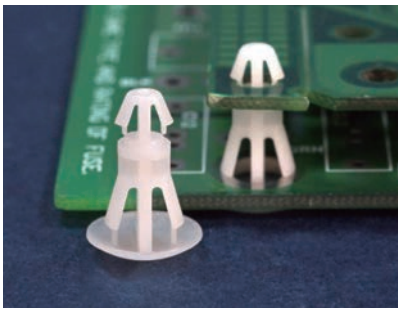


MOUNTING HOLE Ø4.0
THICKNESS 1.2~1.7



MOUNTING HOLE Ø6.0
THICKNESS 0.8~1.6

【 RCF-5S 】

MOUNTING HOLE Ø4.0
THICKNESS 1.2~1.7




MOUNTING HOLE Ø6.0
THICKNESS 0.8~2.0

Part No.	A	Package
RCF-5	5.0	2000
RCF-5S	5.0	
RCF-6	6.35	
RCF-8	8.0	1000
RCF-10	10.0	
RCF-12	12.7	
RCF-15	15.9	


PCB間隔柱 PCB SPACER

用途：固定PC板於機板上，不會突出機板底部，外觀美麗。

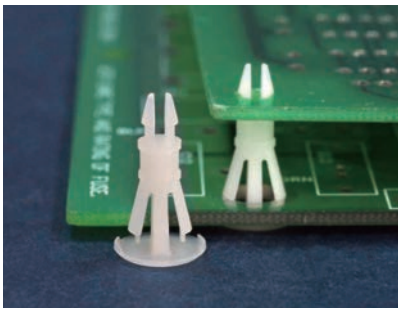

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


MOUNTING HOLE Ø3.2
THICKNESS 1.6



MOUNTING HOLE Ø4.8
THICKNESS 1.5~1.6


Part No.	A	Package
RCBS-6.5	6.5	1000
RCBS-9.5	9.5	
RCBS-12.7	12.7	

MOUNTING HOLE Ø6.2
THICKNESS 1.6




MOUNTING HOLE Ø9.0
THICKNESS 1.4

Part No.	Package
RCBC-12	1000

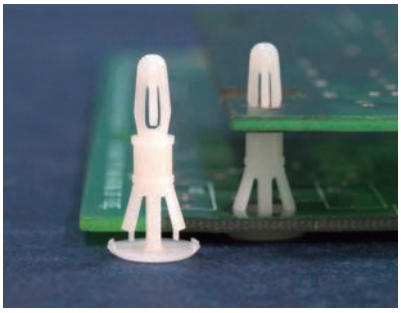


MOUNTING HOLE Ø3.2
THICKNESS 1.6



MOUNTING HOLE Ø4.8
THICKNESS 1.5~1.6


Part No.	Package
RCV-11.1	1000

MOUNTING HOLE Ø3.2
THICKNESS 1.7




MOUNTING HOLE Ø4.8
THICKNESS 1.7

Part No.	Package
RCR-3.2	1000

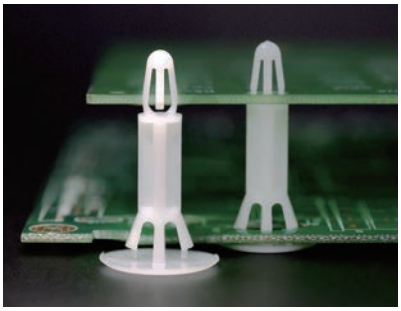


MOUNTING HOLE Ø3.2
THICKNESS 1.2~1.7



MOUNTING HOLE Ø4.8
THICKNESS 1.5~1.6

Part No.	A	Package
RCW-6.5	6.5	1000
RCW-7.9	7.9	
RCW-9.7	9.7	
RCW-11.1	11.1	
RCW-12.7	12.7	
RCW-14.3	14.3	
RCW-15.9	15.9	


MOUNTING HOLE Ø4.0
THICKNESS 1.6



MOUNTING HOLE Ø5.4
THICKNESS 1.5~1.6

Part No.	A	Package
RCWA-6.4	6.4	1000
RCWA-9.5	9.5	
RCWA-12.7	12.7	
RCWA-15.9	15.9	
RCWA-19	19.1	
RCWA-22.2	22.2	
RCWA-25.4	25.4	

MOUNTING HOLE Ø5.3
THICKNESS 1.6




MOUNTING HOLE Ø9.0
THICKNESS 1.8

Part No.	Package
RCWB-21	1000


PCB間隔柱 PCB SPACER

用途：固定PC板於機板上，不會突出機板底部，外觀美麗。

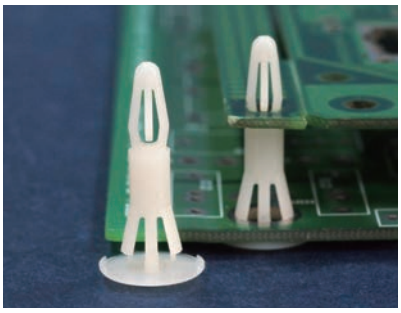

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


MOUNTING HOLE Ø4.0
THICKNESS 1.2~1.7



MOUNTING HOLE Ø5.5
THICKNESS 1.0~1.5


Part No.	Package
RCR-12.7	1000

MOUNTING HOLE Ø4.0
THICKNESS 1.2~1.6




MOUNTING HOLE Ø6.35
THICKNESS 1.0~1.6

Part No.	Package
RCRA-9.5	1000

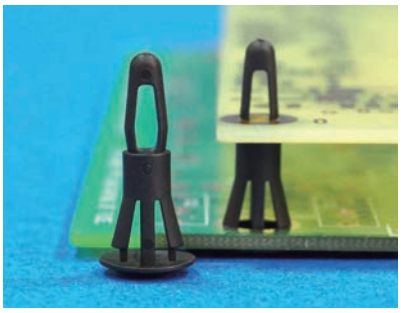


MOUNTING HOLE Ø4.0
THICKNESS 1.6



MOUNTING HOLE Ø6.0
THICKNESS 0.8~1.2


Part No.	Package
PCBTA-4.8	1000

MOUNTING HOLE Ø4.0
THICKNESS 1.6




MOUNTING HOLE Ø5.5
THICKNESS 1.0~1.7

Part No.	A	Package
PCBT-4.8	4.8	1000
PCBT-10	10.0	

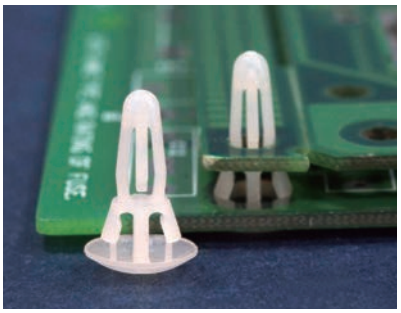


MOUNTING HOLE Ø4.0
THICKNESS 1.2~1.7



MOUNTING HOLE Ø5.5
THICKNESS 0.8~1.6


Part No.	Package
PCBS-3	1000

MOUNTING HOLE Ø4.0
THICKNESS 1.6




MOUNTING HOLE Ø5.4
THICKNESS 1.2~2.0

Part No.	Package
PCBS-6.4	1000

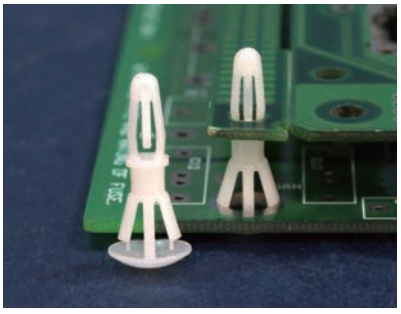

MOUNTING HOLE Ø4.0
THICKNESS 1.6




MOUNTING HOLE Ø5.5
THICKNESS 1.0~1.7

Part No.	A	B	Package
PCBS-6	6.3	1.6	1000
PCBS-8	7.9	2.1	
PCBS-10	10.0	2.1	
PCBS-12A	12.0	2.1	
PCBS-12	12.7	1.6	


PCB間隔柱 PCB SPACER

用途：固定PC板於機板上，不會突出機板底部，外觀美麗。

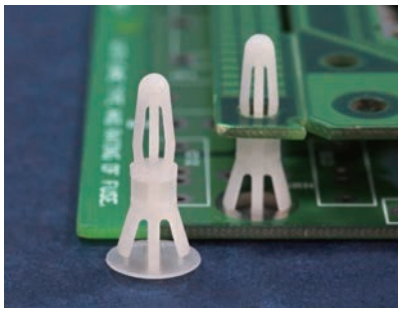

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


MOUNTING HOLE Ø4.0
THICKNESS 1.6



MOUNTING HOLE Ø6.0
THICKNESS 0.8~1.2


Part No.	A	Package
RCFL-4.8	4.8	1000
RCFL-6.4	6.4	

MOUNTING HOLE Ø4.0
THICKNESS 1.6




MOUNTING HOLE Ø6.0
THICKNESS 0.8~1.2

Part No.	A	Package
RCFL-8	8.0	1000
RCFL-9.5	9.5	
RCFL-12.7	12.7	
RCFL-15.9	15.9	
RCFL-19	19.0	

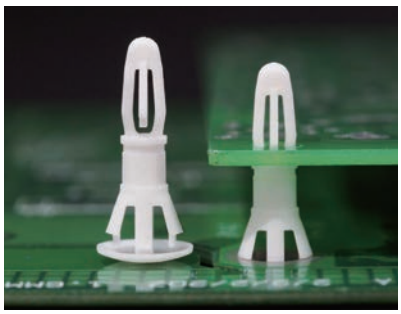


MOUNTING HOLE Ø4.0
THICKNESS 1.6




MOUNTING HOLE Ø6.5
THICKNESS 1.6~2.0

Part No.	Package
RCFB-10	1000

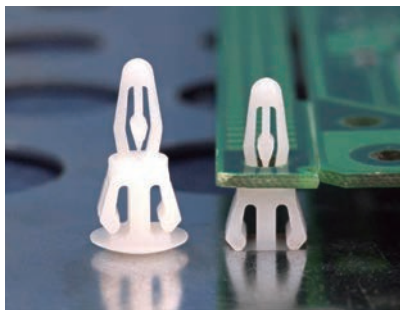


MOUNTING HOLE Ø4.0
THICKNESS 1.6






MOUNTING HOLE
THICKNESS 1.6

Part No.	Package
RCFA-7	1000

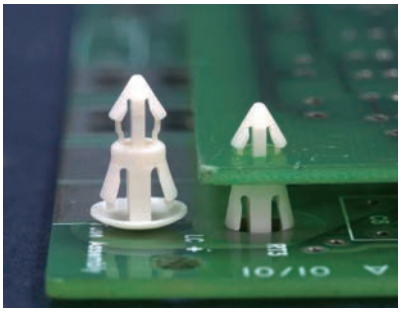


MOUNTING HOLE Ø3.5
THICKNESS 1.6~1.8



MOUNTING HOLE Ø5.5
THICKNESS 0.8

Part No.	Package
RCTA-4.5	1000

MOUNTING HOLE Ø3.5
THICKNESS 1.2~1.7



MOUNTING HOLE Ø4.8~Ø5.0
THICKNESS 1.2~1.7

Part No.	A	Package
RCT-4.5	4.5	1000
RCT-8	7.9	


PCB間隔柱 PCB SPACER

用途：固定PC板於機板上，不會突出機板底部，外觀美麗。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


MOUNTING HOLE Ø4.0
THICKNESS 1.2~1.7



MOUNTING HOLE Ø5.4
THICKNESS 2.0


Part No.	A	C	Package
RCTL-6S	6.0	3.9	1000
RCTL-6	6.3	4.0	
RCTL-12	12.0	3.9	

MOUNTING HOLE Ø4.0
THICKNESS 1.6




MOUNTING HOLE Ø5.4
THICKNESS 0.8~1.6

Part No.	A	B	Package
RCJ-8	8.0	2.1	1000
RCJ-10	10.0	1.7	
RCJ-12	12.0	1.7	
RCJ-12.7	12.7	1.7	

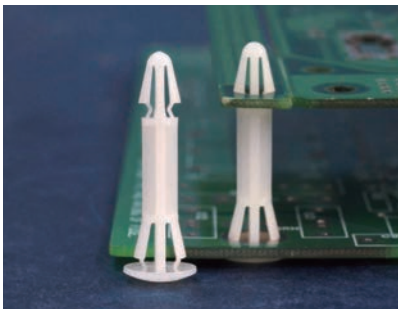


MOUNTING HOLE Ø4.0
THICKNESS 1.2~1.6



MOUNTING HOLE Ø5.5
THICKNESS 1.2~1.6

Part No.	A	Package
RBT-19	19.0	1000
RBT-28.2	28.2	


MOUNTING HOLE Ø4.0
THICKNESS 3.0



MOUNTING HOLE Ø5.5
THICKNESS 1.2~1.6


Part No.	A	B	Package
RBT-16L	16.0	1.8	1000
RBT-25L	25.0	2.0	

MOUNTING HOLE Ø4.0
THICKNESS 1.2~1.7




MOUNTING HOLE Ø5.5
THICKNESS 1.2~1.8

Part No.	A	Package
RBS-5	5.0	1000
RBS-6	6.0	
RBS-7	7.0	
RBS-8	8.0	
RBS-10	10.0	
RBS-11	11.0	
RBS-12	12.0	
RBS-14	14.0	
★RBS-16	16.0	
RBS-18	18.0	
RBS-20	20.0	
RBS-23	23.0	

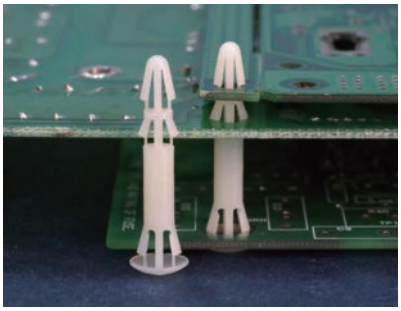

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

用途：用於三層PC板，與機板間之固定，方便、節省空間。



MOUNTING HOLE Ø4.0
THICKNESS 1.6


MOUNTING HOLE Ø4.5
THICKNESS 1.6

MOUNTING HOLE Ø5.0
THICKNESS 1.6

Part No.	Package
DRCB-18	1000


PCB間隔柱 PCB SPACER

用途：固定PC板於機板上，不會突出機板底部，外觀美麗。

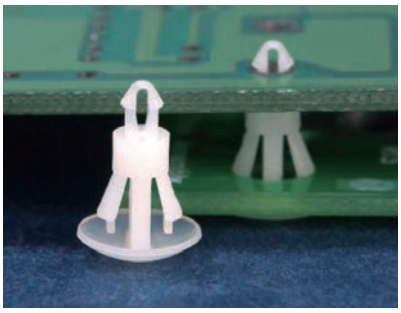

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


MOUNTING HOLE Ø2.0
THICKNESS 1.6



MOUNTING HOLE Ø4.0
THICKNESS 0.8~1.6

Part No.	A	Package
RCAB-6	6.0	1000
RCAB-6.4	6.4	
RCAB-7	7.0	
RCAB-7.5	7.5	
RCAB-8	8.0	
RCAB-9	9.0	
RCAB-9.5	9.5	
RCAB-10	10.0	
RCAB-11.1	11.1	
RCAB-12	12.0	
RCAB-12.7	12.7	
RCAB-14	14.0	
RCAB-16	16.0	


MOUNTING HOLE Ø2.0
THICKNESS 1.6



MOUNTING HOLE Ø4.0
THICKNESS 0.8~1.6


Part No.	A	Package
RCAB-3	3.2	1000
RCAB-4	4.0	
RCAB-4.5	4.5	
RCAB-5	5.0	
RCAB-5.5	5.5	

MOUNTING HOLE Ø2.0
THICKNESS 1.0




MOUNTING HOLE Ø4.0
THICKNESS 0.8~1.6

Part No.	Package
RCAB-4.5S	1000

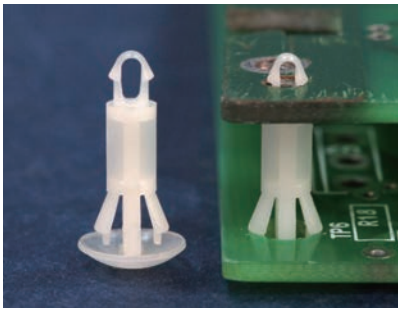


MOUNTING HOLE Ø2.5
THICKNESS 1.6



MOUNTING HOLE Ø4.0
THICKNESS 0.8~1.6

Part No.	A	Package
RCAC-3	3.0	1000
RCAC-4	4.0	
RCAC-4.5	4.5	
RCAC-5	5.0	
RCAC-5.5	5.5	

MOUNTING HOLE Ø2.5
THICKNESS 1.6




MOUNTING HOLE Ø4.0
THICKNESS 0.8~1.6

Part No.	A	Package
RCAC-6	6.0	1000
RCAC-6.4	6.4	
RCAC-7	7.0	
RCAC-7.5	7.5	
RCAC-8	8.0	
RCAC-9	9.0	
RCAC-9.5	9.5	
RCAC-10	10.0	
RCAC-11.1	11.1	
RCAC-12	12.0	
RCAC-12.7	12.7	
RCAC-14	14.0	
RCAC-16	16.0	


PCB間隔柱 PCB SPACER

用途：PC板與PC板間之固定，不佔空間。

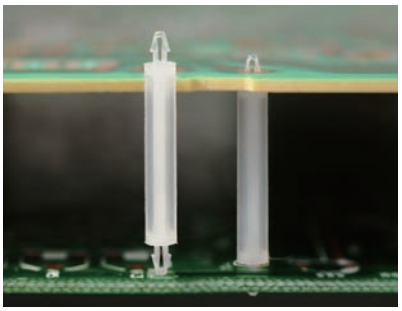


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

MOUNTING HOLE Ø1.5
THICKNESS 1.0




MOUNTING HOLE Ø1.5
THICKNESS 1.0

Part No.	A	Package
MASSD-14	14.0	2000
MASSD-18	18.0	1000

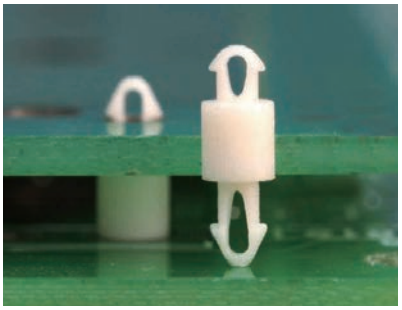


MOUNTING HOLE Ø1.6
THICKNESS 1.0



MOUNTING HOLE Ø1.6
THICKNESS 1.6

Part No.	Package
MADSA-3	1000


MOUNTING HOLE Ø1.6
THICKNESS 1.0



MOUNTING HOLE Ø1.6
THICKNESS 2.0

Part No.	Package
MADSB-3	2000


MOUNTING HOLE Ø1.6
THICKNESS 0.7



MOUNTING HOLE Ø2.0
THICKNESS 1.6

Part No.	A	Package
MADS-6.5	6.5	2000
MADS-19.2	19.2	1000


MOUNTING HOLE Ø1.6
THICKNESS 1.5



MOUNTING HOLE Ø2.0
THICKNESS 1.6


Part No.	Package
MAS-9	1000

MOUNTING HOLE Ø1.7
THICKNESS 1.7




MOUNTING HOLE Ø1.7
THICKNESS 1.7

Part No.	Package
MAD1.7-9.8	1000

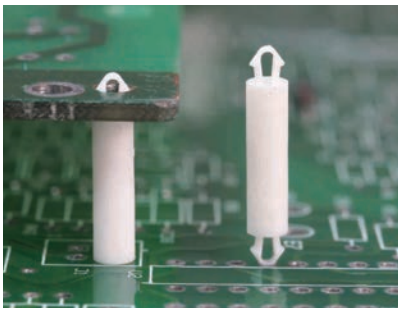


MOUNTING HOLE Ø2.0
THICKNESS 1.0



MOUNTING HOLE Ø2.0
THICKNESS 1.0

Part No.	A	Package
MAD1-3	3.0	2000
MAD1-19	19.0	1000


MOUNTING HOLE Ø2.0
THICKNESS 1.0~1.2




MOUNTING HOLE Ø2.0
THICKNESS 1.0~1.2

Part No.	Package
MAD1.2-12.9	1000


用途：PC板與PC板間之固定，不佔空間。

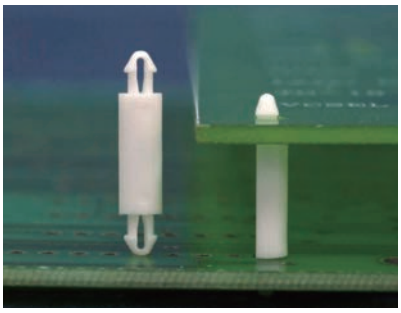


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

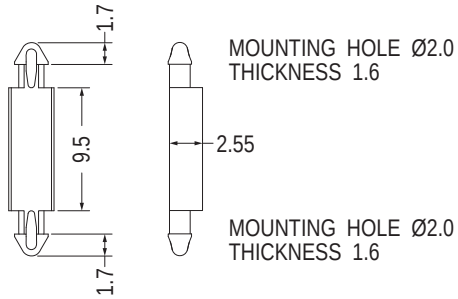

Part No.	Package
MADX-9.5	1000

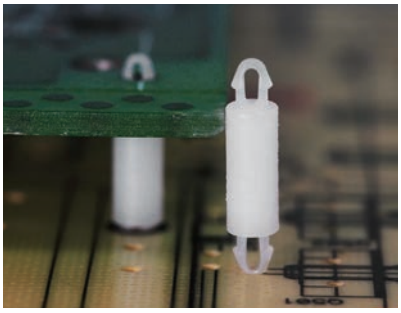


MOUNTING HOLE Ø2.0
THICKNESS 1.2



MOUNTING HOLE Ø2.0
THICKNESS 1.2


Part No.	Package
MAD1.2-6	1000

MOUNTING HOLE Ø2.0
THICKNESS 1.2




MOUNTING HOLE Ø2.0
THICKNESS 1.2

Part No.	Package
MAD1.2-8	1000

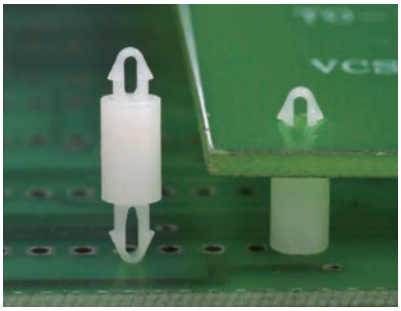


MOUNTING HOLE Ø2.0
THICKNESS 1.6




MOUNTING HOLE Ø2.0
THICKNESS: T

Part No.	A	B	C	T	Package
MADB-3.5	3.5	2.0	2.0	0.9	2000
MADB-6	6.0	1.9	1.9	0.8	

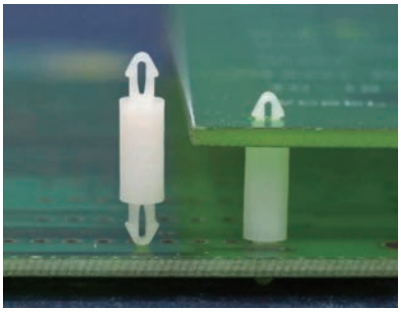


MOUNTING HOLE Ø2.0
THICKNESS 1.6



MOUNTING HOLE Ø2.0
THICKNESS 1.6

【 MAD-14 】

MOUNTING HOLE Ø2.0
THICKNESS 1.6




MOUNTING HOLE Ø2.0
THICKNESS 1.6

Part No.	A	Package
MAD-1.6	1.6	2000
MAD-2.2	2.2	
MAD-3	3.0	
MAD-3.5	3.5	
MAD-4	4.0	
MAD-5	5.0	
MAD-6	6.0	
MAD-6.5	6.5	
MAD-7	7.0	
MAD-8	8.0	
MAD-10S	10.0	
MAD-10	10.5	
MAD-12.5	12.5	
MAD-14	14.0	
MAD-25	25.0	


PCB間隔柱 PCB SPACER

用途：PC板與PC板間之固定，不佔空間。

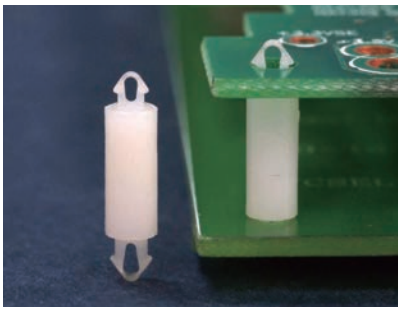


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

MOUNTING HOLE Ø2.0
THICKNESS 1.0




MOUNTING HOLE Ø2.5
THICKNESS 1.6

Part No.	A	Package
MAMDA-1.6	1.6	1000
MAMDA-2.5	2.5	
MAMDA-3.2	3.2	
MAMDA-4	4.0	
MAMDA-4.8	4.8	
MAMDA-5.5	5.5	
MAMDA-6.4	6.4	
MAMDA-7	7.0	
MAMDA-7.9	7.9	
MAMDA-9.5	9.5	
MAMDA-10	10.0	
MAMDA-12.7	12.7	

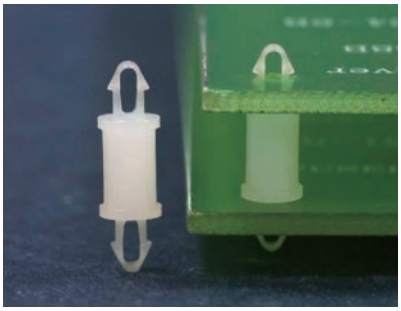


MOUNTING HOLE Ø2.2
THICKNESS 1.6




MOUNTING HOLE Ø2.2
THICKNESS 1.6

Part No.	Package
MAHA-7	1000

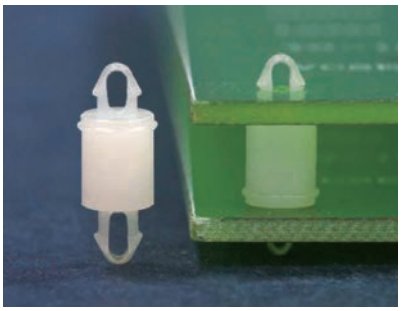


MOUNTING HOLE Ø2.5
THICKNESS 1.0



MOUNTING HOLE Ø2.5
THICKNESS 1.6

Part No.	Package
MADJ-6	2000

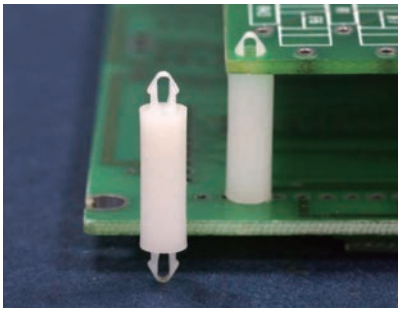


MOUNTING HOLE Ø2.5
THICKNESS 0.6



MOUNTING HOLE Ø2.5
THICKNESS 0.6

Part No.	Package
MADA-18S	2000


MOUNTING HOLE Ø2.5
THICKNESS 1.6



MOUNTING HOLE Ø2.5
THICKNESS 1.6


Part No.	Package
MADAA-14	1000

用途：PC板與PC板間之固定，不佔空間。

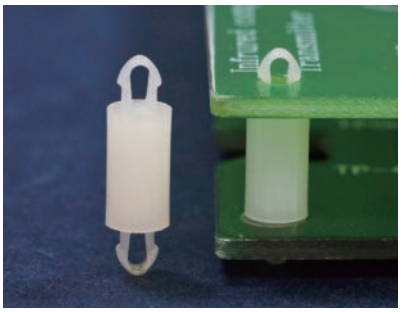

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

MOUNTING HOLE Ø2.5
THICKNESS 1.8




MOUNTING HOLE Ø2.5
THICKNESS 1.8

NEW

Part No.	A	Package
MADA-6L	6.0	2000
MADA-7.9L	7.9	
MADA-9.5L	9.5	1000


MOUNTING HOLE Ø2.5
THICKNESS 1.6



MOUNTING HOLE Ø2.5
THICKNESS 1.6

【 MADA-3-1 】


MOUNTING HOLE Ø2.5
THICKNESS 1.6




MOUNTING HOLE Ø2.5
THICKNESS 1.6


Part No.	A	Package
MADA-2	2.0	2000
MADA-3	3.0	
MADA-3-1	3.0	
MADA-3.5	3.5	
MADA-4	4.0	
MADA-5	5.0	
MADA-6	6.0	
MADA-6.7	6.7	
MADA-7	7.0	
MADA-8	8.0	
MADA-8.5	8.5	

Part No.	A	Package
MADA-9	9.0	2000
MADA-10	10.0	
MADA-11	11.0	
MADA-12	12.0	
MADA-12.7	12.7	
MADA-14	14.0	
MADA-16	16.0	
MADA-18	18.0	
MADA-20	20.0	
MADA-22	22.0	

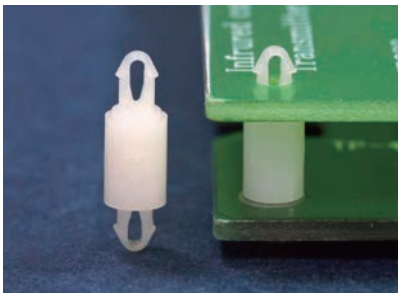

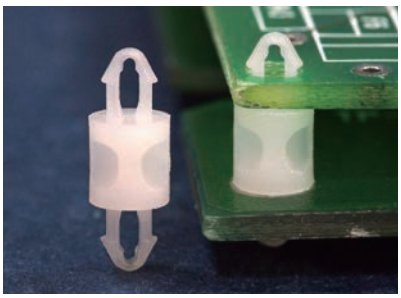


MOUNTING HOLE Ø2.5
THICKNESS 2.2



MOUNTING HOLE Ø2.5
THICKNESS 1.7

Part No.	Package
MAMDF-7	1000


MOUNTING HOLE Ø2.5
THICKNESS 2.0



MOUNTING HOLE Ø2.5
THICKNESS 1.2~1.7

Part No.	Package
MAMDL-9	1000


MOUNTING HOLE Ø2.5
THICKNESS 1.6



MOUNTING HOLE Ø2.5
THICKNESS 1.6

Part No.	A	Package
MADM-2.7S	2.7	2000
MADM-3S	3.0	


MOUNTING HOLE Ø2.5
THICKNESS 1.6



MOUNTING HOLE Ø2.5
THICKNESS 1.6

Part No.	Package
MADM-12.7	2000


MOUNTING HOLE Ø2.5
THICKNESS 1.6



MOUNTING HOLE Ø2.5
THICKNESS 1.6

【 MADM-2, MADM-3,
MADM-4.5 】

MOUNTING HOLE Ø2.5
THICKNESS 1.6





MOUNTING HOLE Ø2.5
THICKNESS 1.6

Part No.	A	Package
MADM-2	2.0	2000
MADM-3	3.0	
MADM-4	4.0	
MADM-4.5	4.5	
MADM-5	5.0	
MADM-6	6.0	
MADM-6.5	6.5	
MADM-7.5	7.5	
MADM-8	8.0	
MADM-9.5	9.5	
MADM-10A	10.0	
MADM-10	10.5	
MADM-27	27.0	

PCB間隔柱 PCB SPACER


用途：PC板與PC板間之固定，不佔空間。

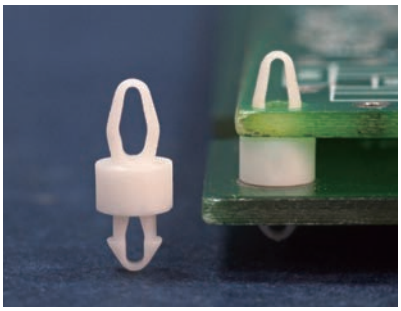

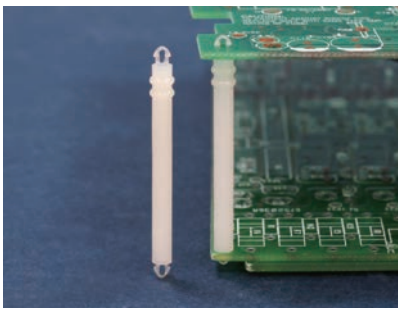

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


MOUNTING HOLE Ø2.5
THICKNESS 1.0



MOUNTING HOLE Ø2.5
THICKNESS 1.6


Part No.	Package
MADE-2.8	1000

MOUNTING HOLE Ø2.5
THICKNESS 1.6




MOUNTING HOLE Ø2.5
THICKNESS 1.0

Part No.	B	C	Package
MAC-40	1.8	1.2	500
MAC-40S	1.5	1.0	

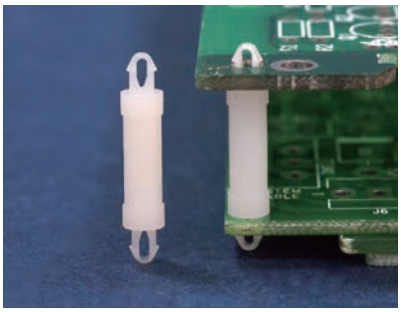


MOUNTING HOLE Ø2.5
THICKNESS 2.0



MOUNTING HOLE Ø2.5
THICKNESS 2.0


Part No.	Package
MAHC-14.3	1000

MOUNTING HOLE Ø2.6
THICKNESS 1.6




MOUNTING HOLE Ø2.6
THICKNESS 1.6

Part No.	A	Package
MAHC-6.4S	6.4	1000
MAHC-9.5S	9.5	
MAHC-12.7S	12.7	
MAHC-15.9S	15.9	

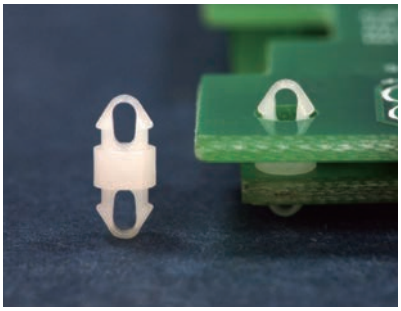


MOUNTING HOLE Ø2.6
THICKNESS 1.0



MOUNTING HOLE Ø2.5
THICKNESS 1.6

Part No.	Package
MADAB-4.3	1000


MOUNTING HOLE Ø2.6
THICKNESS 1.0




MOUNTING HOLE Ø2.6
THICKNESS 1.0

Part No.	Package
MADM1-2.2	2000

用途：PC板與PC板間之固定，不佔空間。

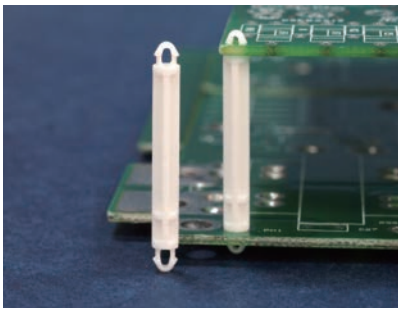


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




MOUNTING HOLE Ø3.0
THICKNESS 1.2

MOUNTING HOLE Ø3.0
THICKNESS 1.6

Part No.	Package
MADL-27.8	1000

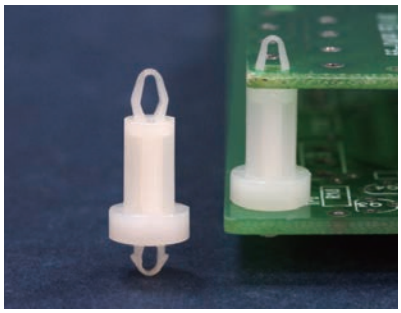





MOUNTING HOLE Ø3.0
THICKNESS 1.2

MOUNTING HOLE Ø3.0
THICKNESS 1.6

Part No.	Package
MAMDC-12	1000

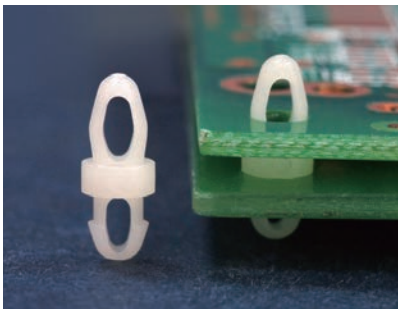



MOUNTING HOLE Ø3.1
THICKNESS 1.4~1.6



MOUNTING HOLE Ø3.0
THICKNESS 1.45~1.6

Part No.	Package
MADD-2	1000

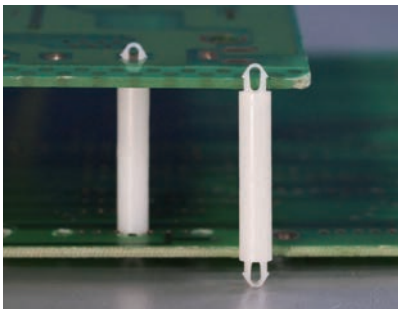





MOUNTING HOLE Ø3.2
THICKNESS 1.6

MOUNTING HOLE Ø3.2
THICKNESS 1.6

Part No.	Package
MADN-24	1000

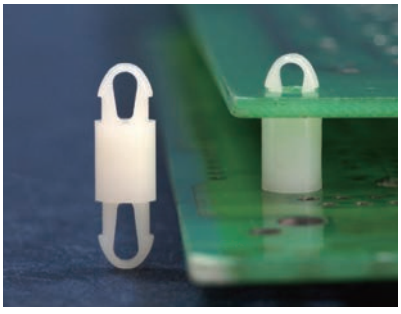

MOUNTING HOLE Ø3.5
THICKNESS 1.6




MOUNTING HOLE Ø3.5
THICKNESS 1.6

Part No.	A	Package
MAF-2	2.0	1000
MAF-3	3.0	
MAF-4	4.0	
MAF-5	5.0	
MAF-6	6.0	
MAF-7	7.0	
MAF-8	8.0	

Part No.	A	Package
MAF-10	10.0	1000
MAF-11	11.0	
MAF-12	12.0	
MAF-14	14.0	
MAF-16	16.0	
MAF-18	18.0	
MAF-20	20.0	
MAF-22	22.0	


PCB間隔柱 PCB SPACER

用途：PC板與PC板間之固定，不佔空間。

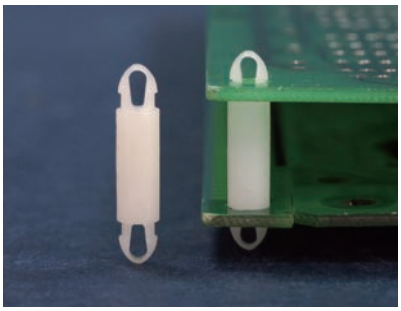

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


MOUNTING HOLE Ø3.5
THICKNESS 1.6



MOUNTING HOLE Ø3.5
THICKNESS 1.6

Part No.	Package
MAD3.5-12	1000


MOUNTING HOLE Ø3.5
THICKNESS 2.1



MOUNTING HOLE Ø3.5
THICKNESS 1.6


Part No.	Package
MDLS-4.5	1000

MOUNTING HOLE Ø3.5
THICKNESS 1.6




MOUNTING HOLE Ø3.5
THICKNESS 2.5

Part No.	Package
MAFA-6	1000

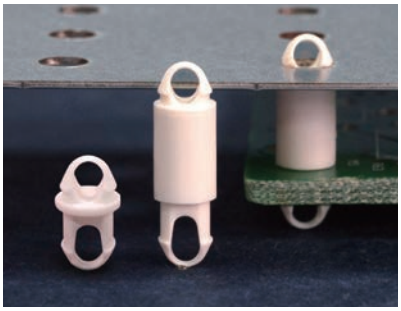


MOUNTING HOLE Ø5.0
THICKNESS 0.8




MOUNTING HOLE Ø5.0
THICKNESS 4.0

Part No.	A	B	Package
MAFB5-0.8	0.8	11.8	500
MAFB5-9.7	9.7	20.7	

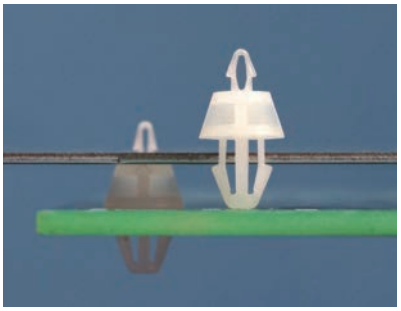


MOUNTING HOLE Ø1.5
THICKNESS 0.8



MOUNTING HOLE Ø3.0
THICKNESS 1.6


Part No.	Package
MAEB-3.2	1000

MOUNTING HOLE Ø2.5
THICKNESS 1.0




MOUNTING HOLE Ø4.0
THICKNESS 1.6

Part No.	Package
MAEE-4.5	1000

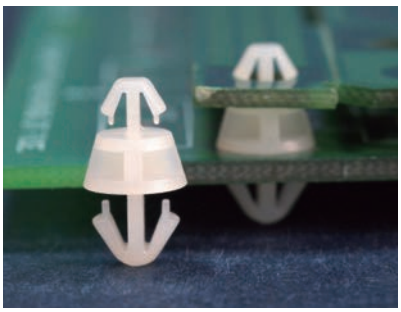


MOUNTING HOLE Ø3.0
THICKNESS 1.0



MOUNTING HOLE Ø4.0
THICKNESS: T

MOUNTING HOLE Ø3.0
THICKNESS 1.0




MOUNTING HOLE Ø4.8
THICKNESS: T

Part No.	B	T	Package
MAEA-3.5M	3.5	1.6	1000
MAEA-3.5	6.0	1.2	
MAEA-3.5L	6.0	1.6	
MAEA-3.5LS	4.1	1.6	


【 MAEA-3.5M 】

用途：PC板與PC板間之固定，不佔空間。

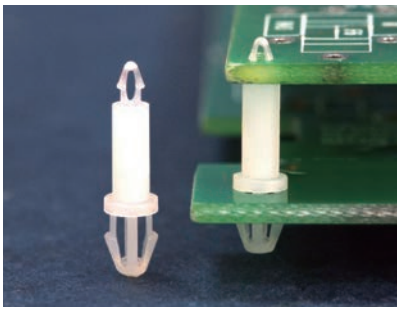


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

MOUNTING HOLE Ø1.5
THICKNESS 1.0




MOUNTING HOLE Ø3.0
THICKNESS 1.6

Part No.	Package
LCMB-8	1000

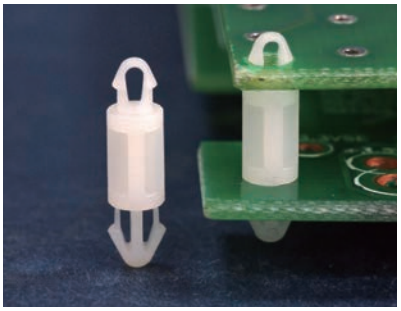


MOUNTING HOLE Ø2.5
THICKNESS 1.6



MOUNTING HOLE Ø3.0
THICKNESS 1.6


Part No.	Package
LCMC-7	1000

MOUNTING HOLE Ø3.5
THICKNESS 2.4





MOUNTING HOLE Ø3.5
THICKNESS 1.6

Part No.	Package
MAMDD-6	1000

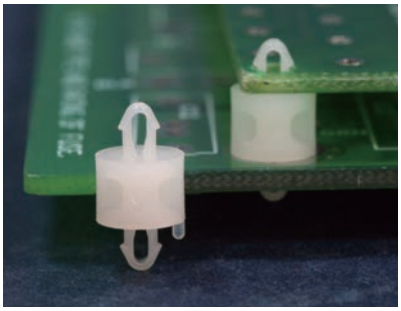

MOUNTING HOLE Ø2.5
THICKNESS 1.6







MOUNTING HOLE


MOUNTING HOLE Ø2.5
THICKNESS 1.6


Part No.	Package
MADMK-5	2000

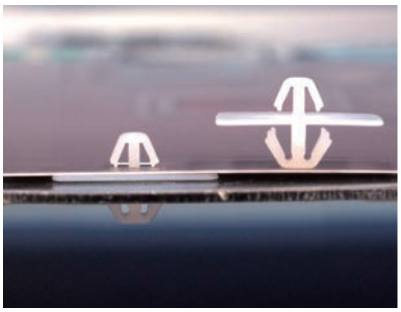




MOUNTING HOLE
THICKNESS: T








MOUNTING HOLE
THICKNESS 1.0~1.5


Part No.	A	B	T	Package
KVD-05	3.5	3.4	0.5	500
KVD-10	3.6	3.5	1.0	

PCB導電間隔柱 PCB CONDUCTIVE SPACER

用途：快速固定PC板於機板上，上下板可導電，抗E.M.I美觀 。

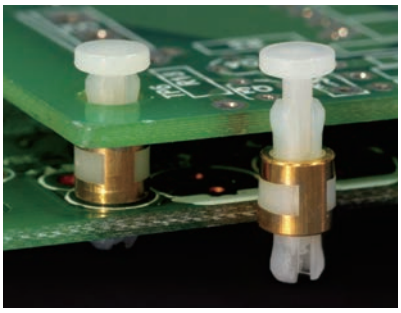


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm
- Patented（專利品）

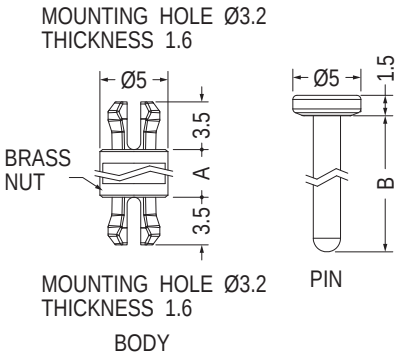


Part No.	A	B	Package
MSPP-3	3.0	10.0	1000
MSPP-4	4.0	11.0	
MSPP-5	5.0	12.0	

PCB間隔柱 PCB SPACER


用途：PC板與PC板間之固定，不佔空間。

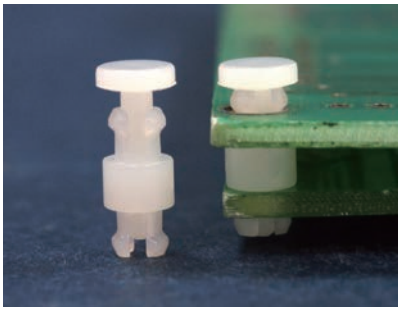


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

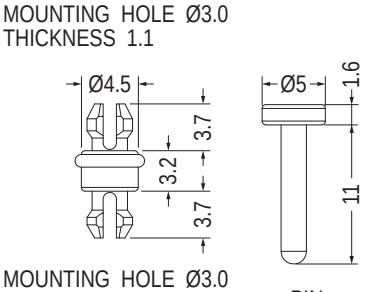


Part No.	Package
MSPC3-3.2L	1000

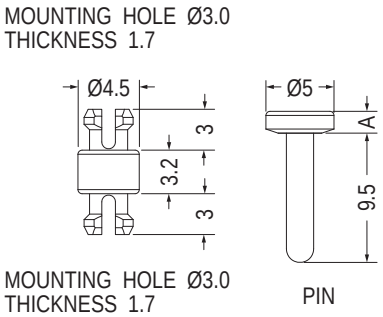


Part No.	A	Package
MSPC3-3.2	1.6	1000
MSPC3-3.2M	3.0	

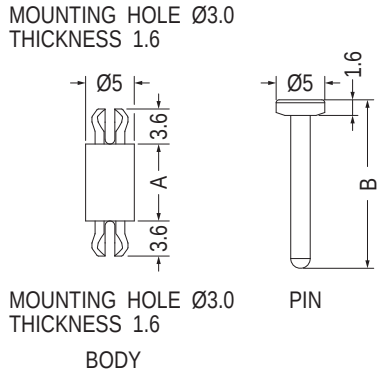


Part No.	A	B	Package
MSPF3-6.4	6.35	15.75	2000
MSPF3-8	7.9	17.3	
MSPF3-10	10.0	19.4	
MSPF3-12.7	12.7	22.1	
MSPF3-15.9	15.9	25.3	

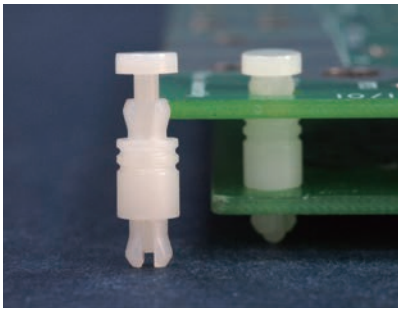

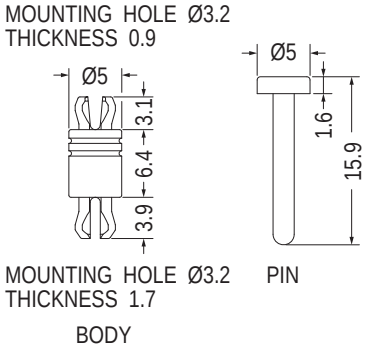


Part No.	Package
MSPB3.2-6.4	1000


用途：PC板與PC板間之固定，不佔空間。

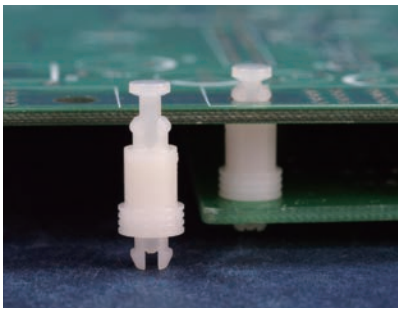

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

MOUNTING HOLE Ø3.3
THICKNESS 1.57






MOUNTING HOLE Ø3.2
THICKNESS 1.72

BODY

PIN

Part No.	Package
MSPB-8	1000

MOUNTING HOLE Ø3.3
THICKNESS 1.6






MOUNTING HOLE Ø3.2
THICKNESS 1.8


BODY


PIN

Part No.	Package
MSPB-8L	1000

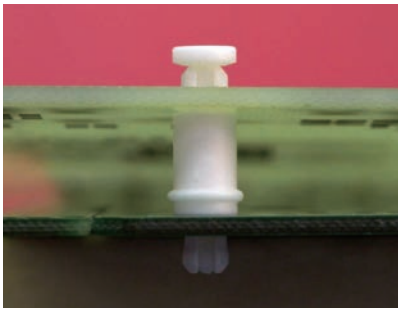

MOUNTING HOLE Ø3.3
THICKNESS 1.6






MOUNTING HOLE Ø3.3
THICKNESS 2.44


BODY


PIN

Part No.	Package
MSPF3.3-8L	1000

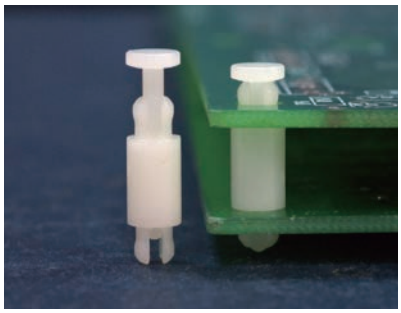

MOUNTING HOLE Ø3.3
THICKNESS 1.6






MOUNTING HOLE Ø3.3
THICKNESS 1.6


BODY

PIN

Part No.	A	B	Package
MSPF3.3-8	8.0	17.35	2000
MSPF3.3-17.5	17.5	26.3	

MOUNTING HOLE Ø3.3
THICKNESS 1.6






MOUNTING HOLE Ø3.3
THICKNESS 1.6


BODY

PIN

Part No.	Package
MSPCA-16	1000

MOUNTING HOLE Ø3.3
THICKNESS 1.6






MOUNTING HOLE Ø3.3
THICKNESS 1.6


BODY

PIN

Part No.	Package
MSPCA3.3-12S	1000

MOUNTING HOLE Ø3.3
THICKNESS 2.2





MOUNTING HOLE Ø3.3
THICKNESS 1.6


BODY

PIN


Part No.	Package
MSPCA3.3-12	1000

PCB間隔柱 PCB SPACER

用途：PC板與PC板間之固定，不佔空間。

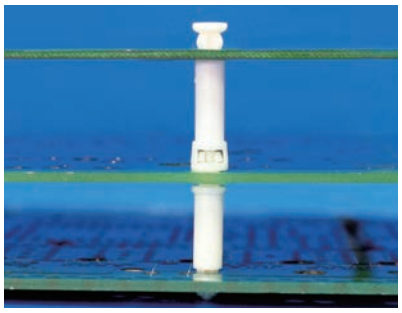


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm
- Patented（專利品）




Part No.	Part No.	Package
MSPO-1216S	MSPO-1216A	1000
	MSPO-1216BS	
	MSPO-1216C	

MOUNTING HOLE Ø3.3
THICKNESS 2.2




MOUNTING HOLE Ø3.3
THICKNESS 1.6

【 MSPO-1216A 】
BODY




【 MSPO-1216C 】
PIN


MOUNTING HOLE Ø3.3
THICKNESS 1.6




【 MSPO-1216BS 】

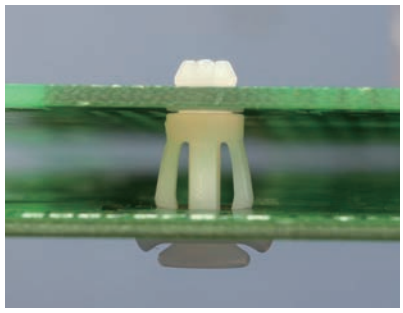

MOUNTING HOLE Ø4.0
THICKNESS 1.6






PIN


MOUNTING HOLE Ø7.0
THICKNESS 0.8~1.6

BODY


Part No.	Package
RCQC-7	1000

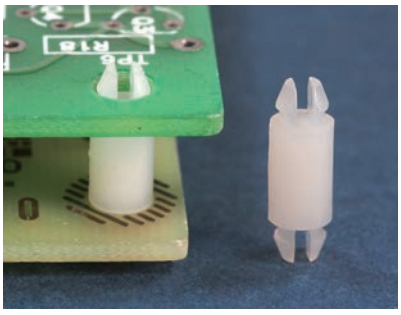


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
MSPS3S-7.5	1000




Part No.	A	Package
DMSB-5	5.0	1000
DMSB-8	8.0	

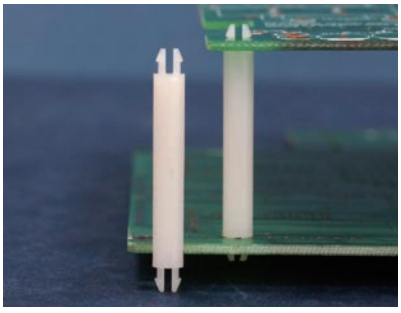




Part No.	A	Package
DMSS-28	28.6	1000
DMSS-38	38.1	

用途：PC板與PC板間之固定，不佔空間。

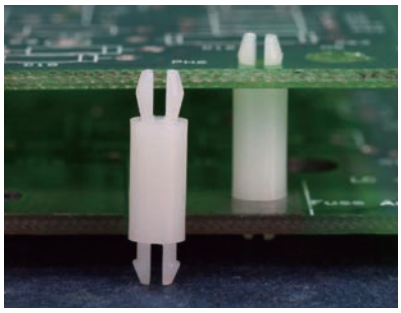

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


MOUNTING HOLE Ø3.2
THICKNESS 1.73



MOUNTING HOLE Ø3.2
THICKNESS 1.6

Part No.	Package
MSP3-8L	1000


MOUNTING HOLE Ø3.2
THICKNESS 1.6




MOUNTING HOLE Ø3.2
THICKNESS 1.6

Part No.	A	Package
★MSP3-1.6	1.6	1000
MSP3-3	3.2	
MSP3-4	4.0	
MSP3-5	4.8	
MSP3-5.8	5.8	
MSP3-6	6.4	
MSP3-8	7.9	
MSP3-8.5	8.5	
MSP3-9.5	9.5	
MSP3-10	10.0	

Part No.	A	Package
MSP3-11	11.1	1000
MSP3-12S	12.0	
MSP3-12	12.7	
MSP3-14	14.3	
MSP3-15.9	15.9	
MSP3-16	16.0	
MSP3-17	17.5	
MSP3-19	19.1	
MSP3-20	20.6	
MSP3-21	21.0	
MSP3-22	22.2	
MSP3-25	25.4	
MSP3-27	27.0	
MSP3-28	28.5	
MSP3-29.2	29.2	
MSP3-31.7	31.7	
MSP3-31.8	31.8	
MSP3-34	34.9	
MSP3-38	38.1	

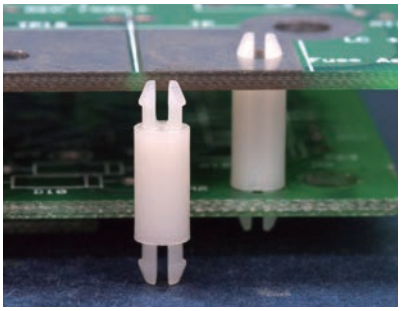


MOUNTING HOLE Ø3.2
THICKNESS 0.8



MOUNTING HOLE Ø3.2
THICKNESS 0.8

【 MSPS3-3S, MSPS3-3.2S 】


MOUNTING HOLE Ø3.2
THICKNESS 1.6




MOUNTING HOLE Ø3.2
THICKNESS 1.6

Part No.	A	Package
MSPS3-1.2	1.2	2000
MSPS3-3S	3.0	
MSPS3-3.2	3.2	1000

Part No.	A	Package
MSPS3-3.2S	3.2	1000
MSPS3-4	4.0	
MSPS3-4.8	4.8	
MSPS3-6.4	6.4	
MSPS3-8	7.9	
MSPS3-8.7	8.7	
MSPS3-9.5	9.5	
MSPS3-11.1	11.1	
MSPS3-12.7	12.7	
MSPS3-14.3	14.3	
MSPS3-15.9	15.9	
MSPS3-19.1	19.1	
MSPS3-20.6	20.6	
MSPS3-22.2	22.2	
MSPS3-25.4	25.4	
MSPS3-31.8	31.8	
MSPS3-34.9	34.9	

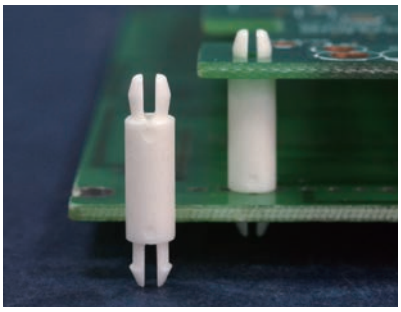

MOUNTING HOLE Ø3.2
THICKNESS 1.6




MOUNTING HOLE Ø3.2
THICKNESS 2.4

Part No.	Package
MSPL-11	1000


PCB間隔柱 PCB SPACER

用途：PC板與PC板間之固定，不佔空間。

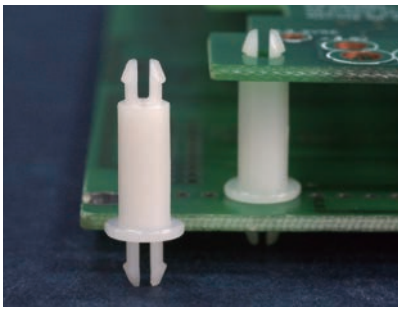


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

MOUNTING HOLE Ø3.2
THICKNESS 1.7




MOUNTING HOLE Ø3.2
THICKNESS 2.7

Part No.	Package
MSPMA-12	1000

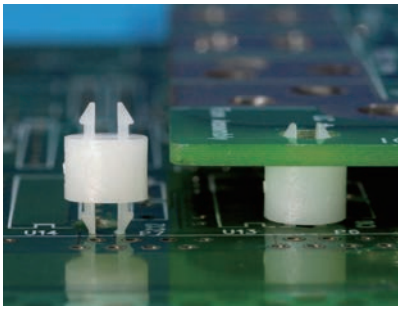


MOUNTING HOLE Ø3.3
THICKNESS 0.8




MOUNTING HOLE Ø3.3
THICKNESS 0.8

Part No.	Package
DMSC-4.5	2000

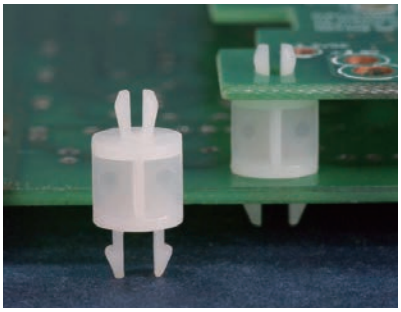


MOUNTING HOLE Ø3.3
THICKNESS 1.6




MOUNTING HOLE
THICKNESS: T

Part No.	A	B	C	T	Package
MSPD-7.9	7.9	4.1	2.6	2.16	1000
MSPD-7.9S	7.9	4.1	2.55	1.6	
MSPD-7.9L	7.9	4.1	2.55	2.34	
MSPD-12	12.0	4.1	2.55	2.16	
MSPD-12M	12.0	4.0	2.55	2.7	
MSPD-16	16.0	4.1	2.55	2.16	

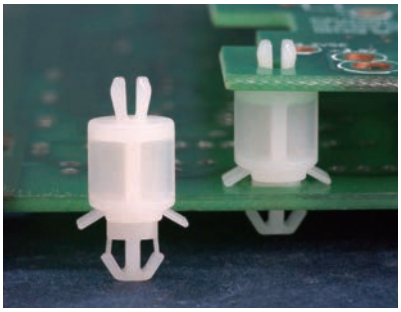


MOUNTING HOLE Ø3.3
THICKNESS 1.6




MOUNTING HOLE
THICKNESS 2.7~3.3

Part No.	A	Package
MSPN-9	9.0	1000
MSPN-12	12.0	


用途：PC板與PC板間之固定，不佔空間。

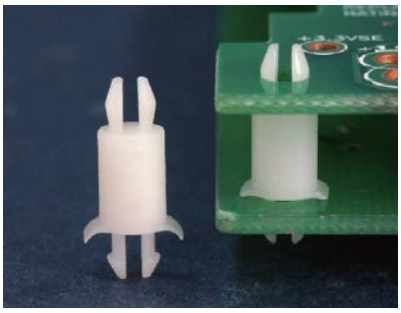

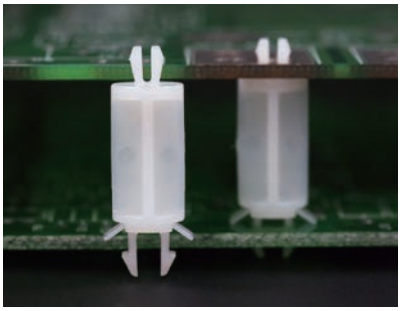

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


MOUNTING HOLE Ø3.3
THICKNESS 1.6~1.7



MOUNTING HOLE Ø3.2
THICKNESS 1.7~2.1

Part No.	Package
MSPH-7.5	1000


MOUNTING HOLE Ø4.3
THICKNESS 1.6~1.7



MOUNTING HOLE Ø4.0
THICKNESS 1.7~2.5


Part No.	Package
MSPH-6.8L	1000

MOUNTING HOLE Ø3.3
THICKNESS 1.6

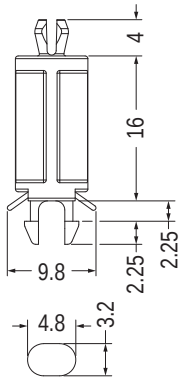


MOUNTING HOLE
THICKNESS 1.8~2.0

Part No.	Package
MSPQ-16	1000

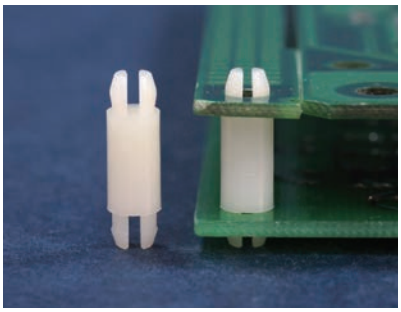


MOUNTING HOLE Ø3.9
THICKNESS 1.6




MOUNTING HOLE Ø3.9
THICKNESS 1.6
【 MSP-15.9S 】

MOUNTING HOLE Ø4.0
THICKNESS 1.6




MOUNTING HOLE Ø4.0
THICKNESS 1.6

Part No.	A	Package
MSP-3	3.2	1000
MSP-4	4.0	
MSP-4.5	4.5	
MSP-5	5.0	
MSP-6	6.3	
MSP-7	7.0	
MSP-8	8.0	
MSP-9	9.5	
MSP-10	10.5	
MSP-12	12.7	
MSP-14	14.0	
MSP-15	15.9	
MSP-15.9S	15.9	
MSP-19	19.0	
MSP-22	22.0	

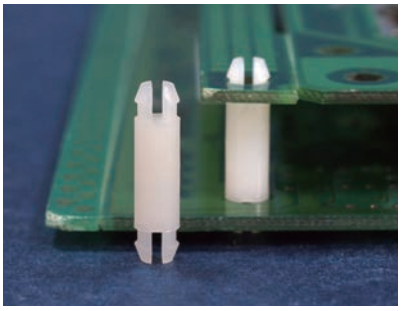


MOUNTING HOLE Ø4.0
THICKNESS 1.6




MOUNTING HOLE Ø4.0
THICKNESS 1.6

Part No.	A	Package
DMSP-4.8	4.8	1000
DMSP-6.4	6.4	
DMSP-11.1	11.1	

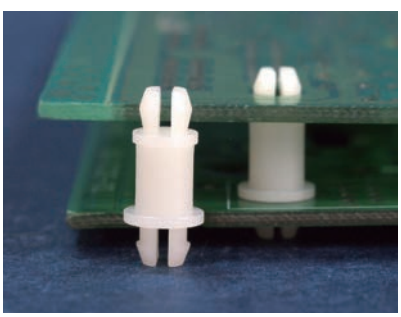

MOUNTING HOLE Ø4.0
THICKNESS 1.6





MOUNTING HOLE Ø4.0
THICKNESS 1.6

Part No.	A	B	C	Package
DMSPS-5	5.0	4.3	4.6	1000
DMSPS-6.4	6.4	4.4	4.6	
DMSPS-7.9	7.9	4.3	4.6	
DMSPS-12.7	12.7	4.3	4.6	
DMSPS-17.5	17.5	4.3	4.6	
DMSPS-17.5S	17.5	4.2	4.25	

PCB間隔柱 PCB SPACER


用途：PC板與PC板間之固定，不佔空間。

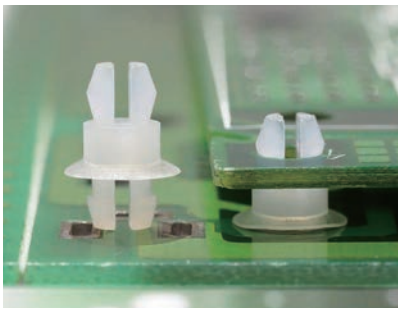

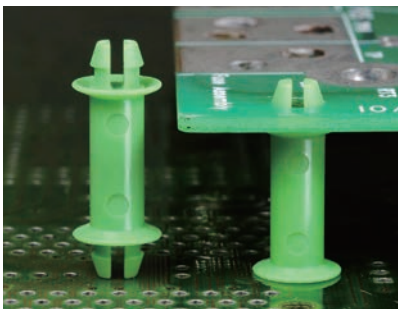

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


MOUNTING HOLE Ø3.9
THICKNESS 1.6



MOUNTING HOLE Ø3.9
THICKNESS 1.6

Part No.	Package
MSPV-3	1000


MOUNTING HOLE Ø3.96
THICKNESS 1.58




MOUNTING HOLE Ø3.96
THICKNESS 1.58

- Color: Green

Part No.	Package
MSPY-12.7	1000

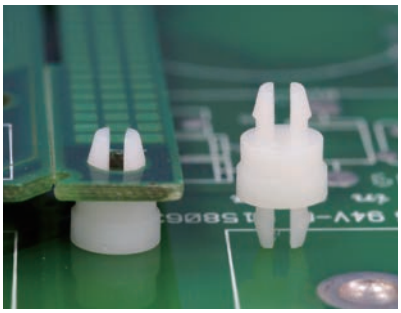


MOUNTING HOLE Ø4.0
THICKNESS 1.57



MOUNTING HOLE Ø4.0
THICKNESS 1.57


Part No.	Package
SP1-4.8	2000

MOUNTING HOLE Ø4.0
THICKNESS 1.6




MOUNTING HOLE Ø4.0
THICKNESS 1.6

Part No.	A	Package
MSPM-5	4.8	1000
MSPM-24	23.8	

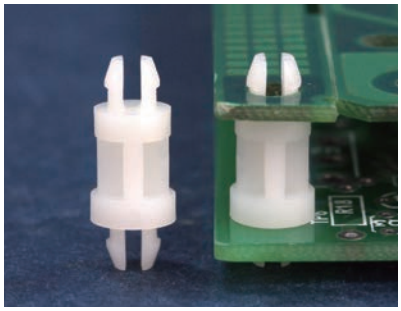


MOUNTING HOLE Ø4.0
THICKNESS 1.6



MOUNTING HOLE Ø4.0
THICKNESS 1.6

Part No.	A	Package
MSP1-6.4	6.4	1000
MSP1-9.5	9.5	
MSP1-10	10.0	
MSP1-12.7	12.7	
MSP1-15.9	15.9	
MSP1-17	17.0	
MSP1-19.1	19.1	
MSP1-22.2	22.2	
★MSP1-25	25.0	
MSP1-25.4	25.4	


MOUNTING HOLE Ø4.0
THICKNESS 1.6



MOUNTING HOLE Ø4.8
THICKNESS 1.6

【 MSPK45-4.8 】


MOUNTING HOLE Ø4.0
THICKNESS 1.6



MOUNTING HOLE Ø4.8
THICKNESS 1.6


Part No.	A	Package
MSPK45-4.8	4.8	2000
MSPK45-6.4	6.4	
MSPK45-9.5	9.5	
MSPK45-12.7	12.7	1000
MSPK45-15.9	15.9	
MSPK45-19.1	19.1	
MSPK45-22.2	22.2	
MSPK45-25.4	25.4	

用途：PC板與PC板間之固定，不佔空間。

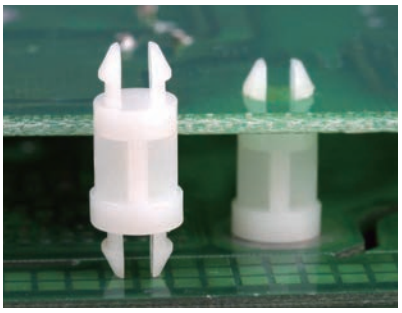


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

MOUNTING HOLE Ø4.8
THICKNESS 1.6



MOUNTING HOLE Ø4.8
THICKNESS 1.6


MOUNTING HOLE Ø4.8
THICKNESS 1.6




MOUNTING HOLE Ø4.8
THICKNESS 1.6


【 MSPK4.8-4.8 】

Part No.	A	Package
MSPK4.8-4.8	4.8	2000
MSPK4.8-6.4	6.4	
MSPK4.8-9.5	9.5	
MSPK4.8-12.7	12.7	
MSPK4.8-15.9	15.9	1000
MSPK4.8-19.1	19.1	
MSPK4.8-22.2	22.2	
MSPK4.8-25.4	25.4	
MSPK4.8-31.7	31.75	

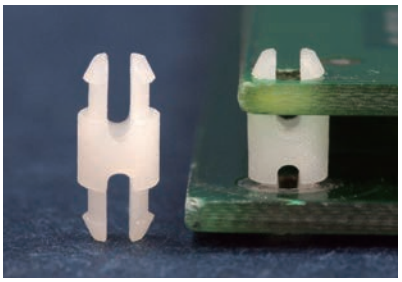

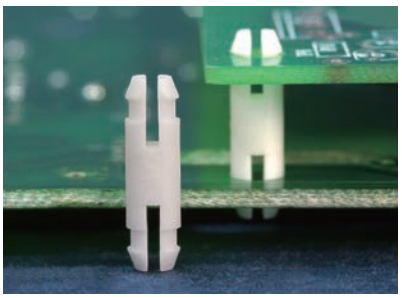


MOUNTING HOLE Ø3.0
THICKNESS 1.6



MOUNTING HOLE Ø3.0
THICKNESS 1.6

Part No.	Package
SSDU1-3.5	1000


MOUNTING HOLE Ø4.0
THICKNESS 1.6



MOUNTING HOLE Ø4.0
THICKNESS 1.6


Part No.	Package
SSDUA-16.5	1000

MOUNTING HOLE Ø4.0
THICKNESS 1.6




MOUNTING HOLE Ø4.0
THICKNESS 1.6

Part No.	Package
DMSA-9	1000

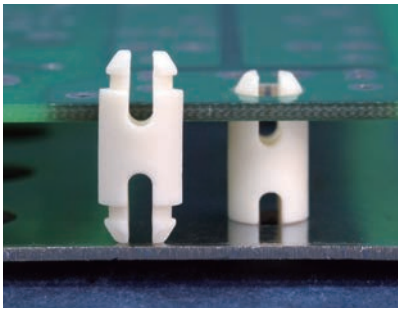



MOUNTING HOLE Ø5.2
THICKNESS: T



MOUNTING HOLE Ø5.2
THICKNESS: T

Part No.	A	B	C	T	Package
SSDU-9.2	9.2	1.55	1.55	1.6	1000
SSDU-9.6	9.6	1.85	1.85	1.2	

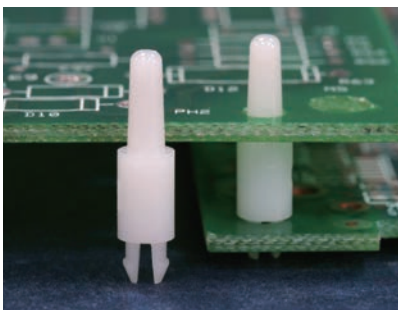




MOUNTING HOLE Ø3.2
THICKNESS 1.6


Part No.	Package
MSPE-7	1000

用途：PC板與PC板間之固定，不佔空間。

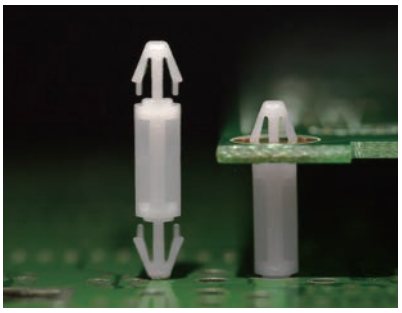


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

MOUNTING HOLE Ø3.0
THICKNESS: T



MOUNTING HOLE Ø3.0
THICKNESS: T


Part No.	A	B	C	T	Package
LCVU-8	8.0	3.7	3.7	1.2~1.8	1000
LCVU-9	9.0	3.55	3.55	2.0	
LCVU-10	10.0	3.7	3.7	1.2~1.8	



MOUNTING HOLE Ø3.0
THICKNESS: E

MOUNTING HOLE Ø3.0
THICKNESS: T


Part No.	A	B	E	T	Package
LCVA-2	2.0	3.1	1.6	0.8~1.0	2000
LCVA-2.5	2.5	3.0	0.8~1.0	1.6	
LCVA-4	4.0	3.1	1.6	0.8~1.0	
LCVA-5	5.0	3.1	1.6	0.8~1.0	




MOUNTING HOLE Ø3.0
THICKNESS: E

MOUNTING HOLE Ø3.0
THICKNESS: T

Part No.	A	B	C	E	T	Package
LCV-2.5	2.5	3.4	3.4	1.6	1.6	1000
LCV-3	3.0	3.55	3.55	1.6	1.6	
LCV-5	5.0	3.4	3.4	1.8	1.8	
LCV-6	6.0	3.6	3.6	1.2~1.7	0.8~1.0	

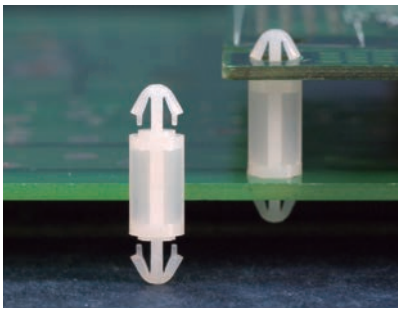




MOUNTING HOLE: ØG
THICKNESS 1.2~1.7

MOUNTING HOLE: ØG
THICKNESS 1.2~1.7


Part No.	A	G	Package
LCJ-14	14.0	3.0	1000
LCJ-15	15.0	3.2	
LCJ-19	19.0	3.0	
LCJ-21	21.0	3.0	



MOUNTING HOLE Ø3.0
THICKNESS 1.2~1.6

MOUNTING HOLE Ø4.0
THICKNESS 3.6~4.0

Part No.	Package
LCX-31	2000




MOUNTING HOLE Ø3.5
THICKNESS: T

MOUNTING HOLE Ø3.5
THICKNESS: T

Part No.	A	T	Package
LCI-2.5	2.5	1.2~1.7	2000
LCI-3	3.0	1.2~1.7	
LCI-3.5	3.5	1.2~1.7	
LCI-4	4.0	1.2~1.7	
LCI-4.5	4.5	1.2~1.7	
LCI-5	5.0	1.2~1.7	
LCI-5.5	5.5	1.2~1.7	


Part No.	A	T	Package
LCI-6	6.0	1.2~1.7	1000
LCI-6.5	6.35	1.2~1.7	
LCI-7	7.0	1.2~1.7	
LCI-8	8.0	1.2~1.7	
LCI-9	9.0	1.2~1.7	
LCI-10	10.0	1.2~1.7	
LCI-10L	10.0	2.38	
LCI-11	11.0	1.2~1.7	
LCI-12	12.0	1.2~1.7	
LCI-15	15.0	1.2~1.7	
LCI-15(2)	15.0	1.6~2.4	
LCI-20	20.0	1.2~1.7	
LCI-22	22.0	1.2~1.7	
LCI-30L	30.0	1.6~2.4	500

用途：PC板與PC板間之固定，不佔空間。

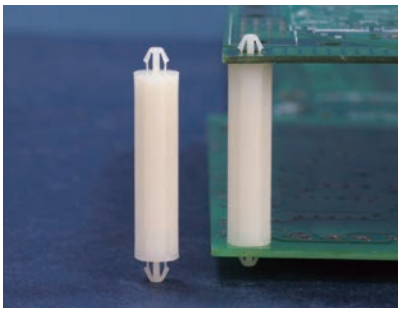


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

MOUNTING HOLE Ø3.5
THICKNESS 1.6




MOUNTING HOLE Ø3.5
THICKNESS 1.6

Part No.	Package
LDE-33	1000

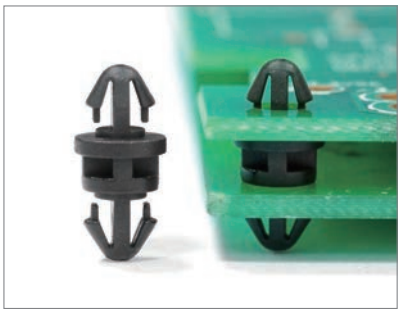


MOUNTING HOLE Ø3.4
THICKNESS 1.2~1.7




MOUNTING HOLE Ø3.7
THICKNESS 1.2~1.7

Part No.	Package
LCIA-3.5	1000

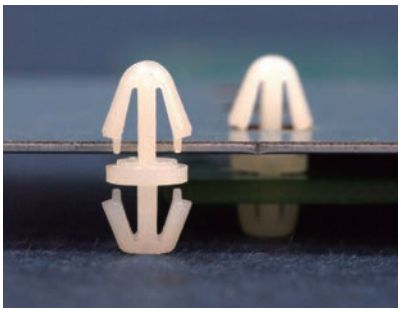


MOUNTING HOLE Ø4.0
THICKNESS 1.2~1.6




MOUNTING HOLE Ø4.0
THICKNESS 0.8

Part No.	Package
LCK-1	1000

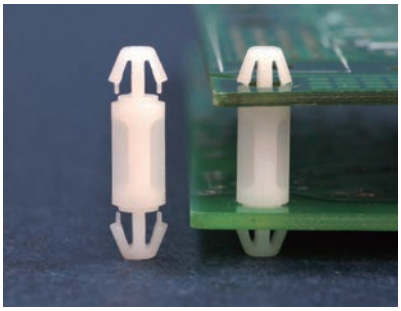

MOUNTING HOLE Ø4.0
THICKNESS 1.2~1.7




MOUNTING HOLE Ø4.0
THICKNESS 1.2~1.7

Part No.	A	Package
LCC-3S	3.0	2000
LCC-3	3.5	
LCC-4	4.0	
LCC-5	5.0	
LCC-6S	6.0	
LCC-6	6.4	
LCC-7	7.0	1000
LCC-8	8.0	
LCC-9.5	9.5	
LCC-10S	10.0	
LCC-10	10.5	
LCC-11.5	11.5	
LCC-12S	12.0	
LCC-12	12.7	
LCC-14	14.0	
LCC-15	15.9	


Part No.	A	Package
LCC-18	18.0	1000
LCC-19	19.0	
LCC-20	20.0	
LCC-25	25.0	
LCC-25.4	25.4	
LCC-27	27.0	
LCC-30	30.0	
LCC-34	34.0	
LCC-40	40.0	
LCC-45	45.0	
LCC-55	55.0	500
LCC-69	69.0	
LCC-71	71.2	
LCC-72	72.0	
LCC-74	74.2	
LCC-80	80.0	

PCB間隔柱 PCB SPACER

用途：PC板與PC板間之固定，不佔空間。

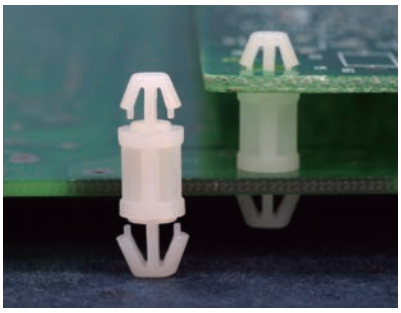


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



MOUNTING HOLE Ø4.0
THICKNESS 1.6

MOUNTING HOLE Ø4.8
THICKNESS 1.6


Part No.	A	Package
LCBM-3	3.0	1000
LCBM-4	4.0	
LCBM-6	6.0	
LCBM-8	8.0	
LCBM-10	10.0	
LCBM-12	12.0	
LCBM-14	14.0	
LCBM-16	16.0	
LCBM-18	18.0	




MOUNTING HOLE Ø4.0
THICKNESS 1.6

MOUNTING HOLE Ø4.8
THICKNESS 2.4

Part No.	Package
LCBM-19L	1000

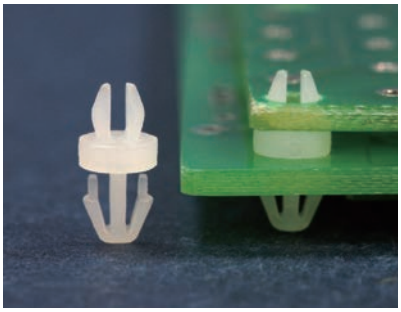


MOUNTING HOLE Ø2.6
THICKNESS 1.0



MOUNTING HOLE Ø2.8
THICKNESS 1.6


Part No.	Package
MSPA-1.6	2000

MOUNTING HOLE Ø2.8
THICKNESS 1.6




MOUNTING HOLE Ø2.8
THICKNESS 1.6

Part No.	Package
MSPA-6.3L	1000

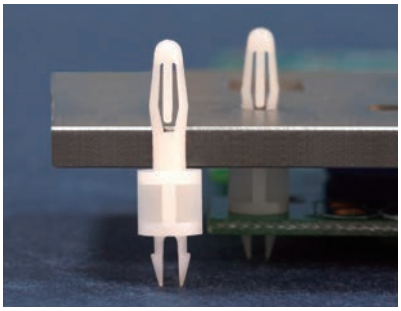

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


MOUNTING HOLE Ø3.0
THICKNESS 4.0



MOUNTING HOLE Ø3.0
THICKNESS 1.6

Part No.	Package
LMSA-6	1000

MOUNTING HOLE Ø3.2
THICKNESS 1.6




MOUNTING HOLE Ø3.2
THICKNESS 2.6

Part No.	Package
LMSE-4.8	1000

用途：PC板與PC板間之固定，不佔空間。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




MOUNTING HOLE Ø3.2
THICKNESS 1.6

MOUNTING HOLE Ø3.2
THICKNESS 1.0~1.2

Part No.	Package
LMSB-4	1000

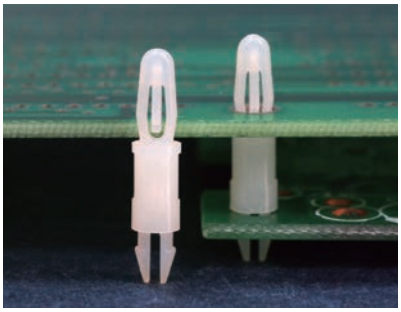




MOUNTING HOLE Ø3.2
THICKNESS 1.6~1.8


MOUNTING HOLE Ø3.2
THICKNESS 1.6

Part No.	A	Package
LMSP-8	7.9	1000
LMSP-9.5	9.5	
LMSP-16	15.9	

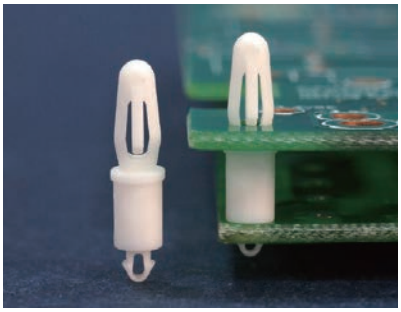

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


MOUNTING HOLE Ø3.2
THICKNESS 1.6~1.7



MOUNTING HOLE Ø2.0
THICKNESS 1.0~1.2


Part No.	Package
LCPL-6.4	1000

MOUNTING HOLE Ø3.5
THICKNESS 1.6




MOUNTING HOLE Ø2.6
THICKNESS 1.6

Part No.	Package
LCPLB-11	1000

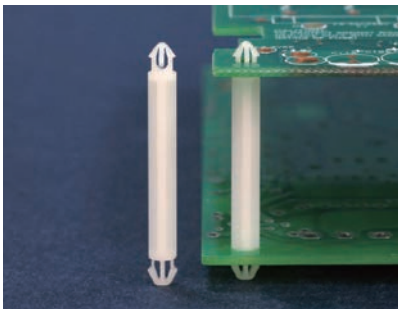

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

MOUNTING HOLE Ø3.3
THICKNESS 1.6~2.1




MOUNTING HOLE Ø3.3
THICKNESS 1.6


Part No.	Package
LCOA-28.8	1000

PCB間隔柱 PCB SPACER

用途：PC板與PC板間之固定，不佔空間。

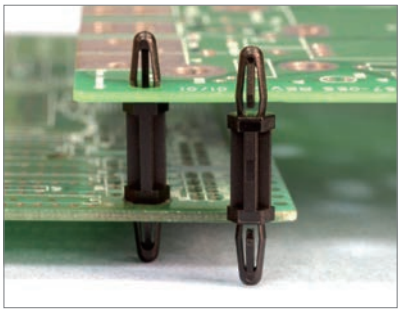


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




MOUNTING HOLE Ø4.0
THICKNESS 1.6

MOUNTING HOLE Ø4.0
THICKNESS 1.6

Part No.	Package
LCSF-15	1000

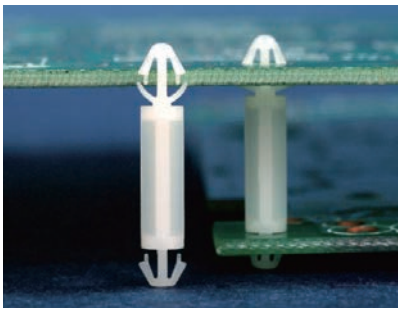





MOUNTING HOLE Ø3.0
THICKNESS 1.6

MOUNTING HOLE Ø3.0
THICKNESS: T

Part No.	T	Package
LCGA-14	0.8~1.0	1000
LCGA-14S	0.6	

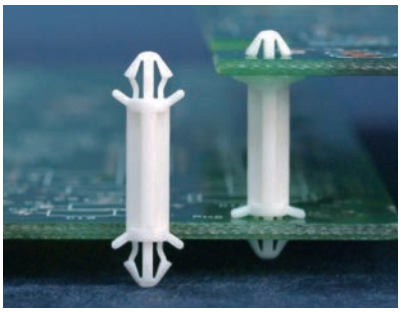





MOUNTING HOLE Ø3.0
THICKNESS 1.2~1.6

MOUNTING HOLE Ø3.0
THICKNESS 1.2~1.6

Part No.	Package
CBSA-13	1000

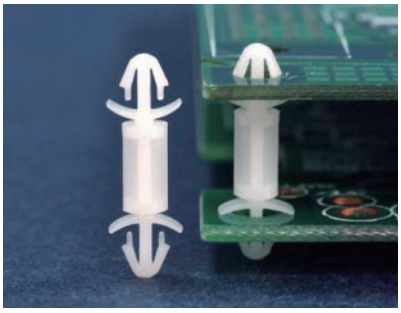


MOUNTING HOLE Ø3.0
THICKNESS 1.2~2.0



MOUNTING HOLE Ø3.0
THICKNESS 1.2~2.0

MOUNTING HOLE Ø3.0
THICKNESS 1.2~2.0




MOUNTING HOLE Ø3.5
THICKNESS 1.6~2.0

Part No.	A	Package
LCF-3	3.2	1000
LCF-4	4.0	
LCF-5	5.0	
LCF-6S	6.0	
LCF-6	6.35	
LCF-7	7.0	
LCF-8	8.0	
LCF-9	9.5	
LCF-10.6	10.6	


Part No.	A	Package
LCF-11	11.2	1000
LCF-12	12.0	
LCF-14.4	14.4	
LCF-15	15.0	
LCF-16	16.0	
LCF-17	17.0	
LCF-20	20.2	
LCF-22	22.0	
LCF-25	25.4	

Part No.	A	Package
LCFO-3	3.0	1000
LCFO-3.5	3.5	
LCFO-4	4.0	
LCFO-4.8	4.8	
LCFO-6	6.0	
LCFO-6.4	6.4	
LCFO-7	7.0	
LCFO-8	8.0	
LCFO-9	9.0	
LCFO-10	10.0	
LCFO-11.5	11.5	
LCFO-12.7	12.7	
LCFO-14	14.0	
LCFO-16	16.0	

用途：PC板與PC板間之固定，不佔空間。

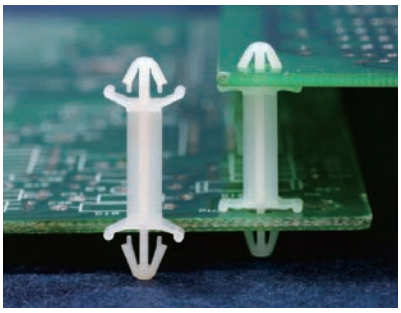


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




MOUNTING HOLE Ø3.5
THICKNESS 1.0

MOUNTING HOLE Ø3.5
THICKNESS 1.6

Part No.	Package
CBCS-14	1000

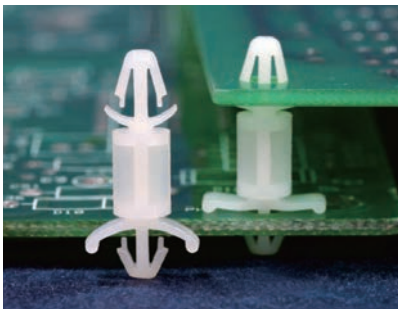





MOUNTING HOLE Ø3.5
THICKNESS 1.6


MOUNTING HOLE Ø3.5
THICKNESS 0.8~2.0

Part No.	A	Package
LCD-3	3.2	2000
LCD-4	4.0	
LCD-5	4.8	1000
LCD-6	6.4	
LCD-7	7.0	
LCD-8	8.0	
LCD-9	9.6	
LCD-11	11.2	
LCD-12	12.7	
LCD-14	14.0	
LCD-16	16.0	
LCD-18	18.0	
LCD-19	19.1	
LCD-27	27.5	

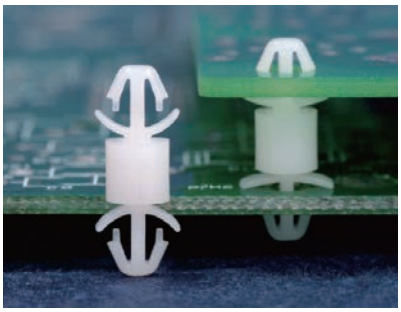

MOUNTING HOLE Ø3.5
THICKNESS 1.6~2.0







MOUNTING HOLE Ø3.5
THICKNESS 1.6~2.0

Part No.	A	D	Package
LCO-5	5.0	3.6	1000
LCO-6.4	6.4	5.0	
LCO-8	8.0	6.6	

MOUNTING HOLE Ø3.5
THICKNESS 1.6~2.0






MOUNTING HOLE Ø3.5
THICKNESS 1.6~2.0

Part No.	A	D	Package
LCO-10	10.0	8.6	1000
LCO-11	11.0	9.6	
LCO-12.7	12.7	11.3	
LCO-15.9	15.9	14.5	

MOUNTING HOLE Ø3.5
THICKNESS 2.0~2.5




MOUNTING HOLE Ø3.5
THICKNESS 2.0~2.5


Part No.	D	Package
LCO-10L	10.1	1000
LCO-10.5L	10.5	

PCB間隔柱 PCB SPACER

用途：PC板與PC板間之固定，不佔空間。

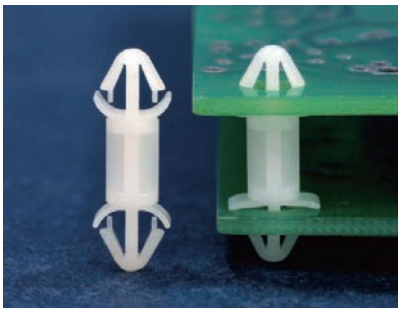


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




MOUNTING HOLE Ø4.0
THICKNESS 1.6

MOUNTING HOLE Ø4.0
THICKNESS 1.6

Part No.	Package
LCFB-8	1000

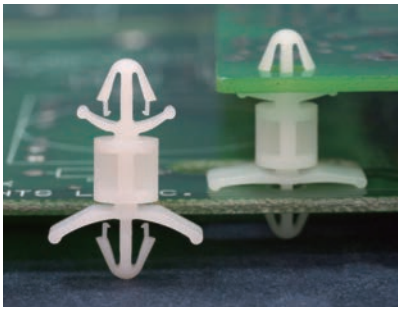





MOUNTING HOLE Ø4.0
THICKNESS 1.6

MOUNTING HOLE Ø4.0
THICKNESS 1.6

Part No.	Package
LCBJ-9	1000

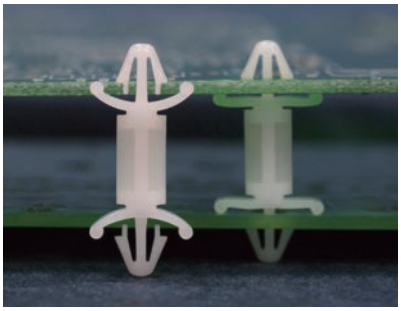





MOUNTING HOLE Ø4.0
THICKNESS 0.8~1.7

MOUNTING HOLE Ø4.0
THICKNESS 0.8~1.7

Part No.	A	Package
LCTA-4.8	4.8	2000
LCTA-12.7	12.7	1000

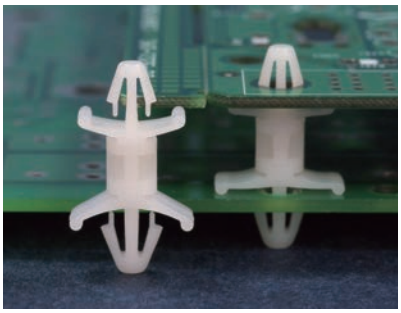





MOUNTING HOLE Ø4.0
THICKNESS 0.8~2.0

MOUNTING HOLE Ø4.5
THICKNESS 0.8~2.0

Part No.	Package
LCT-9	1000

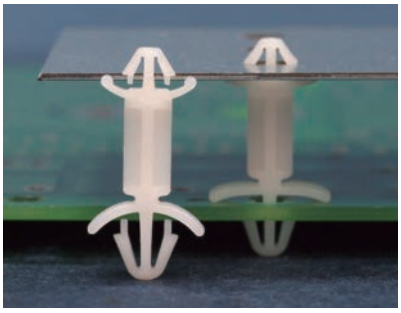




MOUNTING HOLE Ø4.0
THICKNESS 1.0

MOUNTING HOLE Ø4.8
THICKNESS 1.6


Part No.	Package
LCBD-12.7	1000

用途：PC板與PC板間之固定，不佔空間。

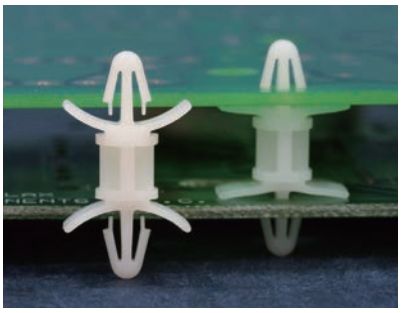

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


MOUNTING HOLE Ø4.0
THICKNESS: T



MOUNTING HOLE Ø4.0
THICKNESS: T

Part No.	A	T	Package
LCEO-5	4.8	0.8~2.0	1000
LCEO-6	6.4	0.8~2.0	
LCEO-8	7.9	0.8~2.0	
LCEO-9	9.5	0.8~2.0	
LCEO-12	12.7	0.8~2.0	
LCEO-12L	11.9	1.2~2.3	
LCEO-15	15.9	0.8~2.0	
LCEO-19	19.0	0.8~2.0	
LCEO-22	22.2	0.8~2.0	


MOUNTING HOLE Ø4.0
THICKNESS 1.6~2.0



MOUNTING HOLE Ø4.8
THICKNESS 0.8~2.0

Part No.	A	Package
LCBZ-4.8	4.8	1000
LCBZ-6.4	6.4	


MOUNTING HOLE Ø4.75
THICKNESS 1.6



MOUNTING HOLE Ø4.75
THICKNESS 1.6

Part No.	Package
★LCBF-7.4	1000


MOUNTING HOLE Ø4.8
THICKNESS 0.8~2.0



MOUNTING HOLE Ø4.8
THICKNESS 0.8~2.0


Part No.	Package
LCBYR-4.8	1000

MOUNTING HOLE Ø4.8
THICKNESS 0.8~2.0




MOUNTING HOLE Ø4.8
THICKNESS 0.8~2.0

Part No.	A	Package
LCBY-4.8	4.8	1000
LCBY-6.4	6.4	
LCBY-9.5	9.5	
LCBY-12.7	12.7	
LCBY-15.9	15.9	
LCBY-19.1	19.1	
LCBY-22.2	22.2	

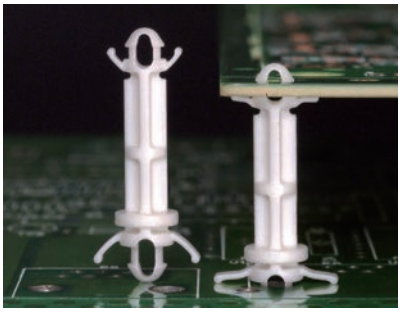


MOUNTING HOLE Ø3.0
THICKNESS 0.8




MOUNTING HOLE: ØG
THICKNESS: T

NEW

Part No.	A	G	T	Package
MADP-17.5	17.5	3.0	1.5	1000
MADP-20S	19.6	4.0	1.2	

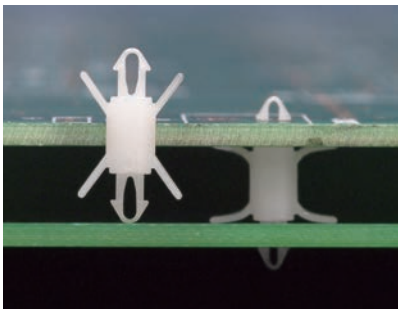

MOUNTING HOLE Ø2.0
THICKNESS 0.8~1.6





MOUNTING HOLE Ø2.0
THICKNESS 0.8~1.6


Part No.	Package
MADG-5.4	2000


PCB間隔柱 PCB SPACER

用途：PC板與PC板間之固定，不佔空間。

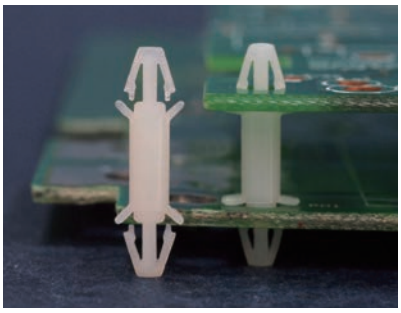

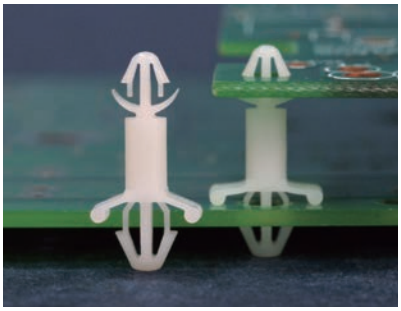


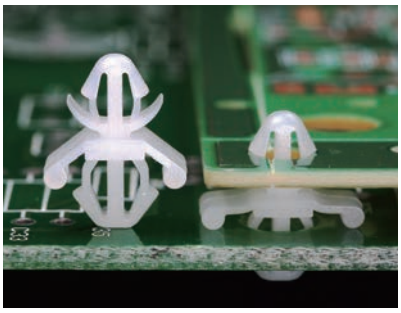

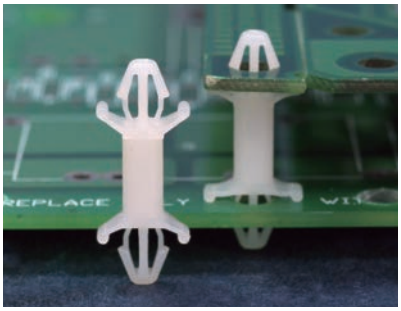

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


MOUNTING HOLE Ø3.0
THICKNESS 1.6



MOUNTING HOLE Ø3.0
THICKNESS 1.6


Part No.	A	Package
LCA-6	6.3	1000
LCA-8	8.0	
LCA-10	10.0	
LCA-11	11.0	
LCA-12	12.7	

MOUNTING HOLE Ø3.0
THICKNESS 0.8~2.0



MOUNTING HOLE Ø4.0
THICKNESS 1.2~2.6


Part No.	A	Package
LCH-3	3.5	1000
LCH-4	4.0	
LCH-5	5.0	
LCH-6	6.3	
LCH-7	7.4	
LCH-8	8.5	
LCH-10	10.0	
LCH-11	11.0	
LCH-12	12.7	
LCH-15	15.9	



MOUNTING HOLE Ø3.0
THICKNESS 0.7~1.6

MOUNTING HOLE Ø4.0
THICKNESS 0.8~2.5

Part No.	A	C	Package
★LCH-3.3S	3.3	2.2	1000
★LCH-6.3S	6.3	2.2	
LCH-8S	8.0	2.5	
LCH-10S	10.0	2.5	
LCH-15S	13.0	2.5	



MOUNTING HOLE Ø3.0
THICKNESS 0.8




MOUNTING HOLE
THICKNESS 1.0

NEW

Part No.	Package
LCHA-2.3	1000

MOUNTING HOLE Ø3.5
THICKNESS 0.8~2.0




MOUNTING HOLE Ø3.5
THICKNESS 0.8~2.0

【 CBSS-2S 】


Part No.	A	Package
CBSS-2	2.1	2000
CBSS-2S	2.1	
CBSS-2.2	2.2	
CBSS-4.8	4.8	

MOUNTING HOLE Ø3.5
THICKNESS 0.8~2.0



MOUNTING HOLE Ø3.5
THICKNESS 0.8~2.0


Part No.	A	Package
CBSS-7	7.0	2000
CBSS-10	10.0	
CBSS-12.7	12.7	
CBSS-14	14.0	
CBSS-17	17.0	



MOUNTING HOLE Ø4.0
THICKNESS 1.6

MOUNTING HOLE Ø4.0
THICKNESS 1.6


Part No.	A	Package
CBLSS-6	4.2	1000
CBLSS-8	6.2	
CBLSS-10	8.2	
CBLSS-12	10.2	
CBLSS-13	11.2	
CBLSS-14	12.2	
CBLSS-16	14.2	
CBLSS-16.8	15.0	
CBLSS-18	16.2	
CBLSS-20	18.2	
CBLSS-42	40.2	

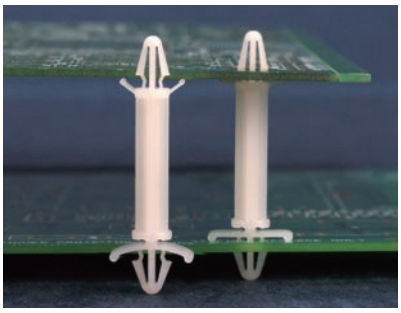

用途：固定PC板於機板上，免工具易拆卸。

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


MOUNTING HOLE Ø4.0
THICKNESS 0.8~1.7



MOUNTING HOLE Ø4.8
THICKNESS 0.8~1.7


Part No.	Package
LCBSA-28.5	500

MOUNTING HOLE Ø4.0
THICKNESS 0.8~1.7




MOUNTING HOLE Ø4.8
THICKNESS 1.8~2.7

Part No.	Package
LCBSA-20L	500

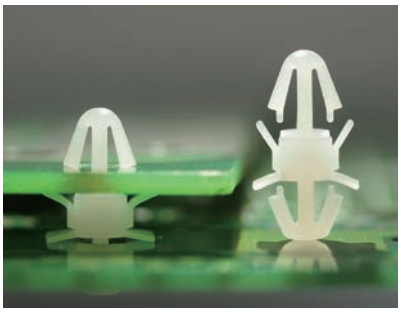

用途：PC板與PC板間之固定，不佔空間。


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



MOUNTING HOLE Ø4.0
THICKNESS 1.6


MOUNTING HOLE Ø4.0
THICKNESS 0.8

Part No.	Package
LCL-3.2	2000

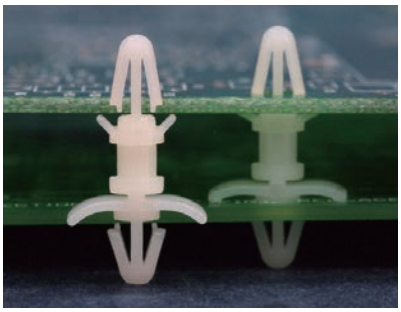

用途：固定PC板於機板上，免工具易拆卸。


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




MOUNTING HOLE Ø4.0
THICKNESS 1.6

MOUNTING HOLE Ø4.8
THICKNESS 0.8~2.0

Part No.	A	Package
LCB-5	5.0	1000
LCB-6	6.3	
LCB-8	8.0	
LCB-10	10.0	
LCB-12	12.7	
LCB-15	15.9	
LCB-20	20.0	
LCB-25	25.0	

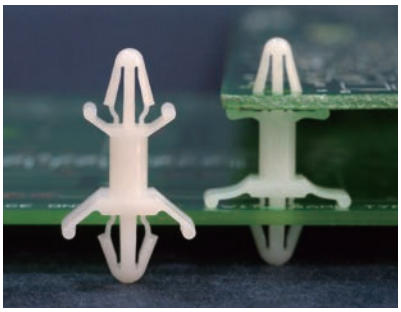


MOUNTING HOLE Ø4.0
THICKNESS 1.6



MOUNTING HOLE Ø4.0
THICKNESS 0.8~2.2

【 CBSB-45 】

MOUNTING HOLE Ø4.0
THICKNESS 1.6




MOUNTING HOLE Ø4.8
THICKNESS 0.8~2.2

Part No.	A	Package
CBS-3.8	3.8	1000
CBS-5	4.6	
CBS-6	6.3	
CBS-8	7.93	
CBS-9	9.2	
CBS-12	12.5	
CBS-15	15.7	
CBS-19	19.0	
CBS-22	22.0	
CBS-25	25.4	
CBS-28	28.6	
CBSB-45	45.0	


PCB間隔柱 PCB SPACER

用途：固定PC板於機板上，免工具易拆卸。

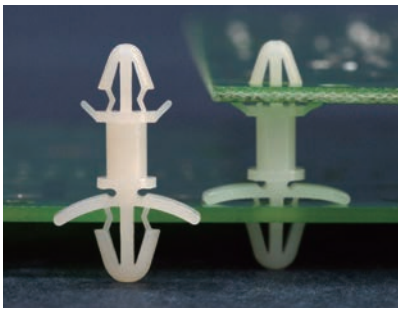


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


MOUNTING HOLE Ø4.0
THICKNESS 1.6



MOUNTING HOLE Ø4.8
THICKNESS 0.8~2.2

Part No.	A	Package
LCBS-4	4.0	1000
LCBS-5	5.0	
LCBS-6	6.35	
LCBS-7	7.0	
LCBS-9	9.2	
LCBS-10	10.0	
LCBS-12	12.5	
LCBS-15	15.7	
LCBS-19	19.0	
LCBS-20	20.0	
LCBS-22	22.0	
LCBS-25	25.4	
LCBS-28	28.6	
LCBS-30	30.0	
LCBS-35	35.0	
LCBS-38	38.0	
LCBS-45	45.0	

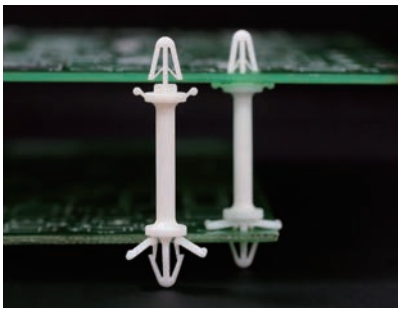





MOUNTING HOLE Ø4.0
THICKNESS 1.6

MOUNTING HOLE Ø4.8
THICKNESS 2.0

Part No.	A	Package
LCBB-6.35	6.35	1000
LCBB-9.5	9.5	
LCBB-12.7	12.7	
LCBB-15.9	15.87	
★LCBB-19	19.05	
LCBB-22.2	22.22	
LCBB-25.4	25.4	

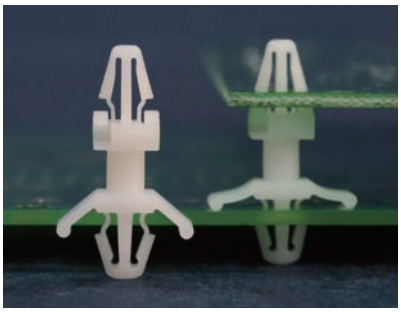


MOUNTING HOLE Ø4.0
THICKNESS 1.2~2.0



MOUNTING HOLE Ø4.8
THICKNESS 0.8~2.0

Part No.	A	B	C	Package
VCBS-9	5.9	9.8		1000
VCBS-11	7.5	11.4	4.0	
VCBS-14	10.5	14.4	4.0	
VCBS-16	12.7	16.6	4.0	
VCBS-17	13.8	17.7	4.0	
VCBS-20	17.0	20.9	4.0	
VCBS-24	20.2	24.1	4.5	
VCBS-27	23.3	27.2	4.5	
VCBS-30	26.5	30.4	4.5	
VCBS-33	29.7	33.6	4.5	
VCBS-39	36.0	39.9	4.5	

MOUNTING HOLE Ø4.0
THICKNESS 1.2~2.0




MOUNTING HOLE Ø4.8
THICKNESS 0.8~3.0

Part No.	A	B	C	Package
VCBSL-9	5.0	9.8		1000
VCBSL-11	6.6	11.4	4.0	
VCBSL-14	9.6	14.4	4.0	
VCBSL-16	11.8	16.6	4.0	
VCBSL-17	12.9	17.7	4.0	
VCBSL-24	19.3	24.1	4.5	
VCBSL-27	22.4	27.2	4.5	
VCBSL-30	25.6	30.4	4.5	
VCBSL-33	28.8	33.6	4.5	
VCBSL-39	35.1	39.9	4.5	


PCB間隔柱 PCB SPACER

用途：固定PC板於機板上，免工具易拆卸。

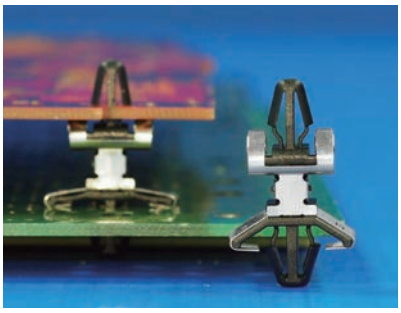


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


MOUNTING HOLE Ø4.0
THICKNESS 1.6~2.0




MOUNTING HOLE Ø4.8
THICKNESS 1.0~2.0



Part No.	Part No.	Package
VCBA-14.4F	VCBA-14.4ST	1000
	VCBA-14.4	

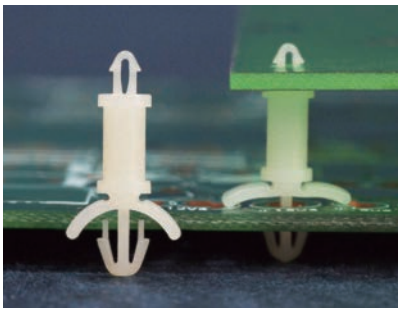


MOUNTING HOLE Ø2.0
THICKNESS 1.6




MOUNTING HOLE Ø3.0~Ø3.2
THICKNESS 0.8~2.0

Part No.	A	Package
LCMA-3.2	3.2	1000
LCMA-4.8	4.8	
LCMA-6.4	6.4	
LCMA-7.9	7.9	
LCMA-9.5	9.5	
LCMA-11.1	11.1	
LCMA-12.7	12.7	
LCMA-14.3	14.3	
LCMA-15.9	15.9	
LCMA-17	17.0	

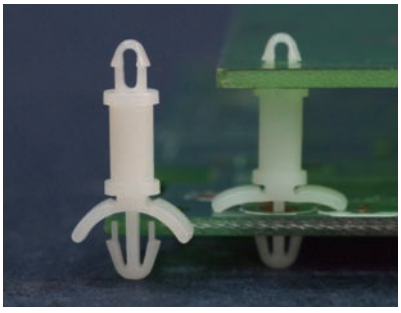


MOUNTING HOLE Ø2.5
THICKNESS 1.6




MOUNTING HOLE Ø3.0~Ø3.2
THICKNESS 0.8~2.0

Part No.	A	Package
LCMD-3.2	3.2	1000
LCMD-4.8	4.8	
LCMD-6.4	6.4	
LCMD-7.9	7.9	
LCMD-9.5	9.5	
LCMD-11.1	11.1	
LCMD-12.7	12.7	
LCMD-14.3	14.3	
LCMD-15.9	15.9	
LCMD-17	17.0	

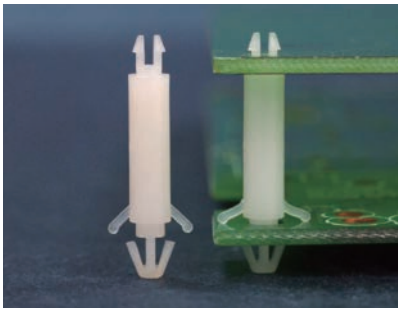

用途：PC板與PC板間之固定，不佔空間。

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




MOUNTING HOLE Ø2.5
THICKNESS 1.0~1.7

MOUNTING HOLE Ø3.0
THICKNESS 1.0~1.7

Part No.	A	Package
LCAB-12	12.0	1000
LCAB-14	14.0	


PCB間隔柱 PCB SPACER

用途：固定PC板於機板上，免工具易拆卸。

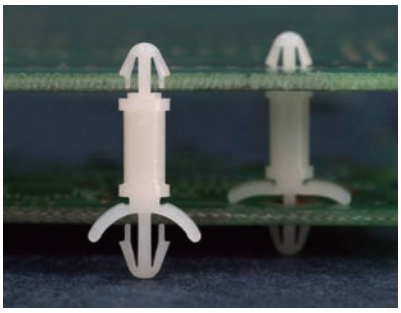


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

MOUNTING HOLE Ø3.0
THICKNESS 1.2~1.7




MOUNTING HOLE Ø3.0
THICKNESS 0.8~2.0

Part No.	A	Package
LCG-3	3.2	1000
LCG-5	4.8	
LCG-6	6.4	
LCG-8	7.9	
LCG-9	9.5	
LCG-11	11.1	
LCG-12	12.7	
LCG-14	14.3	
LCG-15	15.9	
LCG-17	17.0	
LCG-18	18.0	
LCG-19	19.0	
LCG-20	20.0	
LCG-26	26.0	

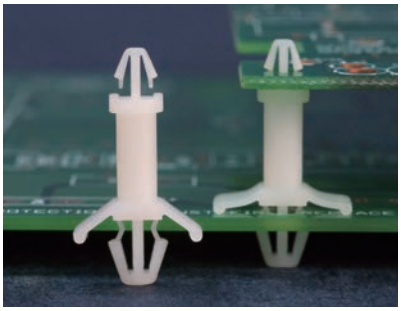


MOUNTING HOLE Ø3.0
THICKNESS 1.4~1.6



MOUNTING HOLE Ø4.8~Ø5.0
THICKNESS 0.8~2.0

Part No.	Package
LCBUA-13.9	1000


MOUNTING HOLE Ø3.0
THICKNESS 1.2~1.7



MOUNTING HOLE Ø4.8
THICKNESS 0.8~2.2


Part No.	A	Package
LCBT-3	3.2	1000
LCBT-5	4.8	
LCBT-6	6.3	
LCBT-8	8.0	
LCBT-10	10.0	
LCBT-12	12.0	
LCBT-14	14.0	
LCBT-16	16.0	
LCBT-18	18.0	
LCBT-25	25.0	

MOUNTING HOLE Ø3.5
THICKNESS 1.2~1.7




MOUNTING HOLE Ø4.8
THICKNESS 0.8~2.2

Part No.	A	Package
LCBU-3	3.2	1000
LCBU-5	5.0	
LCBU-6	6.3	
LCBU-8	8.0	
LCBU-10	10.0	
LCBU-12	12.0	
LCBU-14	14.0	
LCBU-16	16.0	
LCBU-18	18.0	
LCBU-25	25.0	

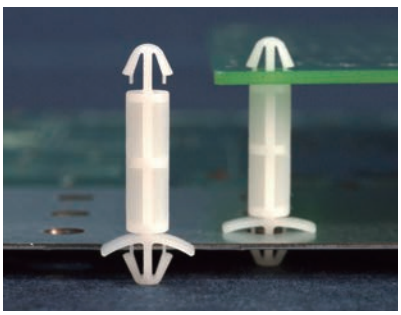

MOUNTING HOLE Ø4.0
THICKNESS 1.6




MOUNTING HOLE Ø4.0
THICKNESS 0.5~1.2

Part No.	Package
LCGB-17.5	1000


PCB間隔柱 PCB SPACER

用途：固定PC板於機板上，免工具易拆卸。

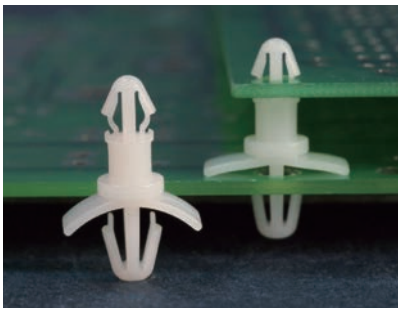


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

MOUNTING HOLE Ø4.0
THICKNESS 1.6



MOUNTING HOLE Ø4.8
THICKNESS 0.8~2.0


Part No.	Package
LCBC-8	1000

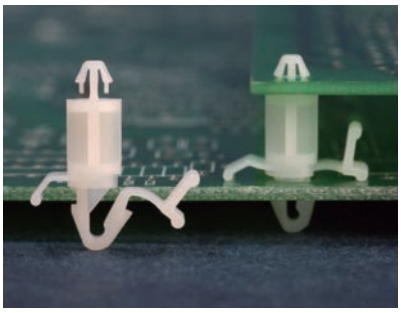

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

用途：PC板與PC板間之固定，不佔空間，可在板上拆卸。


MOUNTING HOLE Ø3.0
THICKNESS 1.6



MOUNTING HOLE Ø4.8
THICKNESS 0.8~1.6

Part No.	A	Package
KLCBS-9.5	9.5	1000
KLCBS-12.7	12.7	
KLCBS-15.9	15.9	
KLCBS-19.1	19.1	


MOUNTING HOLE Ø3.5
THICKNESS 1.6



MOUNTING HOLE Ø4.8
THICKNESS 0.8~1.6


Part No.	A	Package
KLCBM-9.5	9.5	1000
KLCBM-12.7	12.7	
KLCBM-15.9	15.9	
KLCBM-19.1	19.1	

MOUNTING HOLE Ø4.0
THICKNESS 1.6




MOUNTING HOLE Ø4.8
THICKNESS 0.8~1.6


Part No.	A	Package
KLCBL-9.5	9.5	1000
KLCBL-12.7	12.7	
KLCBL-15.9	15.9	
KLCBL-19.1	19.1	

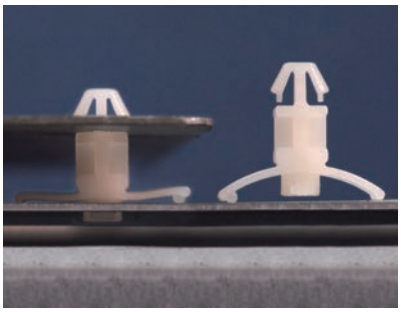

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

MOUNTING HOLE Ø4.0
THICKNESS 1.0






MOUNTING HOLE
THICKNESS 0.6~1.0


Part No.	A	Package
LCBA-5.6	5.6	1000
LCBA-7.6	7.6	

PCB間隔柱 PCB SPACER

用途：固定PC板於機板上，免工具易拆卸。

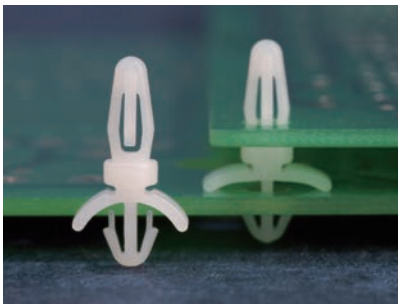


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




MOUNTING HOLE Ø3.2
THICKNESS 1.6~1.7

MOUNTING HOLE Ø3.0~Ø3.2
THICKNESS 0.8~2.0

Part No.	A	Package
LCSE-3.2	3.2	1000
LCSE-4.8	4.8	
LCSE-6.4	6.4	
LCSE-7.9	7.9	
LCSE-9.5	9.5	
LCSE-11.1	11.1	
LCSE-12.7	12.7	
LCSE-14.3	14.3	
LCSE-15.9	15.9	
LCSE-17	17.0	

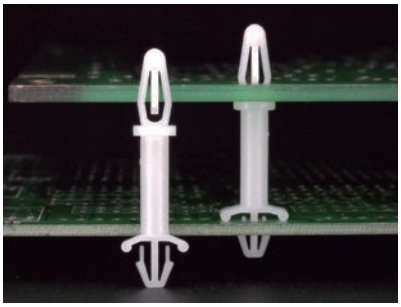





MOUNTING HOLE Ø4.0
THICKNESS 2.4

MOUNTING HOLE Ø4.0
THICKNESS 2.4

Part No.	Package
LCSJ-16	1000

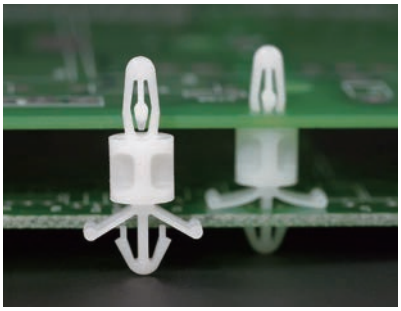





MOUNTING HOLE Ø4.0
THICKNESS 1.6

MOUNTING HOLE Ø4.7
THICKNESS 0.4~2.0

Part No.	Package
LCSH-9.5	1000

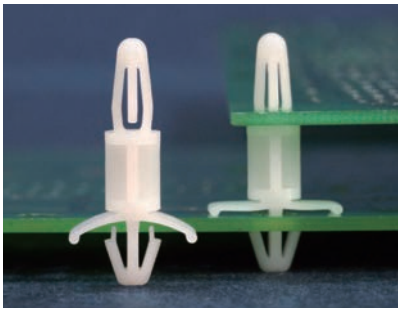




MOUNTING HOLE Ø4.0
THICKNESS 1.6

MOUNTING HOLE Ø4.8
THICKNESS 2.0~3.6

Part No.	A	Package
LCSA-6.4	6.4	1000
LCSA-9.5	9.5	




MOUNTING HOLE Ø4.0
THICKNESS 1.6

MOUNTING HOLE Ø4.8
THICKNESS 0.8~2.0

Part No.	A	Package
LCS-3	3.5	1000
LCS-5	4.8	
LCS-6	6.0	
LCS-6A	6.4	
LCS-8	7.9	
LCS-9	9.5	

Part No.	A	Package
LCS-11	11.1	1000
LCS-12	12.7	
LCS-16	15.9	
LCS-19	19.1	
LCS-22	22.2	
LCS-24	24.0	
LCS-25	25.4	
LCS-27.5	27.5	
LCS-28	28.6	
LCS-31.1	31.1	
LCS-31.7	31.7	
LCS-35	34.9	




MOUNTING HOLE Ø4.0
THICKNESS 1.6


MOUNTING HOLE Ø4.8
THICKNESS 0.8~2.0

Part No.	A	Package
HLCS-4.8	4.8	1000
HLCS-6.4	6.4	
HLCS-9.5	9.5	
HLCS-12.7	12.7	
HLCS-15.9	15.9	
HLCS-25.4	25.4	
HLCS-40	40.0	500
HLCS-49	49.0	

PCB間隔柱 PCB SPACER


用途：固定PC板於機板上，免工具易拆卸。

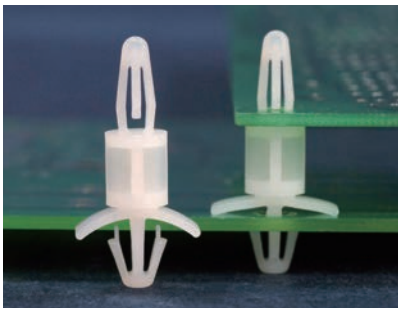

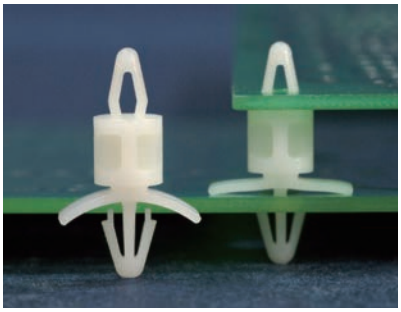


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

MOUNTING HOLE Ø4.0
THICKNESS 2.4



MOUNTING HOLE Ø4.8
THICKNESS 1.6


Part No.	Package
LCSLR-9.5	1000



MOUNTING HOLE Ø4.0
THICKNESS: T

MOUNTING HOLE Ø4.8
THICKNESS 2.0~3.2


Part No.	A	T	Package
LCSD-4.8	4.8	1.6	1000
LCSD-9.5	9.5	1.6	
LCSD-12.7	12.7	1.6	
LCSL-4.8	4.8	2.0~3.2	



MOUNTING HOLE Ø3.5
THICKNESS 1.6

MOUNTING HOLE Ø4.0
THICKNESS 0.8~1.6

Part No.	Package
LCPA-8.2	1000




MOUNTING HOLE Ø4.0
THICKNESS 1.2~1.7

MOUNTING HOLE Ø4.8
THICKNESS 0.8~2.5


Part No.	A	Package
LCP-7.9	7.9	1000
LCP-9	9.5	
LCP-12.7	12.7	
LCP-22	22.2	


MOUNTING HOLE Ø4.0
THICKNESS 1.2~1.7




MOUNTING HOLE Ø4.8
THICKNESS 0.8~2.0

Part No.	Package
LCY-4.8	1000

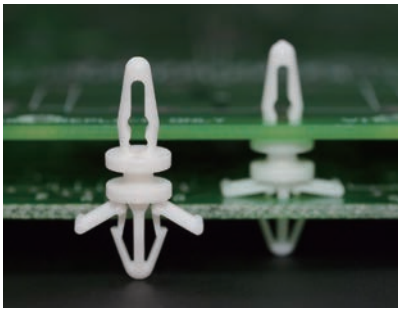

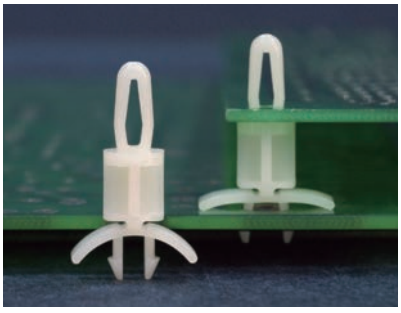




MOUNTING HOLE Ø4.0
THICKNESS 1.6

MOUNTING HOLE Ø4.8
THICKNESS 2.0


Part No.	A	Package
LCPD-6.35	6.35	1000
LCPD-9.5	9.52	
★LCPD-12.7	12.7	



MOUNTING HOLE Ø4.0
THICKNESS 1.2~1.7

MOUNTING HOLE Ø4.8
THICKNESS 0.8~2.0

Part No.	A	Package
UCBS-5	4.8	1000
UCBS-6	6.4	
UCBS-9	9.5	
UCBS-12	12.7	
UCBS-15	15.9	
UCBS-19	19.1	
UCBS-22	22.2	




MOUNTING HOLE Ø3.8
THICKNESS 1.6

MOUNTING HOLE Ø4.8
THICKNESS 0.8~2.0

Part No.	Package
UCBS-5A	1000


PCB間隔柱 PCB SPACER

用途：固定PC板於機板上，免工具易拆卸。

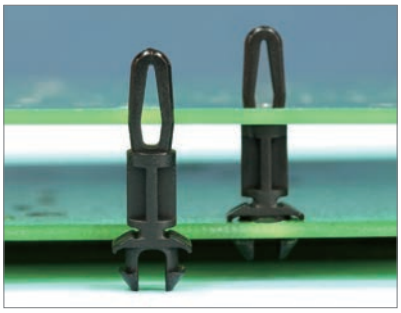


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

MOUNTING HOLE Ø4.0
THICKNESS 1.2~1.7





MOUNTING HOLE Ø5.4
THICKNESS: T

Part No.	B	T	Package
UCBSL-9	11.7	1.6	1000
UCBSL-10	12.0	2.2	

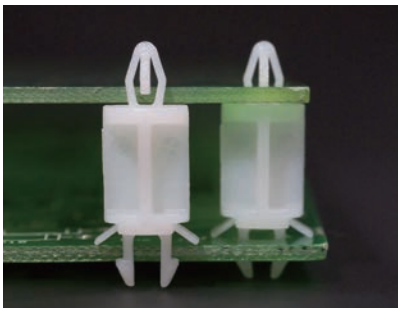


MOUNTING HOLE Ø3.3
THICKNESS 1.6







MOUNTING HOLE
THICKNESS 1.8~2.0

Part No.	A	Package
LMSD-12	12.0	1000
LMSD-16	16.0	

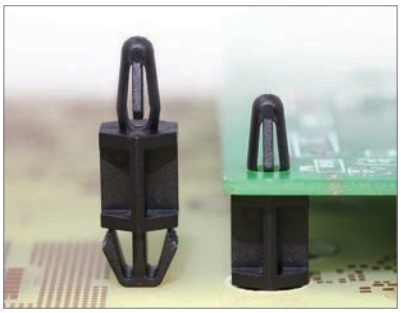

MOUNTING HOLE Ø4.0
THICKNESS 1.6







MOUNTING HOLE
THICKNESS 0.8~1.6

Part No.	Package
LCSI-10	1000


用途：固定PC板於機板上，一頭配合螺母使用，不旋轉。

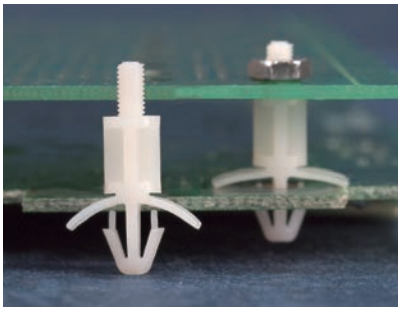


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



【 LCDS3-3, LCDS3-4 】



MOUNTING HOLE Ø4.8
THICKNESS 0.8~2.5




MOUNTING HOLE

Part No.	A	L	Package
LCDS3-3	3.0	4.0	1000
LCDS3-4	4.0	4.0	
LCDS3-5	5.0	4.0	
LCDS3-6	6.0	6.0	
LCDS3-7	7.0	6.0	
LCDS3-8	8.0	6.0	
LCDS3-9	9.0	6.0	
LCDS3-10	10.0	6.0	
LCDS3-11	11.0	6.0	
LCDS3-12	12.0	6.0	
LCDS3-13	13.0	6.0	
LCDS3-14	14.0	6.0	
LCDS3-15	15.0	6.0	


PCB間隔柱 PCB SPACER

用途：固定PC板於機板上，一頭配合螺母使用，不旋轉。

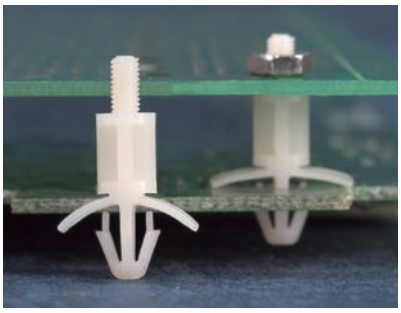



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

Part No.	A	L	Package
LCDS4-3	3.0	4.0	1000
LCDS4-4	4.0	4.0	
LCDS4-5	5.0	4.0	
LCDS4-6	6.0	6.0	
LCDS4-7	7.0	6.0	
LCDS4-8	8.0	6.0	
LCDS4-9	9.0	6.0	
LCDS4-10	10.0	6.0	
LCDS4-11	11.0	6.0	
LCDS4-12	12.0	6.0	
LCDS4-13	13.0	6.0	
LCDS4-14	14.0	6.0	
LCDS4-15	15.0	6.0	




【 LCDS4-3, LCDS4-4 】






MOUNTING HOLE
THICKNESS 0.8~2.5

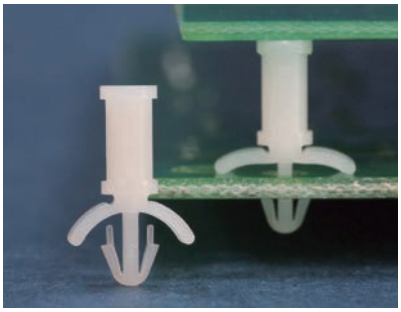


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


用途：一端固定於機板上，另一端支撐PC板，避免下陷造成短路，PC板免鑽孔。



MOUNTING HOLE Ø3.0
THICKNESS 0.8~2.0


Part No.	A	Package
LBS-3	3.2	1000
LBS-5	4.8	
LBS-6	6.4	
LBS-8	7.9	
LBS-9	9.5	
LBS-11	11.1	
LBS-12	12.7	
LBS-14	14.3	
LBS-15	15.9	
LBS-17	17.0	
LBS-19	19.0	
LBS-20	20.0	
LBS-26	26.0	

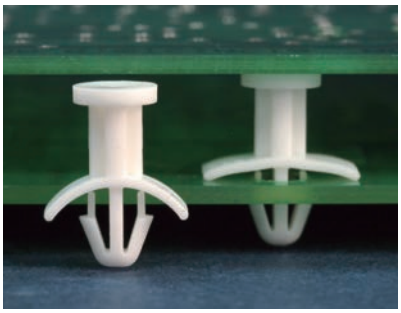



MOUNTING HOLE Ø4.0
THICKNESS 1.0~2.0

Part No.	Package
LASB-3.7	1000




MOUNTING HOLE Ø4.5
THICKNESS 0.8~2.0


Part No.	Package
LASD-8.3	1000

PCB間隔柱 PCB SPACER


用途：一端固定於機板上，另一端支撐PC板，避免下陷造成短路，PC板免鑽孔。

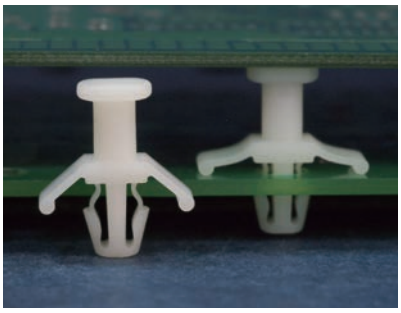


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




MOUNTING HOLE Ø4.8
THICKNESS: T



【 LASE-4.5 】





MOUNTING HOLE Ø3.5
THICKNESS 1.2~1.6

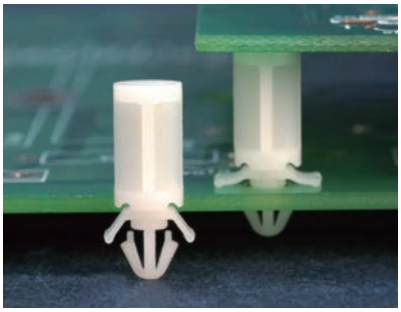


Part No.	A	C	T	Package
LASY-4.6	4.6	4.6	0.8~2.5	1000
LASY-9.3	9.3	4.5	0.5~2.3	
LASY-12.6	12.6	4.5	0.5~2.3	
LASY-15.9	15.9	4.5	0.5~2.3	

Part No.	A	B	Package
LASE-4.5	4.5	3.5	1000
LASE-7	7.0	6.0	
LASE-12	12.0	11.0	

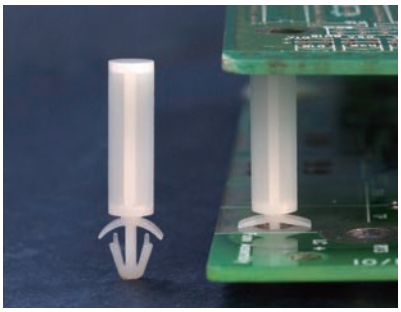




MOUNTING HOLE Ø3.5
THICKNESS 1.6



MOUNTING HOLE Ø3.5
THICKNESS 0.8~1.8

Part No.	A	B	Package
LASJ-17	17.0	15.9	1000
LASJ-18	18.0	16.9	
LASJ-20	20.0	18.9	


Part No.	Package
LASH-22	1000



MOUNTING HOLE Ø4.8
THICKNESS 0.8~2.0


Part No.	A	Package
LAS-3	3.5	1000
LAS-5	4.8	
LAS-6	6.0	
LAS-6A	6.4	
LAS-8	7.9	
LAS-9	9.5	
LAS-11	11.1	
LAS-12	12.7	
LAS-16	15.9	

Part No.	A	Package
LAS-19	19.1	1000
LAS-22	22.2	
LAS-24	24.0	
LAS-25	25.4	
LAS-27.5	27.5	
LAS-28	28.6	500
LAS-31.1	31.1	
LAS-31.7	31.7	
LAS-35	34.9	




MOUNTING HOLE Ø4.8~Ø5.0
THICKNESS 0.8~2.0


Part No.	Package
LASA-9.5	1000

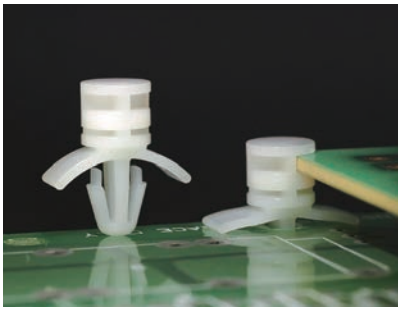

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

用途：一端固定於機板上，另一端讓PC板崁入。







MOUNTING HOLE Ø4.8
THICKNESS 1.6

Part No.	Package
LASL-4.8	1000


PCB間隔柱 PCB SPACER

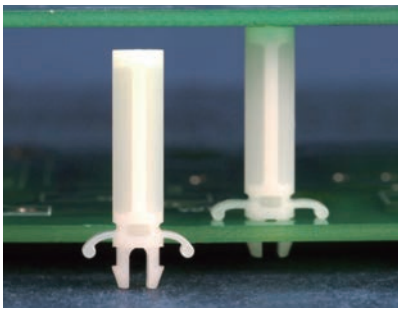

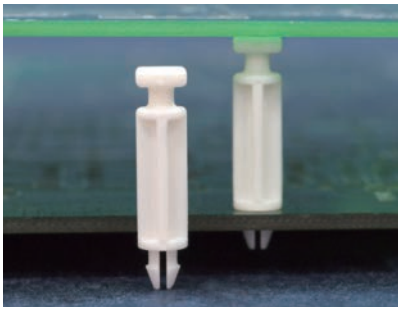


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

用途：一端固定於機板上，另一端支撐PC板，避免下陷造成短路，PC板免鑽孔。




MOUNTING HOLE Ø4.0
THICKNESS 1.2~1.6


Part No.	Package
LASF-18	1000




MOUNTING HOLE Ø3.0
THICKNESS 1.6

Part No.	A	B	Package
MSA-14.1	14.1	22.3	1000
MSA-24.3	24.3	32.5	

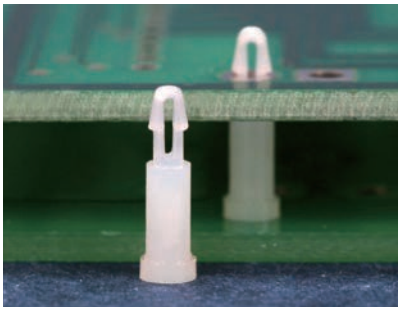

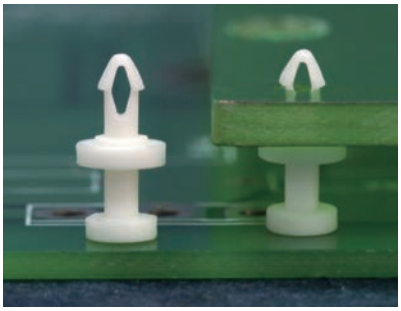


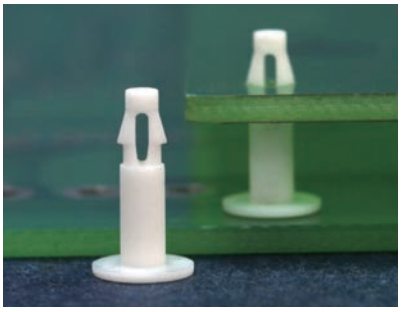

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


用途：支撐PC板，使中間不致震動，載重而凹陷短路。

MOUNTING HOLE Ø1.5
THICKNESS 1.0




Part No.	A	C	Package
MASD-0.8	0.8	4.0	2000
MASD-2	2.0	5.2	

MOUNTING HOLE Ø1.5
THICKNESS 1.6




Part No.	A	Package
MASS-2	2.0	2000
MASS-2.5	2.5	
MASS-3	3.0	
MASS-3.5	3.5	
MASS-4	4.0	
MASS-5	5.0	
MASS-6	6.0	
MASS-6.5	6.5	

MOUNTING HOLE Ø2.0
THICKNESS 1.6




Part No.	Package
MAL-8	1000

MOUNTING HOLE Ø2.0
THICKNESS 2.4



Part No.	Package
MASL-5.4	1000


MOUNTING HOLE Ø2.0
THICKNESS: T





Part No.	A	T	Package
MAST-6	5.5	1.0	1000
MAST-18	18.3	1.6	

PCB間隔柱 PCB SPACER

用途：支撐PC板，使中間不致震動，載重而凹陷短路。

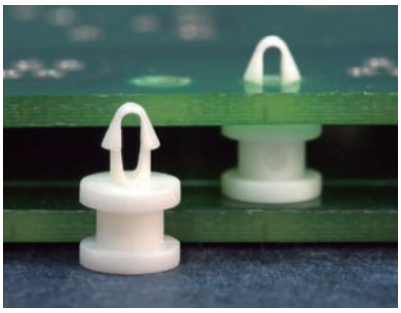


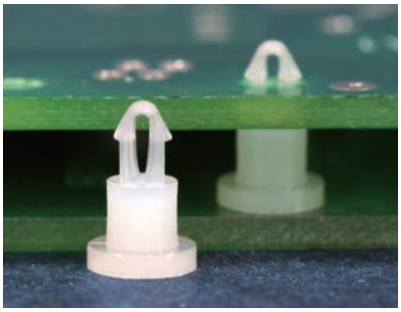

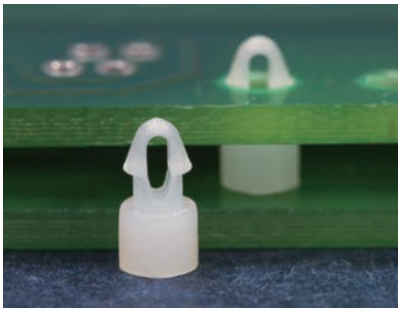


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

MOUNTING HOLE Ø2.0
THICKNESS 1.4




Part No.	Package
MABA-2.6	2000

MOUNTING HOLE Ø2.0
THICKNESS 1.6




Part No.	Package
MAB-4	1000

MOUNTING HOLE Ø2.0
THICKNESS 1.0




Part No.	Package
MA-2.8S	2000

MOUNTING HOLE Ø2.0
THICKNESS 1.0




Part No.	A	Package
MA-2.5S	2.5	2000
MA-3S-1	3.0	

MOUNTING HOLE Ø2.0
THICKNESS 1.6




Part No.	A	B	Package
MA-2.7DL	2.7	1.9	2000
MA-3.5DL	3.5	1.75	
MA-3.85DL	3.85	1.9	
MA-4.5DL	4.5	1.9	
MA-5DL	5.0	1.9	
MA-6.5DL	6.5	1.9	

MOUNTING HOLE Ø2.0
THICKNESS: T




Part No.	A	B	H	T	Package
MA-1.8	1.8	1.9	4.2	1.6	2000
MA-2	2.0	1.9	4.2	1.6	
MA-2L	2.0	2.05	4.8	2.0	
MA-2.5	2.5	1.9	4.1	1.6	
MA-2.5L	2.5	2.0	4.8	1.6	
MA-3	3.0	1.9	4.8	1.6	
MA-3S	3.0	1.8	4.2	1.6	
MA-3.2	3.2	1.9	4.8	1.6	
MA-3.2-1	3.2	2.1	4.8	1.6	
MA-3.5	3.5	1.9	4.2	1.6	
MA-3.5L	3.5	2.0	4.8	1.6	
MA-3.75	3.75	2.0	4.8	1.6	
MA-4	4.0	1.9	4.8	1.6	
MA-4.5	4.5	1.9	4.2	1.6	
MA-4.7	4.7	1.9	4.8	1.6	
MA-5	5.0	1.9	4.8	1.6	
MA-5.6	5.6	2.0	4.2	1.6	
MA-6	6.0	1.9	5.0	1.6	
MA-6.5	6.5	1.9	5.0	1.6	
MA-6.75	6.75	1.9	5.0	1.6	
MA-8	8.0	1.9	5.0	1.6	
MA-9	9.0	1.9	5.0	1.6	

MOUNTING HOLE Ø2.5
THICKNESS 1.0




Part No.	A	Package
MAMS-1.5	1.5	2000
MAMS-1.7	1.7	
MAMS-5	5.0	

MOUNTING HOLE Ø2.5
THICKNESS 1.0




Part No.	Package
MAMS-7.5	1000

用途：支撐PC板，使中間不致震動，載重而凹陷短路。

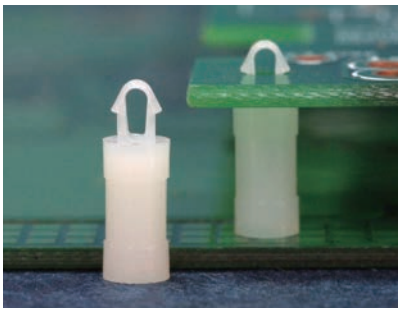


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

MOUNTING HOLE Ø2.6
THICKNESS 1.6




【 MAM-6.35L 】


MOUNTING HOLE Ø2.5
THICKNESS 1.6



Part No.	A	Package
MAM-6.35L	6.35	2000
MAM-6.8	6.8	
MAM-7	7.0	
MAM-8	8.0	
MAM-8.4	8.4	
MAM-9	9.0	
MAM-9.5	9.5	
MAM-11	11.1	
MAM-12.7	12.7	
MAM-15.9	15.9	

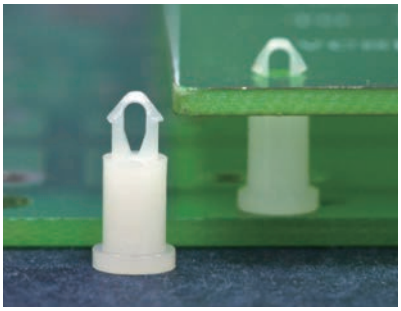


MOUNTING HOLE Ø2.5
THICKNESS 1.6~1.8



【 MAM-1.5L 】


MOUNTING HOLE Ø2.5
THICKNESS 1.4~1.6



【 MAM-2.6 】


Part No.	A	Package
MAM-1.5	1.5	2000
MAM-1.5L	1.5	
MAM-2	2.0	
MAM-2.5	2.5	
MAM-2.6	2.6	
MAM-2.7	2.7	
MAM-3	3.0	
MAM-3.2	3.2	
MAM-3.5	3.5	
MAM-4	4.0	
MAM-4.5	4.5	
MAM-4.8	4.8	
MAM-5	5.0	
MAM-5.7	5.7	
MAM-6	6.0	
MAM-6.4	6.4	


MOUNTING HOLE Ø2.5
THICKNESS 1.6




【 MAM-4.8, MAM-6.4 】


MOUNTING HOLE Ø2.5
THICKNESS 1.6~1.8



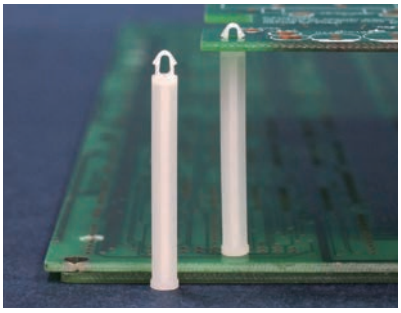

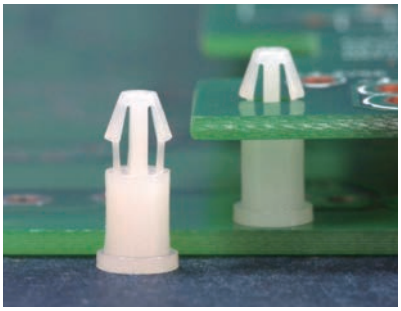


MOUNTING HOLE Ø3.0
THICKNESS: T




【 DCC-20S 】

MOUNTING HOLE Ø3.0
THICKNESS: T




Part No.	A	B	H	T	Package
DCC-2	2.0	3.1	5.0	1.2~1.6	2000
DCC-2.5	2.5	3.1	5.0	1.2~1.6	
DCC-2.7	2.7	3.1	5.0	1.2~1.6	
DCC-3	3.0	3.1	5.0	1.2~1.6	1000
DCC-3.2	3.2	3.1	5.0	1.2~1.6	
DCC-3.5	3.5	3.1	5.0	1.2~1.6	
DCC-4	4.0	3.1	5.0	1.2~1.6	
DCC-4.5	4.5	3.1	5.0	1.2~1.6	
DCC-5	5.0	3.1	5.0	1.2~1.6	
DCC-5S	5.0	2.6	5.0	0.8~1.2	
DCC-5.5	5.5	3.1	5.0	1.2~1.6	
DCC-6	6.0	3.1	5.0	1.2~1.6	
DCC-6.2	6.2	3.1	5.0	1.2~1.6	
DCC-6.5	6.5	3.1	5.0	1.2~1.6	
DCC-9.5L	9.5	3.1	6.0	1.2~1.6	
DCC-20S	20.0	3.1	5.0	0.8	

MOUNTING HOLE Ø2.7
THICKNESS 1.6



Part No.	Package
MAMA-3.5	1000


MOUNTING HOLE Ø3.0
THICKNESS 1.6



Part No.	Package
MAL-34	1000


PCB間隔柱 PCB SPACER

用途：支撐PC板，使中間不致震動，載重而凹陷短路。

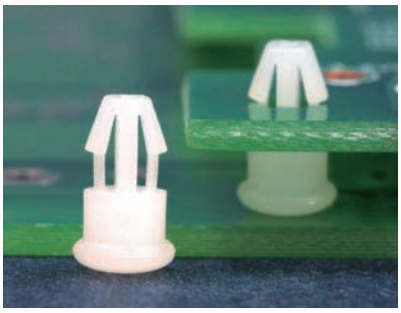


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


MOUNTING HOLE Ø3.0
THICKNESS 1.6




Part No.	Package
DCE-4	1000

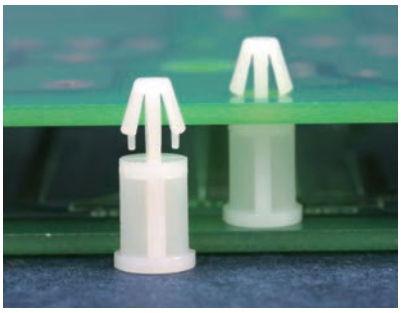


MOUNTING HOLE Ø3.5
THICKNESS 0.8~1.6



Part No.	A	Package
MCM-8	8.0	1000
MCM-14.5	14.5	

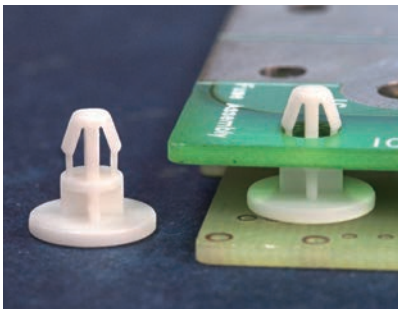


MOUNTING HOLE Ø3.7
THICKNESS 1.6





Part No.	Package
DCCA-4.3	1000

MOUNTING HOLE Ø4.0
THICKNESS 1.2~1.6




Part No.	Package
MCO-16	1000

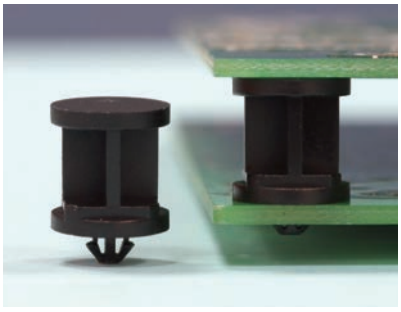





MOUNTING HOLE Ø3.0
THICKNESS: T

Part No.	B	H	T	Package
TCBA-10.5S	6.0	7.5	1.0	1000
TCBA-10.5	8.0	10.0	1.0	
TCBA-10.5L	8.0	10.0	1.6	

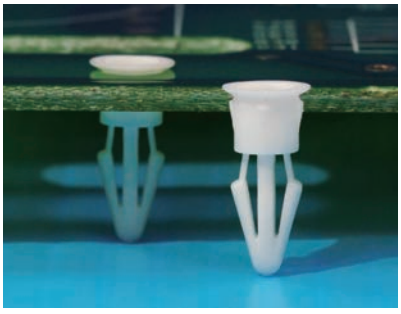






MOUNTING HOLE
THICKNESS 0.8

MOUNTING HOLE Ø3.0~Ø3.18
THICKNESS 1.6

Part No.	Package
DCCB-4.1	1000


PCB間隔柱 PCB SPACER

用途：支撐PC板，使中間不致震動，載重而凹陷短路。

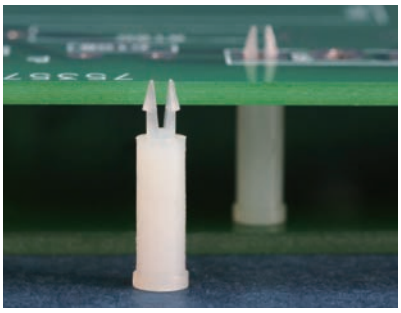


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


MOUNTING HOLE Ø2.0
THICKNESS 1.2~1.8




Part No.	A	Package
MS-4	4.0	2000
MS-5	5.0	
MS-10	10.0	

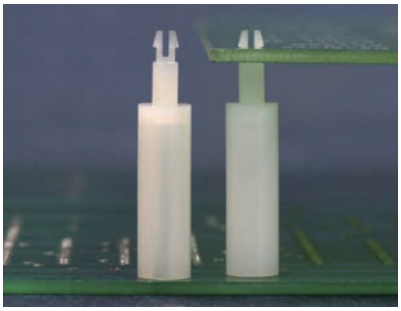


MOUNTING HOLE Ø2.2
THICKNESS 1.6




Part No.	Package
PCLS-25	1000

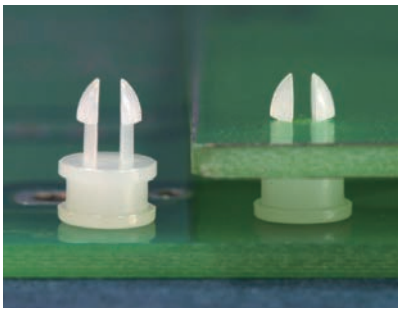

MOUNTING HOLE Ø2.3
THICKNESS 1.6




Part No.	Package
MSB-2.8	1000

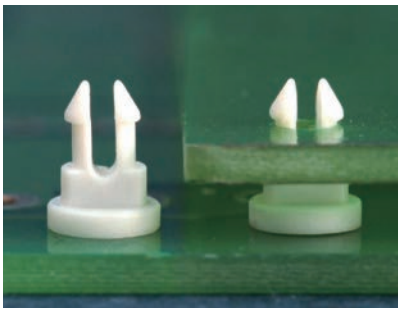


- Material: PBT (UL)
- Flame Class: 94V-0
- Color: Natural
- Unit: mm

MOUNTING HOLE Ø2.5
THICKNESS 1.6




Part No.	Package
MSM-2.5	1000

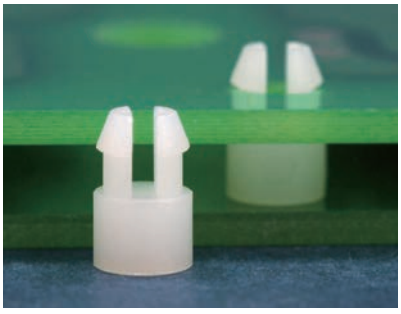

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

MOUNTING HOLE Ø3.9
THICKNESS 1.6



Part No.	Package
MSMA-3.5	2000


PCB間隔柱 PCB SPACER

用途：PC板端直接壓入固定，另一端可配合M2螺絲或自攻螺絲固定。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

MOUNTING HOLE Ø2.5
THICKNESS 1.6



Part No.	Package
MAE2.5-6.5	2000


MOUNTING HOLE Ø2.5
THICKNESS 1.6



・MAE2.5-6.5T為已攻牙M2X0.4P


Part No.	Package
MAE2.5-6.5T	2000

用途：PC板端直接壓入固定，另一端可配合M3螺絲或自攻螺絲固定。

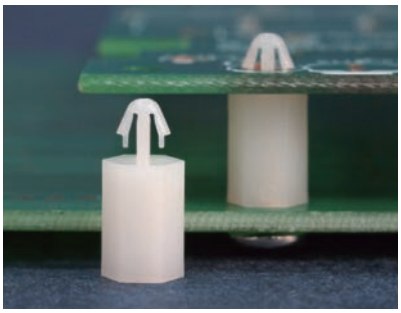

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


MOUNTING HOLE Ø3.0
THICKNESS 1.6



Part No.	A	Package
MAE-4	4.0	1000
MAE-5	5.0	2000
MAE-6	6.0	
MAE-7	7.0	
MAE-8	8.0	
MAE-9	9.0	
MAE-10	10.0	
MAE-11	11.0	1000
MAE-12	12.0	
MAE-13	13.0	

Part No.	A	Package
MAE-14	14.0	1000
MAE-15	15.0	
MAE-16	16.0	
MAE-17	17.0	
MAE-18	18.0	
MAE-19	19.0	
MAE-20	20.0	
MAE-22	22.0	
MAE-23.5	23.5	
MAE-26	26.0	


MOUNTING HOLE Ø3.0
THICKNESS 1.6




・MAE-XT為已攻牙M3X0.5P

Part No.	A	Package
MAE-5T	5.0	2000
MAE-6T	6.0	
MAE-7T	7.0	
MAE-8T	8.0	
MAE-9T	9.0	
MAE-10T	10.0	
MAE-11T	11.0	1000
MAE-12T	12.0	
MAE-13T	13.0	
MAE-14T	14.0	
MAE-15T	15.0	

Part No.	A	Package
MAE-16T	16.0	1000
MAE-17T	17.0	
MAE-18T	18.0	
MAE-19T	19.0	
MAE-20T	20.0	
MAE-22T	22.0	
MAE-23.5T	23.5	
MAE-26T	26.0	
MAE-26.5T	26.5	
MAE-27T	27.0	

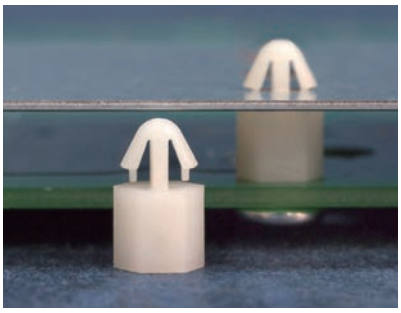

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




MOUNTING HOLE Ø4.0
THICKNESS 1.2

Part No.	Package
MAE4D-6	1000


用途：PC板端直接壓入固定，另一端可配合M3螺絲或自攻螺絲固定。

MOUNTING HOLE Ø4.0
THICKNESS 1.2




・MAE4D-6T為已攻牙M3x0.5P

Part No.	Package
MAE4D-6T	1000

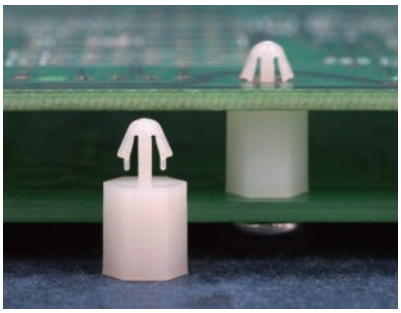

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




MOUNTING HOLE Ø3.0
THICKNESS 1.6

Part No.	Package
MAE-7-440	2000


用途：PC板端直接壓入固定，另一端可配合螺絲或自攻螺絲固定。

MOUNTING HOLE Ø3.0
THICKNESS 1.6




・MAE-7-440T為已攻牙4-40UNC

Part No.	Package
MAE-7-440T	2000

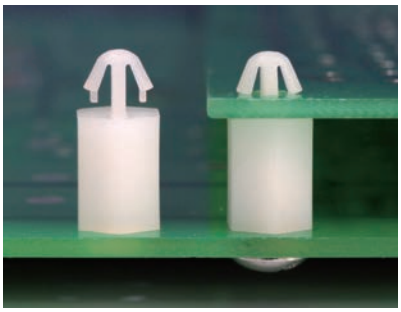

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




MOUNTING HOLE Ø4.0
THICKNESS 1.6

Part No.	A	Package
MAE43-5	5.0	2000
MAE43-6	6.0	
MAE43-7	7.0	
MAE43-8	8.0	
MAE43-9	9.0	
MAE43-10	10.0	
MAE43-11	11.0	
MAE43-12.7	12.7	
MAE43-14	14.0	
MAE43-15	15.0	
MAE43-15.9	15.9	
MAE43-20	20.0	

用途：PC板端直接壓入固定，另一端可配合M3螺絲或自攻螺絲固定。


MOUNTING HOLE Ø4.0
THICKNESS 1.6



・MAE43-XT為已攻牙M3x0.5P

Part No.	A	Package
MAE43-5T	5.0	2000
MAE43-6T	6.0	
MAE43-7T	7.0	
MAE43-8T	8.0	
MAE43-9T	9.0	
MAE43-10T	10.0	
MAE43-11T	11.0	
MAE43-12.7T	12.7	
MAE43-14T	14.0	
MAE43-15T	15.0	
MAE43-15.9T	15.9	
MAE43-20T	20.0	


MOUNTING HOLE Ø4.0
THICKNESS 1.85



Part No.	Package
MAE43-4.8LT	1000


PCB間隔柱 PCB SPACER

用途：PC板端直接壓入固定，另一端可配合M4螺絲或自攻螺絲固定。

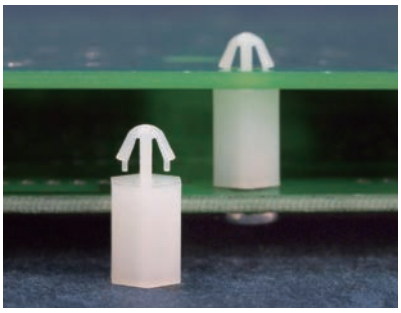


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

MOUNTING HOLE Ø4.0
THICKNESS 1.6




MOUNTING HOLE Ø4.0
THICKNESS 1.6



Part No.	A	Package
MAE4-5	5.0	2000
MAE4-6	6.0	
MAE4-7	7.0	
MAE4-8	8.0	
MAE4-9	9.0	
MAE4-10	10.0	
MAE4-11	11.0	
MAE4-12.7	12.7	
MAE4-14	14.0	
MAE4-15	15.0	
MAE4-15.9	15.9	
MAE4-20	20.0	

・MAE4-XT為已攻牙M4X0.7P


Part No.	A	Package
MAE4-5T	5.0	2000
MAE4-6T	6.0	
MAE4-7T	7.0	
MAE4-8T	8.0	
MAE4-9T	9.0	
MAE4-10T	10.0	
MAE4-11T	11.0	
MAE4-12.7T	12.7	
MAE4-14T	14.0	
MAE4-15T	15.0	
MAE4-15.9T	15.9	
MAE4-20T	20.0	

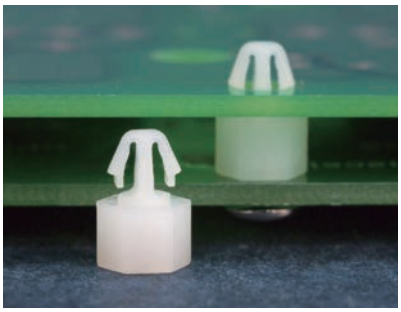


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

用途：機板部分用鐵板自攻螺絲固定，另一頭直接壓入PC板。


MOUNTING HOLE Ø4.0
THICKNESS 1.6




Part No.	Package
MCI-4.7	1000

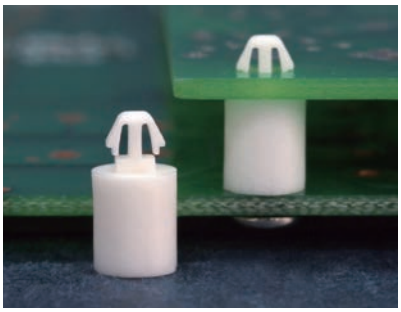

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm







MOUNTING HOLE
THICKNESS 1.6

Part No.	Package
MCSH-7.2	1000

PCB間隔柱 PCB SPACER


用途：支撐PC板，使中間不致震動，載重而凹陷短路。

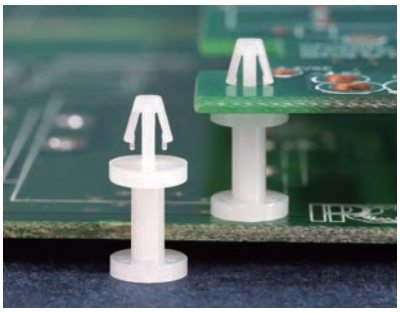

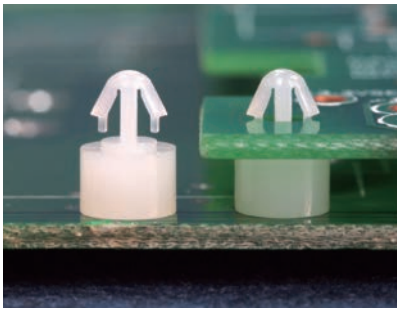


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

MOUNTING HOLE Ø3.0
THICKNESS 1.6




Part No.	A	H	Package
DCB-2	2.0	6.5	2000
DCB-2.5	2.5	6.5	
DCB-3	3.0	6.8	1000
DCB-3.5	3.5	6.8	
DCB-4	4.0	6.8	

MOUNTING HOLE Ø3.0
THICKNESS: T




Part No.	A	H	T	Package
DCB-5	5.0	6.0	1.6	1000
DCB-5.8	5.8	6.9	1.6	
DCB-6	6.0	6.8	1.6	
DCB-6.5	6.5	6.0	1.6	
DCB-7	7.0	6.0	1.6	
DCB-8	8.0	6.8	1.6	
DCB-8(2)	8.0	6.8	2.1	
DCB-10	10.0	6.8	1.6	
DCB-15	15.0	6.0	1.6	
DCB-15L	15.0	15.0	1.6	
DCB-15S	15.0	6.0	1.6	

MOUNTING HOLE Ø3.0
THICKNESS: T




【 DCB-2D,
DCB-3D,
DCB-3.5D 】

MOUNTING HOLE Ø3.0
THICKNESS: T




【 DCB-15D】

MOUNTING HOLE Ø3.0
THICKNESS: T



【 DCB-16DL,
DCB-20DL 】


MOUNTING HOLE Ø3.0
THICKNESS: T



Part No.	A	B	T	Package
DCB-2D	2.0	3.5	1.2~1.7	2000
DCB-3D	3.0	3.7	1.2~1.6	
DCB-3.5D	3.5	4.0	1.2~1.6	
DCB-4D	4.0	3.6	1.2~1.7	1000
DCB-4.5D	4.5	3.6	1.2~1.7	
DCB-5D	5.0	3.6	1.2~1.7	
DCB-5.5D	5.5	4.0	1.2~1.6	
DCB-7D	7.0	4.0	1.2~1.6	


Part No.	A	B	T	Package
DCB-8D	8.0	3.85	1.2~1.7	1000
DCB-8.5D	8.5	4.0	1.2~1.7	
DCB-9D	9.0	4.0	1.2~1.6	
DCB-11D	11.0	3.7	1.2~1.6	
DCB-12D	12.0	4.0	1.2~1.6	
DCB-13D	13.0	4.0	1.2~1.6	
DCB-15D	15.0	3.7	1.2~1.6	
DCB-16DL	16.0	3.7	1.2~1.6	
DCB-20DL	20.0	3.7	1.2~1.6	

MOUNTING HOLE Ø3.0
THICKNESS 3.0




Part No.	Package
DCBA-3.5	1000

MOUNTING HOLE Ø3.1
THICKNESS 1.6




Part No.	Package
DCBA-8	1000


MOUNTING HOLE Ø3.5
THICKNESS 1.6



Part No.	A	Package
PDC-3	3.0	2000
PDC-3.5	3.5	
PDC-4	4.0	




MOUNTING HOLE Ø3.5
THICKNESS 1.6



Part No.	Package
PDC-4.5D	2000


PCB間隔柱 PCB SPACER

用途：支撐PC板，使中間不致震動，載重而凹陷短路。

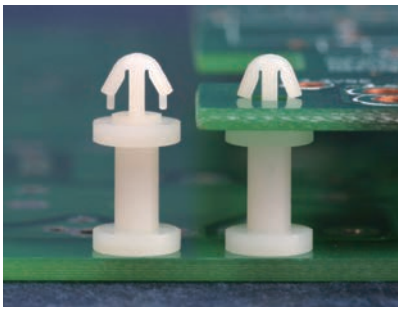


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

MOUNTING HOLE Ø3.5
THICKNESS: T



Part No.	A	B	T	Package
PDC-5	5.0	2.8	1.6	2000
PDC-9	9.0	2.8	1.6	
PDC-10	10.0	2.6	1.8	


MOUNTING HOLE Ø3.5
THICKNESS: T




Part No.	A	T	Package
PDC-5.5D	5.5	1.6	2000
PDC-6D	6.0	1.6	
PDC-6.5D	6.5	1.6	
PDC-7D	7.0	1.6	
PDC-13D	13.0	1.2~1.7	
PDC-13.5D	13.5	1.6	
PDC-26D	26.0	1.6	




MOUNTING HOLE Ø3.5
THICKNESS 1.6



Part No.	Package
MCN-10	1000

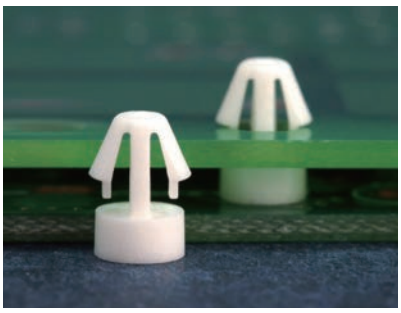


MOUNTING HOLE Ø4.0
THICKNESS: T




Part No.	A	B	T	Package
MC-2	2.0	3.1	1.2~1.7	2000
MC-2-1.2	2.0	3.5	0.8~1.0	
MC-2.5	2.5	3.65	1.2~1.7	1000


MOUNTING HOLE Ø4.0
THICKNESS 1.6



Part No.	A	Package
MC-3	3.0	2000
MC-3.2	3.2	
MC-3.5	3.5	
MC-4	4.0	
MC-5	5.0	

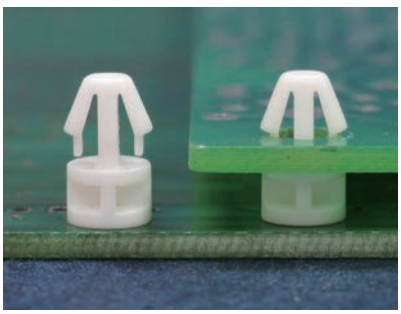


MOUNTING HOLE Ø4.0
THICKNESS 1.2~1.6




Part No.	Package
MC-3.5-1	1000

用途：支撐PC板，使中間不致震動，載重而凹陷短路。

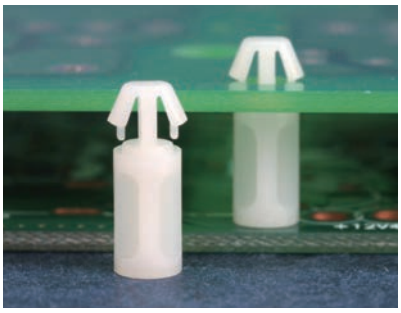


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


MOUNTING HOLE Ø4.0
THICKNESS 1.6



Part No.	A	Package
MC-6	6.3	2000
MC-7	7.0	
MC-7.5	7.5	
MC-8	8.0	
MC-8.5	8.5	
MC-9	9.0	
MC-10	10.0	
MC-11.5	11.5	1000
MC-12	12.7	
MC-16.4	16.4	

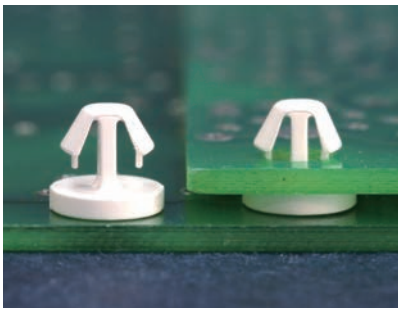


MOUNTING HOLE Ø4.0
THICKNESS 1.6~1.9




Part No.	Package
MCEA-1.9	1000

MOUNTING HOLE Ø4.0
THICKNESS 1.6~1.8




- Material: PC (UL)


Part No.	Package
MCE-1.9	1000

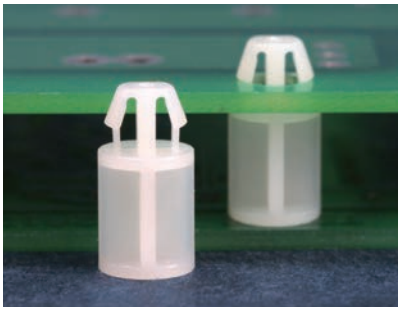

MOUNTING HOLE Ø4.8
THICKNESS 1.6




Part No.	A	Package
MCL-9	9.0	2000
MCL-16	16.0	

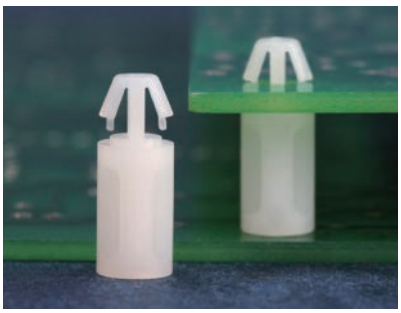


用途：支撐PC板，使中間不致震動，載重而凹陷短路，鐵板可鑽孔用螺絲固定。

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

MOUNTING HOLE Ø4.0
THICKNESS 1.6




Part No.	A	Package
MCH-6	6.35	1000
MCH-10	9.7	
MCH-12	12.7	

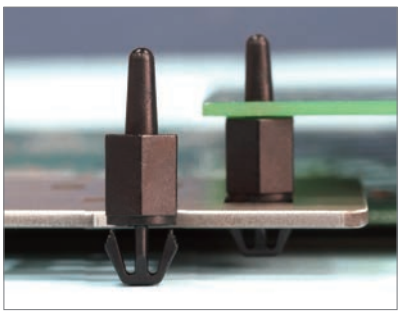



用途：PC板直接壓入固定，另一端直接壓入機板固定，省時易拆裝。

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



MOUNTING HOLE Ø3.7






MOUNTING HOLE
THICKNESS 0.8~1.6


Part No.	Package
KVLMA-10	1000

PCB間隔柱 PCB SPACER

用途：固定PC板於機板上，一頭配合螺絲使用，不旋轉。

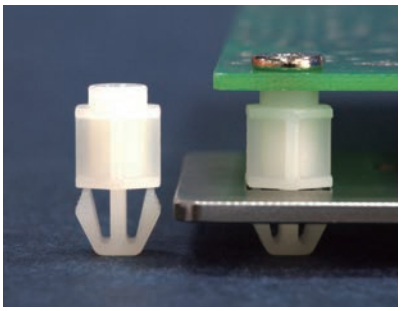



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

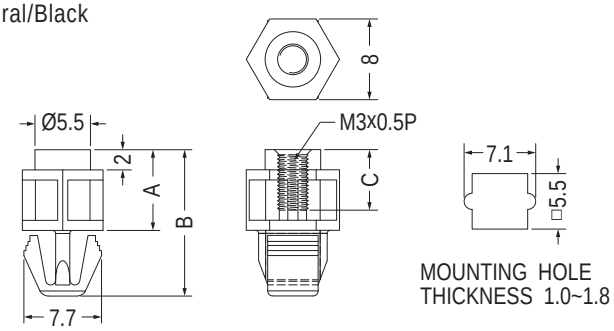


Part No.	A	B	C	Package
KVLM3-5	5.0	11.5	3.0	1000
KVLM3-6	6.0	12.5	4.0	
KVLM3-6.35	6.35	12.85	4.35	
KVLM3-8	8.0	14.5	6.0	
KVLM3-9.5	9.5	16.0	8.0	
KVLM3-10	10.0	16.5	8.0	
KVLM3-12	12.0	18.5	8.0	

Part No.	A	B	C	Package
KVLM3-12.7	12.7	19.2	8.0	1000
KVLM3-15.9	15.9	22.4	8.0	
KVLM3-18	18.0	24.5	8.0	
KVLM3-20	20.0	26.5	8.0	
KVLM3-22	22.0	28.5	8.0	
KVLM3-25.4	25.4	31.9	8.0	

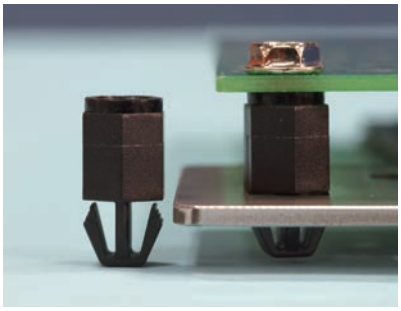

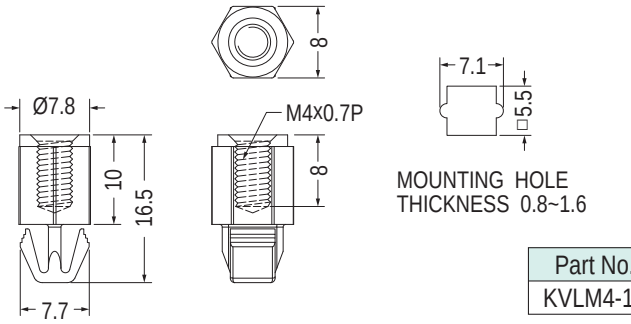


Part No.	Package
KVLM4-10	1000

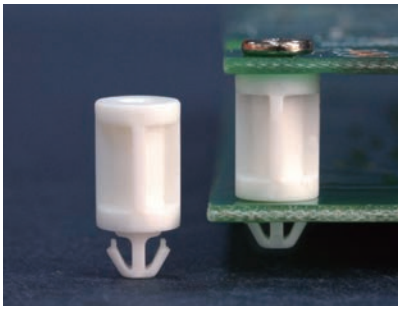



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

用途：固定PC板於機板上，一頭配合螺絲使用。



Part No.	A	B	Package
MCIA-12	12.0	17.0	1000
MCIA-16	16.0	21.0	

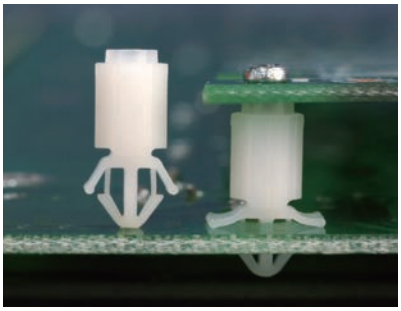





Part No.	L	Package
TCBC-8.7	8.7	1000
TCBC-13.7	13.7	


PCB間隔柱 PCB SPACER


用途：固定PC板於機板上，一頭配合自攻螺絲使用。

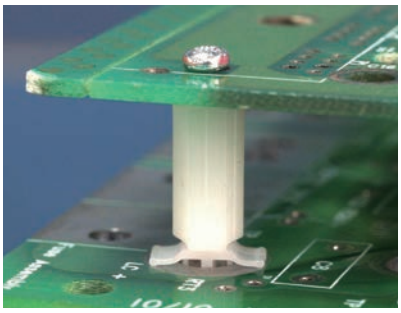

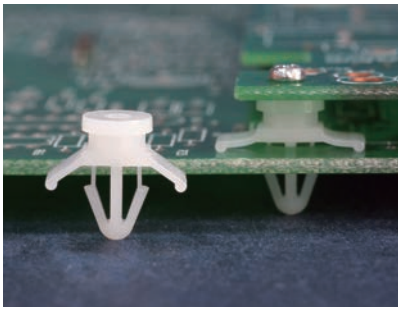


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

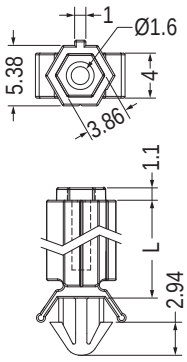




MOUNTING HOLE
THICKNESS 0.8



MOUNTING HOLE Ø4.8~Ø5.0
THICKNESS 2.0


Part No.	L	Package
TCBE-8.7	8.7	1000
TCBE-13.7	13.7	

Part No.	Package
TCBD-4.8	1000

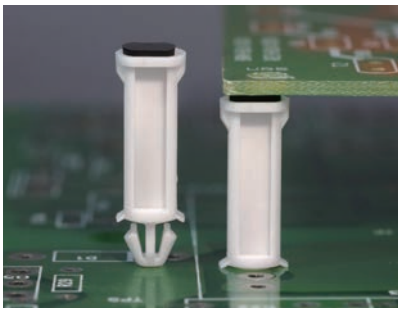


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Foot Material: Silicon Rubber (UL)
- Foot Flame Class: 94V-0
- Color: Natural/Black
- Unit: mm


用途：固定PC板於機板上，一頭有矽膠墊片支撐PC板，避免震動。



MOUNTING HOLE Ø4.0
THICKNESS 1.6




(PCB SPACER)
【 TCBH-17 】



3M DOUBLE ADHESIVE TAPE

(FOOT)
【 TF-1752I 】


Part No.	Part No.	Package
TCBH-17F	TCBH-17	1000
	TF-1752I	
	上述零件可單獨選購	

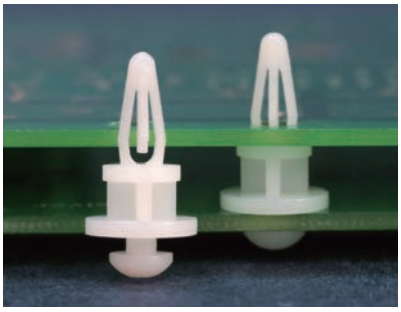


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

用途：一般用於電腦機板固定。

MOUNTING HOLE Ø4.0
THICKNESS 1.6



THICKNESS 1.6





MOUNTING HOLE

Part No.	Package
ACBR-6	1000

PCB間隔柱 PCB SPACER


用途：一般用於電腦機板固定。

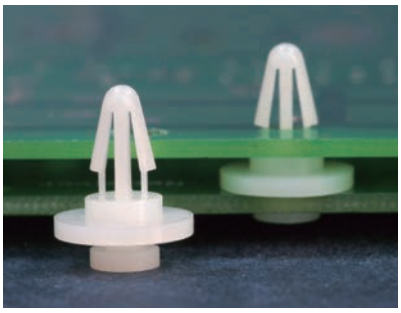

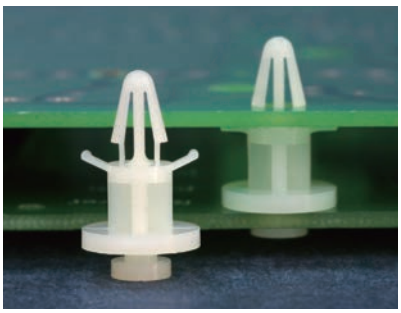


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


MOUNTING HOLE Ø4.0
THICKNESS 2.7



【 ACB-2.3 】

MOUNTING HOLE Ø4.0
THICKNESS 1.6~2.0







MOUNTING HOLE

Part No.	A	F	H	J	Package
ACB-2.3	2.5	1.0	10.0	2.8	1000
ACB-2.5	2.5	1.4	11.5	2.8	
ACB-3	3.2	1.2	11.6	3.2	

MOUNTING HOLE Ø4.0
THICKNESS: T







MOUNTING HOLE

Part No.	A	B	F	H	T	Package
ACB-5	5.0	7.0	1.3	11.7	1.6	1000
ACB-6	6.3	7.0	1.3	11.6	1.6	
ACB-8	8.0	7.0	1.4	11.6	1.6	
ACB-60	60.0	7.3	2.8	11.3	1.2~1.7	250
ACB-68	68.0	7.3	1.3	11.3	1.6	
ACB-74	74.0	7.3	1.3	11.3	1.6	


MOUNTING HOLE Ø4.0
THICKNESS 1.6







MOUNTING HOLE

Part No.	Package
MCB-6	500

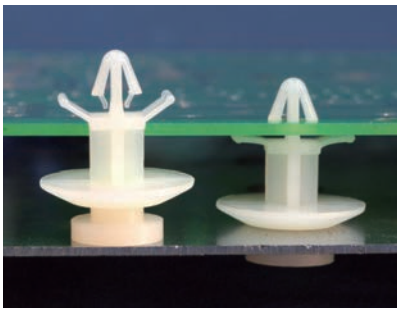


MOUNTING HOLE Ø4.5
THICKNESS 1.2~2.0







MOUNTING HOLE

Part No.	Package
MBC-11	500

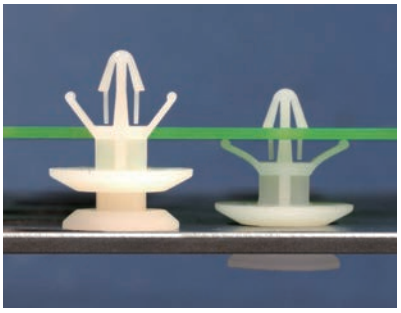

MOUNTING HOLE Ø4.5~Ø4.8
THICKNESS 0.8~2.5






MOUNTING HOLE


Part No.	Package
MBD-10	500

用途：機板部份用鐵板自攻螺絲固定，另一頭直接壓入PC板。

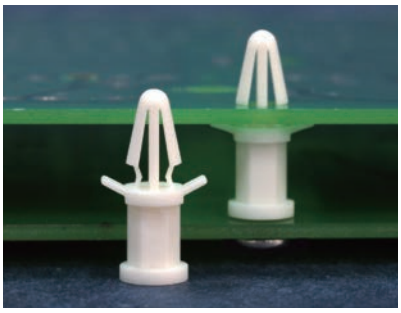

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


MOUNTING HOLE Ø4.0
THICKNESS 1.2~1.7



FOR M3 SELF-TAPPING SCREW

Part No.	Package
TCBS-18	1000


MOUNTING HOLE Ø4.0
THICKNESS 1.2~1.9




【 TCBS-38.5 】

FOR M3 SELF-TAPPING SCREW


MOUNTING HOLE Ø4.0
THICKNESS 1.2~1.7




Part No.	A	Package
TCBS-5	5.0	1000
TCBS-6A	6.0	
TCBS-6	6.35	
TCBS-7	7.0	
TCBS-9.5	9.5	
TCBS-10	10.0	
TCBS-12.5	12.5	
TCBS-15	15.0	
TCBS-20	20.0	
TCBS-24.5	24.5	
TCBS-25	25.0	
TCBS-26	26.0	
TCBS-30	30.0	
TCBS-35	35.0	
TCBS-38.5	38.5	

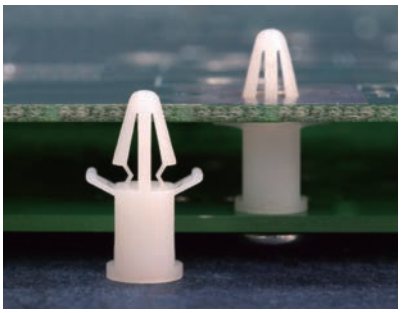


THICKNESS 1.2~1.7






MOUNTING HOLE

THICKNESS 1.2~1.7




FOR SCREW




MOUNTING HOLE

Part No.	Package
TCBT-3.6	1000


Part No.	A	B	C	Screw	Package
TCBT-7	7.0	6.9	2.4	4-40 UNC	1000
TCBT-7.7	7.7	5.9	2.6	M3	
TCBT-8.5	8.5	6.9	2.6	M3	
TCBT-16	16.0	6.9	2.4	4-40 UNC	

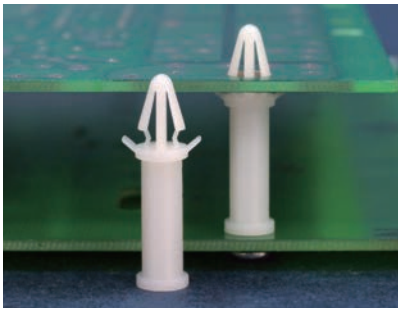



FOR M3 SCREW

THICKNESS 1.2~1.9




MOUNTING HOLE

Part No.	Package
TCBT-19	1000


PCB間隔柱 PCB SPACER

用途：支撐PC板，使中間不致震動，載重而凹陷短路。

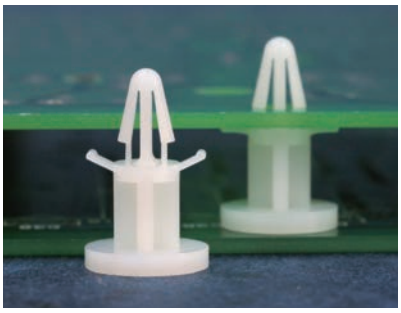


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


MOUNTING HOLE Ø4.0
THICKNESS 1.2~1.7




Part No.	A	D	H	Package
MBS-6	6.4	11.4	11.8	1000
MBS-8	8.0	11.4	11.8	
MBS-8.9S	8.9	11.1	8.0	
MBS-8.9	8.9	11.1	11.9	
MBS-9.5L	9.5	11.4	20.0	
MBS-10	10.0	11.4	12.0	
MBS-11	11.0	11.4	12.0	500
MBS-14	14.0	11.4	12.0	
MBS-74	74.0	10.4	11.3	250

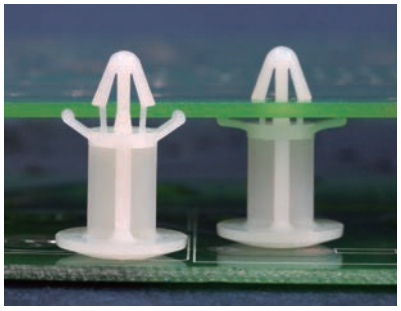


MOUNTING HOLE Ø4.5
THICKNESS 1.2~1.7






MOUNTING HOLE

Part No.	Package
MTD-11	500

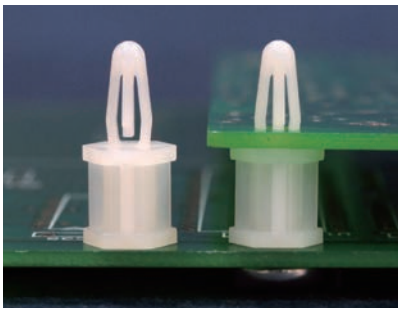


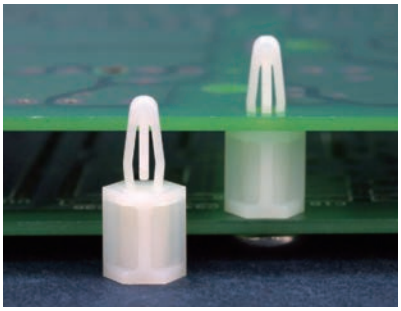

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


用途：機板部份用M3.5鐵板自攻螺絲固定，另一頭直接壓入PC板。

MOUNTING HOLE Ø4.0
THICKNESS 1.6




Part No.	A	B	C	Package
BS-6	6.4	4.8	10.2	1000
BS-9	9.5	8.0	10.2	
BS-12	12.7	11.0	10.2	
BS-14	14.0	12.7	10.2	
BS-15S	15.0	13.0	10.4	
BS-15	15.9	13.0	10.2	
BS-19	19.1	16.2	10.2	
BS-22	22.2	19.4	10.2	
BS-25	25.4	24.0	10.2	
BS-28	28.6	25.9	10.2	
BS-29	29.0	25.9	10.2	

MOUNTING HOLE Ø4.0
THICKNESS 2.0




Part No.	Package
BS-8	1000

MOUNTING HOLE Ø4.0
THICKNESS 1.6




Part No.	Package
BS-35.7	500

MOUNTING HOLE Ø4.0
THICKNESS 2.0




Part No.	A	B	Package
BS-10-1	10.0	8.0	1000
BS-20-1	20.0	12.0	

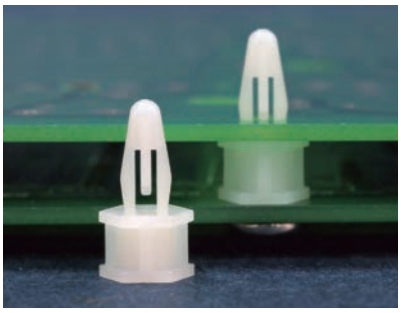


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

用途：機板部份用M3鐵板自攻螺絲固定，另一頭直接壓入PC板。

MOUNTING HOLE Ø4.0
THICKNESS 1.2~1.7




Part No.	Package
BSB-6	1000

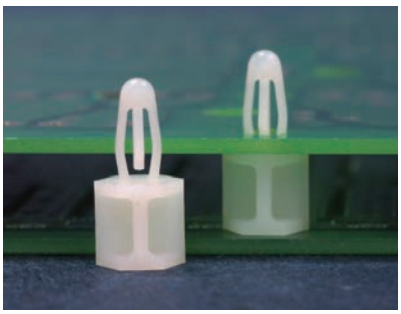


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

用途：支撐PC板，使中間不致震動，載重而凹陷短路。

MOUNTING HOLE Ø4.2
THICKNESS 1.6




Part No.	Package
BSB-8.5	1000

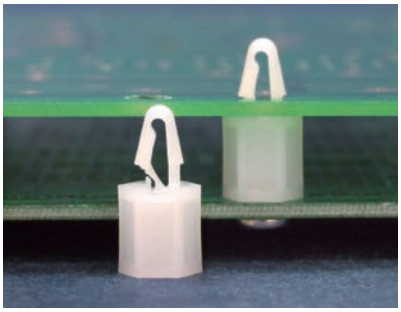


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

用途：機板部份用M3.5鐵板自攻螺絲固定，另一頭直接壓入PC板。

MOUNTING HOLE Ø4.0
THICKNESS 1.6~2.0

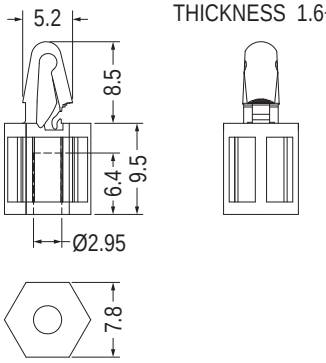


Part No.	Package
BSCL-9.5	1000

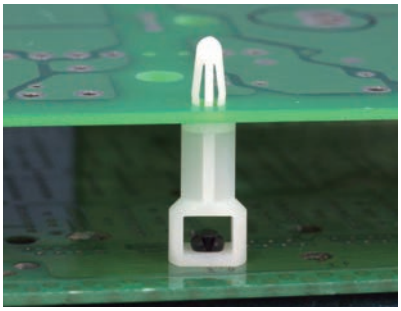

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

用途：一端配合SR4系列鉚釘固定於機板上，一端固定於PC板上。

MOUNTING HOLE Ø4.0
THICKNESS 1.6

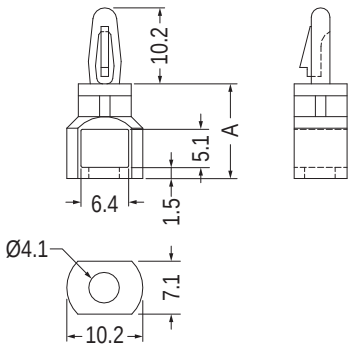

Part No.	A	Package
SRLCB-9	9.5	1000
SRLCB-11	11.1	
SRLCB-12	12.7	
SRLCB-15	15.9	
SRLCB-19.1	19.1	
SRLCB-22	22.2	
SRLCB-25	25.4	


PCB間隔柱 PCB SPACER

用途：一端配合SR4系列鉚釘固定於機板上，一端固定於PC板上。






- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

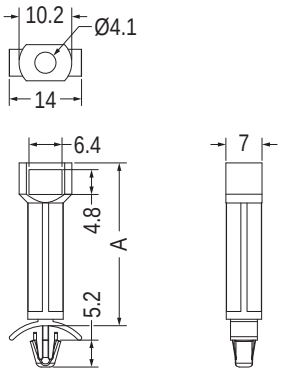


MOUNTING HOLE Ø4.75~Ø4.8
THICKNESS 0.8~2.0


Part No.	A	Package
SRLA-29.5	29.5	1000
SRLA-31.5	31.5	

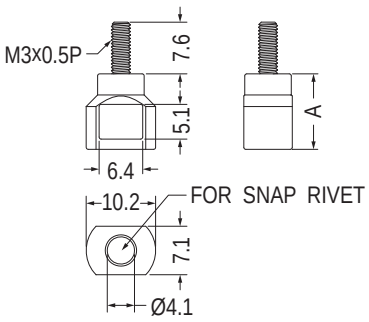


Part No.	A	Package
TCEB3-9.5	9.5	1000
TCEB3-11.1	11.1	

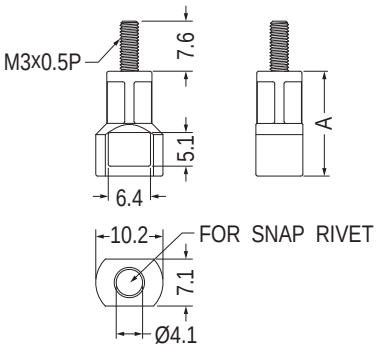


Part No.	A	Package
TCEB3-12.7	12.7	1000
TCEB3-15.9	15.9	
TCEB3-19.1	19.1	
TCEB3-22.2	22.2	
TCEB3-25.4	25.4	

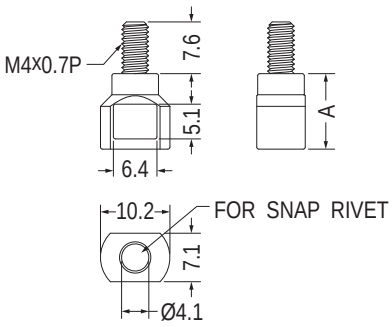


Part No.	A	Package
TCEB4-9.5	9.5	1000
TCEB4-11.1	11.1	

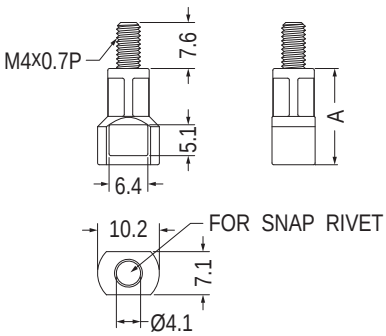

Part No.	A	Package
TCEB4-12.7	12.7	1000
TCEB4-15.9	15.9	
TCEB4-19.1	19.1	
TCEB4-22.2	22.2	
TCEB4-25.4	25.4	

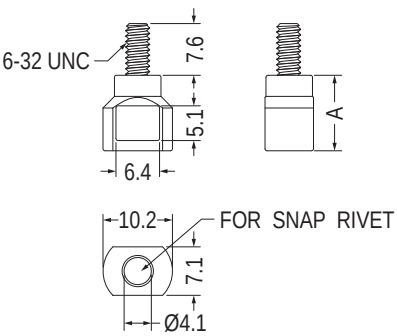


Part No.	A	Package
TCEB632-9.5	9.5	1000
TCEB632-11.1	11.1	

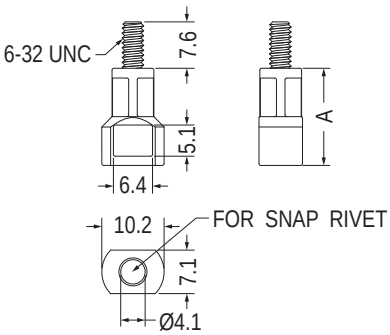

Part No.	A	Package
TCEB632-12.7	12.7	1000
TCEB632-15.9	15.9	
TCEB632-19.1	19.1	
TCEB632-22.2	22.2	
TCEB632-25.4	25.4	


PCB間隔柱 PCB SPACER

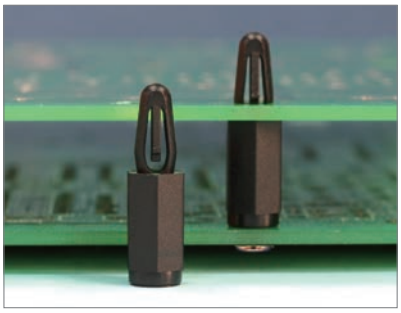

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


用途：機板部份用螺絲固定，另一頭直接壓入PC板。

MOUNTING HOLE Ø4.0
THICKNESS 1.6




Part No.	A	B	Package
★BSCB-7	7.0	5.5	1000
BSCB-10	10.0	8.0	
BSCB-12	12.0	8.0	
★BSCB-14	14.0	10.0	
BSCB-15	15.0	10.0	
BSCB-25	25.0	10.0	

MOUNTING HOLE Ø4.0
THICKNESS 1.8




Part No.	Package
BSCB-20	1000

MOUNTING HOLE Ø4.0
THICKNESS 2.0




Part No.	Package
BSCB-6	1000

MOUNTING HOLE Ø4.0
THICKNESS 1.6




Part No.	A	B	Package
BSCB4-6	6.0	4.0	1000
BSCB4-8	8.0	6.0	
BSCB4-10	10.0	8.0	

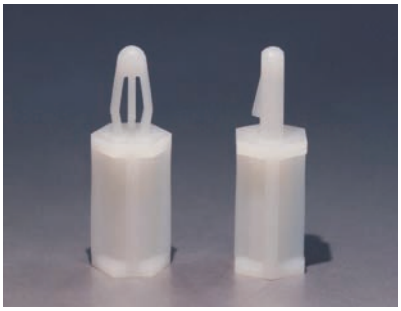


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

用途：機板部份用6-32鐵板自攻螺絲固定，另一頭直接壓入PC板。



MOUNTING HOLE Ø4.0
THICKNESS 1.6


Part No.	Package
BSB632-15.9	1000

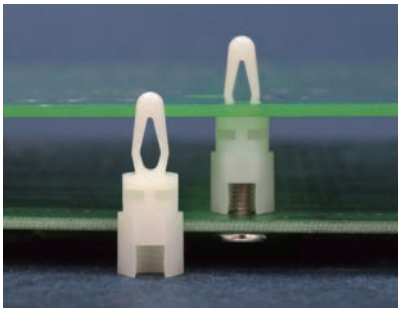

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

用途：機板部份用螺絲固定，另一頭直接壓入PC板。


MOUNTING HOLE Ø4.0
THICKNESS 1.57

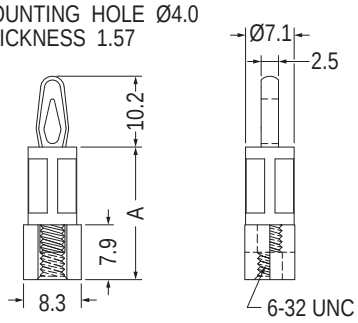

Part No.	A	Package
BSC632-9.5	9.5	1000
BSC632-12.7	12.7	
BSC632-15.9	15.9	
BSC632-19.1	19.1	
BSC632-22.2	22.2	
BSC632-25.4	25.4	


PCB間隔柱 PCB SPACER

用途：機板部份用螺絲固定，另一頭直接壓入PC板。

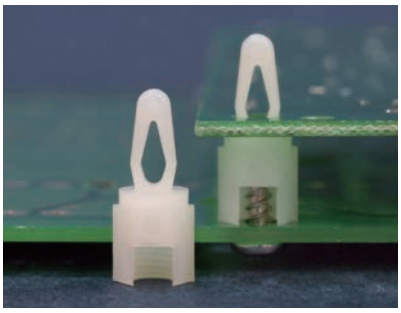


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


MOUNTING HOLE Ø4.0
THICKNESS 1.6



Part No.	A	Package
BSCM4-9.5	9.5	1000
BSCM4-12.7	12.7	
BSCM4-15.9	15.9	
BSCM4-19.1	19.1	
BSCM4-22.2	22.2	
BSCM4-25.4	25.4	

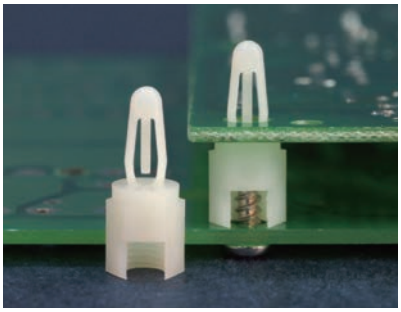


MOUNTING HOLE Ø4.0
THICKNESS 1.6




Part No.	A	Package
BSDM4-9.5	9.5	1000
BSDM4-12.7	12.7	
BSDM4-15.9	15.9	
BSDM4-19.1	19.1	
BSDM4-22.2	22.2	
BSDM4-25.4	25.4	


MOUNTING HOLE Ø4.0
THICKNESS 1.6



Part No.	A	Package
BSD632-9.5	9.5	1000
BSD632-12.7	12.7	
BSD632-15.9	15.9	
BSD632-19.1	19.1	
BSD632-22.2	22.2	
BSD632-25.4	25.4	


用途：一端固定於木頭或音箱上，另一端固定於PC板上。

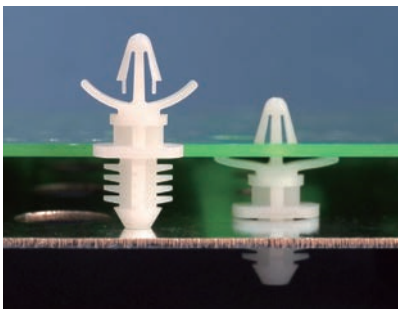

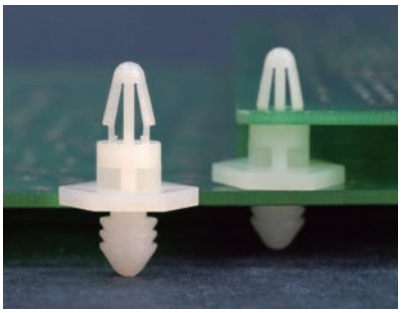

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


MOUNTING HOLE Ø4.0
THICKNESS 0.8~2.0



MOUNTING HOLE Ø7.9
THICKNESS 6.4

Part No.	Package
WBHC-6.4	1000


MOUNTING HOLE Ø4.0
THICKNESS 1.2~1.6



MOUNTING HOLE Ø6.0
THICKNESS 7.0

Part No.	Package
ACBW-6.8	1000


PCB間隔柱 PCB SPACER

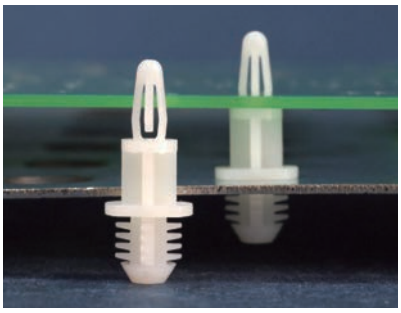

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


用途：一端固定於木頭或音箱上，另一端固定於PC板上。


MOUNTING HOLE Ø4.0
THICKNESS 1.2~1.7



HOLE IN PANEL Ø7.9
THICKNESS 6.4


Part No.	A	Package
WBH-5	4.8	1000
WBH-6	6.4	
WBH-9	9.5	
WBH-11	11.1	
WBH-12	12.7	
WBH-16	15.9	
WBH-19	19.1	
WBH-22	22.2	
WBH-25	25.4	

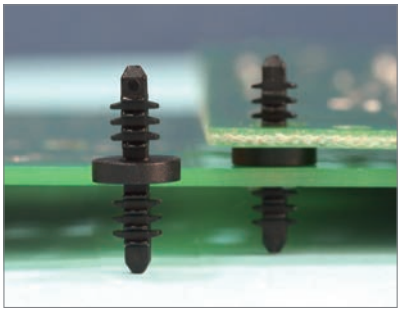

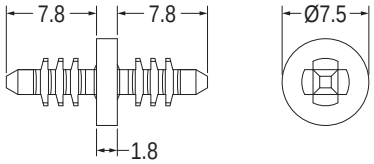


MOUNTING HOLE Ø4.0
THICKNESS 2.6~6.3

Part No.	Package
WBHB-1.8	1000

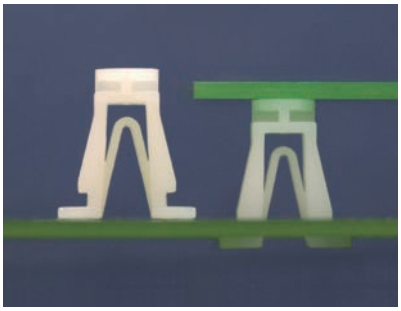


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

用途：一端固定於機板上，另一端支撐PC板，避免下陷造成短路，PC板免鑽孔。



MOUNTING HOLE


Part No.	Package
PAA-11	1000

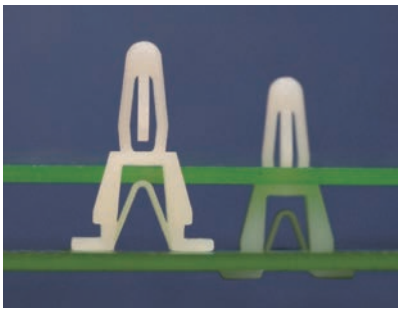

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

用途：固定PC板於機板上，不會突出機板底部，外觀美麗。


MOUNTING HOLE Ø4.0
THICKNESS 0.8~1.7



MOUNTING HOLE

Part No.	Package
PCC-6	2000


MOUNTING HOLE Ø4.0
THICKNESS 1.2~1.7



MOUNTING HOLE


Part No.	Package
PCC-11	1000

PCB間隔柱 PCB SPACER

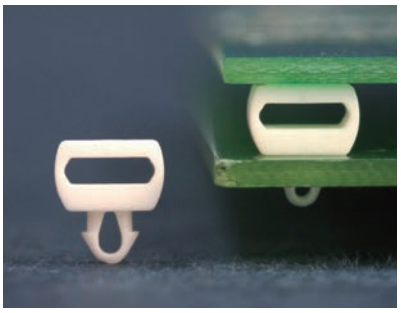


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

用途：支撐PC板，使中間不致震動，載重而凹陷短路，吸震力強。




MOUNTING HOLE Ø2.5
THICKNESS 1.0


Part No.	Package
LIJ-4	2000



MOUNTING HOLE Ø3.0
THICKNESS 1.6


Part No.	A	Package
LIO-10	10.0	2000
LIO-10.5	10.5	

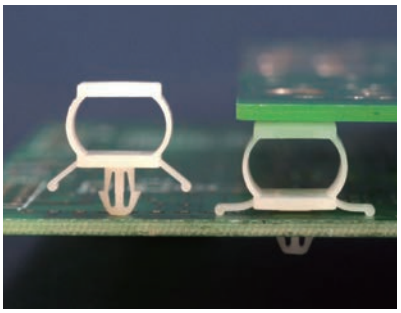

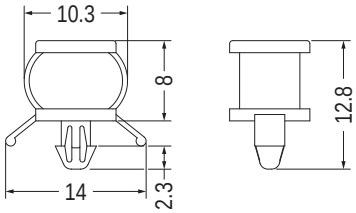


MOUNTING HOLE Ø3.0
THICKNESS 1.1~1.6


Part No.	Package
LIO-8	2000

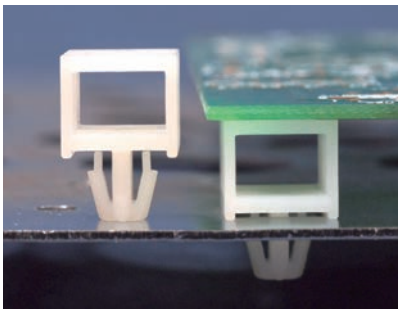

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


用途：固定PC板於機板上，維修方便不佔空間。

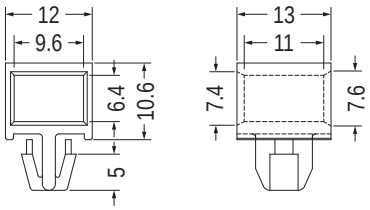




MOUNTING HOLE
THICKNESS: T

Part No.	T	Package
LDD-10	1.6~1.8	500
LDD-10(2)	1.8~2.0	

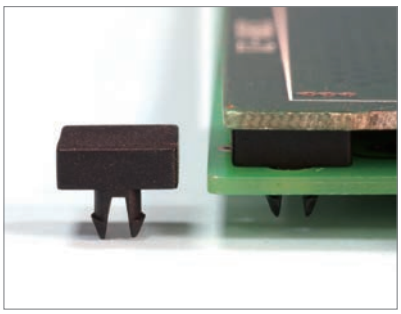


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

用途：用於PC板墊高及支撐。




MOUNTING HOLE Ø3.8
THICKNESS 2.5


Part No.	Package
LIES-1	1000

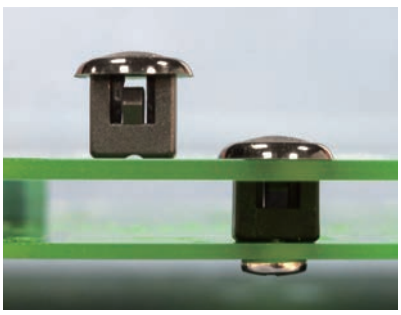

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

用途：固定PC板於機板上，PC板用螺絲固定，易拆卸。







MOUNTING HOLE
THICKNESS 0.8~2.0

Part No.	A	B	Package
LHC-8	8.4	10.8	1000
LHC-12	12.5	14.9	


用途：配合螺絲固定電漿面板於機殼上，可靠不脫落。

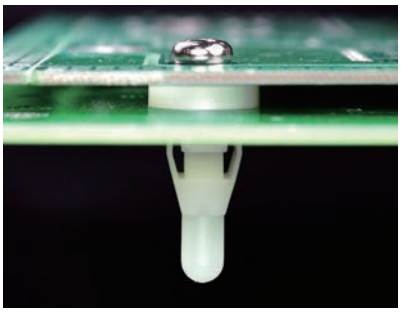

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm





Part No.	Package
YES-3	500

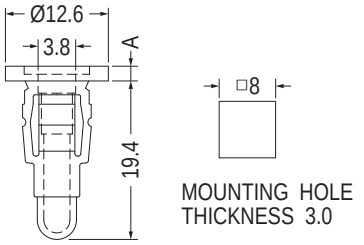


Part No.	A	Package
YES-08	0.8	500
YES-32	3.2	
YES-48	4.8	

用途：可搭配自攻牙螺絲用於PC板之固定。

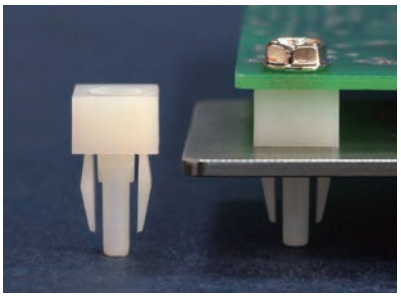


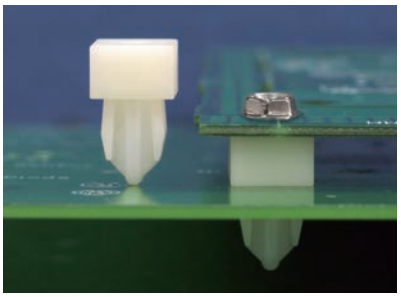

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
ES-1	2000

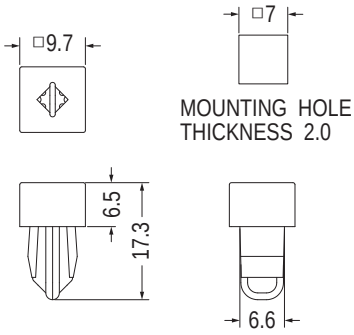


Part No.	Package
ES-2	1000


用途：配合螺絲用於PC板之固定或當螺絲固定座。

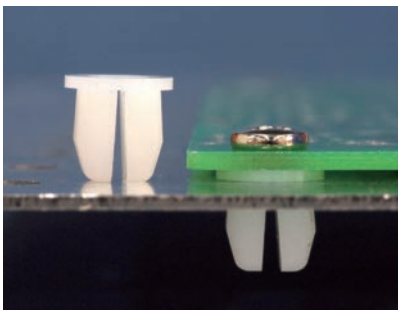


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

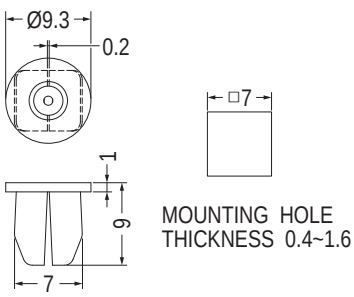

Part No.	Package
ESS-1	1000




Part No.	Package
ESS-3	1000

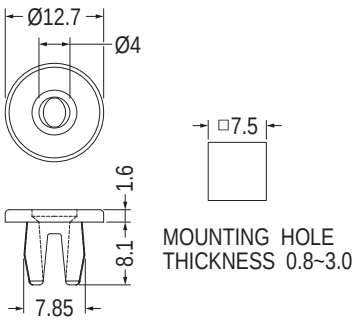


Part No.	Package
ESS-4	1000

PCB間隔柱 PCB SPACER


用途：配合螺絲用於PC板之固定。

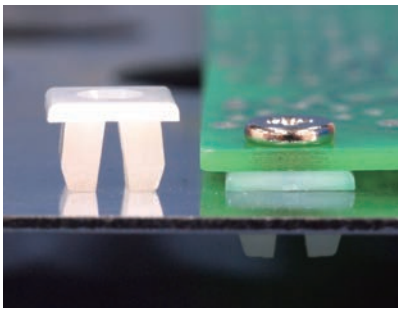


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

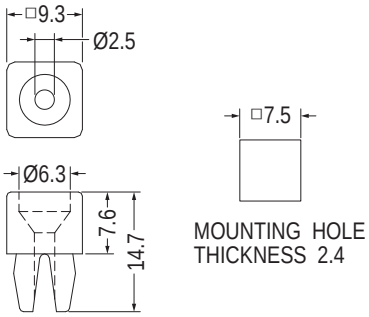


Part No.	Package
ESS-7.6	1000

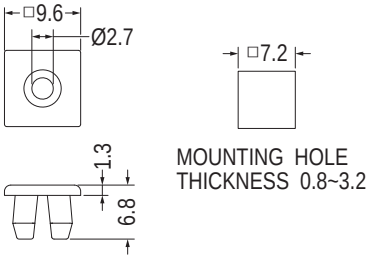


Part No.	Package
ESS-2	1000

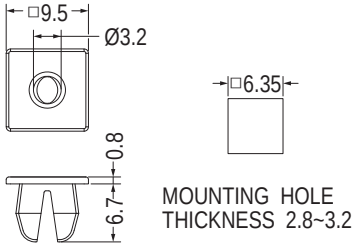


Part No.	Package
ESS-5	1000

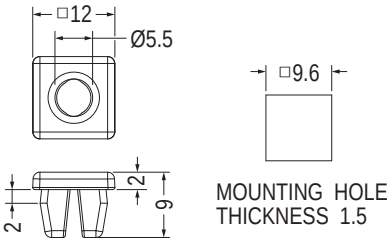



Part No.	Package
ESS6-2.5	1000

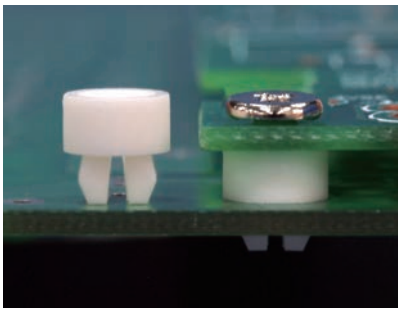


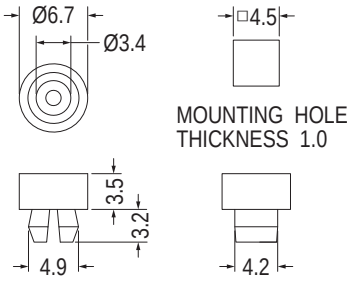


Part No.	Package
ETSA-3.5	1000

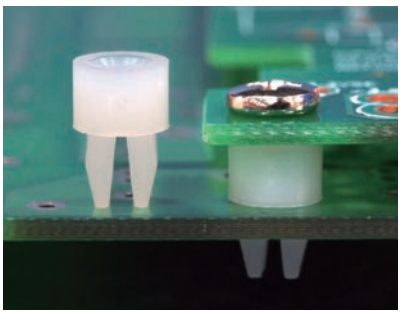






【 ETS-3.2-2 】



【 ETS-7M 】




【 ETS-7 】


Part No.	A	B	C	Package
ETS-3	3.0	5.4	4.4	2000
ETS-3-1	3.0	5.4	5.0	
ETS-3.2	3.2	5.4	4.4	
ETS-3.2-1	3.2	5.4	5.0	
ETS-3.2-2	3.2	4.0	5.0	
ETS-3.4	3.4	5.4	4.4	
ETS-3.6	3.6	5.4	5.0	
ETS-4.6	4.6	5.4	4.4	
ETS-4.8	4.8	5.4	4.4	
ETS-6.3	6.3	5.4	4.4	1000
ETSS-6.5	6.5	4.0	4.4	
ETS-7M	7.0	4.0		
ETS-7	7.0	5.0		
ETS-8	8.0	5.4	4.4	
ETS-10	10.0	5.4	4.4	
ETS-12	12.7	5.4	4.4	
ETS-16	15.9	5.4	4.4	
ETS-19	19.1	5.4	4.4	

用途：配合螺絲用於PC板之固定。



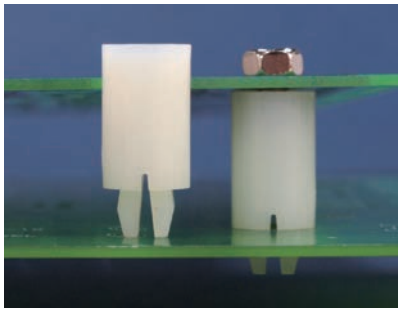



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

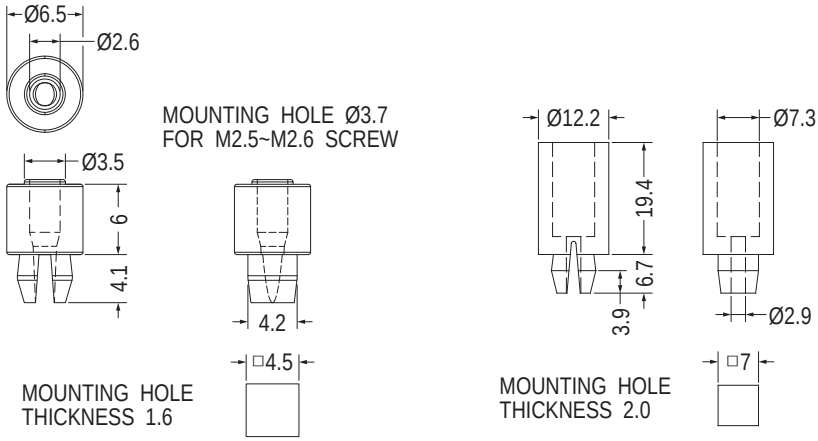


Part No.	Package
ETSB-6	1000

Part No.	Package
ESS-19	1000

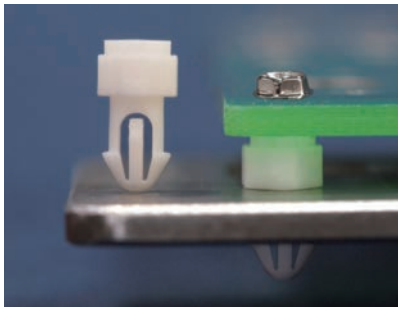

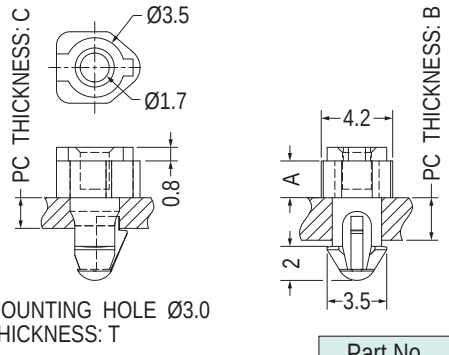


Part No.	A	B	C	T	Package
BSE-2.2	2.16	2.5	1.6	1.6~2.5	1000
BSE-2.2L	2.2	3.3	2.0	1.7~3.05	

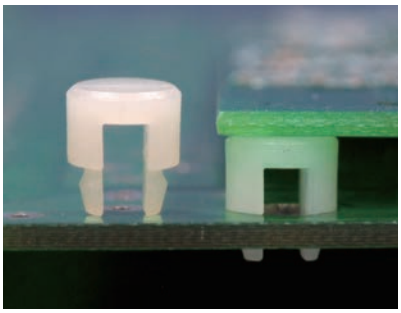


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

用途：直接壓入板內固定。




Part No.	Package
CUS-5	2000

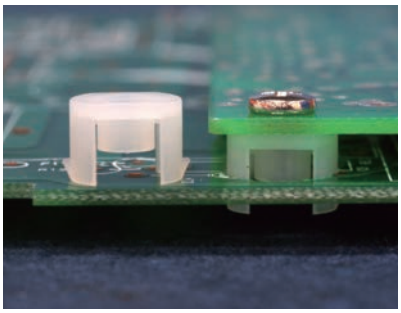

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


用途：一頭直接壓入機板固定，另一頭用螺絲貫穿固定於機板，一般用於DVD內部之PC板固定。

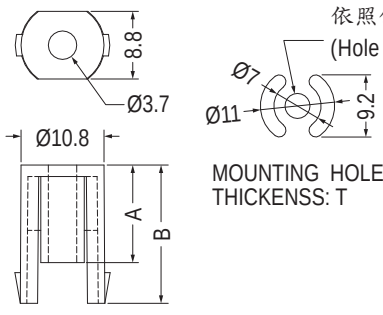


Part No.	A	B	T	Package
DVDS-5	5.0	7.8	0.8~1.0	500
DVDS-9	9.4	14.7	0.8~1.2	
DVDS-12	12.7	18.1	0.8~1.2	


PCB間隔柱 PCB SPACER

用途：用於機器之面板固定，配合螺絲使用。

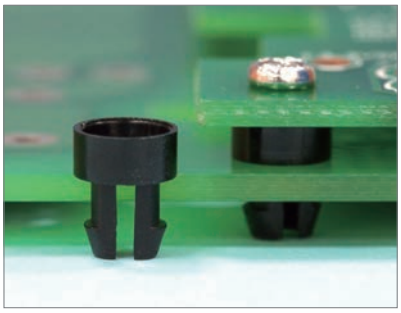

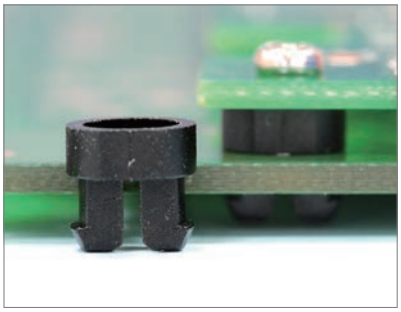


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




MOUNTING HOLE Ø4.0
THICKNESS 2.3~2.5

Part No.	Package
SOR-2	2000




MOUNTING HOLE Ø5.5
THICKNESS 2.3~2.5

Part No.	Package
SOR-1	2000




FOR M2.5 or M2.6 SCREW




MOUNTING HOLE
THICKNESS 2.8

Part No.	Package
SOR-3	2000

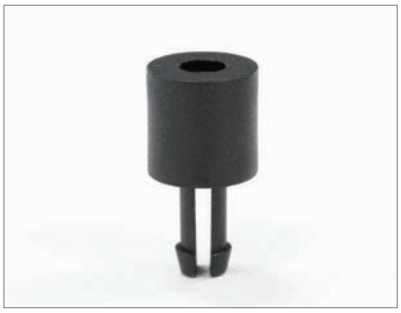


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

用途：固定PC板於機板上，免工具，易拆卸。




MOUNTING HOLE Ø3.5
THICKNESS 5.5

Part No.	Package
SSUL-8	1000

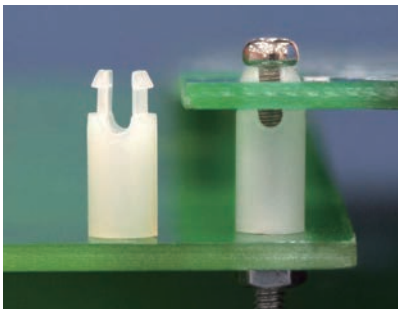


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

用途：快速固定PC板於機板上，如配合螺絲可將PC板固定於木板上。




MOUNTING HOLE Ø3.0
THICKNESS: T



FOR M2 SCREW

MOUNTING HOLE Ø3.0
THICKNESS 1.3



FOR M2 SCREW


Part No.	Package
SS3-7(1.3)	1000

Part No.	A	B	T	Package
SS1-2	2.0	1.2	0.8~1.0	2000
SS1-2.5	2.5	1.2	0.8~1.0	
SS1-3	3.0	1.2	0.8~1.0	
SS1-3.5	3.5	1.2	0.8~1.0	
SS1-4	4.0	1.2	0.8~1.0	
SS1-4.5	4.5	1.2	0.8~1.0	
SS1-5	5.0	1.2	0.8~1.0	
SS1-5.5	5.5	1.2	0.8~1.0	
SS1-6	6.0	1.2	0.8~1.0	


Part No.	A	B	T	Package
SS1-2S	2.0	0.5	0.8~1.0	2000
SS1-2.5S	2.5	0.5	0.8~1.0	
SS1-3S	3.0	0.5	0.8~1.0	
SS1-3.5S	3.5	0.5	0.8~1.0	
SS1-4S	4.0	0.5	0.8~1.0	
SS1-4.5S	4.5	0.5	0.8~1.0	
SS1-5S	5.0	0.5	0.8~1.0	
SS1-5.5S	5.5	0.5	0.8~1.0	
SS1-6S	6.0	0.5	0.8~1.0	
SS1-2L	2.0	1.0	1.6	
SS1-2.5L	2.5	1.0	1.6	
SS1-3L	3.0	1.0	1.6	
SS1-3.5L	3.5	1.0	1.6	
SS1-4L	4.0	1.0	1.6	
SS1-4.5L	4.5	1.0	1.6	
SS1-5L	5.0	1.0	1.6	
SS1-5.5L	5.5	1.0	1.6	
SS1-6L	6.0	1.0	1.6	
SS1-8L	8.0	1.0	1.6	
SS1-9L	9.0	1.0	1.6	

PCB間隔柱 PCB SPACER


用途：快速固定PC板於機板上，如配合螺絲可將PC板固定於木板上。

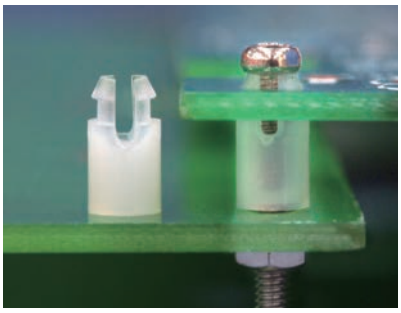

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




MOUNTING HOLE Ø4.0
THICKNESS: T



FOR SCREW

Part No.	A	C	T	Screw	Package
SS2-2.5U	2.5	2.1	1.6~1.8	M2	2000
SS2-2.5S	2.5	2.7	1.6	M2.6	
SS2-3S	3.0	2.7	1.6	M2.6	
SS2-4S	4.0	2.7	1.6	M2.6	
SS2-5S	5.0	2.7	1.6	M2.6	
SS2-6S	6.0	2.7	1.6	M2.6	
SS2-2.5	2.5	2.8	1.6~1.8	M2.6	
SS2-3	3.0	2.8	1.6~1.8	M2.6	
SS2-4	4.0	2.8	1.6~1.8	M2.6	
SS2-5	5.0	2.8	1.6~1.8	M2.6	
SS2-5.4	5.4	2.8	1.6~1.8	M2.6	
SS2-6	6.0	2.8	1.6~1.8	M2.6	
SS2-8	8.0	2.8	1.6~1.8	M2.6	
SS2-9.5	9.5	2.8	1.6~1.8	M2.6	


MOUNTING HOLE Ø4.8
THICKNESS 1.0~1.2



FOR M3 SCREW

【 SS-2S 】


MOUNTING HOLE Ø4.8
THICKNESS 1.2~1.7



FOR M3 SCREW

【 SS-10A 】

MOUNTING HOLE Ø4.8
THICKNESS 1.2~1.7




FOR M3 SCREW

Part No.	A	B	D	Package
SS-2S	2.0	1.5	6.4	1000
SS-2.4	2.4	1.5	6.4	
SS-3	3.2	1.5	6.4	
SS-3.5	3.5	1.5	6.4	
SS-4	4.0	1.5	6.4	
SS-4.5	4.5	1.5	6.4	

Part No.	A	B	D	Package
SS-5	4.8	1.5	6.4	1000
SS-5A	5.0	1.5	6.4	
SS-6	6.4	1.5	6.4	
SS-7	7.0	1.5	6.5	
SS-7.4	7.4	1.7	6.5	
SS-8	7.9	1.5	6.4	

Part No.	A	B	D	Package
SS-10	9.5	1.5	6.4	1000
SS-10A	9.5	1.7	6.5	
SS-11	11.1	1.5	6.4	
SS-12A	12.0	1.5	6.4	
SS-12	12.7	1.5	6.4	
SS-14	14.2	1.5	6.4	
SS-14.5	14.55	1.5	6.4	
SS-15	15.0	1.5	6.4	
SS-16	15.9	1.5	6.4	
SS-17.2	17.2	1.5	6.4	
SS-19	19.1	1.5	6.4	
SS-22	22.2	1.5	6.4	500
SS-25	25.4	1.5	6.4	


MOUNTING HOLE Ø4.8
THICKNESS 1.6



FOR M3 SCREW

Part No.	Package
SSA-12.7	1000


MOUNTING HOLE Ø5.8
THICKNESS 1.6



FOR M3.5 or M4 SCREW

Part No.	Package
SSA4-5.5	1000

MOUNTING HOLE Ø5.9
THICKNESS: T




FOR M4 SCREW

Part No.	A	C	T	Package
SSU4-6.3	6.35	3.9	1.2~1.7	1000
SSU4-6.3L	6.35	4.3	1.6	
SSU4-9.5	9.5	3.9	1.2~1.7	
SSU4-9.5L	9.53	4.3	1.6	
SSU4-12.7	12.7	3.9	1.2~1.7	
SSU4-12.7L	12.7	4.3	1.6	
SSU4-15.9	15.9	3.9	1.2~1.7	


PCB間隔柱 PCB SPACER

用途：快速固定PC板於機板上，如配合螺絲可將PC板固定於木板上。

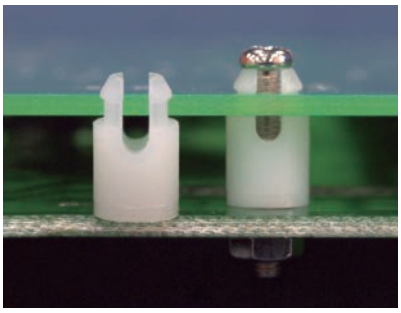

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


MOUNTING HOLE Ø5.9
THICKNESS 1.8



FOR M3.5 SCREW

Part No.	A	Package
SS3.5-6.3	6.3	1000
SS3.5-9.5	9.5	
SS3.5-12.7	12.7	
SS3.5-15	15.9	


MOUNTING HOLE Ø5.9
THICKNESS 1.8



FOR M4 SCREW

【 SS4-8L, SS4-16L 】

MOUNTING HOLE Ø5.9
THICKNESS 1.2~1.7




FOR M3.5 or M4 SCREW

Part No.	A	Package
SS4-3	3.0	1000
SS4-4	4.0	
SS4-4.6	4.6	
SS4-5	5.0	

Part No.	A	Package
SS4-6	6.4	1000
SS4-8	7.9	
★SS4-8L	7.95	
SS4-9	9.5	
SS4-11	11.1	
SS4-12S	12.0	
SS4-12	12.7	
SS4-16	15.9	
SS4-16L	15.9	
SS4-17	17.0	
SS4-19	19.1	
SS4-22	22.2	500
SS4-25	25.4	
SS4-30	30.0	

MOUNTING HOLE Ø6.0
THICKNESS 1.6




FOR M4 SCREW


Part No.	Package
SSUA4-6.3L	1000

PCB固定座 PCB MOUNTING BLOCK


用途：用於主機板或PC板固定。

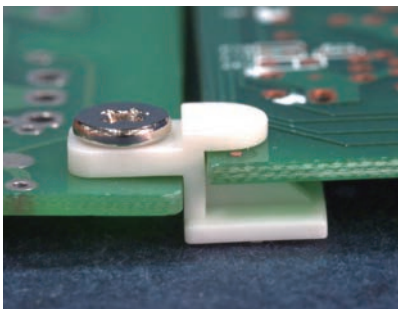


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

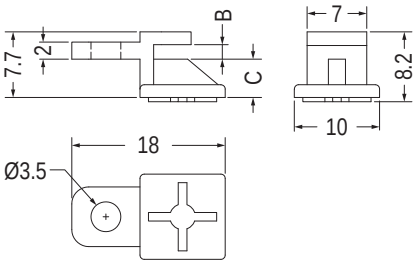


Part No.	B	C	Package
UBD-1	1.7	4.5	1000
UBD-2	2.0	4.15	

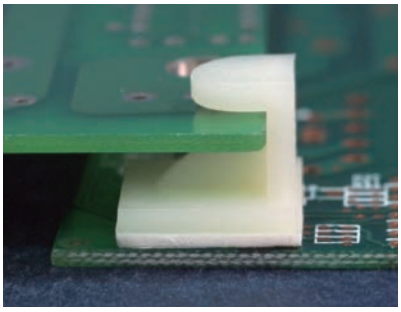


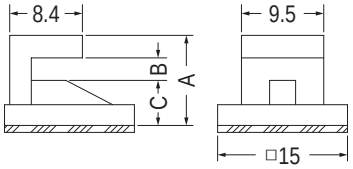

3M DOUBLE ADHESIVE TAPE
A尺寸不含背膠高度

Part No.	A	B	C	Package
UB-6A	10.4	2.6	5.1	1000
UB-8A	11.9	2.4	7.0	
UB-10A	14.1	2.5	9.1	
UB-11A	15.0	2.5	10.0	
UB-12A	16.1	2.5	11.1	

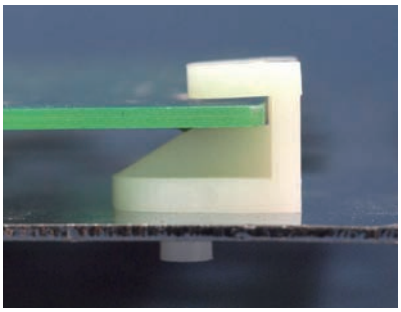


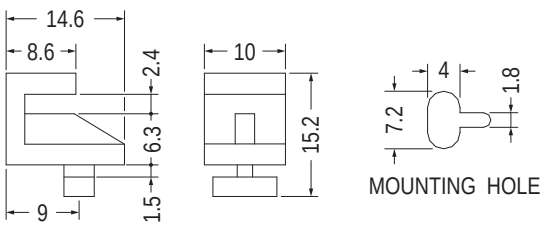


MOUNTING HOLE

Part No.	Package
UB-6E	1000

用途：用於主機板或PC板固定。

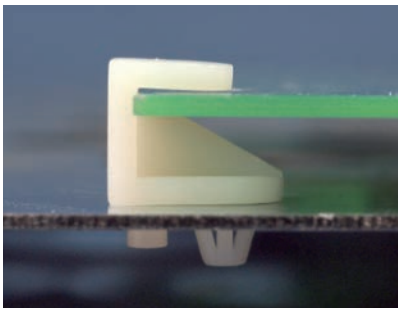


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

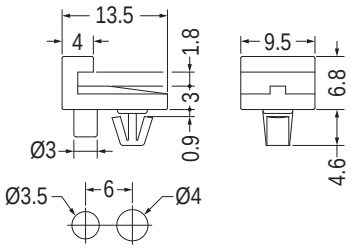


MOUNTING HOLE
THICKNESS 0.8

Part No.	Package
UB-3S	1000




MOUNTING HOLE
THICKNESS 0.8

Part No.	Package
UB-4	1000




MOUNTING HOLE
THICKNESS 1.0

Part No.	Package
UB-6	1000




MOUNTING HOLE
THICKNESS 1.6

Part No.	Package
UB-6D	1000




MOUNTING HOLE
THICKNESS 1.6

Part No.	Package
UB-14D	1000

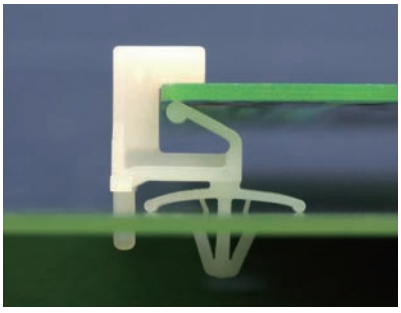


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

用途：支撐PC板，使中間不致震動，載重而凹陷短路。





MOUNTING HOLE Ø4.8
THICKNESS 0.8~2.0




MOUNTING HOLE

Part No.	A	B	Package
WLCF-6	6.3	16.8	1000
WLCF-8	8.0	18.5	
WLCF-9	9.5	20.0	
WLCF-12	12.7	23.2	500
WLCF-16	15.9	26.4	

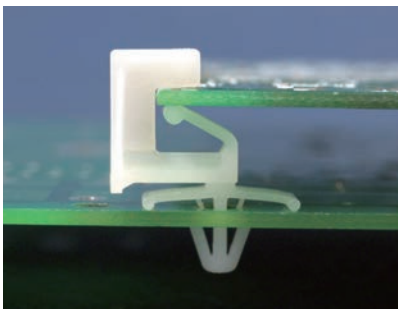

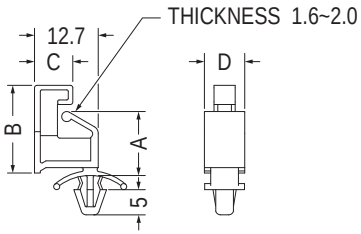


MOUNTING HOLE Ø4.8
THICKNESS 0.8~2.0



【 ULCF-6~ULCF-8S 】


Part No.	A	B	C	D	Package
ULCF-6	6.3	11.0	9.0	8.0	1000
ULCF-8	8.0	12.7	9.0	8.0	
ULCF-8S	8.0	12.7	7.6	6.0	
ULCF-9	9.5	14.2	9.0	8.0	
ULCF-12	12.7	17.4	9.0	8.0	
ULCF-16	15.9	20.6	9.0	8.0	

PCB間隔柱 PCB SPACER

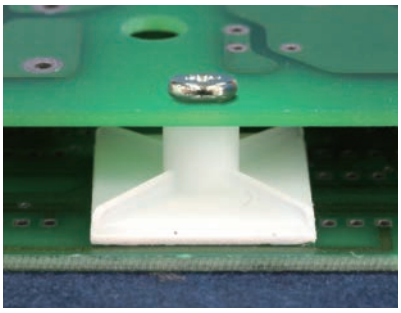


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

用途：背膠式，用於不能鑽孔之機板與PC板間之固定，配合螺絲使用，拆卸方便 。




3M DOUBLE ADHESIVE TAPE
A尺寸不含背膠高度

Part No.	A	Package
ASR-5	4.2	500
ASR-6	5.6	
ASR-7	6.2	
ASR-8	7.2	
ASR-9	8.2	
ASR-11	10.0	
ASR-12.7	11.9	
ASR-14.5	13.6	
ASR-15.9	15.1	
ASR-17.5	16.3	
ASR-19.1	18.3	

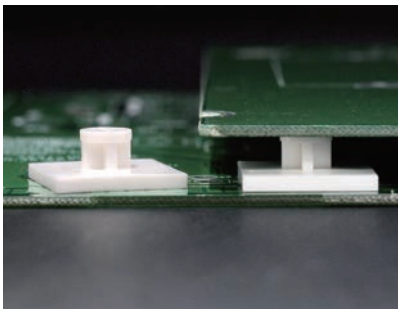


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

用途：背膠式，用於不能鑽孔之機板與PC板間之固定。




3M DOUBLE ADHESIVE TAPE
高度尺寸不含背膠高度

Part No.	Package
AST-7.2	500

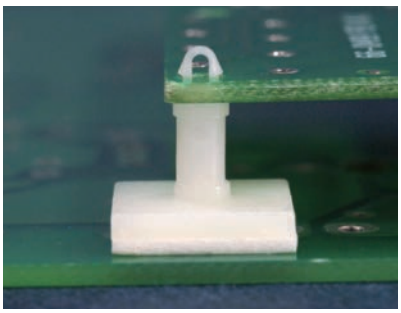


MOUNTING HOLE Ø2.0
THICKNESS 1.6



3M DOUBLE ADHESIVE TAPE
A尺寸不含背膠高度


Part No.	A	Package
ISS-4.8	4.0	1000
ISS-6.4	5.6	
ISS-8	7.2	
ISS-9.5	8.7	
ISS-11.1	10.3	
ISS-12.7	11.9	
ISS-15.9	15.1	
ISS-19.1	18.3	


MOUNTING HOLE Ø2.5
THICKNESS 1.6



3M DOUBLE ADHESIVE TAPE
A尺寸不含背膠高度

Part No.	A	Package
GSS-4.8	4.0	1000
GSS-6.4	5.6	
GSS-8	7.2	
GSS-9.5	8.7	
GSS-11.1	10.3	
GSS-12.7	11.9	
GSS-14.3	13.5	
GSS-15.9	15.1	
GSS-19.1	18.3	

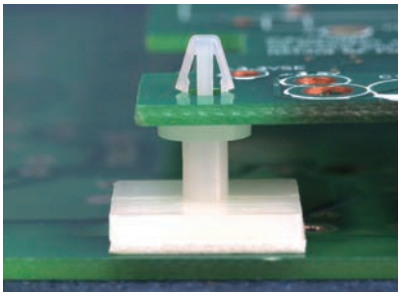




MOUNTING HOLE Ø3.0
THICKNESS 1.2~1.7

3M DOUBLE ADHESIVE TAPE
A尺寸不含背膠高度

• Patented (專利品)


Part No.	A	Package
BSS-6	5.6	1000
BSS-9	8.0	
BSS-12	11.9	

用途：背膠式，用於不能鑽孔之機板與PC板間之固定。

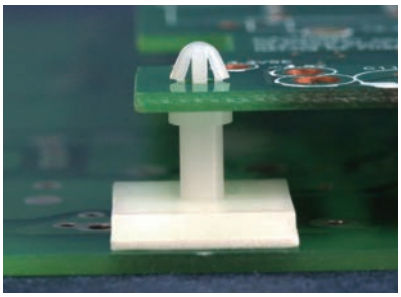

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


MOUNTING HOLE Ø3.0
THICKNESS 1.6



3M DOUBLE ADHESIVE TAPE
高度尺寸不含背膠高度

Part No.	Package
CSSA-2	1000


MOUNTING HOLE Ø3.0
THICKNESS 1.2~1.6



3M DOUBLE ADHESIVE TAPE
A尺寸不含背膠高度


Part No.	A	Package
CSS-3.5	2.7	1000
CSS-5	4.0	
CSS-6.4	5.6	
CSS-8	7.2	
CSS-10	9.2	
CSS-11	9.7	
CSS-12.7	11.9	

MOUNTING HOLE Ø3.5
THICKNESS 1.2~1.6




3M DOUBLE ADHESIVE TAPE
A尺寸不含背膠高度

Part No.	A	Package
FSS-3.5	2.7	1000
FSS-5	4.0	
FSS-6.4	5.6	
FSS-8	7.2	
FSS-10	9.2	
FSS-12.7	11.9	

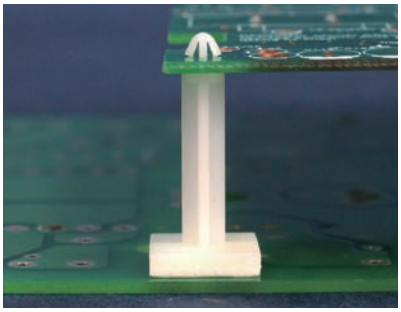

MOUNTING HOLE Ø3.5
THICKNESS 1.2~1.6




3M DOUBLE ADHESIVE TAPE
高度尺寸不含背膠高度


Part No.	Package
FSL-25	1000




MOUNTING HOLE Ø3.5
THICKNESS 2.4




Part No.	Package
FSSA-15	1000

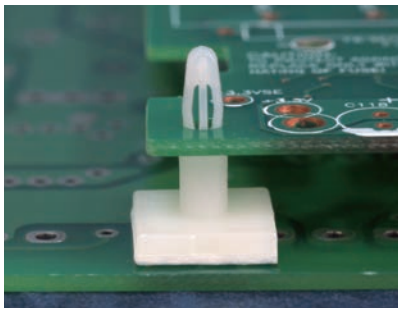




MOUNTING HOLE Ø3.2
THICKNESS 1.6



3M DOUBLE ADHESIVE TAPE
A尺寸不含背膠高度


Part No.	A	Package
JSS-4.8	4.0	500
JSS-6.4	5.6	
JSS-7.9	6.8	
JSS-8.4	7.5	
JSS-9.5	8.5	
JSS-11	10.6	
JSS-12.7	11.7	
JSS-15.9	15.0	

PCB間隔柱 PCB SPACER

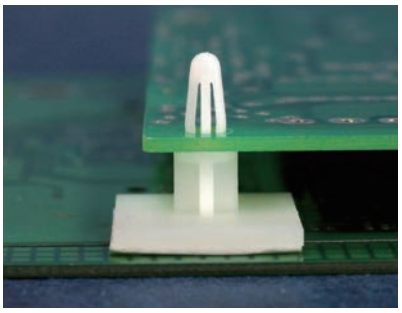

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


用途：背膠式，用於不能鑽孔之機板與PC板間之固定。

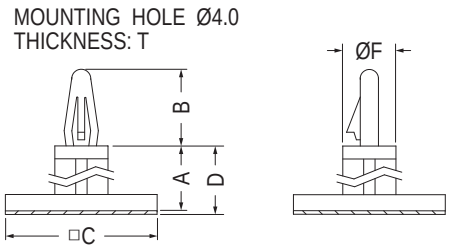

3M DOUBLE ADHESIVE TAPE
A尺寸不含背膠高度


• 背膠高度以0.9為標準

Part No.	A	B	C	D	F	T	Package
ASS-5	4.6	10.0	20.0	5.5	7.0	1.2~1.7	500
ASS-6	5.5	10.0	20.0	6.4	7.0	1.2~1.7	
ASS-6L	5.5	10.2	17.8	6.4	6.9	1.2~1.6	
ASS-8	7.2	10.0	20.0	8.1	7.0	1.2~1.7	
ASS-9.5L	8.6	10.2	17.8	9.5	7.0	1.2~1.6	
ASS-10	9.0	10.0	20.0	9.9	7.0	1.2~1.7	
ASS-12.7L	11.8	10.2	18.0	12.7	6.9	1.2~1.6	
ASS-12	12.0	10.0	20.0	12.9	7.0	1.2~1.7	
ASS-15	15.4	10.0	20.0	16.3	7.0	1.2~1.7	
ASS-15.3S	15.3	8.0	17.8	16.2	7.1	1.2~1.6	
ASS-15.9L	15.0	10.2	18.0	15.9	6.9	1.2~1.6	
ASS-18.5	18.5	10.0	18.0	19.4	6.8	1.2~2.0	

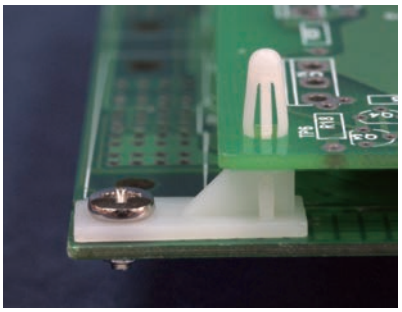


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

用途：機板部分用螺絲固定，另一頭直接壓入PC板。




Part No.	Package
LCBL-8	1000

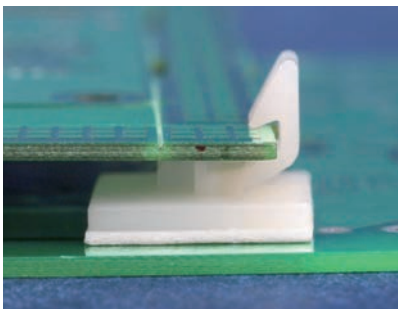

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

用途：背膠式，用於不能鑽孔之機板與PC板間之固定。




Part No.	Package
ULCK-6.4	1000

3M DOUBLE ADHESIVE TAPE
高度尺寸不含背膠高度



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

用途：背膠式，用於PC板端直接壓入固定。



Part No.	Package
ULCKA-15.6	1000


3M DOUBLE ADHESIVE TAPE
高度尺寸不含背膠高度

用途：PC板直接壓入固定，另一頭用螺絲固定，省時易拆卸。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


MOUNTING HOLE Ø2.5
THICKNESS 1.0



Part No.	Package
ULCI-11	1000

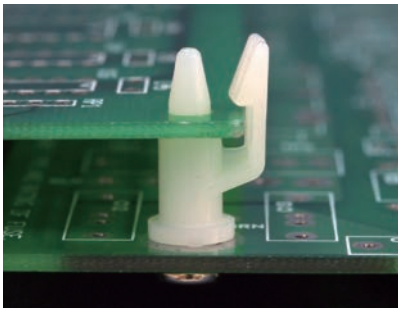


MOUNTING HOLE Ø4.0
THICKNESS 1.2~1.6

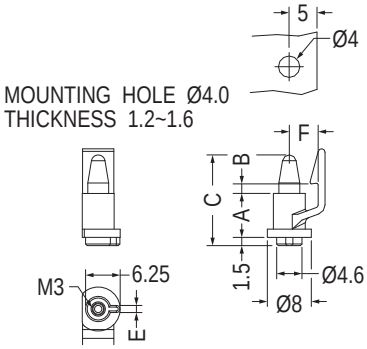

Part No.	A	B	C	E	F	Package
ULCC-6	6.3	1.73	14.8	1.3	5.25	500
ULCC-8	8.0	1.7	16.5	1.3	5.25	
ULCC-10	10.0	2.24	19.0	1.4	5.25	
ULCC-12	12.0	1.75	19.8	1.4	5.25	
ULCC-19	18.55	1.9	27.05	1.3	5.5	




MOUNTING HOLE Ø2.5
THICKNESS 1.0

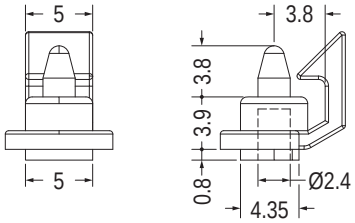


Part No.	Package
ULCIJ-4	1000




MOUNTING HOLE Ø3.3
THICKNESS 1.0

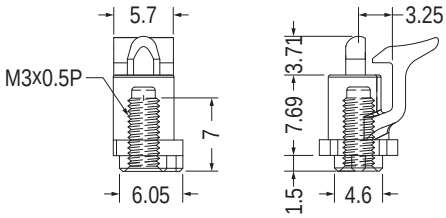

Part No.	Package
ULCD-7.8	1000

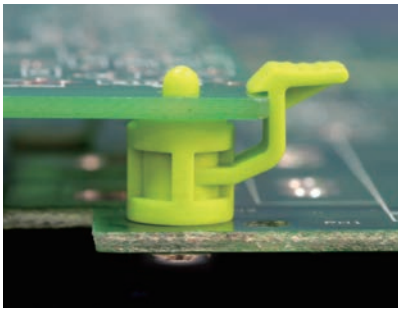


MOUNTING HOLE Ø3.3
THICKNESS 1.6

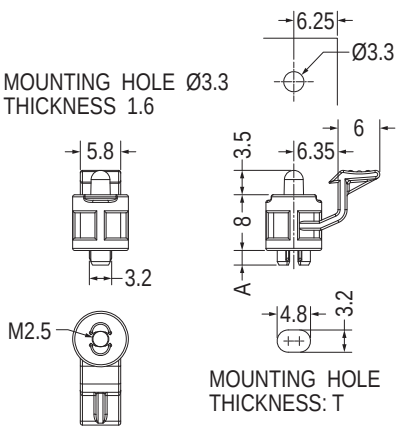

- Color: Natural/Black/Green


Part No.	A	T	Package
ULCH-2	2.1	2.16	1000
ULCH-2S	1.5	1.6	

PCB間隔柱 PCB SPACER

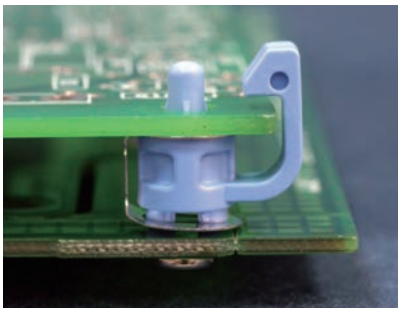


- Material: Nylon 66 (UL)
- Ground Terminal Material: SPTE
- Flame Class: 94V-2/94V-0
- Color: Natural/Black/Blue
- Unit: mm

用途：PC板與PC板之固定，加強導電幫助接地，不佔空間。

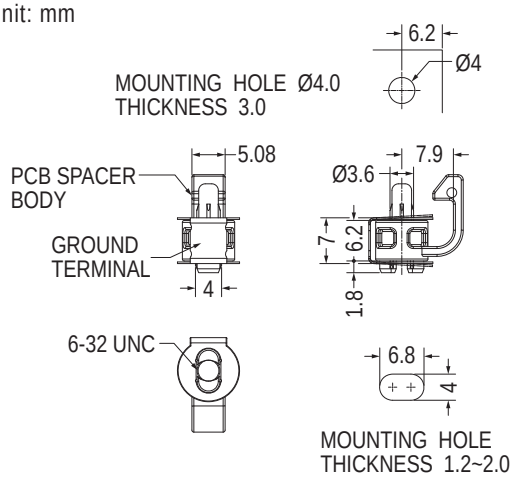


Part No.	Package
ULCH-1	1000

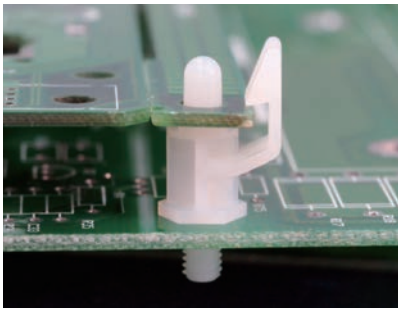


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

用途：PC板直接壓入固定，另一端可配合螺絲或攻牙。

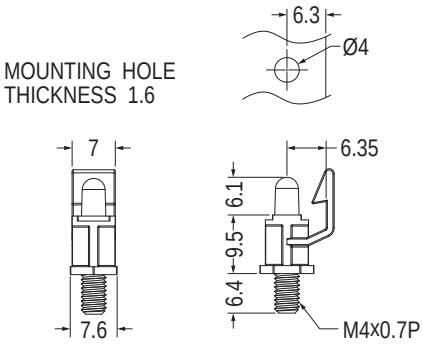


Part No.	Package
ULCBM4-9.5	1000

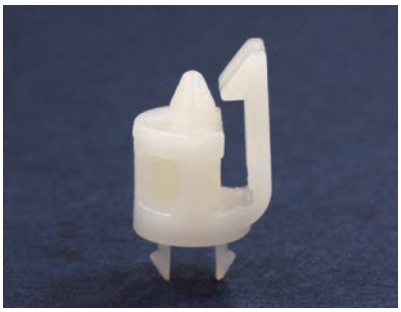



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

用途：PC板直接壓入固定，另一頭直接壓入機板固定，省時易拆裝。

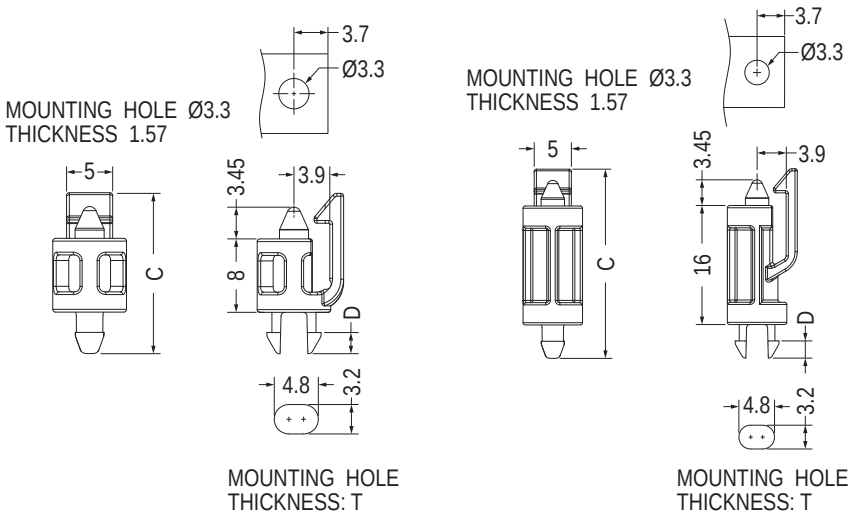


Part No.	C	D	T	Package
ULCSA-8	17.45	2.3	2.13	1000
ULCSA-8S	16.5	1.9	1.57	

Part No.	C	D	T	Package
ULCSA-16	25.45	2.3	2.13	1000
ULCSA-16S	24.5	1.9	1.57	


PCB間隔柱 PCB SPACER

用途：PC板直接壓入固定，另一頭直接壓入機板固定，省時易拆裝。

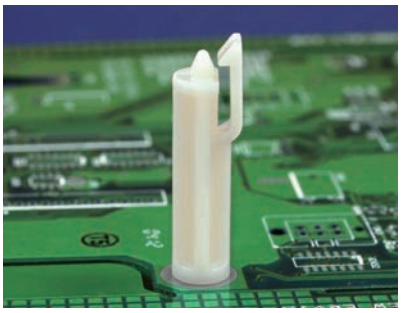


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

MOUNTING HOLE Ø3.3
THICKNESS 1.57

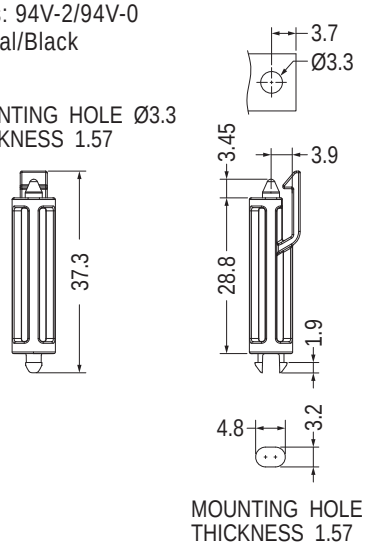


MOUNTING HOLE
THICKNESS 1.57

Part No.	Package
ULCSA-28.8S	500

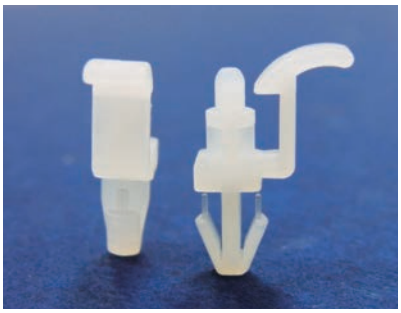

MOUNTING HOLE Ø2.35
THICKNESS 1.0

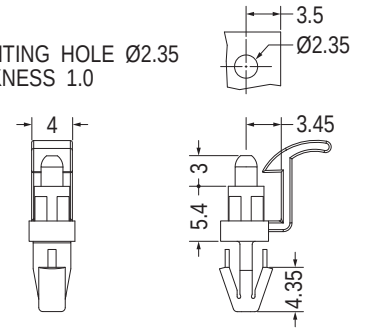


MOUNTING HOLE Ø4.0
THICKNESS 2.4

Part No.	Package
ULCBA-5	1000



MOUNTING HOLE
THICKNESS 1.3


MOUNTING HOLE
THICKNESS 1.7

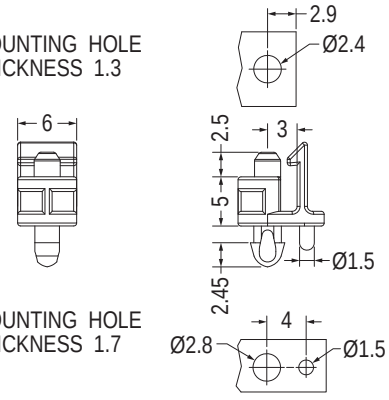

Part No.	Package
ULCSD-5	1000

MOUNTING HOLE
THICKNESS: E


MOUNTING HOLE
THICKNESS: T

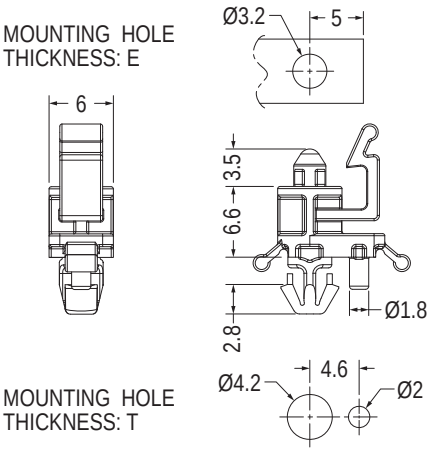

Part No.	E	T	Package
ULCSF-6.6	1.6	1.93	1000
ULCSF-6.6L	1.4~1.8	2.3~2.7	
ULCSF-6.6XL	1.4~1.8	2.52~3.08	
ULCSF-6.6XXL	1.4~1.8	2.83~3.47	


PCB間隔柱 PCB SPACER

用途：PC板直接壓入固定，另一頭直接壓入機板固定，省時易拆裝。

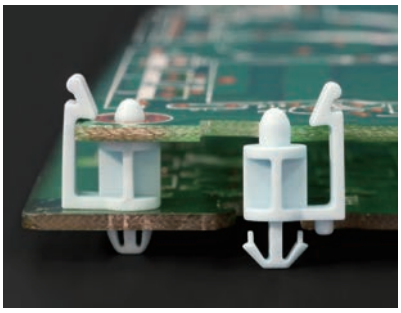

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black/Blue
- Unit: mm


MOUNTING HOLE
THICKNESS 1.6

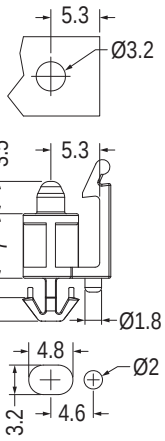

MOUNTING HOLE
THICKNESS 2.0


Part No.	Package
ULCSE-7	1000

MOUNTING HOLE
THICKNESS 1.6

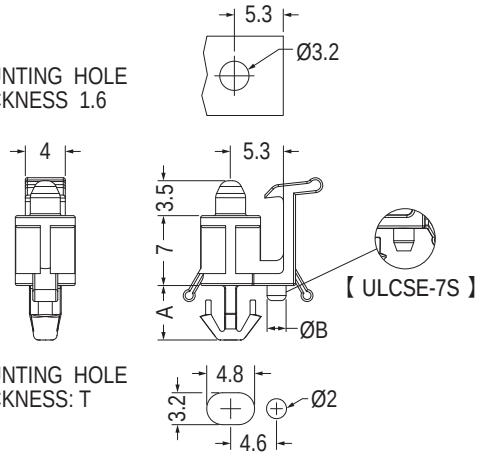


MOUNTING HOLE
THICKNESS: T

Part No.	A	B	T	Package
ULCSE-7S	4.35	1.8	1.6	1000
ULCSE-7L	5.0	1.9	2.34	
ULCSE-7L1	5.45	1.9	2.4	

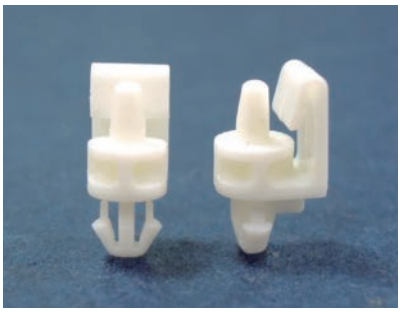


MOUNTING HOLE Ø2.6
THICKNESS 0.8~1.0

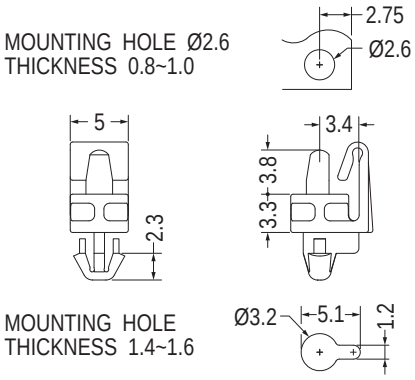


MOUNTING HOLE
THICKNESS 1.4~1.6

Part No.	Package
LCUE-3.3	2000

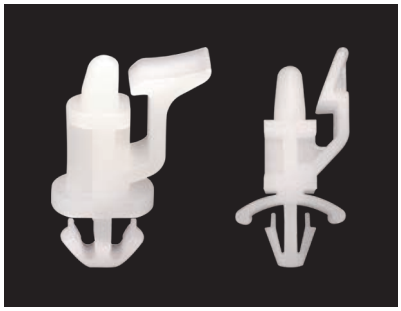


MOUNTING HOLE Ø3.4
THICKNESS 1.2

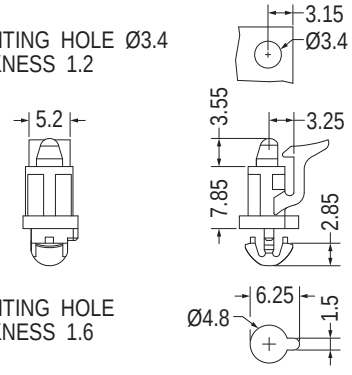

MOUNTING HOLE
THICKNESS 1.6

Part No.	Package
ULCBA-7.8	1000


MOUNTING HOLE Ø4.0
THICKNESS 0.8~1.6

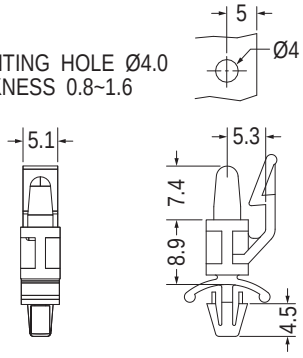

MOUNTING HOLE Ø4.0
THICKNESS 0.8~2.0


Part No.	Package
ULCE-9	1000

PCB間隔柱 PCB SPACER

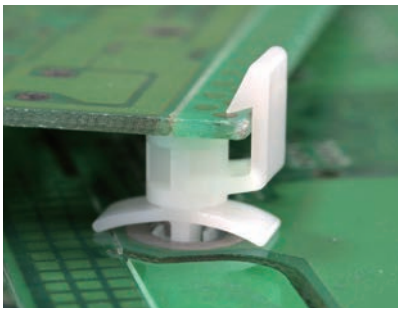


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

用途：用於不能鑽孔之機板與PC板間之固定。



Part No.	Package
ULCBB-7.9	1000




Part No.	Package
ULCBB-12.7L	1000



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black/Blue
- Unit: mm

用途：支撐PC板，使中間不致震動，載重而凹陷短路。

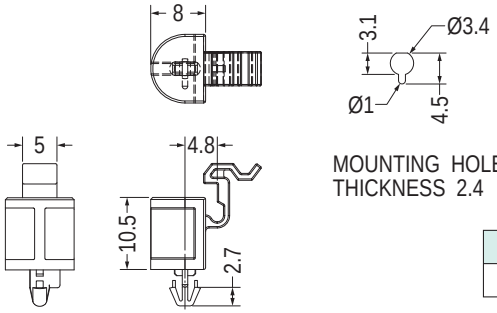


Part No.	Package
LCUA-11	1000




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black/Green
- Unit: mm


用途：PC板直接壓入固定，另一頭直接壓入機板固定，省時易拆裝。

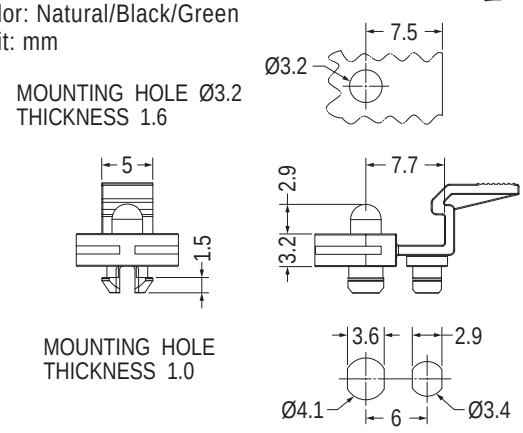

Part No.	Package
LCUAD-1	1000

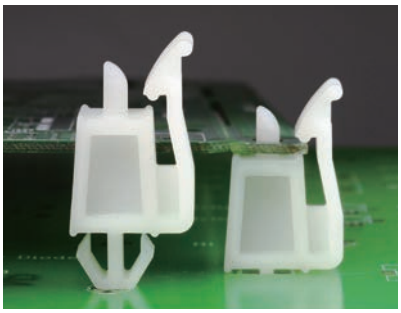


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

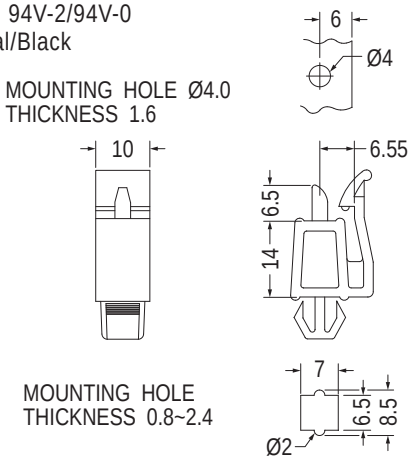

Part No.	Package
KES-15	500


PCB間隔柱 PCB SPACER

用途：PC板直接壓入固定，另一頭直接壓入機板固定，省時易拆裝。

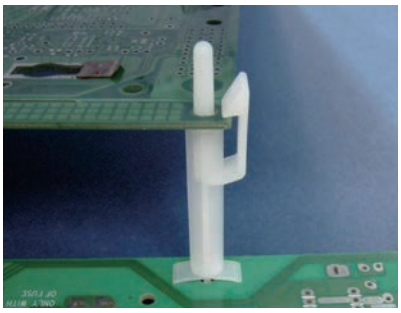

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


MOUNTING HOLE Ø4.0
THICKNESS 1.6



MOUNTING HOLE Ø4.8
THICKNESS 1.6~2.2


Part No.	Package
ULCB-9S	500


MOUNTING HOLE Ø4.0
THICKNESS 1.6




MOUNTING HOLE Ø4.8
THICKNESS 1.6

Part No.	A	Package
ULCB-15	15.9	500
ULCB-38	38.1	

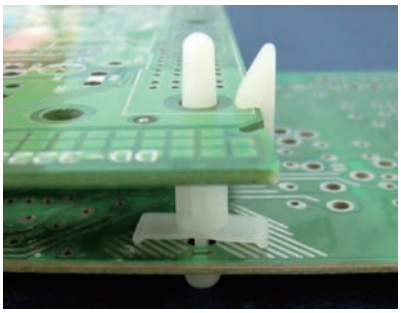




MOUNTING HOLE Ø4.0
THICKNESS 1.6~1.8




MOUNTING HOLE Ø4.8
THICKNESS 0.5~2.0

Part No.	A	Package
ULCB-6	6.3	1000
ULCB-8	8.0	
ULCB-9	9.5	
ULCB-10	10.0	
ULCB-12	12.7	
ULCB-16	15.9	
ULCB-19.1	19.1	
ULCB-23	23.0	

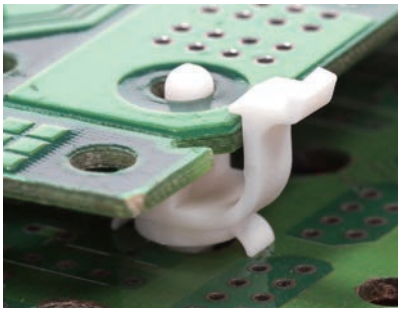

THICKNESS 1.6




MOUNTING HOLE
THICKNESS 1.8~2.2



Part No.	Package
LCUAC-2L	1000


THICKNESS 1.6

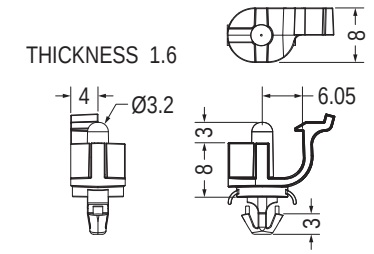


MOUNTING HOLE
THICKNESS 1.8~2.2

- Color: Natural/Black/Green/Gary

Part No.	Package
LCUAC-2R	1000

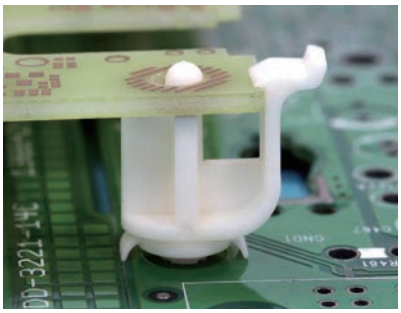


THICKNESS 1.6

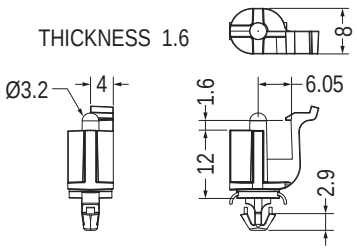

MOUNTING HOLE
THICKNESS 2.2~2.5

Part No.	Package
LCUAC-3L	1000


THICKNESS 1.6



MOUNTING HOLE
THICKNESS 2.2~2.5


Part No.	Package
LCUAC-3R	1000

用途：PC板直接壓入固定，另一頭直接壓入機板固定，省時易拆裝。

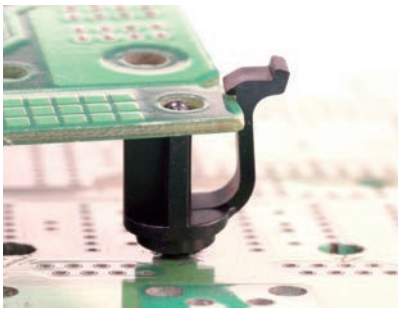


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

THICKNESS 1.6

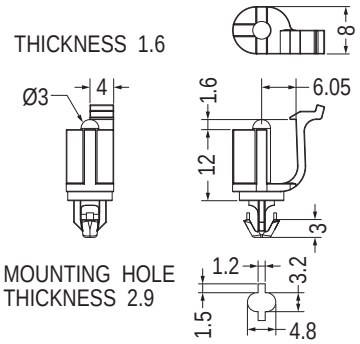


Part No.	Package
LCUAC-7L	1000


THICKNESS 1.6

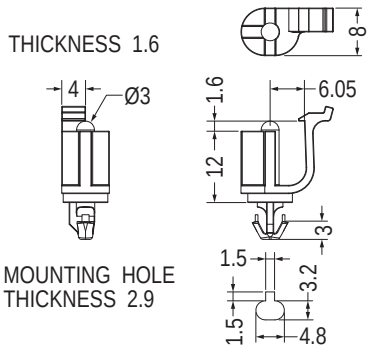

Part No.	Package
LCUAC-7R	1000

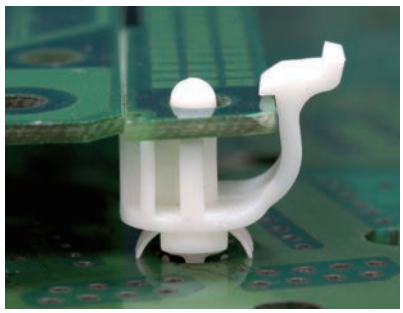


THICKNESS 1.6

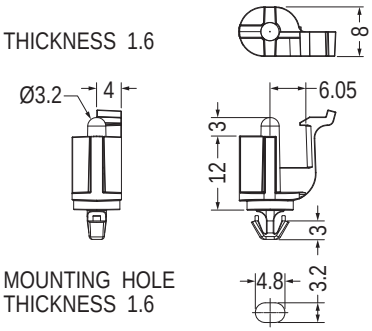


Part No.	Package
LCUAC-8L	1000

THICKNESS 1.6

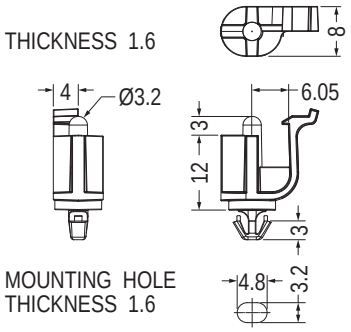


Part No.	Package
LCUAC-8R	1000

THICKNESS 1.6




Part No.	Package
LCUAC-9L	1000

THICKNESS 1.6

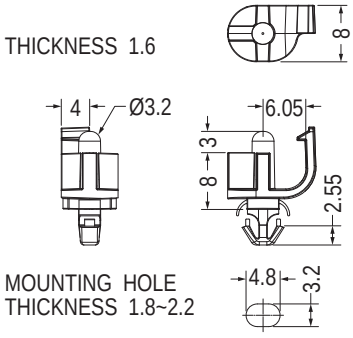


Part No.	Package
LCUAC-9R	1000

THICKNESS 1.6

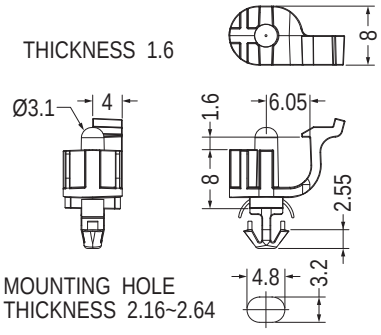


Part No.	Package
LCUAC-11L	1000

THICKNESS 1.6

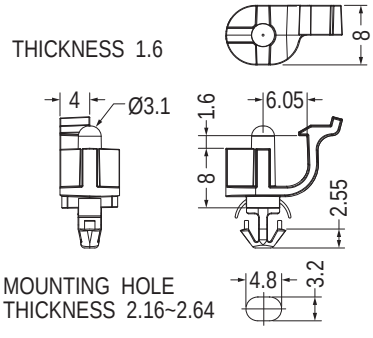


Part No.	Package
LCUAC-11R	1000

THICKNESS 1.6

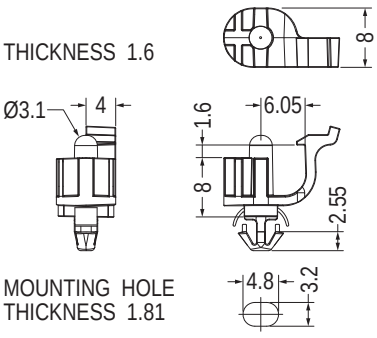

Part No.	Package
LCUAE-8L	1000


THICKNESS 1.6

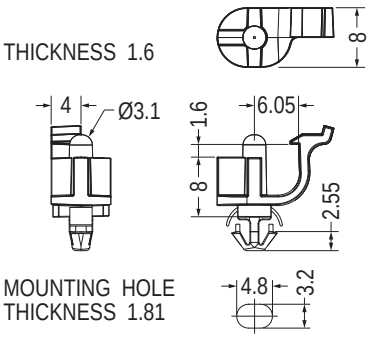


Part No.	Package
LCUAE-8R	1000

PCB間隔柱 PCB SPACER


用途：PC板直接壓入固定，另一頭直接壓入機板固定，省時易拆裝。

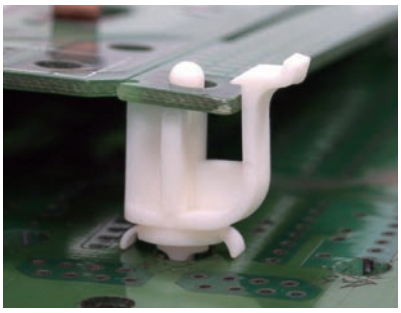


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

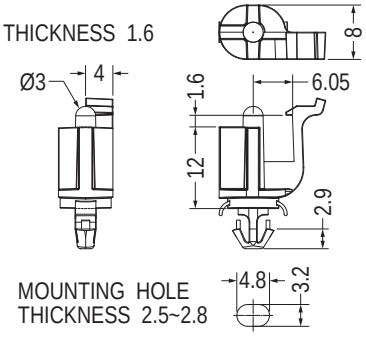


Part No.	Package
LCUAE-12L	1000

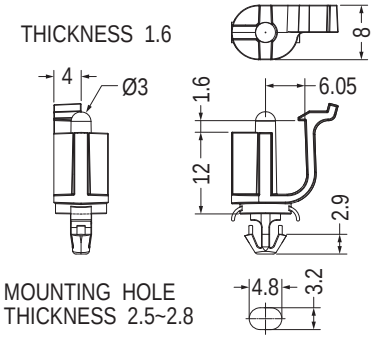


Part No.	Package
LCUAE-12R	1000

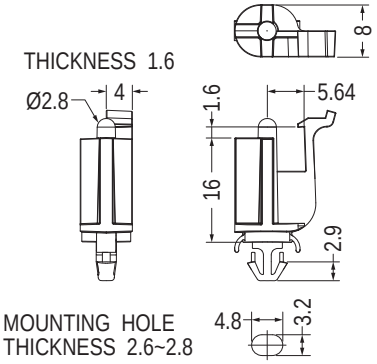


Part No.	Package
LCUAE-16LA	1000

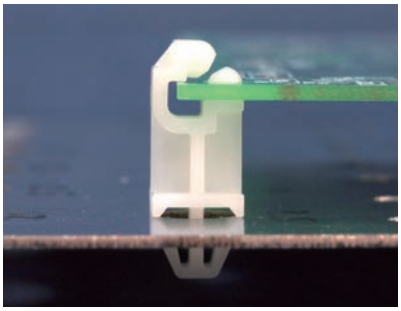

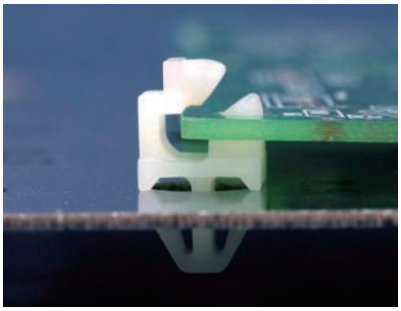


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

用途：用於PC板固定及墊高，拆卸方便。

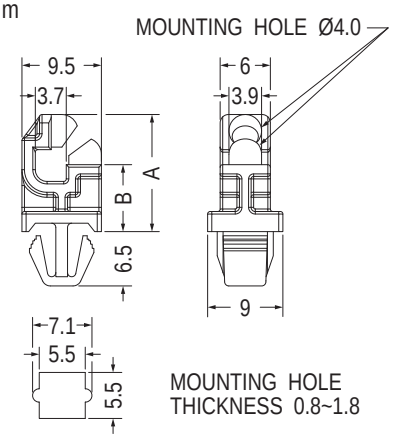

Part No.	A	B	Package
LCMM-8	14.0	8.0	1000
LCMM-12	18.0	12.0	
LCMM-18	24.0	18.0	

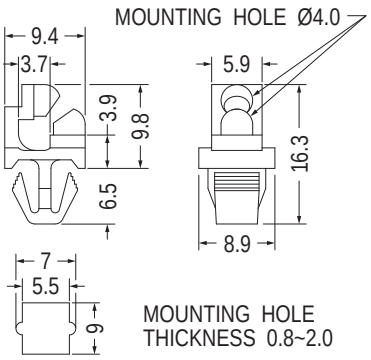


Part No.	Package
LCMM-4	1000



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


用途：將PC板固定於機殼上，PC板可前後30°移動。

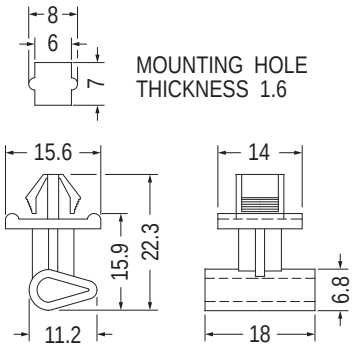


Part No.	Package
PS-16	500


PCB間隔柱 PCB SPACER

用途：用於PC板固定及墊高，拆卸方便。

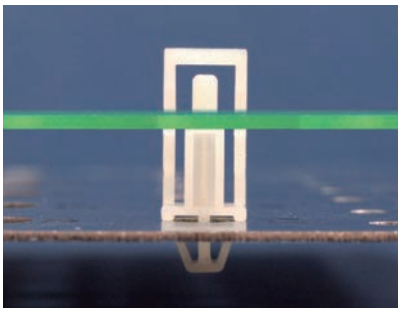


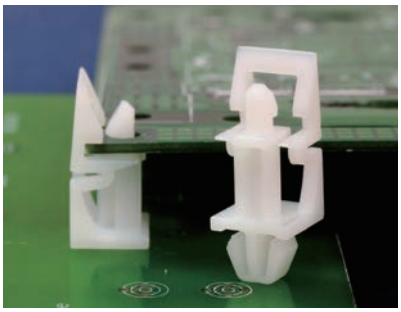


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

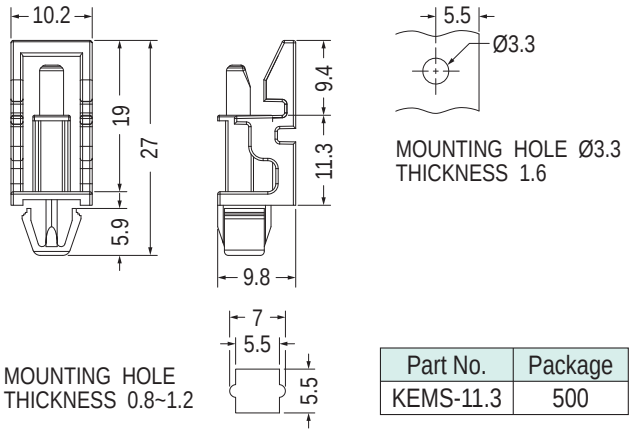


Part No.	Package
KEMS-11.3	500

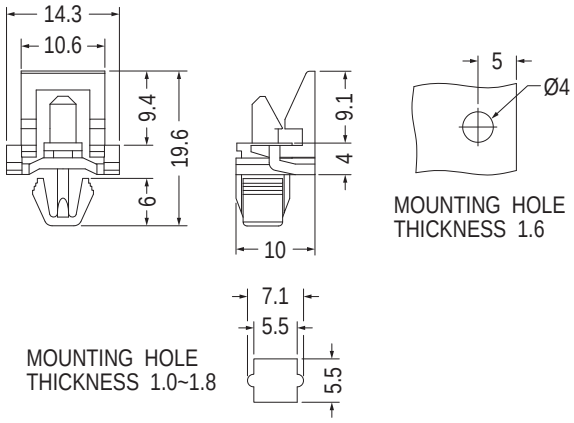

Part No.	Package
KEML-4	500

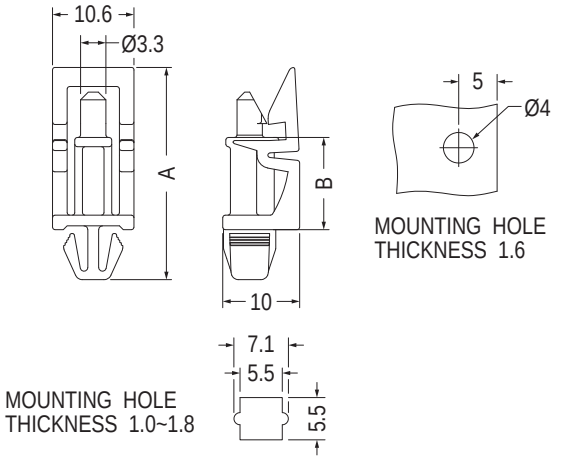


Part No.	A	B	Package
KEML-10	25.6	10.0	500
KEML-12	27.6	12.0	1000

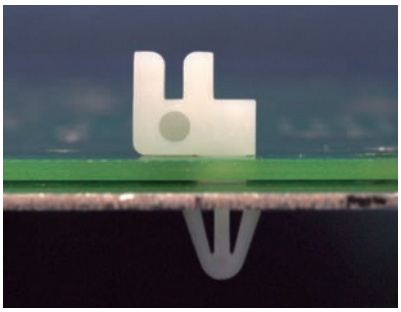


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

用途：用於PC板與機板之固定。

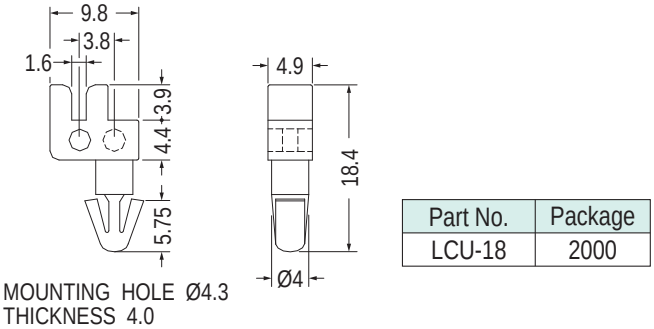


Part No.	Package
LCU-18	2000

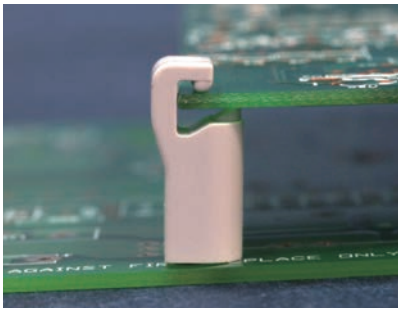

- Material: PC+ABS
- Color: Natural/Gray
- Unit: mm


用途：用於PCB固定及墊高，拆裝方便。

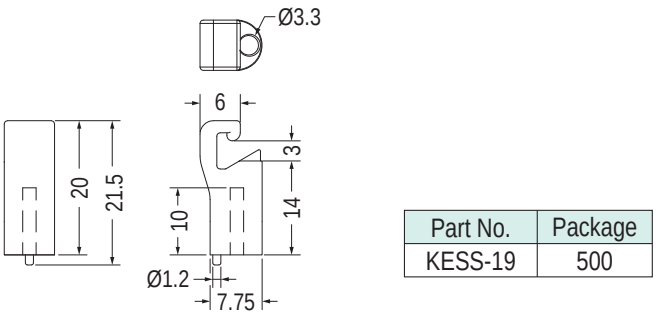


Part No.	Package
KESS-19	500

PCB固定座 PCB MOUNTING BLOCK


用途：用於PC板與機板之固定。

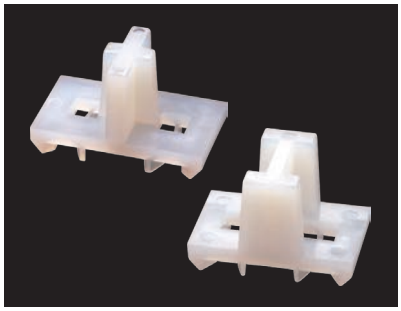

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	Package
LIH-8	2000




Part No.	Package
MOU-01	2000

間隔柱 SPACER

用途：用於零件之固定。




- Material: PC (UL)
- Flame Class: 94V-2
- Color: Natural/Black
- Unit: mm




Part No.	Package
SMHC-1	1000

PCB間隔柱 PCB SPACER


用途：用於PC板與機板間墊高，省時方便。

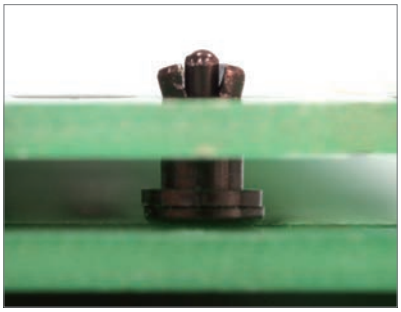


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



【 SRMA-2A 】





【 SRMA-2B 】




組裝示意圖

Part No.	組裝方式	Package
SRMA-2	不組裝	2000
SRMA-2F	SRMA-2A	
	SRMA-2B	
	組裝	

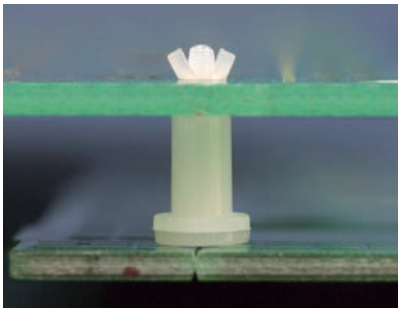






組裝示意圖

MOUNTING HOLE Ø2.0
THICKNESS 0.8~1.6


Part No.	A	Package
SRMA-3	3.0	2000
SRMA-3.5	3.5	
SRMA-4	4.0	
SRMA-5	5.0	
SRMA-6	6.5	
SRMA-9	9.0	

PCB間隔柱 PCB SPACER

用途：用於PC板與機板間之固定易裝卸。

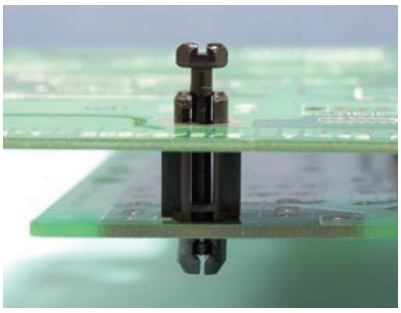


- Clip Material: PC (UL)/94V-2
- Pin Material: Nylon 66 (UL)/94V-2
- Color: Black
- Unit: mm




MOUNTING HOLE Ø6.3~Ø6.4
THICKNESS 1.4~2.4

【 SCMB-4.8 】



MOUNTING HOLE Ø6.4~Ø6.5
THICKNESS 0.8~1.6


Part No.	A	B	Package
SCMB-4.8	4.8	16.6	1000
SCMB-6.3	6.35	18.3	
SCMB-9.5	9.5	21.45	
SCMB-12.7	12.7	24.65	
SCMB-15.9	15.9	27.85	
SCMB-19.1	19.1	31.05	

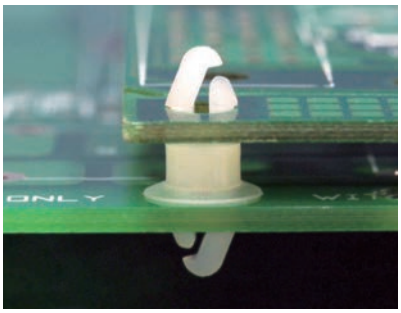

用途：PC板與PC板間之固定，不佔空間。


- Material: Nylon 66 (UL)/PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

MOUNTING HOLE Ø4.0
THICKNESS 1.6~1.9



MOUNTING HOLE Ø4.0
THICKNESS 1.6~1.9


Part No.	Package
MSPR-3	1000

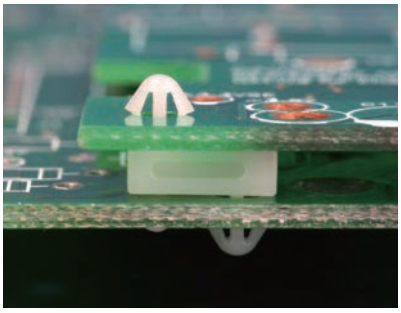



用途：兩片PC板間隔之固定。

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

MOUNTING HOLE Ø3.2
THICKNESS 1.6









MOUNTING HOLE

MOUNTING HOLE Ø3.2
THICKNESS 1.6

Part No.	Package
LUCE-1	1000

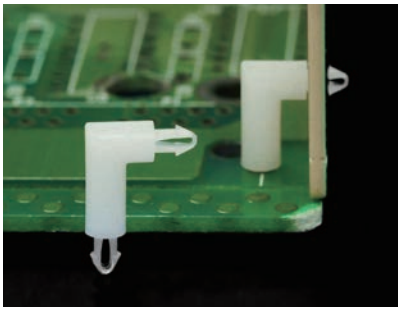




MOUNTING HOLE Ø2.0
THICKNESS 1.6

MOUNTING HOLE Ø2.0
THICKNESS 1.6


Part No.	Package
EM-682	2000

PCB固定扣 PCB HINGE


用途：一端固定於機板或PC板上，另一端固定於PC板上成90°。

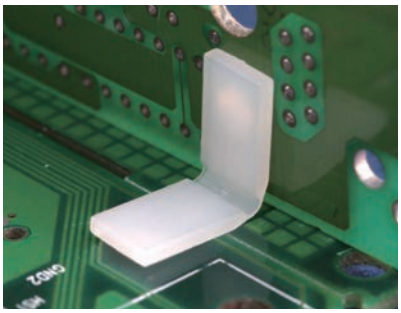


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




MOUNTING HOLE Ø4.0
THICKNESS 1.6~1.8




Part No.	Package
LPZ-1	1000




MOUNTING HOLE Ø4.0
THICKNESS 2.36




Part No.	Package
LPZ-9	1000

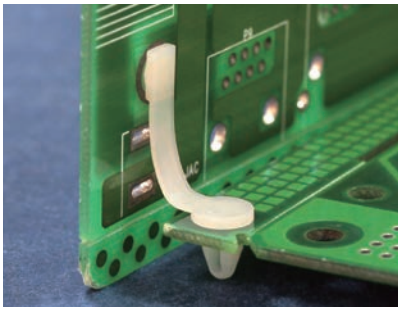




MOUNTING HOLE Ø4.0
THICKNESS 1.6




Part No.	Package
LPZ-6	1000



MOUNTING HOLE Ø4.0
THICKNESS 3.0


MOUNTING HOLE Ø3.8
THICKNESS 1.4




Part No.	Package
LPZ-2	1000


PCB固定扣 PCB BRACKET

用途：快速固定PC板於機板上。

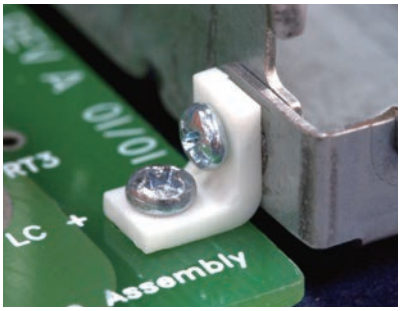


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




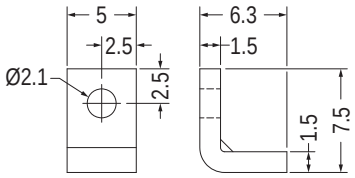


Part No.	Package
DELT-19	1000



Part No.	Package
DELT-25	1000

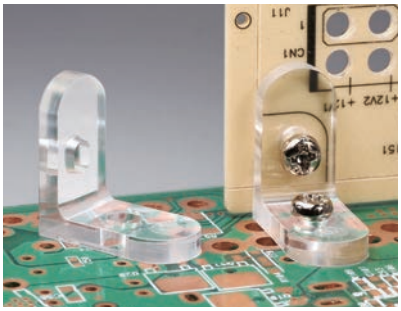

- Material: PC (UL)
- Flame Class: 94V-2
- Color: Transparent
- Unit: mm

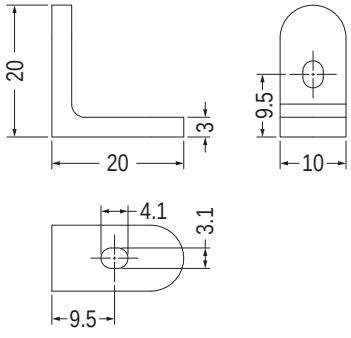


Part No.	Package
LPZA-1	1000

PCB固定座 PCB MOUNTING BLOCK


用途：做為PC板與機板間之固定，需配合M3螺絲使用。



- Material: ABS (UL)
- Flame Class: 94HB
- Color: Natural
- Unit: mm

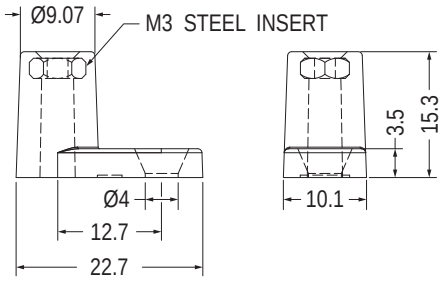



Part No.	Package
LLCB3-15	1000

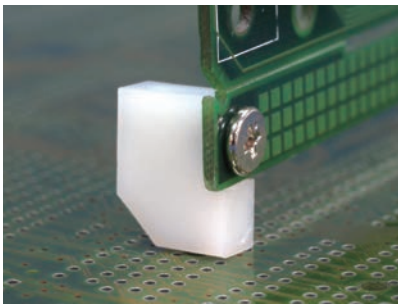


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


用途：用於PC板固定，使PC板與機板成90°固定。

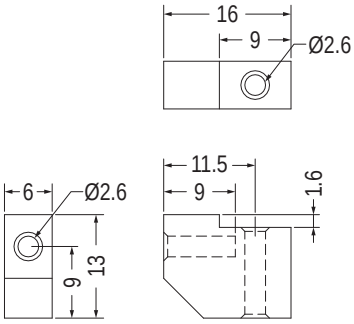

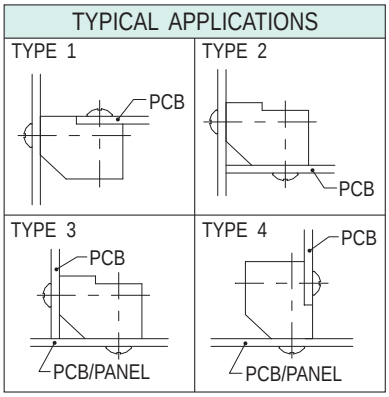


Part No.	Package
PMB-1	500

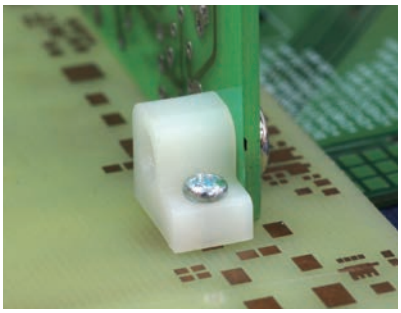




Part No.	Package
PMB-2	500

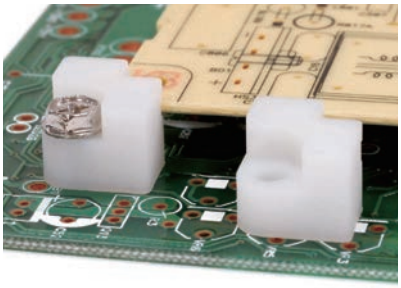

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

用途：快速固定PC板於機板上。




Part No.	Package
TCEA-1	1000

PCB固定座 PCB MOUNTING BLOCK


用途：配合螺絲，固定PC板於機板上。



- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm




Part No.	Package
HW2839	1000

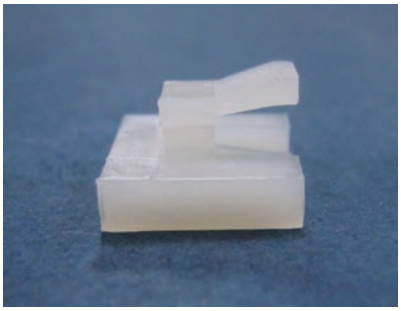

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


用途：做為PC板與機板之絕緣。

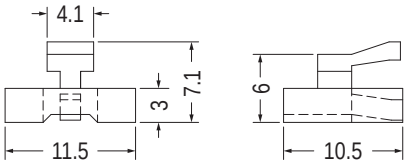


Part No.	Package
JYCE-1	1000

PCB間隔柱 PCB SPACER

用途：用於散熱片之絕緣。

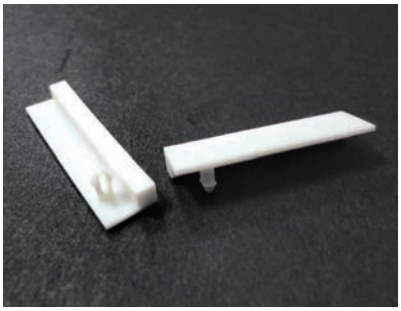


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

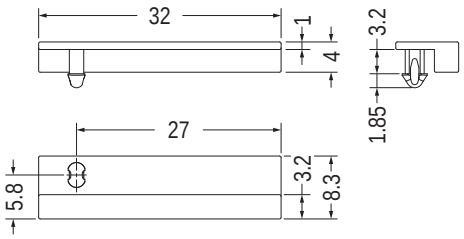


MOUNTING HOLE Ø2.5
THICKNESS 3.0

Part No.	Package
CGLF-32	1000

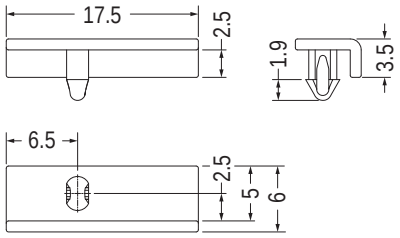


MOUNTING HOLE Ø2.5
THICKNESS 2.5

Part No.	Package
CGLE-18	1000

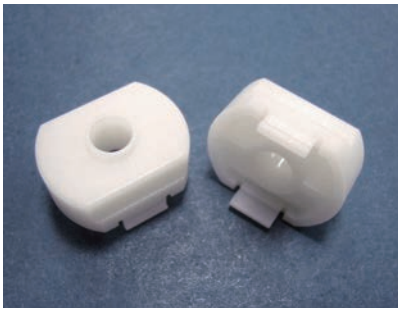

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

用途：用於PC板與機板間之固定。



THICKNESS 1.2


Part No.	Package
DDMC-5.5	1000

圓體間隔柱 ROUND SPACER

用途：用於零件之間隔與固定。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2
- Color: Black
- Unit: mm

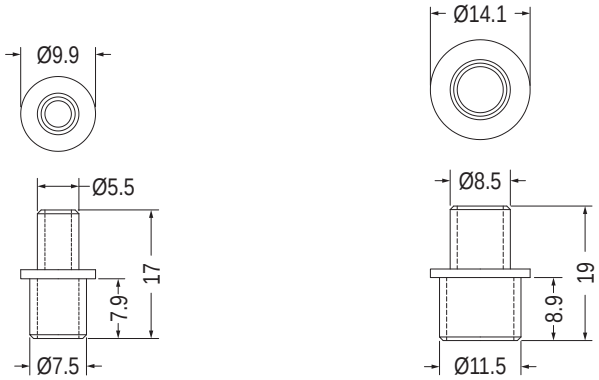


Part No.	Package
BPLT-9	1000

Part No.	Package
BPLT-13	1000




- Material: POM (UL)
- Flame Class: 94HB
- Color: Black
- Unit: mm

用途：用於零件之絕緣使用，RSUA-1A與RSUA-1B需配合使用。

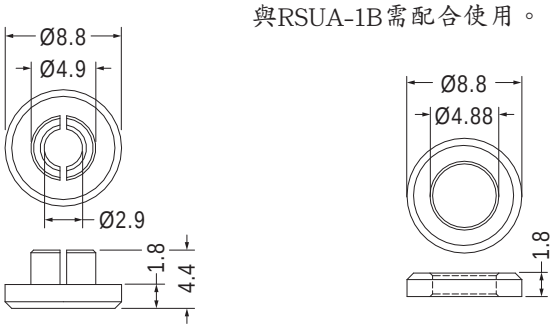


Part No.	Package
RSUA-1A	1000

Part No.	Package
RSUA-1B	1000

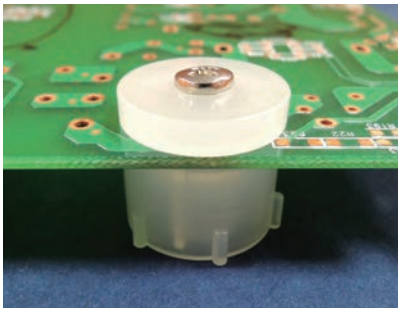


- Material: PC (UL)
- Flame Class: 94V-0
- Color: Natural
- Unit: mm

用途：做為PC板與機板間之墊高與固定。

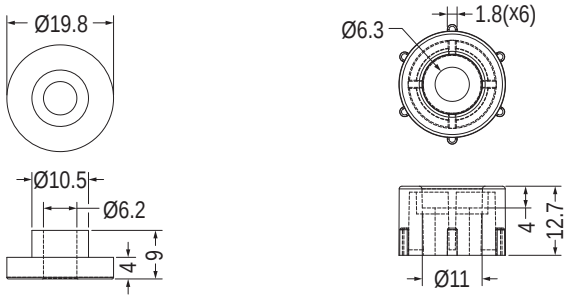


Part No.	Package
RLA-1	500

Part No.	Package
RLA-12.7	500

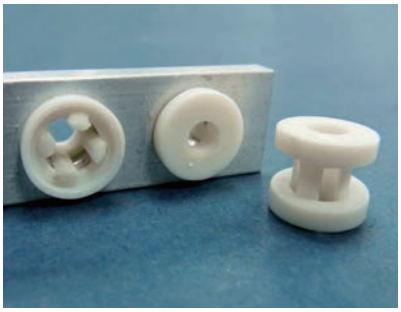

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

用途：用於PC板與機板間之墊高與絕緣。

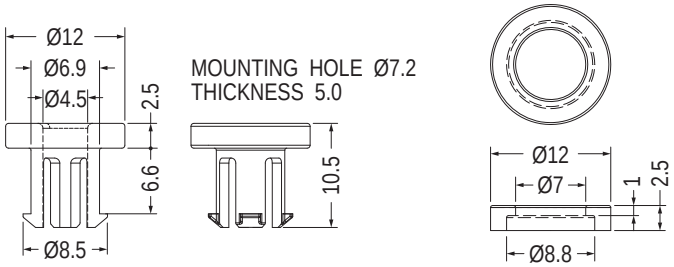


Part No.	Package
RML-1	1000


Part No.	Package
RML-25	1000


圓體間隔柱 ROUND SPACER

用途：用於PC板與機板間之固定。

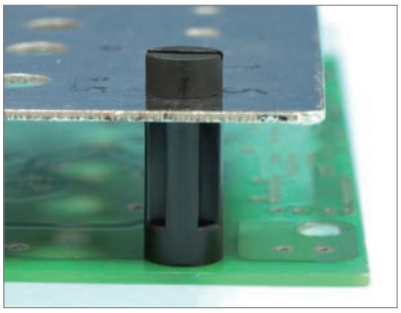


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm






【 JYCE-2A 】




【 JYCE-2B 】

Part No.	Package
JYCE-2	500

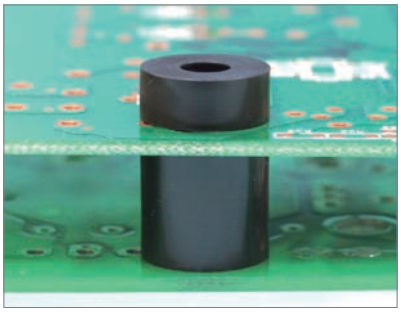


- Material: POM (UL)
- Flame Class: 94HB
- Color: Natural/Black
- Unit: mm

用途：用於PC板與機板間之墊高與絕緣。




【 RXS-13.5 】




【 RXS-1 】


Part No.	Package
RXS-1	500
RXS-13.5	

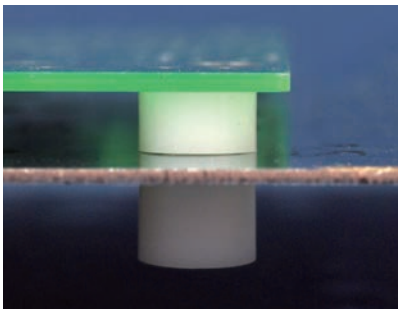

- Material: ABS (UL)
- Flame Class: 94HB
- Color: Natural
- Unit: mm



【 RMM- 】




【 RMM-1 】


Part No.		L	Package
RMM-1	RMM-75	7.5	1000
	RMM-100	10.0	
	RMM-150	15.0	



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural
- Unit: mm




【 RMM- 】




【 RMM-3 】

Part No.		L	Package
RMM-3	RMM-57	5.7	1000
	RMM-200	20.0	



【 RSS- 】




【 RSS-1 】


Part No.		L	Package
RSS-1	RSS-60	6.0	1000
	RSS-78	7.8	
	RSS-105	10.5	
	RSS-150	15.0	500
	RSS-180	18.0	
	RSS-200	20.0	
	RSS-250	25.0	

圓體間隔柱 ROUND SPACER

用途：用於PC板與機板間之墊高與絕緣。

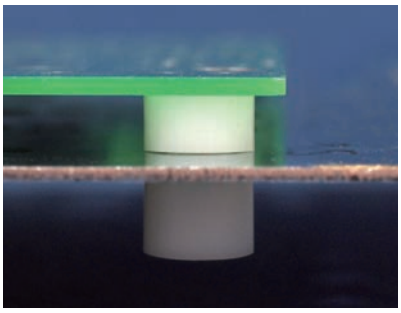


- Material: ABS (UL)
- Flame Class: 94HB
- Color: Natural
- Unit: mm

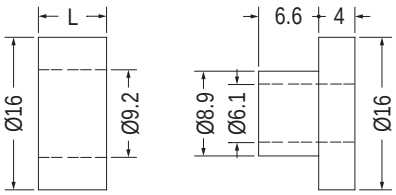


【 RXL- 】 【 RXL-1 】

Part No.		L	Package
RXL-1	RXL-5	5.0	500
	RXL-7	7.5	
	RXL-10	10.0	

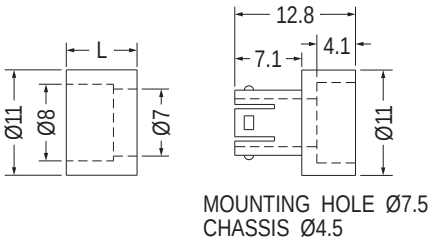


【 RLL- 】 【 RLL-1 】

Part No.		L	Package
RLL-1	RLL-57	5.7	1000
	RLL-75	7.5	
	RLL-100	10.3	
	RLL-150	15.0	500
	RLL-200	20.0	1000
	RLL-254	25.4	

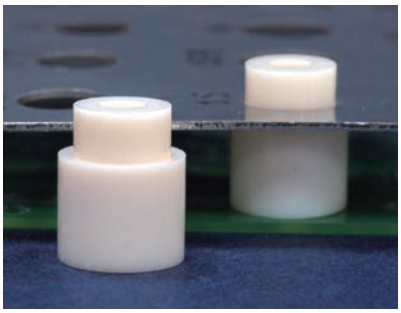


- Material: PC+ABS (UL)
- Flame Class: 94V-0
- Color: Natural
- Unit: mm


用途：做為PC板與機板之絕緣。




Part No.	Package
RCXL-1	1000



Part No.	Package
RCXL-14	1000

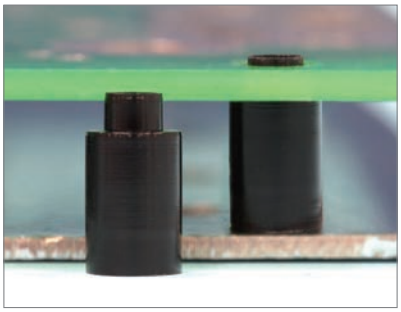


- Material: POM
- Color: Black
- Unit: mm




Part No.	Package
LASK-4	1000

- Material: ABS (UL)
- Flame Class: 94HB
- Color: Natural/Black
- Unit: mm



Part No.	Package
LASK-5	1000


- Material: N6T (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm




Part No.	Package
LASK-6	1000

圓體間隔柱 ROUND SPACER


用途：做為板件與機板間之墊高與固定。

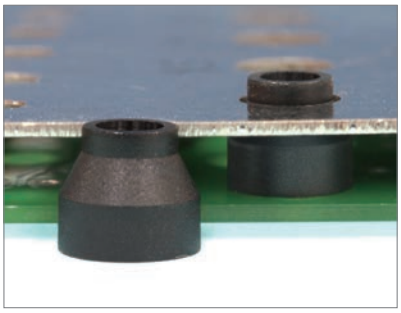

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	Package
RCSL5-10	500




Part No.	Package
RCSL6-8.5	500



- Material: Nylon 6T (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm


用途：做為螺絲或機板之絕緣用。




Part No.	Package
R7-13	1000

背膠式圓體間隔柱 ROUND SPACER WITH ADHESIVE TAPE

用途：背膠式，做為PC板之墊高。

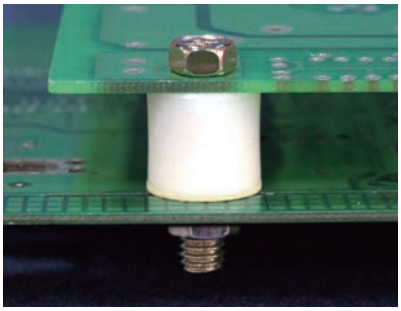

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




3M DOUBLE ADHESIVE TAPE


Part No.	Package
6-13A	1000

圓體間隔柱 ROUND SPACER


用途：做為PC板與機板之絕緣用。

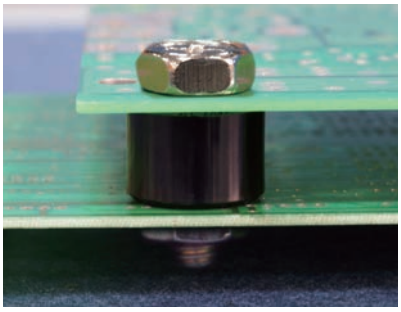

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	Package
9-15	1000




Part No.	A	B	C	Package
KE3.5-2	2.0	3.5	6.3	2000
KE4.1-8	8.0	4.1	6.0	1000

圓體間隔柱 ROUND SPACER


用途：做為PC板與機板之絕緣用。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2
- Color: Red
- Unit: mm




Part No.	Package
EM-733	2000

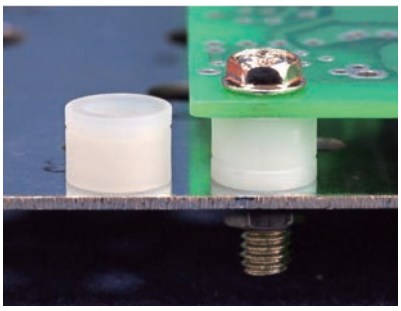

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
RR-1	1000

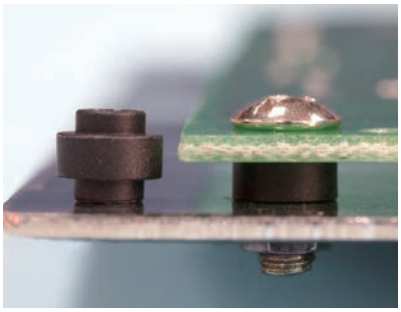


- Material: Nylon 6T (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm

MOUNTING HOLE Ø4.5




MOUNTING HOLE Ø4.5

Part No.	A	B	Package
LUS-2.7	2.7	1.5	1000
LUS-2.9	2.9	0.7	
LUS-3	3.0	0.7	
LUS-3.85	3.85	1.4	

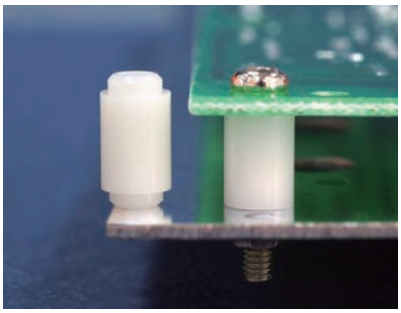


- Material: ABS (UL)
- Flame Class: 94HB
- Color: Natural
- Unit: mm



Part No.	Package
LUS-9.1	1000


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	A	B	D	E	F	Package
LUS-10	10.0	1.5	3.2	5.5	7.5	1000
LUS-74.5	74.5	1.0	6.5	8.0	10.0	500

圓體間隔柱 ROUND SPACER

用途：用於PC板與機板之絕緣。

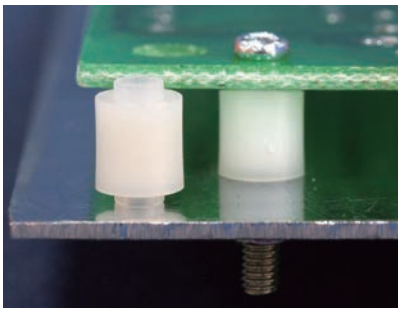


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




MOUNTING HOLE Ø3.5

Part No.	Package
LUS2-8.2	1000

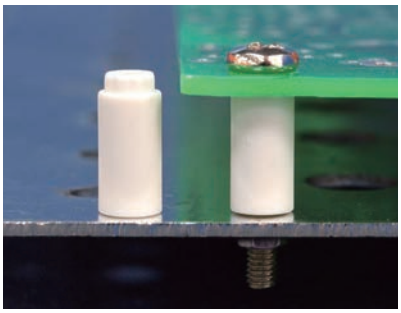


- Material: PBT (UL)
- Flame Class: 94V-0
- Color: Natural/Black
- Unit: mm




【 LUSS-6.2, LUSS-9 】

Part No.	A	B	Package
LUSS-6.2	6.2	1.0	1000
LUSS-6.4	6.4	1.4	
LUSS-7.1	7.07	1.4	
LUSS-9	9.0	1.4	
LUSS-9.4	9.43	1.4	
LUSS-10.1	10.06	1.4	

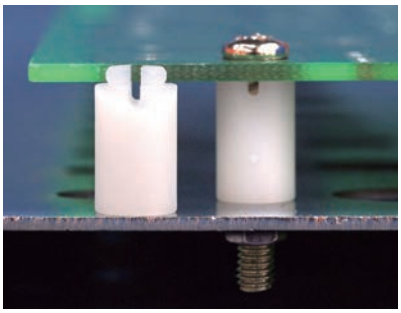



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

用途：PC板與PC板間之固定，不佔空間。



Part No.	Package
LUSA-11	1000

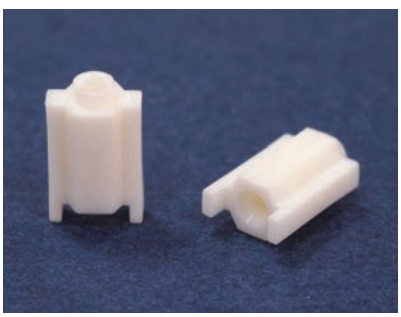


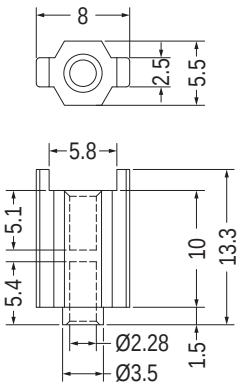


Part No.	Package
LUSB-10	1000

圓體間隔柱 ROUND SPACER

用途：做為PC板之墊高，尺寸齊全。

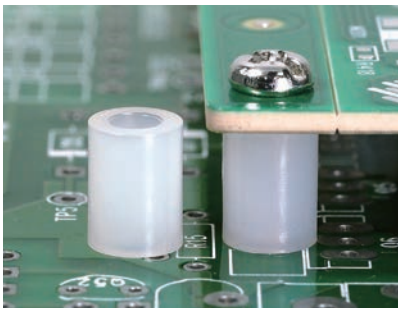

- Material: Nylon 66 (UL)/POM/TPE/PE/ PC (UL)/ABS (UL)/PPS
- Flame Class: 94HB/94V-2/94V-0
- Color: Natural/Black
- Unit: mm

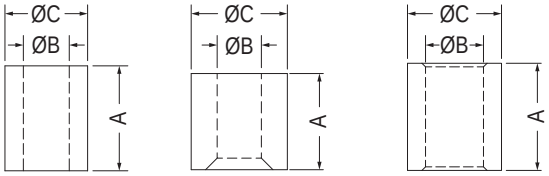


【 2.3-5, 2.3-5.5 】 【 4.9-4.5, 4.9-11.5, 4.9-13 】

Part No.	A(L)	B(ID)	C(OD)	Package
0.7-1.6	1.6	0.7	2.0	1000
0.7-3	3.0	0.71	2.2	
1.2-2.5	2.5	1.2	4.0	
1.2-3	3.0	1.2	3.2	
1.2-5	5.0	1.2	4.0	
1.2-6.35	6.35	1.2	3.2	2000
1.2-7.6	7.6	1.2	4.0	1000
1.4-3	3.0	1.4	3.5	
1.6-2	2.0	1.6	4.0	
1.6-4	4.0	1.6	4.0	
1.6-5.9	5.89	1.63	3.18	2000
1.7-11.3	11.3	1.7	3.0	1000
2-3-1.9	1.9	2.02	3.0	2000
2.05-3.5	3.5	2.05	3.0	1000
2.1-2.1	2.1	2.1	2.4	
2.2-2.5	1.5	2.2	2.5	2000
2.2-5	5.0	2.2	4.0	1000
2.3-5	5.0	2.3	5.0	
2.3-5.5	5.5	2.3	5.0	
2.4-9.4	9.4	2.4	4.8	
2.5-2.15	2.15	2.5	4.0	
2.5-1655	16.0	2.5	5.5	
2.7-2.8	2.84	2.7	6.35	
2.7-6.7	6.71	2.7	6.35	
2.73-2.3	2.3	2.73	4.3	
2.8-3.8	3.8	2.8	4.3	
2.95-8	8.0	2.95	3.55	
3-25-6	25.0	3.0	6.0	
3.1-2	2.0	3.1	6.0	2000
3.1-2.2	2.2	3.1	8.0	
★3.1-2.5	2.5	3.1	6.0	
3.1-3.5	3.5	3.1	5.7	
3.1-3.7	3.7	3.15	5.0	
3.1-4-6	4.0	3.1	6.0	1000
3.1-5	5.0	3.1	6.0	
3.1-6	6.0	3.1	6.0	
6-3.1-7.5	7.5	3.1	6.0	2000
3.1-7.5	7.5	3.1	8.0	1000
3.1-8	8.0	3.1	6.0	2000
3.1-3.8	3.85	3.15	5.0	1000
3.1-4	4.0	3.15	5.0	
3.2-2.2	2.2	3.2	5.5	2000
3.2-2.5	2.5	3.2	4.2	1000
3.2-3	3.0	3.2	5.8	
3.2-4.45	4.45	3.2	6.4	
3-5.8	5.85	3.2	5.0	
3.2-6.4	6.4	3.2	5.8	
6432-6.4	6.4	3.2	6.4	
3.2-6.8	6.8	3.2	4.5	
3.2-10	10.0	3.2	8.0	
3.35-5	5.0	3.35	8.0	
3.5-5.5	5.5	3.5	6.3	


Part No.	A(L)	B(ID)	C(OD)	Package
3.55-10	10.0	3.55	6.0	1000
3.55-31.8	31.8	3.55	6.35	
3.56-4.76	4.76	3.56	7.94	
3.56-9.53	9.53	3.56	6.35	
3.6-2	2.0	3.6	7.0	
3.6-19	19.0	3.6	8.0	
3.7-6.1	6.1	3.7	6.4	2000
3.7-9.5	9.5	3.73	6.35	
3.7-10	10.0	3.73	6.35	1000
3.8-0.5	0.5	3.8	5.3	2000
3.8-5.5	5.5	3.8	5.3	
3.9-5.3	5.3	3.9	8.0	1000
3.95-3.8	3.8	3.95	6.1	
4-4.8	4.8	4.0	7.5	2000
4.1-2.5	2.5	4.1	8.0	1000
4.2-2.4	2.4	4.2	7.5	2000
4.2-4.8	4.8	4.2	5.5	
4.2-8.5	8.5	4.2	10.0	1000
4.3-1.5	1.5	4.3	5.8	2000
4.3-5.5	5.5	4.3	5.8	
4.3-10.5	10.5	4.3	5.8	1000
4.3-15.5	15.5	4.3	5.8	
4.4-6	6.0	4.4	7.43	
4.4-6.4	6.4	4.4	9.5	2000
4.5-3.2	3.18	4.45	6.35	1000
★4.5-5	5.0	4.45	6.0	
4.5-2.75	2.75	4.5	6.0	
★4.5-10	10.0	4.5	8.0	
4.5-11	11.0	4.5	7.0	
4.5-11.5	11.5	4.5	7.0	
4.5-19.9	19.9	4.5	6.1	250
4.7-3.5	3.5	4.7	6.0	1000
4.9-3	3.0	4.9	7.94	
4.9-4.5	4.5	4.9	7.94	
4.9-11.5	11.5	4.9	7.94	
4.9-13	13.0	4.9	7.94	
5-3.5	3.5	5.0	9.0	
5-4	4.0	5.0	12.0	
5-4.2	4.2	5.0	7.0	2000
5-6.5L	6.5	5.0	9.5	
5-7.9L	7.9	5.0	9.5	
5-38.1	38.1	5.0	7.9	1000
5-40	40.0	5.0	9.0	500
5.1-12.7	12.7	5.1	9.5	1000
5.2-2	2.0	5.2	6.8	
5.2-2.3	2.3	5.2	6.8	
5.2-3	3.0	5.2	6.8	
5.2-4.1	4.1	5.2	6.8	
5.2-6	6.0	5.2	10.0	
5.2-7.5	7.5	5.2	7.6	
5.2-11	11.0	5.2	7.6	
5.2-13	13.0	5.2	6.8	

圓體間隔柱 ROUND SPACER

用途：做為PC板之墊高，尺寸齊全。

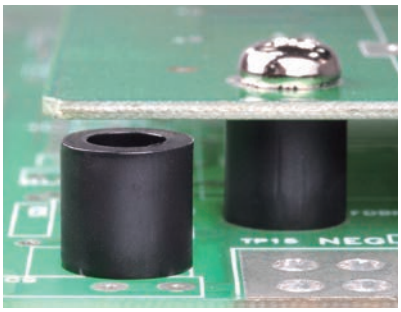


- Material: Nylon 66 (UL)/POM/TPE/PE/ PC (UL)/ABS (UL)/PPS
- Flame Class: 94HB/94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	A(L)	B(ID)	C(OD)	Package
5.3-2.8	2.8	5.3	8.5	2000
5.4-122	122.0	5.4	9.53	250
5.5-4	4.0	5.5	15.0	1000
5.55-11.8	11.8	5.55	7.0	
5-5	5.0	5.6	8.6	
5-6	6.0	5.6	8.6	
5-7.9	7.9	5.6	8.6	
5-8	8.0	5.6	8.6	
5-8.8	8.8	5.6	8.6	
5-11.8	11.8	5.6	8.6	1000
5-14	14.0	5.6	8.6	
5-16.5	16.5	5.6	8.6	
5-16.7	16.7	5.6	8.6	
5-17	17.0	5.6	8.6	
5-20	20.0	5.6	8.6	250
5.7-12.9	12.9	5.7	7.7	1000
5.7-14.1	14.1	5.7	7.7	
5.8-4.9	4.9	5.8	7.3	
5.8-14.4	14.4	5.8	7.3	2000
★6-3.2	3.2	6.0	8.0	
6-6	6.0	6.0	10.0	
6-22	22.0	6.0	15.0	250
6.2-6S	6.0	6.2	10.0	
6.2-10	10.0	6.2	10.4	1000
6.2-12	12.0	6.2	10.4	
6.3-5	5.0	6.3	15.0	
6.3-20	20.0	6.3	12.7	250
6.35-3.2	3.2	6.35	9.1	
6.35-7.1	7.1	6.35	8.0	1000
6.4-3	3.0	6.4	12.0	
6.4-10	10.0	6.4	20.0	500
6.5-3	3.0	6.5	9.2	1000

Part No.	A(L)	B(ID)	C(OD)	Package
6-4.2	4.2	6.6	10.6	
6-4.8	4.8	6.6	9.1	
6-16	15.7	6.6	9.1	
6.8-5	5.0	6.8	10.0	1000
6.9-12.7	12.7	6.9	12.7	
7-5.5	5.5	7.0	13.0	
7-8.7	8.7	7.0	10.0	
7.5-8.9	8.9	7.5	10.0	
7.5-29	29.0	7.5	11.0	250
★8-1.6	1.6	8.0	15.0	
8-16	15.7	8.1	10.7	1000
8.2-5.5	5.5	8.2	12.0	
8.2-80	80.0	8.2	10.0	250
8.4-5	5.0	8.4	16.0	
8.5-4.6	4.6	8.5	10.3	
8.5-612	6.0	8.5	12.0	
8.5-8	7.9	8.5	11.0	
9-2.5	2.5	9.0	15.0	1000
9-4	4.0	9.0	15.0	
9-10.5	10.5	9.0	15.0	
9.1-7.5	7.5	9.1	17.9	
9.25-4	4.0	9.25	12.25	
9.5-34	34.0	9.5	19.0	
10-6	6.0	10.0	12.0	250
1012-26	26.0	10.0	12.0	
12-19	19.0	12.0	14.0	1000
12.4-5	5.0	12.4	22.0	
★12.8-20	20.0	12.8	22.0	250
12.8-35	35.0	12.8	22.0	
13-5	5.0	13.0	24.0	
20.5-9.5	9.5	20.5	25.5	500
29-16	16.0	29.5	33.5	250

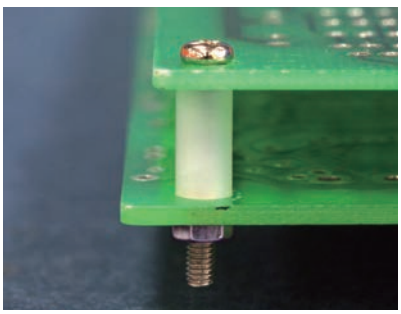

- Material: Nylon 66 (UL)/PBT (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	A(L)	Package
2-1.8	1.8	
2-2	2.0	
2-2.5	2.5	
2-3	3.0	
2-3.2	3.2	
2-4	4.0	2000
2-4.3	4.3	
2-5	5.0	
2-5.3	5.3	
2-6	6.0	
2-7	7.0	


Part No.	A(L)	Package
2-8	8.0	
2-9	9.0	
2-9.5	9.5	
2-10	10.0	
2-11	11.0	2000
2-12	12.0	
2-13	13.0	
2-14	14.0	
2-15	15.0	
2-16	16.0	

圓體間隔柱 ROUND SPACER


用途：做為PC板之墊高，尺寸齊全。

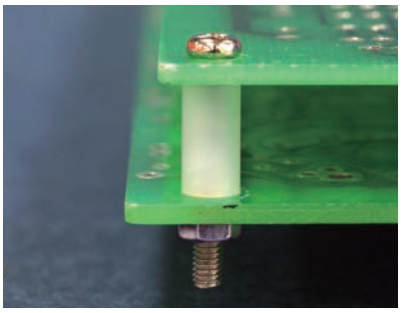


- Material: Nylon 66 (UL)/PBT (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	A(L)	Package
2.6-2	2.0	2000
2.6-3	3.0	
2.6-4	4.0	
2.6-5	5.0	
2.6-6	6.0	
2.6-7	7.0	
2.6-8	8.0	
2.6-9	9.0	
2.6-10	10.0	
2.6-11	11.0	
2.6-12	12.0	
2.6-13	13.0	
2.6-14	14.0	
2.6-15	15.0	
2.6-16	16.0	

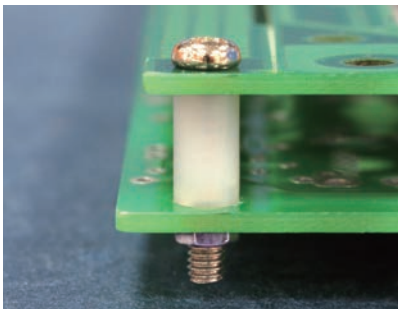

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	A(L)	B(ID)	C(OD)	Package
3-20L	20.0	3.2	6.0	1000
3-38.1	38.1	3.05	6.35	




Part No.	A	Package
3-1.5	1.5	2000
3-2	2.0	
3-2.5	2.5	
3-3	3.0	
3-3.3	3.3	
3-3.5	3.5	
3-4	4.0	
3-4.2	4.2	
3-4.5	4.5	
3-5	5.0	
3-5.1	5.05	
3-5.5	5.5	
3-6	6.0	
3-6.35	6.35	
3-7	7.0	

Part No.	A	Package
3-7.5	7.5	2000
3-8	8.0	
3-9	9.0	
3-9.5	9.5	
3-10	10.0	
3-10.5	10.5	
3-11	11.0	
3-12	12.0	
3-13	13.0	1000
3-13.6	13.6	
3-14	14.0	
3-15	15.0	
3-15.5	15.5	
3-16	16.0	
3-16.5	16.5	
3-16.8	16.8	


Part No.	A	Package
3-17	17.0	1000
3-17.5	17.5	
3-18	18.0	
3-19	19.0	
3-20	20.0	
3-21	21.0	
3-22	22.0	
3-23	23.0	
3-24	24.0	
3-25	25.0	
3-26	26.0	
3-27	27.0	
3-28	28.0	
3-29	29.0	
3-30	30.0	
3-35	35.0	

圓體間隔柱 ROUND SPACER

用途：做為PC板之墊高，尺寸齊全。

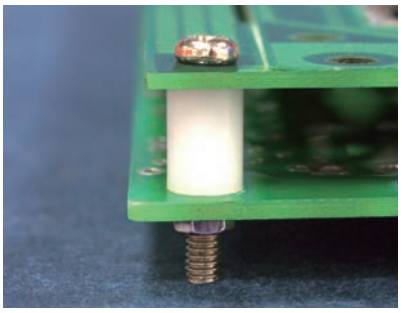

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	A(L)	B(ID)	C(OD)	Package
3.5-1.6	1.6	3.5	6.3	2000
3.5-2	2.0	3.5	6.3	
3.5-3	3.0	3.5	6.3	
3.5-3.5	3.5	3.5	6.3	
3.5-4	4.0	3.5	6.3	
3.5-4.5	4.5	3.5	6.3	
3.5-5	5.0	3.5	6.3	
3.5-6	6.0	3.5	6.3	
3.5-6.4	6.4	3.5	6.3	
3.5-7	7.0	3.5	6.3	
3.5-7.5	7.5	3.5	6.3	
3.5-8	8.0	3.5	6.3	
3.5-9	9.0	3.5	6.3	
3.5-9.5	9.5	3.5	6.3	
3.5-10	10.0	3.5	6.3	
3.5-11	11.0	3.5	6.3	
3.5-12	12.0	3.5	6.3	1000
3.5-12.7	12.7	3.5	6.3	
3.5-13	13.0	3.5	6.3	
3.5-14	14.0	3.5	6.3	
3.5-15	15.0	3.5	6.3	
3.5-15.5	15.5	3.5	6.3	
3.5-16	16.0	3.5	6.3	
3.5-17	17.0	3.5	6.3	
3.5-17.7	17.7	3.5	6.3	
3.5-18	18.0	3.5	6.3	
3.5-19	19.0	3.5	6.3	
3.5-20	20.0	3.5	6.3	
3.5-21	21.0	3.7	6.3	
3.5-22	22.0	3.7	6.3	
3.5-23	23.0	3.7	6.3	
3.5-24	24.0	3.7	6.3	
3.5-25	25.0	3.7	6.3	
3.5-26	26.0	3.7	6.3	
3.5-27	27.0	3.7	6.3	
3.5-28	28.0	3.7	6.3	
3.5-28.5	28.57	3.55	6.35	
3.5-29	29.0	3.7	6.3	
3.5-30	30.0	3.7	6.3	
3.5-35	35.0	3.7	6.3	


Part No.	A(L)	B(ID)	C(OD)	Package
4-2	2.0	4.2	6.3	2000
4-3	3.0	4.2	6.3	
4-3.4	3.4	4.2	6.3	
4-3.5	3.5	4.2	6.3	
4-4	4.0	4.2	6.3	
4-4.83	4.83	4.2	6.3	
4-5	5.0	4.2	6.3	
4-6	6.0	4.2	6.3	
4-7	7.0	4.2	6.3	
4-7.5	7.5	4.2	6.3	
4-8	8.0	4.2	6.3	
4-8.5	8.5	4.2	6.3	
4-9	9.0	4.2	6.3	
4-9.5	9.5	4.2	6.3	
4-10	10.0	4.2	6.3	
4-11	11.0	4.2	6.3	
4-12	12.0	4.2	6.3	
4-12.7	12.7	4.2	6.3	1000
4-13	13.0	4.2	6.3	
4-14	14.0	4.2	6.3	
4-15	15.0	4.2	6.3	
4-16	16.0	4.2	6.3	
4-17	17.0	4.2	6.3	
4-18	18.0	4.2	6.3	
4-19	19.0	4.2	6.3	
4-20	20.0	4.2	6.3	
4-21	21.0	4.2	6.3	
4-22	22.0	4.2	6.3	
4-23	23.0	4.2	6.3	
4-24	24.0	4.2	6.3	
4-25	25.0	4.2	6.3	
4-26	26.0	4.2	6.3	
4-27	27.0	4.2	6.3	
4-28	28.0	4.2	6.3	
4-28.7	28.7	4.2	6.3	
4-29	29.0	4.2	6.3	
4-30	30.0	4.2	6.3	
4-40	40.0	4.2	6.3	
4-45	45.0	4.2	6.3	

圓體間隔柱 ROUND SPACER

用途：做為PC板與PC板或機板間之固定不掉落。

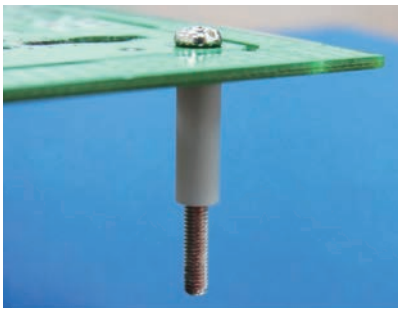


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

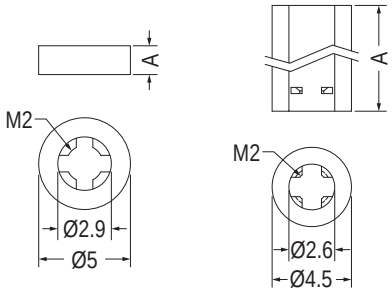

【 KWH2-1.6 】

Part No.	A	Package
KWH2-1.6	1.57	2000
KWH2-2	2.0	
KWH2-3	3.0	
KWH2-3.5	3.5	
KWH2-4	4.0	
KWH2-5	5.0	
KWH2-6	6.0	
KWH2-6.3	6.3	
KWH2-7	7.0	
KWH2-8	8.0	
KWH2-9	9.0	
KWH2-9.5	9.5	
KWH2-10	10.0	
KWH2-11	11.0	
KWH2-11.5	11.5	
KWH2-12	12.0	
KWH2-12.7	12.7	
KWH2-13	13.0	
KWH2-14	14.0	

Part No.	A	Package
KWH2-15	15.0	2000
KWH2-15.9	15.9	
KWH2-16	16.0	
KWH2-17	17.0	
KWH2-18	18.0	
KWH2-19	19.0	
KWH2-20	20.0	1000
KWH2-21	21.0	
KWH2-22	22.0	
KWH2-23	23.0	
KWH2-24	24.0	
KWH2-25	25.0	
KWH2-25.4	25.4	
KWH2-26	26.0	
KWH2-27	27.0	
KWH2-28	28.0	
KWH2-29	29.0	
KWH2-30	30.0	

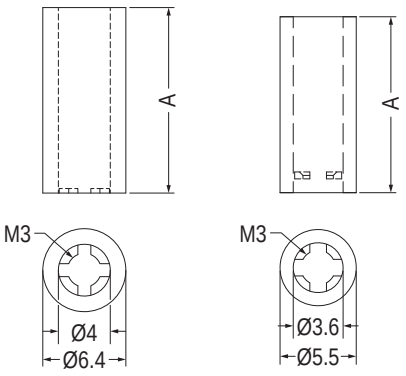


【 KWH3-3.2L, KWH3-14.3L 】

Part No.	A	Package
KWH3-1.5	1.5	2000
KWH3-2	2.0	
KWH3-3	3.0	
KWH3-3.2L	3.2	
KWH3-3.5	3.5	
KWH3-4	4.0	
KWH3-5	5.0	
KWH3-6	6.0	
KWH3-6.3	6.3	
KWH3-7	7.0	
KWH3-8	8.0	
KWH3-9	9.0	
KWH3-9.5	9.5	
KWH3-10	10.0	
KWH3-11	11.0	
KWH3-11.5	11.5	
KWH3-12	12.0	
KWH3-12.7	12.7	
KWH3-13	13.0	


Part No.	A	Package
KWH3-14	14.0	1000
KWH3-14.3L	14.3	
KWH3-15	15.0	
KWH3-15.9	15.9	
KWH3-16	16.0	
KWH3-17	17.0	
KWH3-18	18.0	
KWH3-19	19.0	
KWH3-20	20.0	
KWH3-21	21.0	
KWH3-22	22.0	
KWH3-23	23.0	
KWH3-24	24.0	
KWH3-25	25.0	
KWH3-25.4	25.4	
KWH3-26	26.0	
KWH3-27	27.0	
KWH3-28	28.0	
KWH3-29	29.0	
KWH3-30	30.0	

圓體間隔柱 ROUND SPACER

用途：做為PC板與PC板或機板間之固定不掉落。

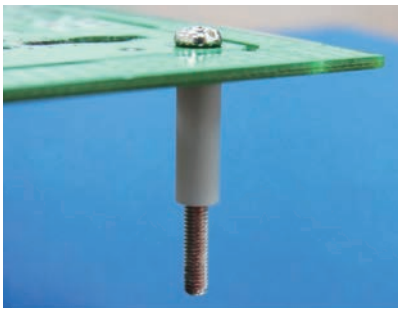


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	A	Package
KWH3.5-2	2.0	2000
KWH3.5-3	3.0	
KWH3.5-4	4.0	
KWH3.5-5	5.0	
KWH3.5-6	6.0	
KWH3.5-6.3	6.3	
KWH3.5-7	7.0	
KWH3.5-8	8.0	
KWH3.5-9	9.0	
KWH3.5-10	10.0	
KWH3.5-11	11.0	
KWH3.5-12	12.0	
KWH3.5-12.7	12.7	
KWH3.5-13	13.0	
KWH3.5-14	14.0	
KWH3.5-15	15.0	
KWH3.5-15.9	15.9	


Part No.	A	Package
KWH3.5-16	16.0	2000
KWH3.5-17	17.0	
KWH3.5-18	18.0	
KWH3.5-19	19.0	
KWH3.5-20	20.0	1000
KWH3.5-21	21.0	
KWH3.5-22	22.0	
KWH3.5-23	23.0	
KWH3.5-24	24.0	
KWH3.5-25	25.0	
KWH3.5-25.4	25.4	
KWH3.5-26	26.0	
KWH3.5-27	27.0	
KWH3.5-28	28.0	
KWH3.5-29	29.0	
KWH3.5-30	30.0	



【 KWH4-3.2L, KWH4-4.8L, KWH4-11L 】




【 KWH4-9.5L 】




Part No.	A	Package
KWH4-2	2.0	2000
KWH4-3	3.0	
KWH4-3.2L	3.2	
KWH4-4	4.0	
KWH4-4.8L	4.8	
KWH4-5	5.0	
KWH4-6	6.0	
KWH4-6.3	6.3	
KWH4-7	7.0	
KWH4-8	8.0	
KWH4-9	9.0	
KWH4-9.5L	9.5	
KWH4-10	10.0	
KWH4-11	11.0	
★KWH4-11L	11.1	
KWH4-12	12.0	
KWH4-12.7	12.7	
KWH4-13	13.0	
KWH4-14	14.0	

Part No.	A	Package
KWH4-15	15.0	2000
KWH4-15.9	15.9	
KWH4-16	16.0	
KWH4-17	17.0	
KWH4-18	18.0	
KWH4-19	19.0	
KWH4-20	20.0	1000
KWH4-21	21.0	
KWH4-22	22.0	
KWH4-23	23.0	
KWH4-24	24.0	
KWH4-25	25.0	
KWH4-25.4	25.4	
KWH4-26	26.0	
KWH4-27	27.0	
KWH4-28	28.0	
KWH4-29	29.0	
KWH4-30	30.0	




Part No.	A	Package
KWH5-3.2	3.2	2000
KWH5-4.8	4.8	
KWH5-6.4	6.4	
KWH5-7.9	7.9	1000
KWH5-9.5	9.5	




Part No.	Package
KWH6-3.2	1000

圓體間隔柱 ROUND SPACER

用途：做為PC板與PC板或機板間之固定不掉落。

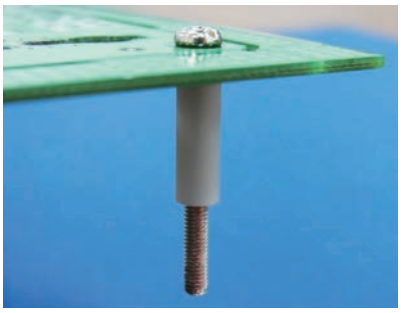

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	A	Package
KWH440-2	2.0	2000
KWH440-3	3.0	
KWH440-4	4.0	
KWH440-5	5.0	
KWH440-6	6.0	
KWH440-6.3	6.3	
KWH440-7	7.0	
KWH440-8	8.0	
KWH440-9	9.0	
KWH440-9.5	9.5	
KWH440-10	10.0	
KWH440-11	11.0	
KWH440-12	12.0	
KWH440-12.7	12.7	
KWH440-13	13.0	
KWH440-14	14.0	
KWH440-15	15.0	


Part No.	A	Package
KWH440-15.9	15.9	2000
KWH440-16	16.0	
KWH440-17	17.0	
KWH440-18	18.0	
KWH440-19	19.0	
KWH440-20	20.0	1000
KWH440-21	21.0	
KWH440-22	22.0	
KWH440-23	23.0	
KWH440-24	24.0	
KWH440-25	25.0	
KWH440-25.4	25.4	
KWH440-26	26.0	
KWH440-27	27.0	
KWH440-28	28.0	
KWH440-29	29.0	
KWH440-30	30.0	

塑膠螺柱 PLASTIC STANDOFF


用途：做為PC板與機板間之固定。

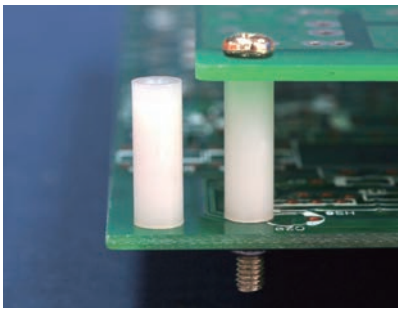


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	A	B	Package
HPP25-14.5	14.5	6.0	1000
HPP25-20	20.0	9.0	




Part No.	A	Package
HPP3-9	9.0	1000
HPP3-9.5	9.5	

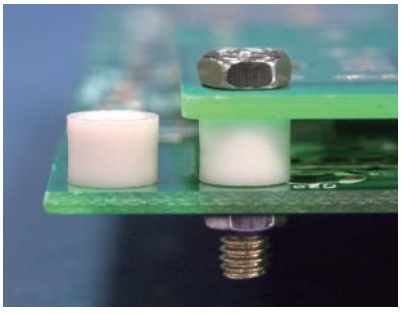



Part No.	Package
HPP3-25	1000




Part No.	Package
HPP4-4.5	1000

塑膠螺柱 PLASTIC STANDOFF


用途：做為牙管的延伸與對接。



- Material: PC+ABS (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm




Part No.	Package
HP2050	1000

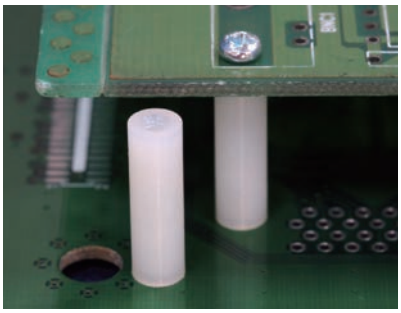


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


用途：做為PC板與機板間之固定。




Part No.	Package
HP256-16	1000




Part No.	A	Package
HPP440-6.35	6.35	1000
HPP440-11.2	11.2	




Part No.	Package
HPP440-17.4	1000




Part No.	Package
HPP632-14	1000



Part No.	Package
HPP632-51	200

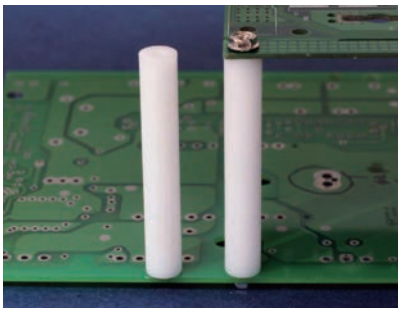


- Material: POM (UL)
- Flame Class: 94HB
- Color: Natural
- Unit: mm




Part No.	Package
HPP10-64	250

金屬柱 METAL STANDOFF

用途：做為PC板與機板間之固定，六角型不滑動。

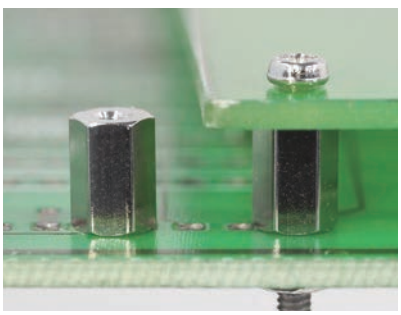


- Material: Brass
- Finish: Nickel Plated
- Unit: mm




Part No.	Package
BHP2-6	1000

塑膠螺柱 PLASTIC STANDOFF


用途：做為PC板與機板間之固定，六角型不滑動。

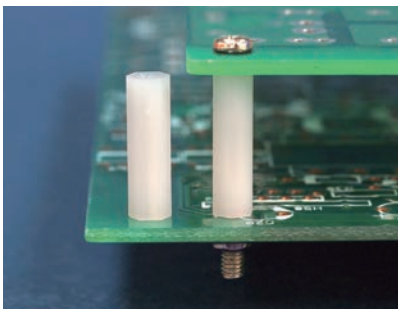


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	A	Package
HPS2-4	4.0	1000
HPS2-4.5	4.5	
HPS2-5	5.0	
HPS2-6	6.0	
HPS2-7	7.0	
HPS2-8	8.0	
HPS2-9	9.0	
HPS2-10	10.0	
HPS2-11	11.0	
HPS2-12	12.0	
HPS2-12.7	12.7	



Part No.	A	Package
HPS2-13	13.0	1000
HPS2-14	14.0	
HPS2-15	15.0	
HPS2-16	16.0	
HPS2-17	17.0	
HPS2-18	18.0	
HPS2-19	19.0	
HPS2-20	20.0	
HPS2-21	21.0	
HPS2-22	22.0	
HPS2-23	23.0	
HPS2-24	24.0	
HPS2-25	25.0	




Part No.	A	Package
HP2-4	4.0	1000
HP2-5	5.0	
HP2-6	6.0	
HP2-7	7.0	
HP2-8	8.0	
HP2-9	9.0	
HP2-10	10.0	
HP2-11	11.0	
HP2-12	12.0	




Part No.	A	Package
HP2-13	13.0	1000
HP2-14	14.0	
HP2-15	15.0	
HP2-16	16.0	
HP2-17	17.0	
HP2-18	18.0	
HP2-18.8	18.8	
HP2-19	19.0	


Part No.	A	Package
HP2-20	20.0	1000
HP2-21	21.0	
HP2-22	22.0	
HP2-23	23.0	
HP2-24	24.0	
HP2-25	25.0	
HP2-26	26.0	
HP2-27	27.0	
HP2-28	28.0	



Part No.	Package
HPS2.5-11	1000

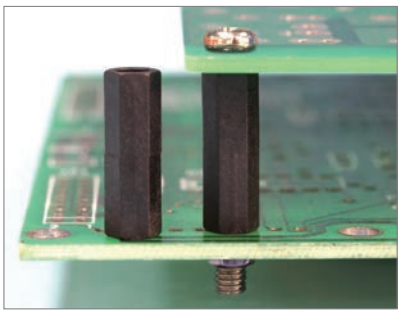


- Material: Nylon 6 (UL)
- Flame Class: 94HB
- Color: Black
- Unit: mm




Part No.	Package
HPS2.5-16.5	1000

塑膠螺柱 PLASTIC STANDOFF


用途：做為PC板與機板間之固定，六角型不滑動。

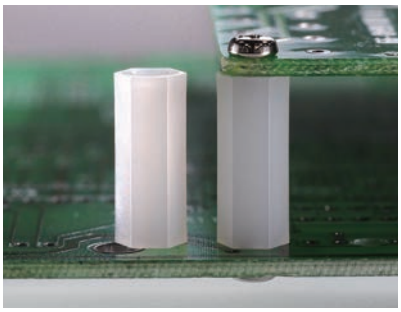


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	A	Package
HP2.5-8	8.0	1000
HP2.5-10	10.0	




Part No.	A	B	Package
HP2.5-15	15.0	5.5	1000
HP2.5-15S	15.0	4.0	
HP2.5-25	25.0	5.5	
HP2.5-25S	25.0	4.0	
HP2.5-31	31.0	5.5	




Part No.	A	Package
HPS2.6-18	18.0	1000
HPS2.6-19	19.0	
HPS2.6-31.75	31.75	




Part No.	A	Package
HPS-6	6.0	1000
HPS-8	8.0	
HPS-10	10.0	
HPS-12	12.0	




Part No.	A	Package
HPS-15	15.0	1000
HPS-17.4	17.4	
HPS-18	18.0	
HPS-20	20.0	
HPS-25	25.0	





【 HP-34 】



Part No.	A	Package
HP-4	4.0	1000
HP-5	5.0	
HP-6	6.0	
HP-6.3	6.35	
HP-7	7.0	
HP-8	8.0	
HP-8.5	8.5	
HP-9	9.0	
HP-9.5	9.5	
HP-10	10.0	
HP-10.5	10.5	
HP-11	11.0	
HP-12A	12.0	
HP-12	12.7	


・產品兩端皆有螺牙可供鎖付

Part No.	A	B	Package
HP-13.5	13.5	6.0	1000
HP-14	14.0	6.0	
HP-14.5	14.5	6.0	
HP-15	15.0	6.0	
HP-15.5	15.5	6.0	
HP-16	16.0	6.0	
HP-16.5	16.5	6.0	
HP-17	17.0	6.0	
HP-17.5	17.5	6.0	
HP-18	18.0	6.0	
HP-19	19.0	6.0	
HP-20	20.0	6.0	
HP-21.5	21.5	6.0	
HP-22	22.0	6.0	
HP-24	24.0	6.0	
HP-25	25.0	6.0	
HP-26	26.0	6.0	
HP-27	27.0	6.0	
HP-28	28.0	6.0	


Part No.	A	B	Package
HP-28.6	28.6	6.0	1000
HP-30	30.0	6.0	
HP-30.8	30.8	6.0	
HP-32	32.0	6.0	
HP-34	34.0	8.0	
HP-35	35.0	6.0	500
HP-37	37.0	6.0	
HP-38	38.0	6.0	
HP-40	40.0	6.0	
HP-42	42.0	6.0	
HP-45	45.0	6.0	
HP-47	47.0	6.0	
HP-49	49.0	6.0	
HP-50	50.0	6.0	
HP-52	52.0	6.0	
HP-54	54.0	6.0	
HP-55.5	55.5	8.0	
HP-60.2	60.2	6.0	
HP-70	70.0	10.0	
HP-76.7	76.7	8.5	

塑膠螺柱 PLASTIC STANDOFF


用途：做為PC板與機板間之固定，六角型不滑動。

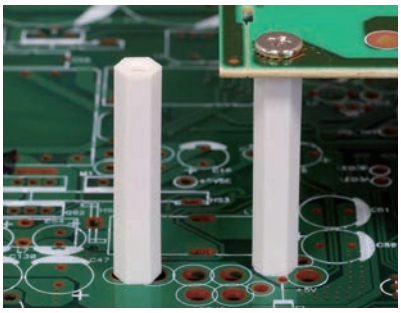


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
HPA3-22.6	1000

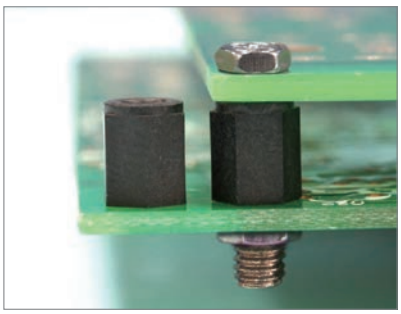





Part No.	Package
HPR3-7	1000




Part No.	A	B	Package
HPR-20	20.0	8.0	1000
HPR3-30	30.0	10.0	




Part No.	A	Package
HPH-10	10.0	1000
HPH-12	12.0	
HPH-15	15.0	

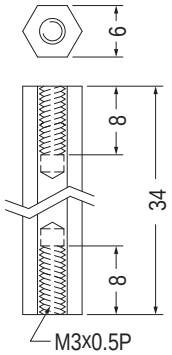


Part No.	Package
HPH-34	1000

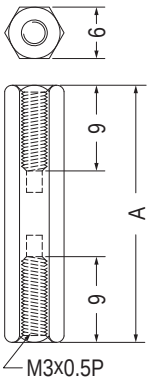


Part No.	A	Package
HPL-30	30.0	500
HPL-40	40.0	




Part No.	Package
HPL-100	500

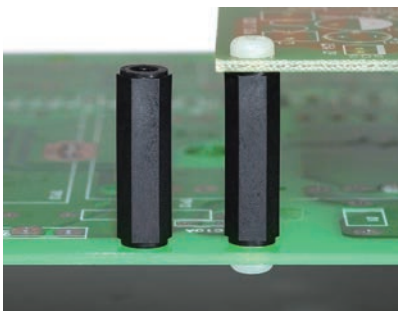

- Material: Nylon 6 (UL)+GF
- Flame Class: 94HB
- Color: Black




Part No.	Package
HPR-8	1000




Part No.	A	Package
HPR3-11	11.0	1000
HPR3-22	22.0	

塑膠螺柱 PLASTIC STANDOFF


用途：做為PC板與機板間之固定，六角型不滑動。

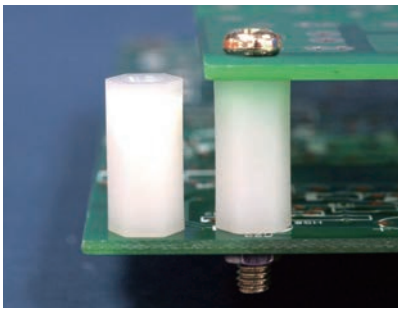


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	A	Package
HPS4-6	6.0	1000
HPS4-8	8.0	
HPS4-10	10.0	
HPS4-12	12.0	
HPS4-15	15.0	
HPS4-18	18.0	
HPS4-20	20.0	




Part No.	A	Package
HP4-6	6.0	1000
HP4-7	7.0	
HP4-8	8.0	
HP4-9	9.0	
HP4-10	10.0	
HP4-11	11.0	
HP4-12	12.0	
HP4-12.7	12.7	
HP4-14	14.0	
★HP4-15	15.0	
HP4-16	16.0	




Part No.	A	Package
HP4-20	20.0	1000
HP4-25	25.0	
HP4-26	26.0	
HP4-30	30.0	
HP4-35	35.0	
HP4-40	40.0	
HP4-45S	45.0	
HP4-45	45.5	




Part No.	Package
HPL4-37	1000

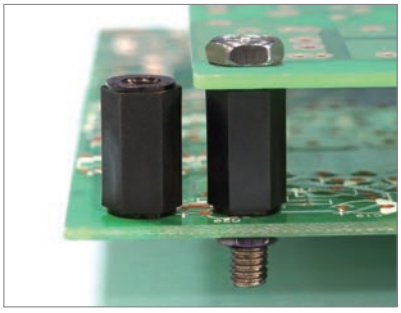





Part No.	Package
HPR4-10	1000




Part No.	Package
HPR4-15	1000

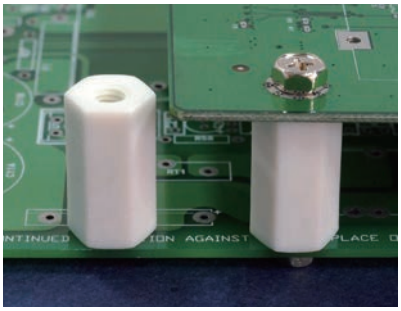


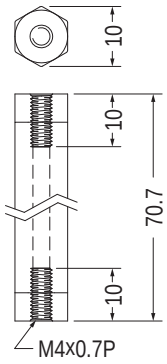

Part No.	Package
HPR4-70L	500



Part No.	A	Package
HPR5-25	25.0	1000
HPR5-45	45.0	500




Part No.	Package
HP6-25	500

塑膠螺柱 PLASTIC STANDOFF


用途：做為斷路器保護，避免誤觸。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
M-3/8-27	1000

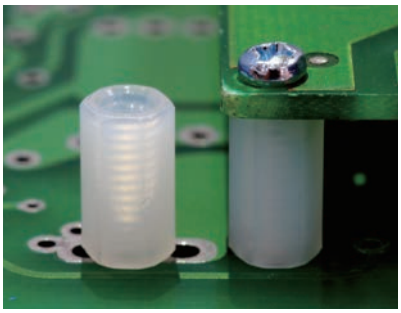


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


用途：做為PC板與機板間之固定，六角型不滑動。





Part No.	A	B	Package
HP440-7.9S	7.9	4.75	1000
HP440-9.5	9.5	4.8	
HP440-15.9S	15.88	4.75	




Part No.	Package
HP440-18	1000

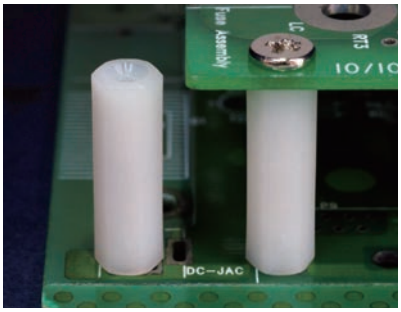

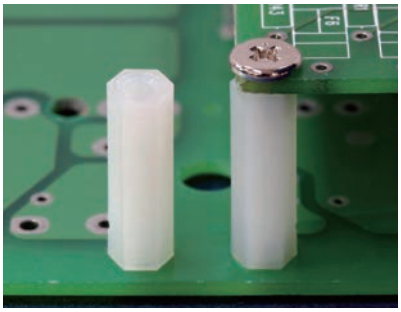





Part No.	A	Package
HP44L-6.35	6.35	1000
HP44L-8	8.0	
HP44L-9.5	9.5	
HP44L-12.7	12.7	
HP44L-15.9	15.9	
HP44L-19.1	19.1	




Part No.	A	B	Package
HP44L-22	22.2	9.0	1000
HP44L-23.8	23.8	6.4	
HP44L-25.4	25.4	9.0	
HP44L-28.6	28.6	6.4	



Part No.	Package
HPS632-12	1000




Part No.	Package
HPS632-19.1	1000




Part No.	Package
HP632-64	500

塑膠螺柱 PLASTIC STANDOFF


用途：做為PC板與機板間之固定，六角型不滑動。

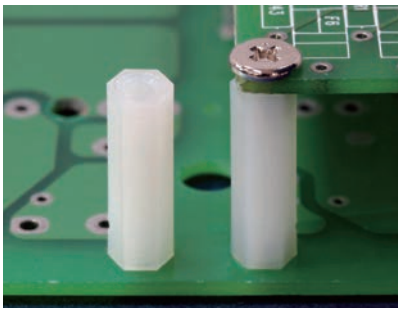


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	A	B	Package
HP632-6.4	6.4	6.35	1000
HP632-9.5	9.5	6.35	
HP632-12.7	12.7	6.35	
HP632-15.9	15.9	6.35	
HP632-19.1	19.1	6.35	
HP632-22.2	22.2	6.35	
HP632-25.4	25.4	6.4	




Part No.	A	Package
HP632-28.5	28.5	1000
★HP632-30	30.0	
HP632-31.8	31.8	
HP632-38.1	38.1	

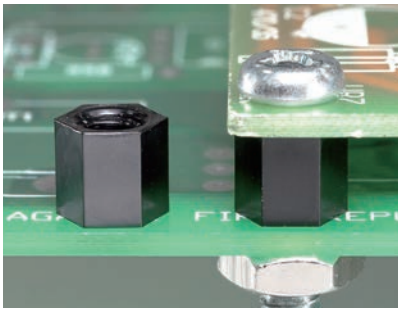





Part No.	A	Package
★HP832-12.7	12.7	1000
HP832-19.1	19.1	
HP832-25.4	25.4	



- Material: Nylon 46 (UL)
- Flame Class: 94V-2
- Color: Black

Part No.	Package
HP832-6.35	1000

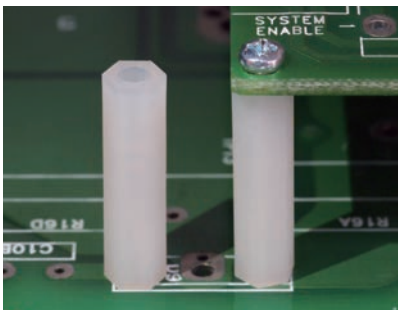




無攻牙
CLEAR WITHOUT TAPPING


Part No.	A	Package
HP48-20	20.0	1000
HP48-32	32.0	

塑膠金屬螺柱 PLASTIC STANDOFF WITH METAL INSERTS


用途：做為PC板與機板間之固定，六角型不滑動。

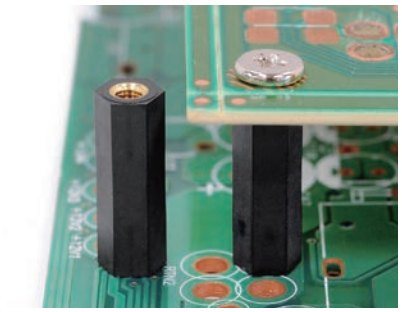


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	A	B	Package
HPC-11.9	11.9	4.0	1000
HPC-15	15.0	4.5	




Part No.	A	Package
HPC-19	19.0	1000
HPC-30	30.0	
HPC-45	45.0	




Part No.	Package
HPC-21	1000

塑膠金屬螺柱 PLASTIC STANDOFF WITH METAL INSERTS


用途：做為PC板與機板間之固定，六角型不滑動。

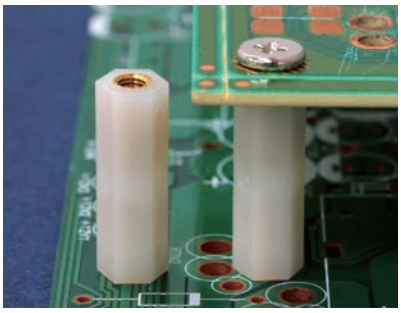


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
HPCA-21	1000



Part No.	Package
HPC-73	1000




Part No.	A	Package
HPC4-30	30.0	250
HPC4-35	35.0	
HPC4-40	40.0	




Part No.	Package
HPC44-21	1000

塑膠螺柱 PLASTIC STANDOFF


用途：做為PC板與機板間之固定，一端配合螺絲，另一端配合螺帽使用。

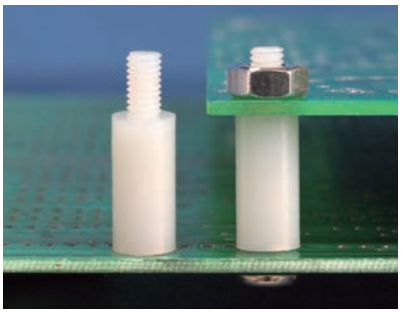

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
TPR4-15	1000

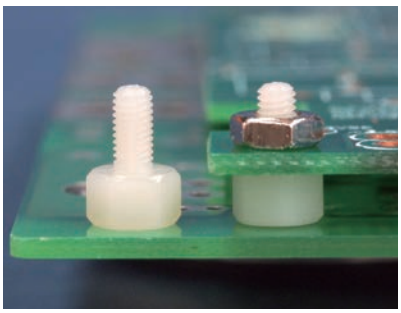


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

用途：做為於零件之墊高。




Part No.	Package
TPA-4	1000

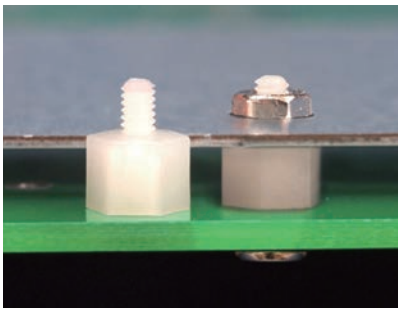

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


用途：做為PC板與機板間之固定，一端配合螺絲，另一端配合螺帽使用。




Part No.	Package
TP2L-4	1000

塑膠螺柱 PLASTIC STANDOFF

用途：做為PC板與機板間之固定，一端配合螺絲，另一端配合螺帽使用。

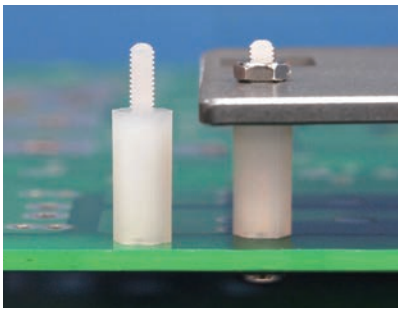


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

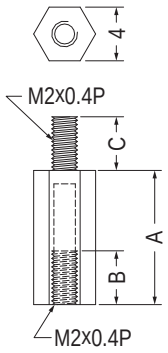


Part No.	A	B	C	Package
TP2-5S	5.0	3.0	4.0	1000
TP2-6.5S	6.5	4.0	4.0	
TP2-8S	8.0	4.0	4.0	
TP2-10S	10.0	4.0	4.0	
TP2-15S	15.0	4.0	4.0	
TP2-4	4.0	2.5	5.0	
TP2-5	5.0	3.0	5.0	
TP2-5.5	5.5	3.0	5.0	
TP2-6	6.0	4.0	5.0	
TP2-6.5	6.5	4.0	5.0	
TP2-7	7.0	4.0	5.0	
TP2-8	8.0	5.0	5.0	
TP2-9	9.0	5.0	5.0	
TP2-10	10.0	5.0	5.0	
TP2-11	11.0	5.0	5.0	
TP2-12	12.0	5.0	5.0	

Part No.	A	B	C	Package
TP2-13	13.0	5.0	5.0	1000
TP2-14	14.0	5.0	5.0	
TP2-15	15.0	5.0	5.0	
TP2-16	16.0	5.0	5.0	
TP2-17	17.0	5.0	5.0	
TP2-18	18.0	5.0	5.0	
TP2-19	19.0	5.0	5.0	
TP2-20	20.0	5.0	5.0	
TP2-21	21.0	5.0	5.0	
TP2-22	22.0	5.0	5.0	
TP2-23	23.0	5.0	5.0	
TP2-24	24.0	5.0	5.0	
TP2-25	25.0	5.0	5.0	
TP2-26	26.0	5.0	5.0	
TP2-27	27.0	5.0	5.0	
TP2-28	28.0	5.0	5.0	




Part No.	Package
TP2.5-2-6	1000




Part No.	A	B	Package
TP2.5-5	5.0	3.0	1000
TP2.5-6	6.0	4.0	
TP2.5-7	7.0	5.0	
TP2.5-8	8.0	5.0	
TP2.5-9	9.0	5.0	
TP2.5-10	10.0	5.0	
TP2.5-11	11.0	5.0	
TP2.5-12	12.0	5.0	
TP2.5-13	13.0	5.0	
TP2.5-14	14.0	5.0	
TP2.5-15	15.0	5.0	
TP2.5-16	16.0	5.0	

Part No.	A	B	Package
TP2.5-17	17.0	5.0	1000
TP2.5-18	18.0	5.0	
TP2.5-19	19.0	5.0	
TP2.5-20	20.0	5.0	
TP2.5-21	21.0	5.0	
TP2.5-22	22.0	5.0	
TP2.5-23	23.0	5.0	
TP2.5-24	24.0	5.0	
TP2.5-24.5	24.5	5.0	
TP2.5-25	25.0	5.0	
TP2.5-26	26.0	5.0	
TP2.5-27	27.0	5.0	
TP2.5-28	28.0	5.0	

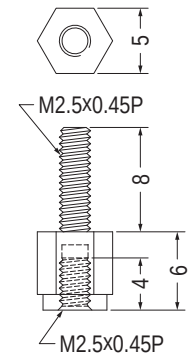

Part No.	Package
TP2.5-6L	1000

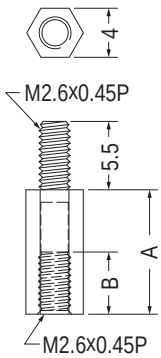



Part No.	A	B	Package
TP2.6-4	4.0	2.0	1000
TP2.6-5	5.0	3.0	
TP2.6-6	6.0	4.0	
TP2.6-7	7.0	5.0	
TP2.6-8	8.0	5.5	
TP2.6-9	9.0	5.5	
TP2.6-10	10.0	5.5	
TP2.6-11	11.0	5.5	
TP2.6-12	12.0	5.5	
TP2.6-12.7	12.7	5.5	
TP2.6-13	13.0	5.5	
TP2.6-14	14.0	5.5	
TP2.6-15	15.0	5.5	

Part No.	A	B	Package
TP2.6-16	16.0	5.5	1000
TP2.6-17	17.0	5.5	
TP2.6-18	18.0	5.5	
TP2.6-19	19.0	5.5	
TP2.6-20	20.0	5.5	
TP2.6-21	21.0	5.5	
TP2.6-22	22.0	5.5	
TP2.6-23	23.0	5.5	
TP2.6-24	24.0	5.5	
TP2.6-25	25.0	5.5	
TP2.6-26	26.0	5.5	
TP2.6-27	27.0	5.5	
TP2.6-28	28.0	5.5	


塑膠螺柱 PLASTIC STANDOFF

用途：做為PC板與機板間之固定，一端配合螺絲，另一端配合螺帽使用。

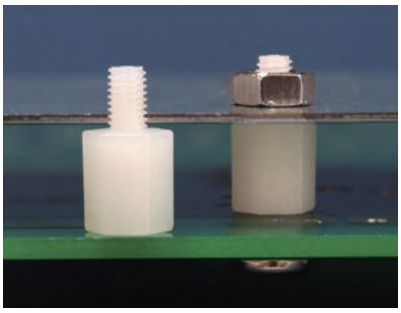


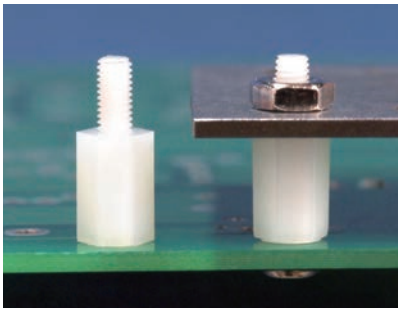


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
TP3-2.5-6	1000




Part No.	A	B	Package
TP3-6	6.0	5.0	1000
TP3-7.5	7.5	6.25	




Part No.	A	C	Package
TPS-10S	10.0	5.0	1000
TPS-10	10.0	8.0	
TPS-12	12.0	8.0	
TPS-13	13.0	8.0	
TPS-15	15.0	8.0	
TPS-18	18.0	8.0	
TPS-20	20.0	8.0	
TPS-25	25.0	8.0	



Part No.	A	B	C	Package
TP-5S	5.0	4.0	3.5	1000
TP-5SM	5.0	4.0	5.0	
TP-6S	6.0	4.0	5.0	
TP-7-4	7.0	5.0	4.0	
TP-9-4	9.0	6.0	4.0	
TP-10.8	10.8	6.0	3.5	
TP-11.2	11.2	6.0	3.5	
TP-16S	16.0	6.0	4.0	
TP-18S	18.0	6.0	5.0	
TP-20S	20.0	8.0	5.0	



Part No.	Package
TP-32.7L	1000




Part No.	A	B	Package
TP-4	4.0	3.0	1000
TP-5	5.0	3.0	
TP-6	6.0	4.0	
TP-7	7.0	5.0	
TP-7.5	7.5	5.0	
TP-8	8.0	6.0	
TP-8.5	8.5	6.0	
TP-9	9.0	6.0	

Part No.	A	B	Package
TP-9.5	9.5	6.0	1000
TP-10	10.0	6.0	
TP-10.5	10.5	6.0	
TP-10.8L	10.8	6.0	
TP-11	11.0	6.0	
TP-12A	12.0	6.0	
TP-12	12.7	6.0	
TP-13	13.0	6.0	
TP-14	14.0	6.0	
TP-15	15.0	6.0	
TP-15.5	15.5	6.0	
TP-16	16.0	6.0	
TP-16.5	16.5	6.0	
TP-17	17.0	6.0	
TP-18	18.0	6.0	
TP-18.5	18.5	6.0	
TP-19	19.0	6.0	
TP-20	20.0	8.0	


Part No.	A	B	Package
TP-21	21.0	6.0	1000
TP-22	22.0	6.0	
★TP-23	23.0	6.0	
TP-24.5	24.5	6.0	
TP-25	25.0	6.0	
TP-27	27.0	6.0	
TP-28	28.0	6.0	
TP-28.5	28.5	6.0	
TP-30	30.0	8.0	
TP-33	33.0	6.0	
TP-34.5	34.5	6.0	
TP-35	35.0	6.0	
TP-36	36.0	6.0	
TP-37	37.0	6.0	
TP-40	40.0	6.0	
TP-45	45.0	6.0	
TP-53.5	53.5	6.0	
TP-55.5	55.5	8.0	

塑膠螺柱 PLASTIC STANDOFF

用途：做為PC板與機板間之固定，一端配合螺絲，另一端配合螺帽使用。

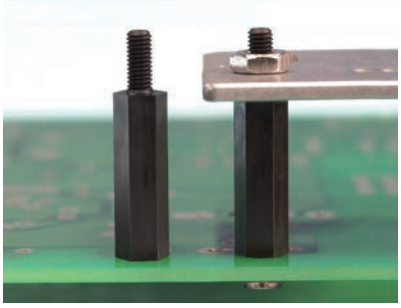


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
★TP-23-1	1000


- Material: POM
- Color: Black
- Unit: mm

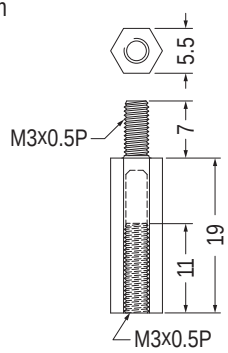


Part No.	Package
TPD-19	1000

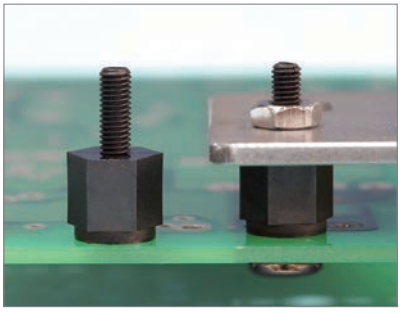


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	A	B	C	D	Package
TP3-6L	6.0	4.0	8.0	6.0	1000
TP3-8L	8.0	6.0	8.0	6.0	
TP3-10L	10.0	8.0	8.0	6.0	
TP3-10.4	10.4	7.0	5.0	7.0	
TP3-11L	11.0	9.0	8.0	6.0	
TP3-12L	12.0	10.0	8.0	6.0	
TP3-15L	15.0	10.0	8.0	6.0	
TP3-18L	18.0	10.0	8.0	6.0	
TP3-50L	50.0	10.0	8.0	6.0	500

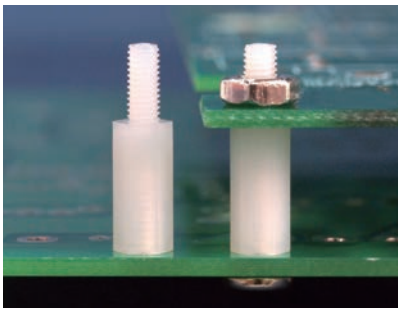





Part No.	Package
TP-8L	1000




Part No.	Package
TPS44-11	1000



Part No.	Package
TPS632-6	1000

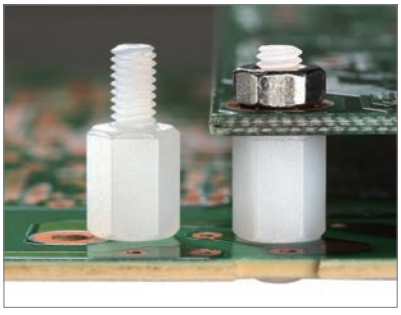




NEW


Part No.	Package
TP3.5-3-8	1000

塑膠螺柱 PLASTIC STANDOFF


用途：做為PC板與機板間之固定，一端配合螺絲，另一端配合螺帽使用。

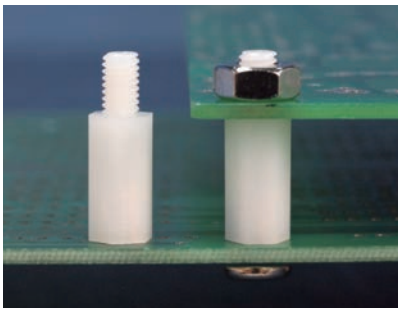


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

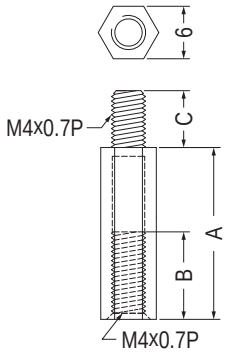

Part No.	A	B	C	Package
TPS4-10L	10.0	8.0	9.5	1000
TPS4-12L	12.0	8.0	9.5	
TPS4-13	13.0	6.0	6.5	
TPS4-15L	15.0	12.0	9.5	
TPS4-20L	20.0	12.0	9.5	
TPS4-25L	25.0	12.0	9.5	
TPS4-30	30.0	10.0	6.5	
TPS4-55	55.0	10.0	6.5	





【 TP4-10LS 】




Part No.	A	B	C	D	Package
TP4-6	6.0	4.0	6.5	7.0	1000
TP4-8	8.0	6.0	6.5	7.0	
TP4-10	10.0	6.0	6.5	7.0	
TP4-10LS	10.0	7.0	8.0	7.0	
TP4-10L	10.0	7.0	8.0	8.0	


Part No.	A	B	C	D	Package
TP4-12	12.0	6.0	6.5	7.0	1000
TP4-13	13.0	6.0	6.5	7.0	
TP4-14	14.0	6.0	6.5	7.0	
TP4-15	15.0	6.0	6.5	7.0	
TP4-16	16.0	7.0	6.5	7.0	
TP4-17	17.0	7.0	6.5	7.0	
TP4-19	19.0	7.0	6.5	7.0	
TP4-20	20.0	8.0	6.5	7.0	
TP4-25	25.0	8.0	6.5	7.0	
TP4-27	27.0	8.0	6.5	7.0	
TP4-30	30.0	8.0	6.5	7.0	
TP4-34	34.0	8.0	6.5	7.0	
TP4-35	35.0	8.0	6.5	7.0	
TP4-37	37.0	8.0	6.5	7.0	
TP4-40	40.0	8.0	6.5	7.0	
TP4-45	45.5	8.0	6.5	7.0	
TP4-57	57.0	8.0	6.5	7.0	

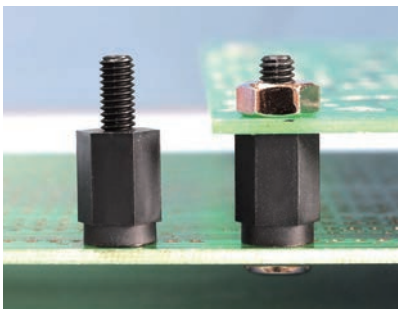



Part No.	A	B	Package
TP4-8L	8.0	6.0	1000
TP4-10R	10.0	8.0	
TP4-11R	11.0	9.0	
TP4-12L	12.0	10.0	
TP4-14L	14.0	10.0	
TP4-20L	20.0	10.0	
TP4-32L	32.0	10.0	500
TP4-35L	35.0	10.0	1000

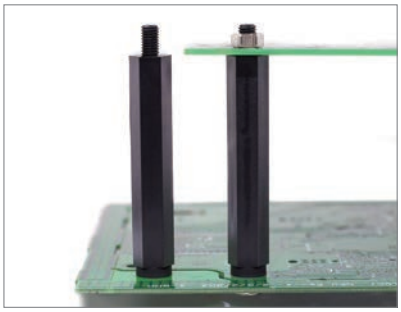





Part No.	Package
TP5-60	250

塑膠螺柱 PLASTIC STANDOFF


用途：做為PC板與機板間之固定，一端配合螺絲，另一端配合螺帽使用。

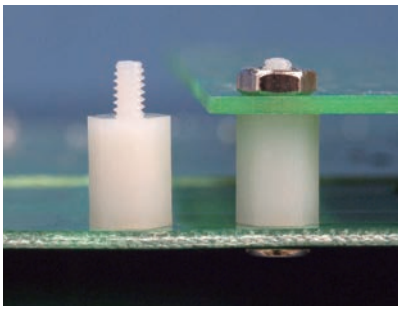


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	A	B	C	D	Package
TP440-6.4	6.4	4.0	4.8	6.4	1000
TP440-6.4-4.8	6.4	4.8	4.8	6.4	
TP440-7	7.0	4.0	4.8	6.4	
TP440-8S	8.0	6.35	4.8	4.8	
TP440-9.5	9.5	6.0	4.8	6.4	
TP440-12.7	12.7	6.0	4.8	6.4	
TP440-15.2	15.24	4.75	4.75	6.35	
TP440-15.9	15.9	6.0	4.8	6.4	
TP440-19.1	19.1	6.0	4.8	6.4	
TP440-19.1S	19.05	6.35	4.75	4.75	
TP440-22.2	22.2	4.75	4.75	6.35	
TP440-25.4	25.4	4.75	4.75	6.35	
TP440-28.7	28.7	6.0	4.8	6.4	






Part No.	Package
TP632-M310	1000


Part No.	A	B	Package
TP632-5S	5.0	3.0	1000
TP632-5.5S	5.5	3.5	
TP632-6S	6.0	4.0	
TP632-6.3S	6.3	4.0	
TP632-8S	8.0	6.0	
TP632-9S	9.0	6.0	
TP632-10S	10.0	6.0	

Part No.	A	B	Package
TP632-11S	11.0	6.0	1000
TP632-12S	12.0	6.0	
TP632-12.7S	12.7	6.0	
TP632-15.9S	15.9	6.0	
TP632-19.1S	19.1	6.0	
TP632-25.4S	25.4	6.0	
TP632-31.8S	31.8	6.0	



Part No.	A	B	Package
TP632-5	5.0	3.0	1000
TP632-5.5	5.5	3.5	
TP632-6	6.0	4.0	
TP632-6.3	6.3	4.0	
TP632-8	8.0	6.0	
TP632-9	9.0	6.0	
★TP632-9.5	9.5	6.0	
TP632-10	10.0	6.0	

Part No.	A	B	Package
TP632-11	11.0	6.0	1000
TP632-12	12.0	6.0	
TP632-12.7	12.7	6.0	
TP632-15.9	15.9	6.0	
TP632-19.1	19.1	6.0	
TP632-25.4	25.4	6.0	
TP632-28.6	28.6	9.5	
TP632-31.8	31.8	6.0	
TP632-51	51.0	6.0	



- Material: Nylon 46 (UL)
- Flame Class: 94V-2
- Color: Black


Part No.	Package
TP632-17	1000

塑膠螺柱 PLASTIC STANDOFF


用途：做為PC板與機板間之固定，一端配合螺絲，另一端配合螺帽使用。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	A	B	C	D	Package
TP632-9.5L	9.5	6.4	6.4	6.4	1000
TP632-17.5L	17.5	6.4	6.4	6.4	
TP632-31.8L	31.8	6.35	6.35	6.35	
TP632-34.9L	34.9	6.35	6.35	6.35	
TP632-38.1L	38.1	6.35	6.35	6.35	
TP632-41.3L	41.3	6.35	6.35	6.35	500
TP632-44.5L	44.5	6.35	6.35	6.35	
TP632-50.8L	50.8	6.35	6.35	6.35	

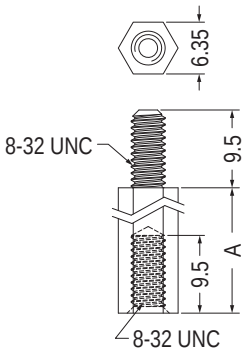

Part No.	A	Package
TP832-12.7	12.7	1000
TP832-19.1	19.1	
TP832-22.2	22.2	




- Material: Nylon 46 (UL)
- Flame Class: 94V-2
- Color: Black


Part No.	Package
TP832-9.5	1000

塑膠金屬螺柱 PLASTIC STANDOFF WITH METAL INSERTS


用途：PC板與PC板間之固定，不佔空間。

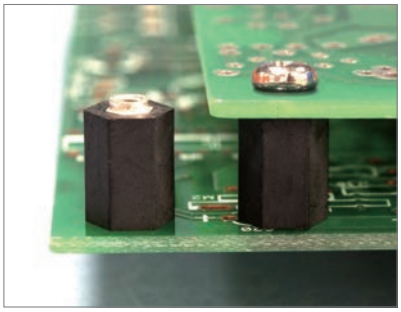

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
HPB2.5-10	1000

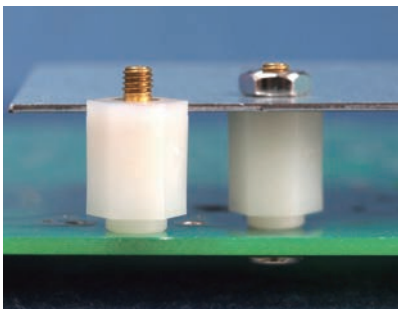

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


用途：做為PC板與機板間之固定，一端配合螺絲，另一端配合螺帽使用。




Part No.	Package
MTPE3-12	1000

塑膠金屬螺柱 PLASTIC STANDOFF WITH METAL INSERTS


用途：做為PC板與機板間之固定，一端配合螺絲，另一端配合螺帽使用。

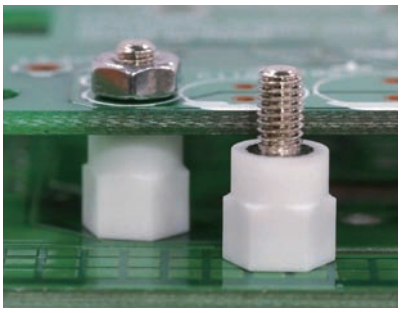


- Material: Nylon 6 (UL)
- Flame Class: 94V-0
- Color: Natural
- Unit: mm




Part No.	Package
MTPF3-7	1000

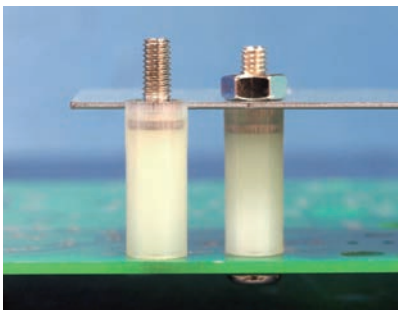

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	A	Package
MTPC4-20	20.0	1000
MTPC4-57	57.0	

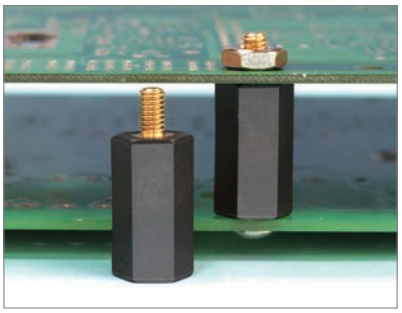


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

用途：PC板與PC板間之固定，不佔空間。




Part No.	Package
MTPA4-3-20	1000

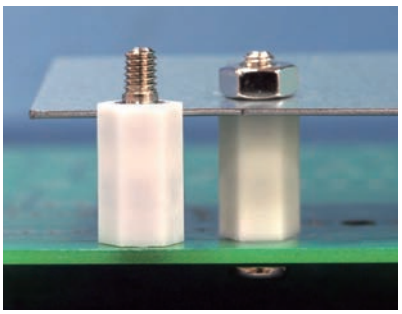


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

用途：做為PC板與機板間之固定，一端配合螺絲，另一端配合螺帽使用。




Part No.	C	Package
MTPA4-15-1	6.0	1000
MTPA4-15L	8.0	




Part No.	A	B	C	D	Package
MTPA4-15	15.0	5.0	6.0	8.0	1000
MTPA4-50L	50.0	6.0	8.0	9.0	200

塑膠金屬螺柱 PLASTIC STANDOFF WITH METAL INSERTS


用途：做為PC板與機板間之固定，一端配合螺絲，另一端配合螺帽使用。

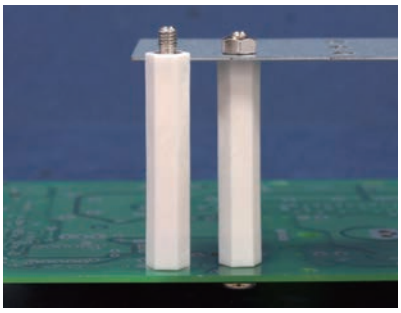


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
MTPA5-4-50	250



Part No.	Package
MTPA6-5-30	1000

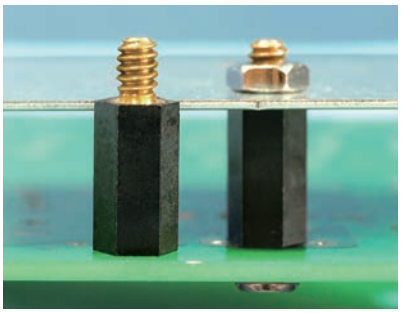





Part No.	Package
MTPD632-11.9	1000

金屬柱 METAL STANDOFF


用途：做為PC板與機板間之固定，一端配合螺絲，另一端配合螺帽使用。

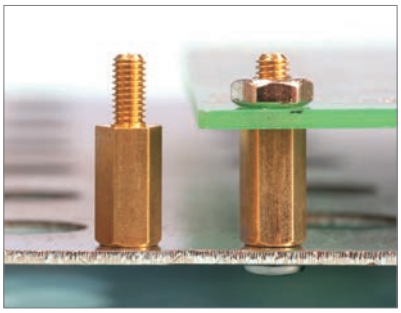


- Material: Brass
- Unit: mm



Part No.	Package
TP-10BA	1000

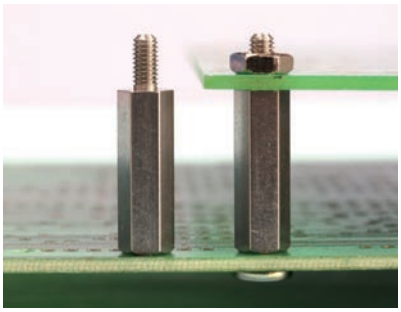


- Material: Steel/SUS
- Unit: mm




Part No.	A	B	D	Package
TP-18SUS	18.0	8.0	5.5	500
TP-25ST	25.0	6.0	5.0	
TP-30SUS	30.0	6.0	5.0	
TP-55SUS	54.9	8.0	5.5	

金屬柱 METAL STANDOFF


用途：做為PC板與機板間之固定，一端配合螺絲，另一端配合螺帽使用。

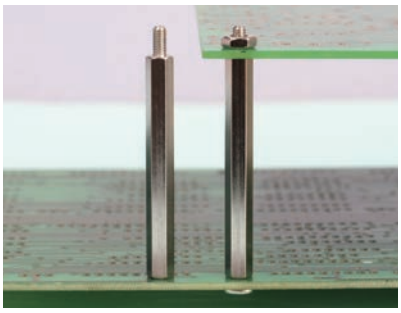


- Material: Steel
- Unit: mm

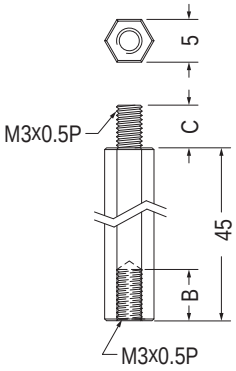


Part No.	B	C	Package
TP3-45ST	5.5	6.0	500
TP3-45LST	6.0	7.0	




Part No.	A	Package
TPB3-20NI	20.0	500
TPB3-40NI	40.0	

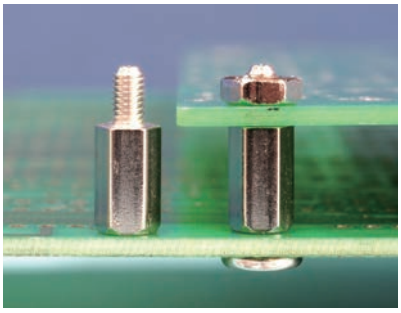





Part No.	Package
TP3-9ST	1000




Part No.	Package
TPS3-7ST	1000

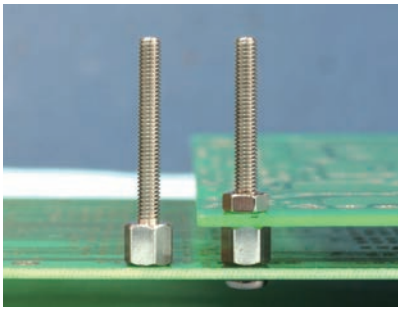


- Material: SUS
- Unit: mm

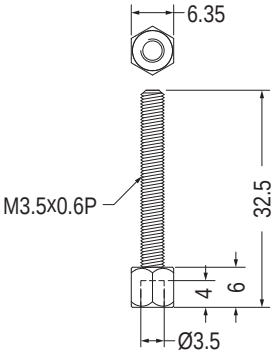


Part No.	Package
TP-6ST	500



Part No.	Package
TP-6ST-1	500

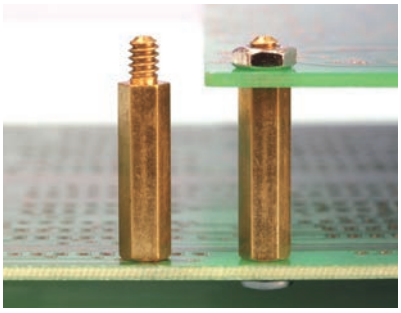


- Material: Brass
- Unit: mm

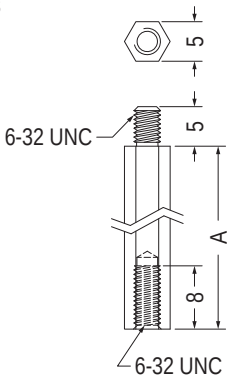


Part No.	A	Package
TP632-19.05BA	19.05	500
TP632-25.4BA	25.4	

塑膠金屬螺柱 PLASTIC STANDOFF WITH METAL INSERTS


用途：做為PC板與機板間之固定，一端配合螺絲，另一端配合螺帽使用。

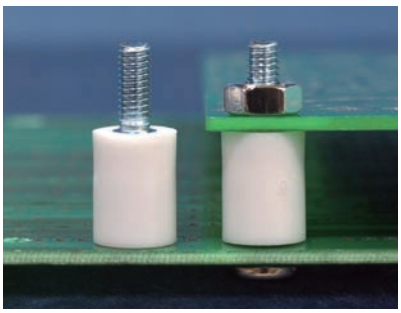


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	Package
MTPG3-42	500




Part No.	Package
MTP4-12.7	1000

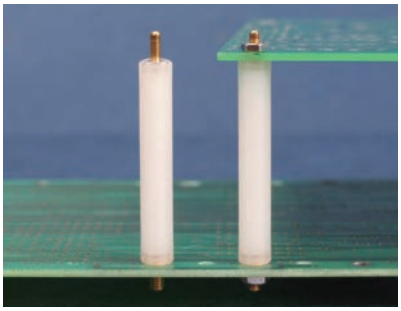


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


用途：做為PC板與機板間之固定，兩端配合攻牙或螺母使用。

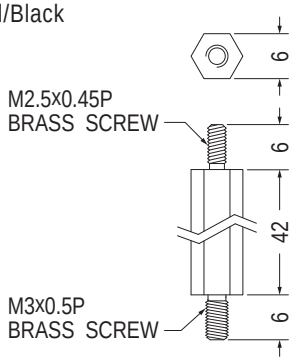

Part No.	Package
TPIM2.5-3-42	500

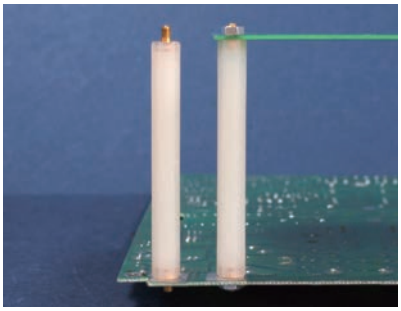


- Material: Nylon 6
- Color: Natural
- Unit: mm




Part No.	Package
TPIM4-90	500

塑膠螺柱 PLASTIC STANDOFF

用途：做為PC板與機板間之固定，兩端配合攻牙或螺母使用。

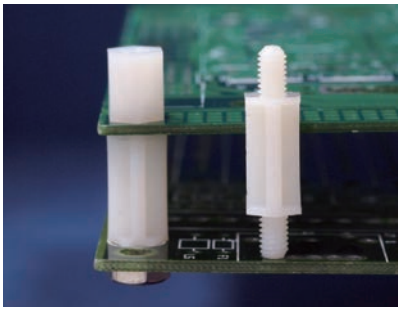

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

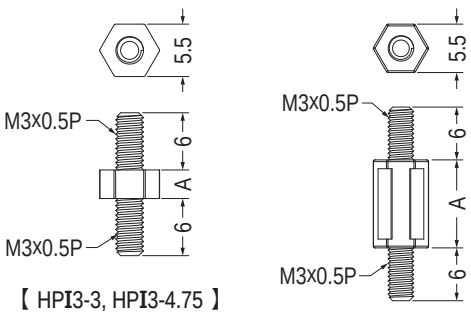


【 HPI3-3, HPI3-4.75 】


Part No.	A	Package
HPI3-3	3.0	1000
HPI3-4.75	4.75	
HPI3-5	5.0	
HPI3-5.5	5.5	
HPI3-10	10.0	
HPI3-15	15.0	

塑膠螺柱 PLASTIC STANDOFF


用途：做為PC板與機板間之固定，兩端配合攻牙或螺母使用。

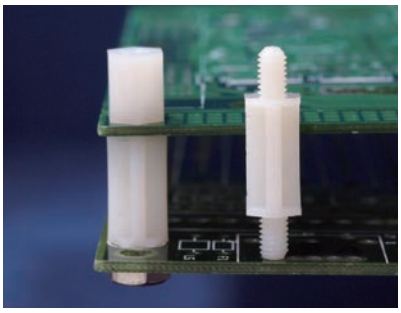


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	A	B	C	Package
HPI4-5	5.0	6.0	6.0	1000
HPI4-10	10.0	6.0	6.0	
HPI4-15	15.0	6.0	6.0	
HPI4-17L	17.0	8.0	8.0	
HPI4-19	19.0	6.0	6.0	
★HPI4-19L	19.0	9.0	9.0	
HPI4-25	25.0	6.0	6.0	




Part No.	Package
HPIB4-18.5	1000




Part No.	Package
HPID4-14	1000

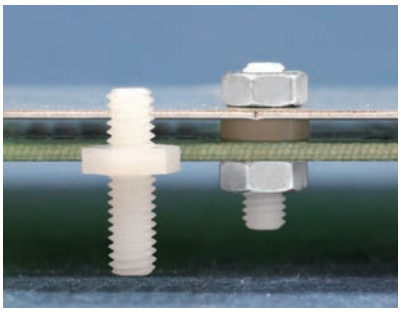




Part No.	Package
HPIA4-2	1000




Part No.	Package
HPIE4-3	1000

PCB間隔柱 PCB SPACER

用途：PC板端直接壓入固定，另一端可配合螺母或攻牙。

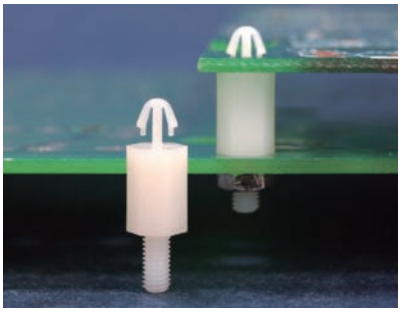


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

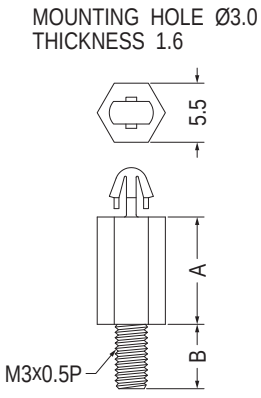


Part No.	A	B	Package
SCBA-3	3.0	6.3	1000
SCBA-3S	3.0	3.0	
SCBA-4	4.0	6.3	
SCBA-5	5.0	6.3	
SCBA-5S	5.0	4.5	
SCBA-6	6.0	6.3	
SCBA-6S	6.0	4.5	
SCBA-7	7.0	6.3	
SCBA-8	8.0	6.3	
SCBA-9	9.0	6.3	
SCBA-10	10.0	6.3	
SCBA-11	11.0	6.3	
SCBA-12	12.0	6.3	
SCBA-13	13.0	6.3	
SCBA-14	14.0	6.3	
SCBA-15	15.0	6.3	
SCBA-16	16.0	6.3	

用途：PC板端直接壓入固定，另一端可配合螺母或攻牙。

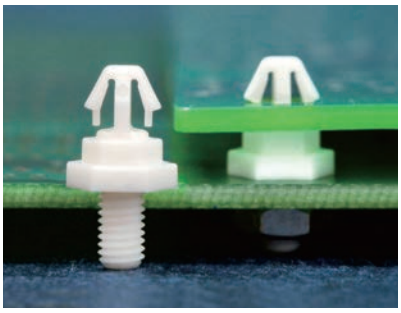


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

MOUNTING HOLE Ø3.5
THICKNESS 0.8




Part No.	A	Package
SCBC-3	3.0	1000
SCBC-4.75	4.76	
SCBC-5.5	5.5	2000


MOUNTING HOLE Ø3.5
THICKNESS 1.6




Part No.	Package
SCBB-3	1000

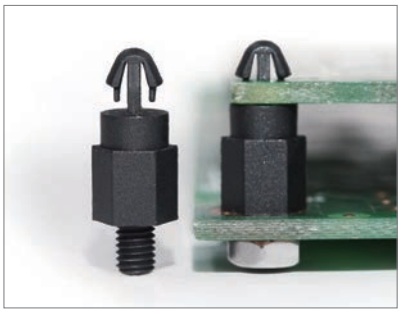


MOUNTING HOLE Ø3.0
THICKNESS 1.6




Part No.	Package
SCBD-8	1000

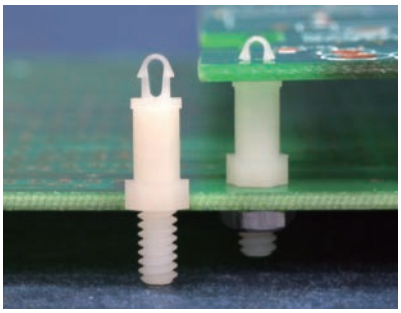


MOUNTING HOLE Ø2.5
THICKNESS 1.6



Part No.	A	Package
SCBS632-3.2	3.2	1000
SCBS632-4.8	4.8	
SCBS632-6.4	6.4	
SCBS632-7.9	7.9	
SCBS632-9.5	9.5	
SCBS632-11.1	11.1	
SCBS632-12.7	12.7	
SCBS632-14.3	14.3	
SCBS632-15.9	15.9	

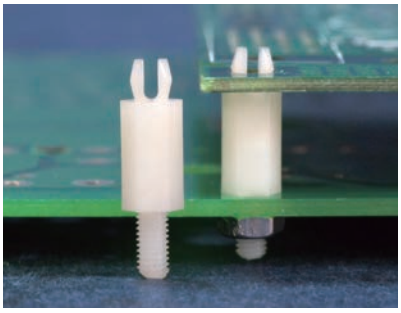


MOUNTING HOLE Ø3.0
THICKNESS 1.2



Part No.	Package
MSPA3-9.7	1000


PCB間隔柱 PCB SPACER

用途：PC板端直接壓入固定，另一端可配合螺母或攻牙。

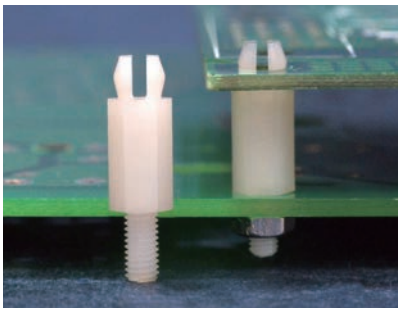


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

MOUNTING HOLE Ø3.9~Ø4.0
THICKNESS 1.6




Part No.	A	Package
MSPG3-3.2	3.2	1000
MSPG3-4.8	4.8	
MSPG3-6.4	6.4	
MSPG3-9.5	9.5	
MSPG3-12.7	12.7	
MSPG3-15.9	15.9	
MSPG3-19.1	19.1	
MSPG3-22.2	22.2	


MOUNTING HOLE Ø3.9~Ø4.0
THICKNESS 1.6



Part No.	A	Package
MSPG4-3.2	3.2	1000
MSPG4-4.8	4.8	
MSPG4-6.4	6.4	
MSPG4-9.5	9.5	
MSPG4-12.7	12.7	
MSPG4-15.9	15.9	
MSPG4-19.1	19.1	
MSPG4-22.2	22.2	

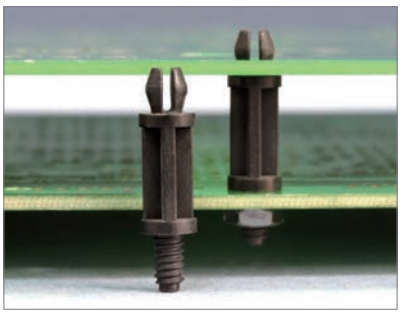


MOUNTING HOLE: ØG
THICKNESS 2.1





【 MSPS-13 】

MOUNTING HOLE: ØG
THICKNESS 1.6




Part No.	A	B	G	Package
MSPS-2S	2.0	3.0	4.0	2000
MSPS-3	3.2	6.0	4.0	
MSPS-5	4.8	6.0	3.9~4.0	1000
MSPS-6	6.4	6.0	3.9~4.0	
MSPS-12.7	12.7	6.0	3.9~4.0	
MSPS-13	13.0	6.35	4.0	
MSPS-15.9	15.9	6.0	3.9~4.0	
MSPS-19.1	19.1	6.0	3.9~4.0	
MSPS-22.2	22.2	6.0	3.9~4.0	

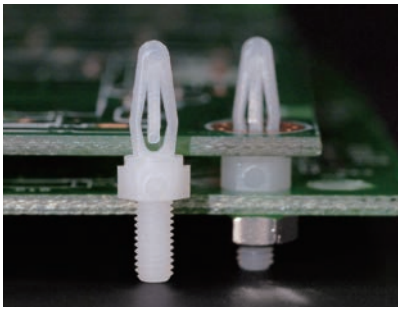

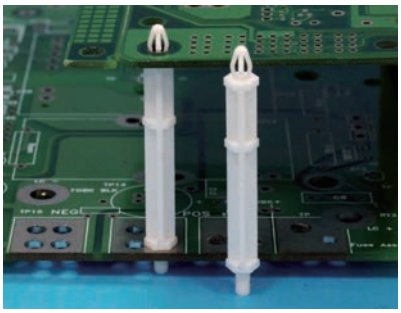


MOUNTING HOLE Ø3.2
THICKNESS 1.6

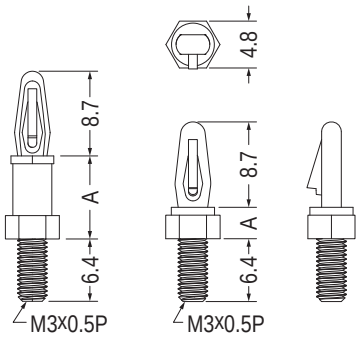

【 SCB3-12.7 】


Part No.	A	Package
SCB3-3.2	3.2	1000
SCB3-9.5	9.5	
SCB3-12.7	12.7	

MOUNTING HOLE Ø3.4
THICKNESS 1.6

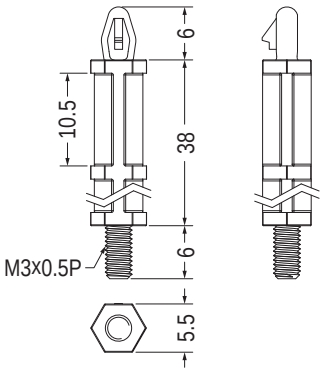


Part No.	Package
SCB3-38	1000

用途：PC板端直接壓入固定，另一端可配合螺母或攻牙。

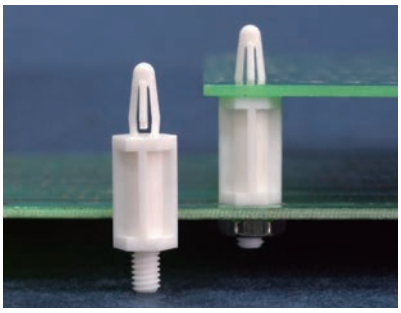


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

MOUNTING HOLE Ø4.0
THICKNESS 1.6

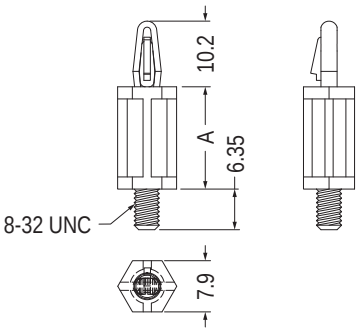


Part No.	A	Package
SCB832-6.35	6.35	1000
SCB832-12.7	12.7	
SCB832-15.9	15.9	
SCB832-19	19.05	

MOUNTING HOLE Ø4.0
THICKNESS 1.6




Part No.	A	B	Package
SCB-6	6.3	7.8	1000
SCB-10	9.5	7.8	
SCB-12	12.7	7.8	
SCB-15	15.9	7.8	
SCB-15A	15.9	4.8	

MOUNTING HOLE Ø4.0
THICKNESS 1.6




Part No.	A	Package
SCB-8.5S	8.5	1000
SCB-10SA	10.0	


MOUNTING HOLE Ø4.0
THICKNESS 1.2~1.7




Part No.	A	B	Thread	Package
SCB-6SM3	6.3	4.8	M3x0.5P	1000
SCB-6S	6.3	4.8	6-32 UNC	
SCB-8S	8.0	4.5	6-32 UNC	
SCB-10S	10.0	4.5	6-32 UNC	

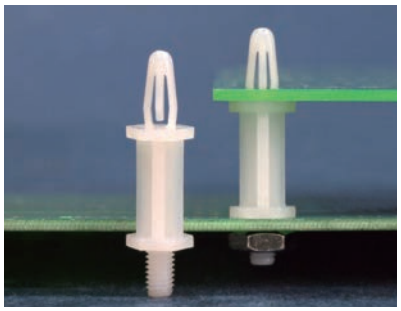


MOUNTING HOLE Ø4.0
THICKNESS: T



Part No.	A	B	C	D	T	Package
SCB4-6	6.3	4.8	10.7	7.6	1.2~1.7	1000
SCB4-6A	6.3	6.4	10.7	7.6	1.2~1.7	
SCB4-9.5	9.5	6.4	10.2	7.7	1.6	
★SCB4-14.3	14.3	6.4	10.2	7.7	1.6	
SCB4-16	15.9	6.4	10.0	8.0	1.6~1.8	

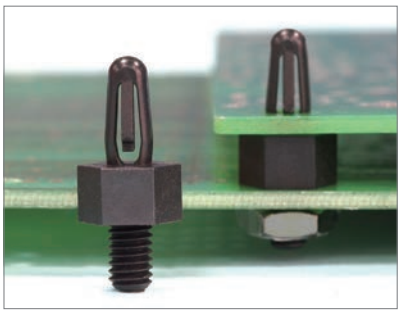


MOUNTING HOLE Ø4.0
THICKNESS: T



Part No.	A	B	T	Package
SCB4-4	4.0	6.4	2.0	1000
SCB4-5	5.0	6.0	1.6	


MOUNTING HOLE Ø4.0
THICKNESS 1.6




Part No.	A	Package
SCB4-23.8	23.8	1000
SCB4-30	30.0	


PCB間隔柱 PCB SPACER


用途：PC板端直接壓入固定，另一端可配合螺母或攻牙。

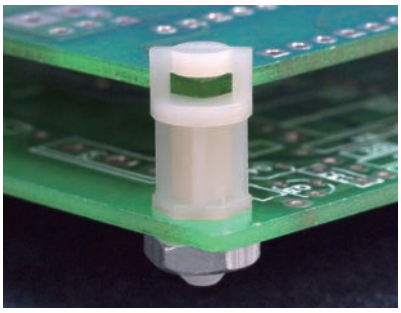

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

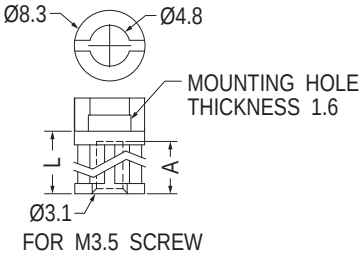


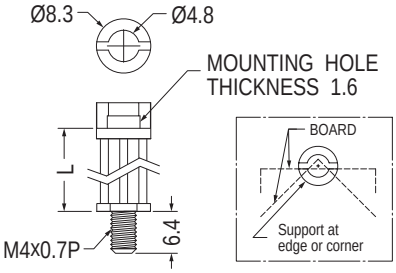

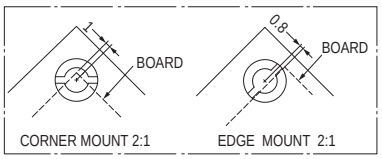


Part No.	A	L	Package
TCEH-6.4	5.2	6.4	1000
TCEH-9.5	7.9	9.5	
TCEH-12.7	7.9	12.7	
TCEH-15.9	7.9	15.9	

Part No.	L	Package
TCEP4-6.4	6.4	1000
TCEP4-9.5	9.5	
TCEP4-12.7	12.7	
TCEP4-15.9	15.9	

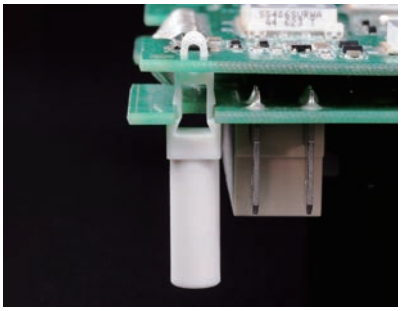

- Material: PBT (UL)+GF
- Flame Class: 94V-0
- Color: Natural
- Unit: mm


用途：用於PC板之間隔柱。

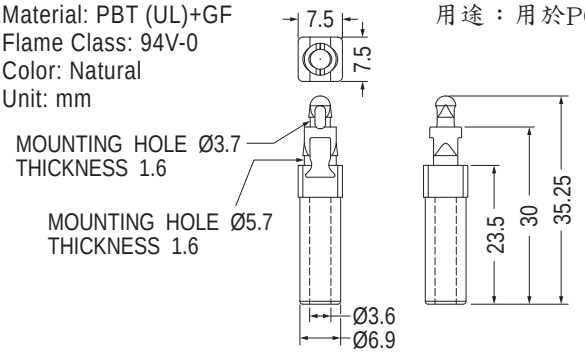


Part No.	Package
THCS-2	1000

觸控間隔柱 TOUCH CONTROL SPACER

用途：固定觸控面板於機板上，具減震效果。

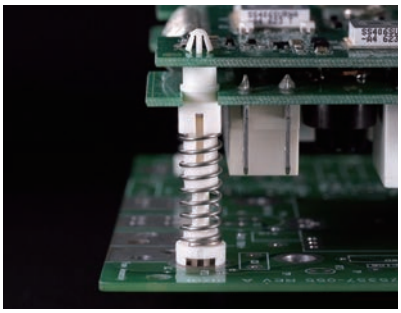


- Material: Nylon 66 (UL)
- Flame Class: 94V-0
- Spring Material: SUS
- Color: Natural
- Unit: mm
- Patented（專利品）

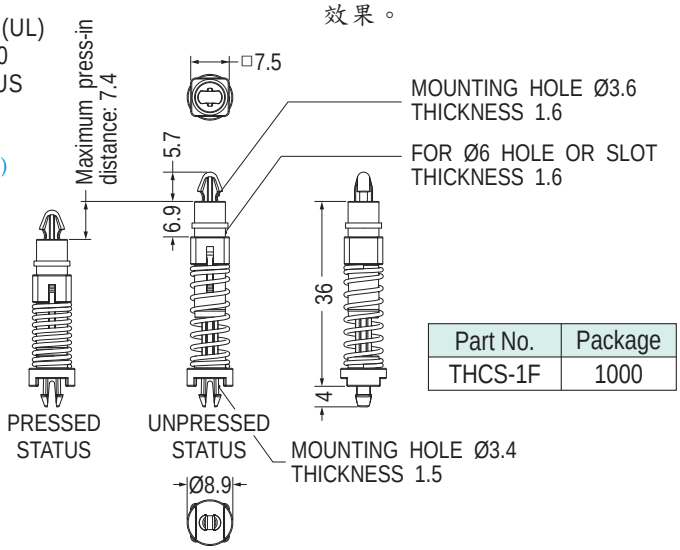


Part No.	Package
THCS-1F	1000

PCB導電間隔柱 PCB CONDUCTIVE SPACER

用途：支撐PC板與機板間之導電。

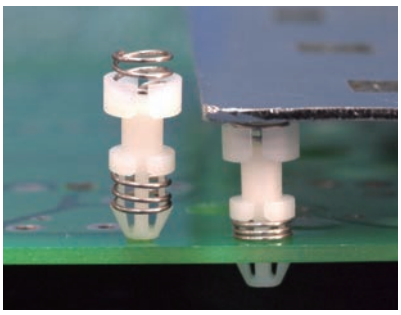



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm
- USA Patented（美國專利品）

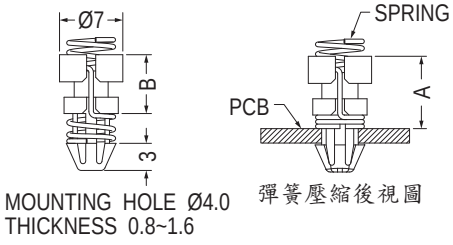


Part No.	A	B	Package
ALUCA-8	8.0	6.5	1000
ALUCA-9	9.0	7.5	
ALUCA-10	10.0	8.5	
ALUCA-12	12.0	10.5	
ALUCA-14	14.0	12.5	
ALUCA-16	16.0	14.5	

用途：用於支撐液晶面板，高導光，高反射，高透光。

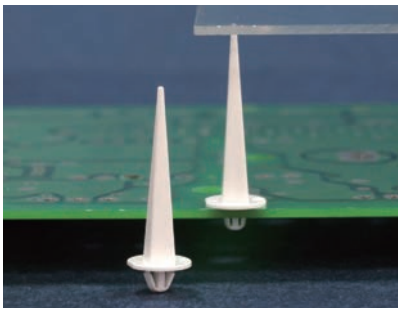


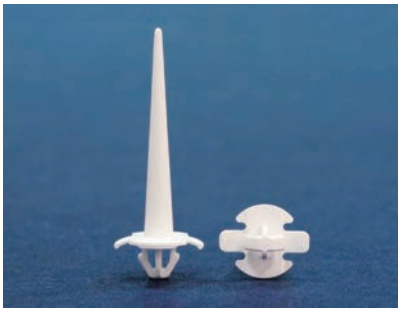




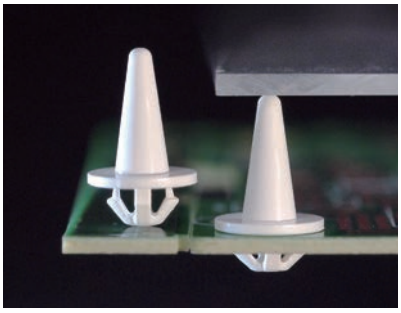


- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Transparent
- Unit: mm






MOUNTING HOLE
THICKNESS: T

Part No.	A	C	T	Package
MCFG-3010	30.5	0.8	1.0	1000
MCFG-35810	35.8	1.05	1.05	

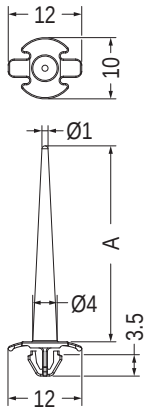


MOUNTING HOLE Ø4.5
THICKNESS 0.8~1.0

Part No.	A	Package
MCFD-2810	28.0	1000
MCFD-3210	32.0	




MOUNTING HOLE Ø4.5
THICKNESS: T

Part No.	T	Package
MCFA-2508	0.6~0.8	500
MCFA-2511	0.8~1.1	




MOUNTING HOLE Ø4.5
THICKNESS 0.6~0.8

Part No.	Package
MCFC-2508	1000




MOUNTING HOLE Ø4.5
THICKNESS 1.0

Part No.	Package
MCFL-3310	1000



MOUNTING HOLE Ø4.6
THICKNESS: T

Part No.	T	Package
MCF-3305	0.6	500
MCF-3308	0.5~0.8	





MOUNTING HOLE Ø4.6
THICKNESS 1.0

Part No.	Package
MCFF-25	1000


導光板間隔柱 PILLAR SUPPORT

用途：用於支撐液晶面板，高導光，高反射，高透光。

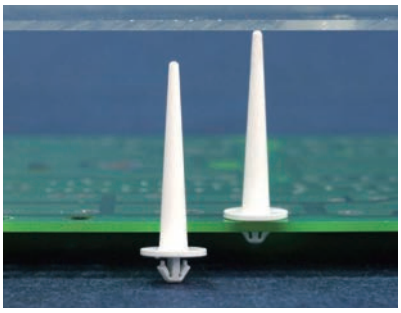

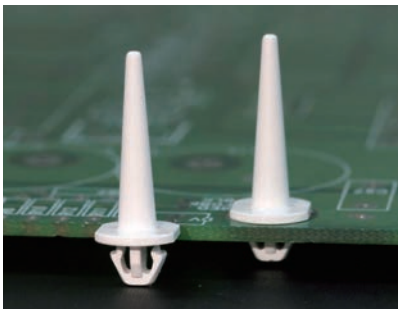


- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Transparent
- Unit: mm




MOUNTING HOLE Ø5.2
THICKNESS: T

Part No.	A	B	C	T	Package
MCF-2310	23.5	4.5	1.6	0.8~1.0	500
MCF-4213	40.0	3.95	1.3	1.0~1.3	




MOUNTING HOLE Ø3.8
THICKNESS: T

Part No.	A	T	Package
MCFO-2806	28.5	0.5~0.65	1000
MCFO-2906	29.5	0.5~0.65	
MCFO-2908	29.5	0.6~0.8	




MOUNTING HOLE: ØG
THICKNESS: T


Part No.	B	C	D	G	T	Package
MCFJ-4	3.9	1.06	2.65	3.8	1.0	1000
MCFJ-6	4.3	1.5	2.65	3.8	1.25	
MCFJ-7	3.9	1.06	2.5	3.5	0.8	




MOUNTING HOLE Ø4.6
THICKNESS 1.3

Part No.	Package
MCFF-20	1000

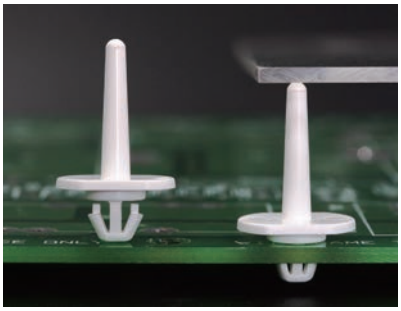


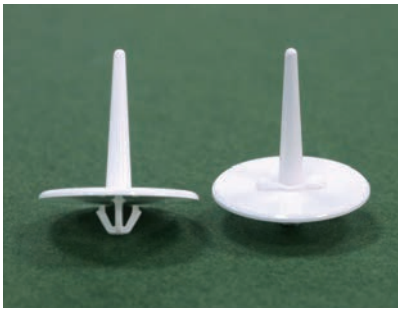




MOUNTING HOLE Ø4.5
THICKNESS 1.2

Part No.	Package
MCFF-18	1000



MOUNTING HOLE Ø5.5
THICKNESS 0.8


Part No.	A	Package
MCFF-21	23.0	1000
★MCFF-21L	24.0	




MOUNTING HOLE Ø4.7
THICKNESS 1.0

Part No.	Package
MCFF-11	1000

用途：用於支撐液晶面板，高導光，高反射，高透光。

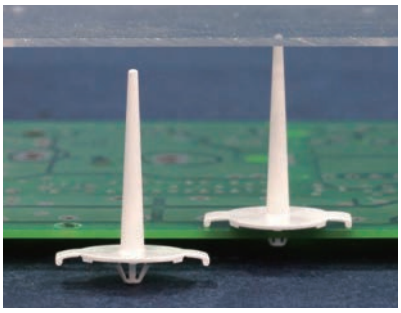



- Material: PC (UL)
- Flame Class: 94V-0
- Color: Natural
- Unit: mm

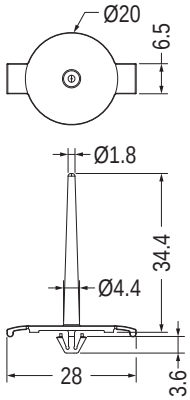

MOUNTING HOLE Ø5.0
THICKNESS 0.75~1.05

Part No.	Package
MCFD-1	500

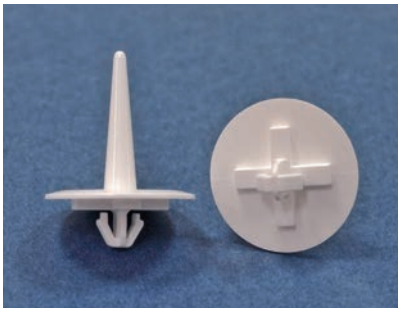




MOUNTING HOLE Ø4.6
THICKNESS: T

Part No.	A	T	Package
MCFF-9	17.16	0.6~0.8	1000
MCFF-10	31.42	0.8	500
MCFF-14	18.0	0.8	1000




- Material: Nylon 66 (UL)
- Flame Class: 94V-0
- Color: White
- Unit: mm

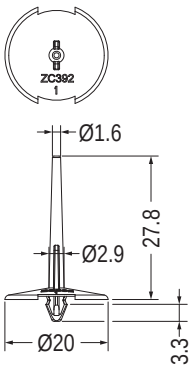

MOUNTING HOLE Ø3.0
THICKNESS 0.65


Part No.	Package
MCFM-2807	1000

- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm




MOUNTING HOLE Ø5.0
THICKNESS 1.0

Part No.	Package
MCFF-24	1000

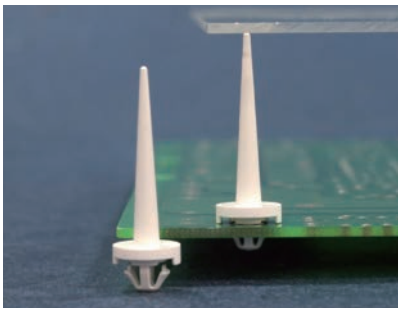

- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Transparent
- Unit: mm




MOUNTING HOLE Ø5.2
THICKNESS 0.6~0.8


Part No.	A	Package
MCF-428	42.6	500
MCF-2908	29.0	

導光板間隔柱 PILLAR SUPPORT

用途：用於支撐液晶面板，高導光，高反射，高透光。

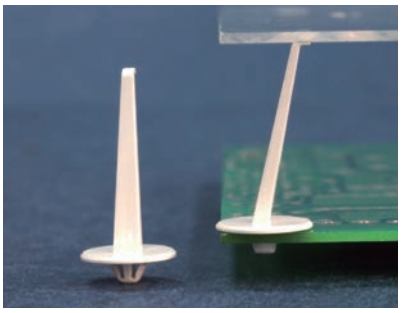



- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Transparent
- Unit: mm



MOUNTING HOLE Ø4.5
THICKNESS 0.8~1.0

Part No.	Package
MCF-1	1000

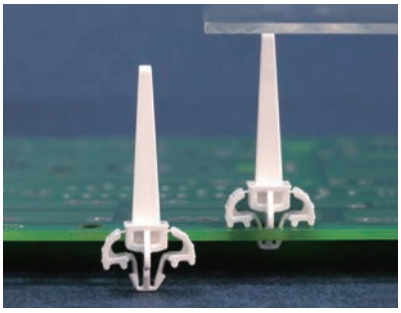


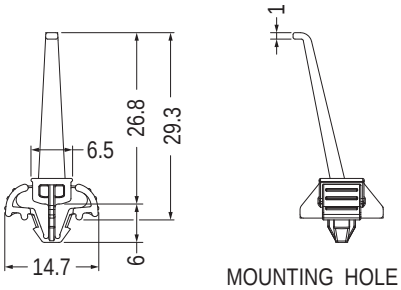


MOUNTING HOLE Ø4.5
THICKNESS 1.0

- Patented（專利品）

Part No.	Package
MCFF-5	1000

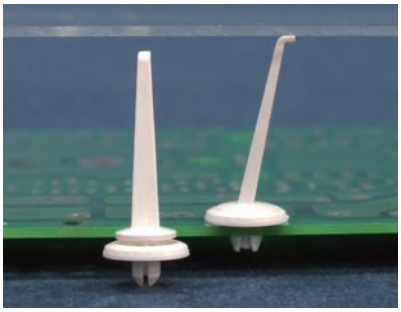



- Material: PC (UL)
- Flame Class: 94V-0
- Color: Natural
- Unit: mm
- Patented（專利品）

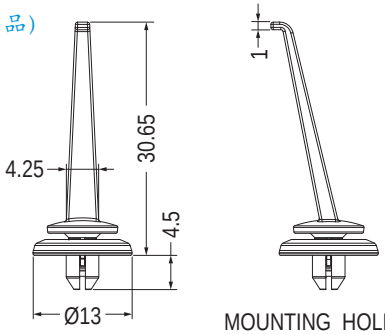


MOUNTING HOLE Ø4.5
THICKNESS 1.0~1.2


Part No.	Package
MCFF-6	500

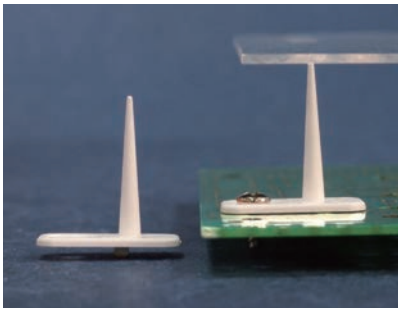

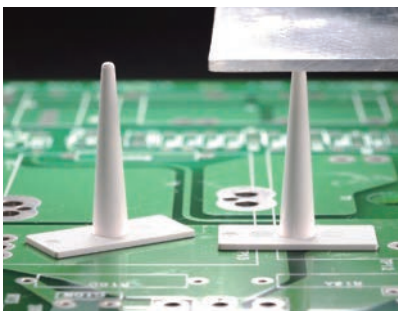



- Material: PC (UL)
- Flame Class: 94V-0
- Color: White
- Unit: mm






Part No.	Package
MCFJ-1	1000





MOUNTING HOLE Ø5.0
THICKNESS 0.6~0.8


Part No.	Package
MCFJ-2	1000

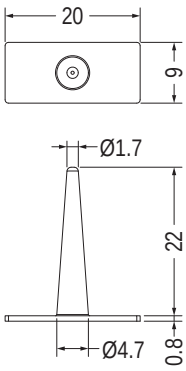


Part No.	Package
MCFP-33	1000

導光板間隔柱 PILLAR SUPPORT

用途：用於支撐液晶面板，高導光，高反射，高透光。

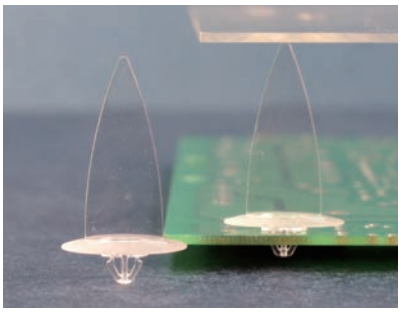


- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm

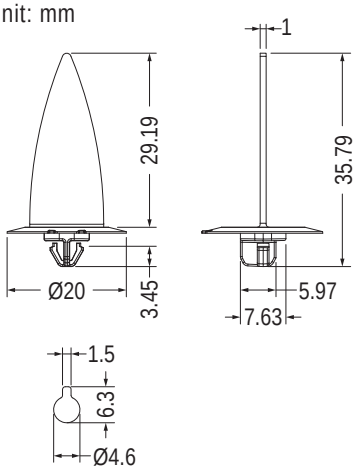


MOUNTING HOLE
THICKNESS 0.8


Part No.	Package
MCFF-15	1000

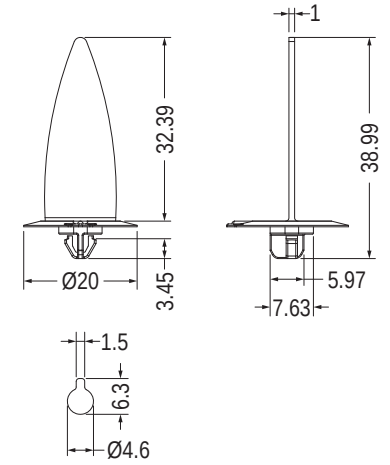


MOUNTING HOLE
THICKNESS 0.8

Part No.	Package
MCFF-16	1000

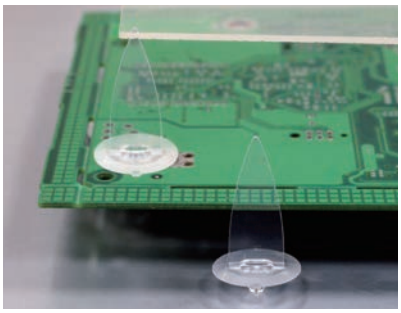


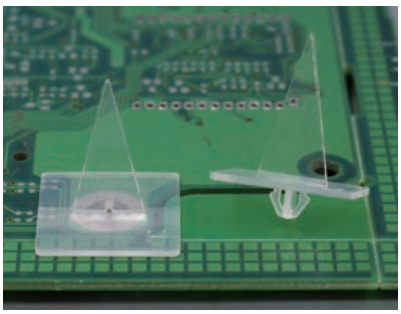

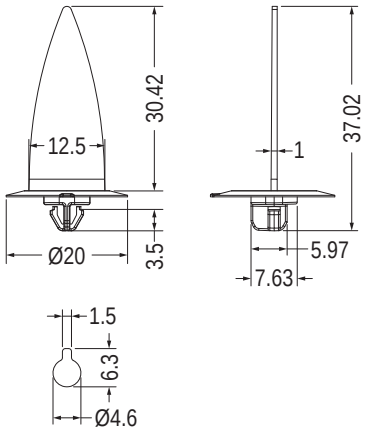

MOUNTING HOLE
THICKNESS 0.8

Part No.	Package
MCFF-13	1000

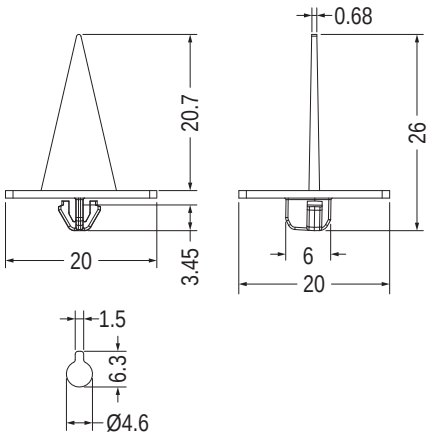



MOUNTING HOLE
THICKNESS 0.8

Part No.	Package
MCFF-17	1000



- Material: PC (UL)/94V-0
- Color: Transparent
- Base Material: Nylon 66 (UL)/94V-0
- Base Color: Natural
- Unit: mm
- Patented（專利品）

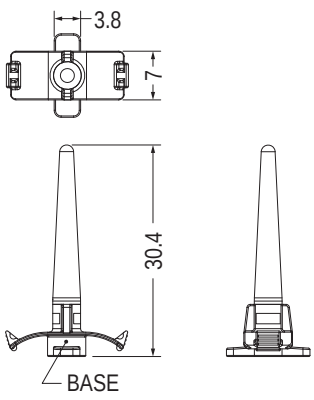




MOUNTING HOLE
THICKNESS 0.5~1.0


Part No.	Package
MCFF-7	1000


導光板間隔柱 PILLAR SUPPORT

用途：用於支撐液晶面板，高導光，高反射，高透光。

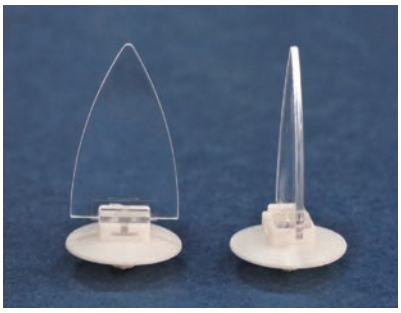


- Material1: PC (UL)
- Material2: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color1: Transparent
- Color2: Natural/White
- Unit: mm
- Patented（專利品）







MOUNTING HOLE
THICKNESS 0.8~1.0


Part No.	Package
MCFF-12	1000

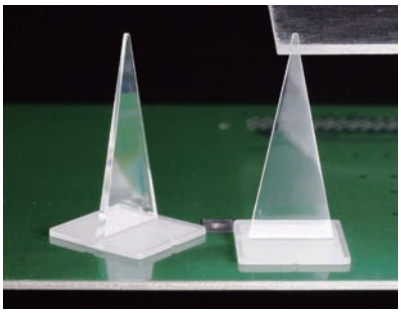

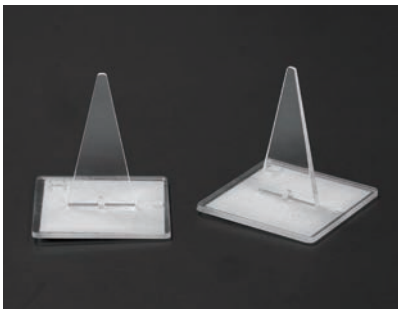

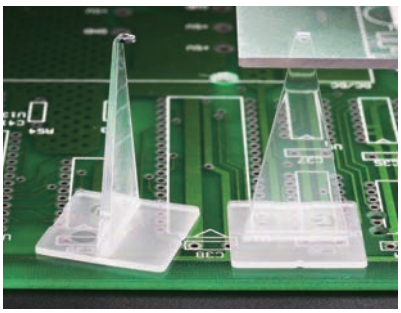


- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm




WHITE REFLECTING SHEET

Part No.	Package
MCFP-30	1000




DOUBLE ADHESIVE TAPE

Part No.	Package
MCFP-17-1	1000

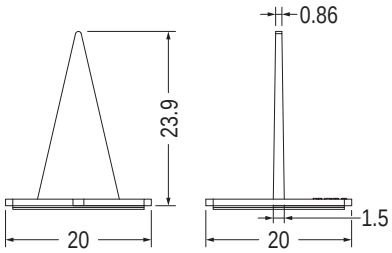


WHITE REFLECTING SHEET

Part No.	Package
★MCFP-35	1000

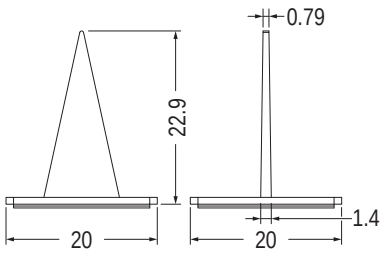


WHITE REFLECTING SHEET

Part No.	Package
★MCFP-34	1000

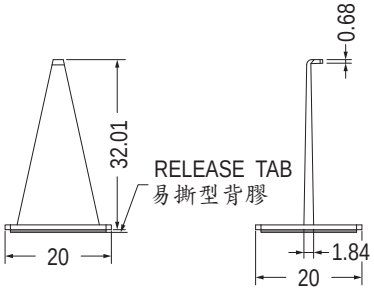


WHITE REFLECTING SHEET

Part No.	Package
★MCFP-36	500

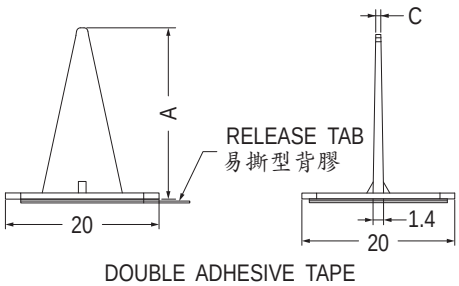

DOUBLE ADHESIVE TAPE

Part No.	A	C	Package
MCFP-12	20.7	0.71	1000
MCFP-25	22.3	0.68	

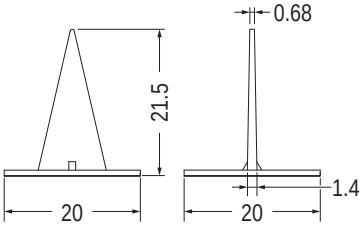


DOUBLE ADHESIVE TAPE


Part No.	Package
MCFP-5	1000

導光板間隔柱 PILLAR SUPPORT

用途：用於支撐液晶面板，高導光，高反射，高透光。

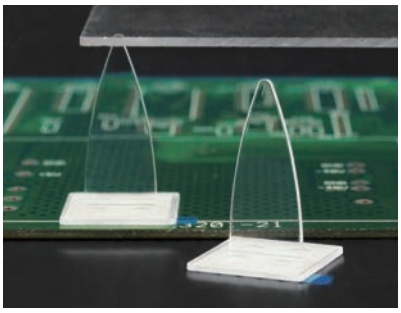



- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm

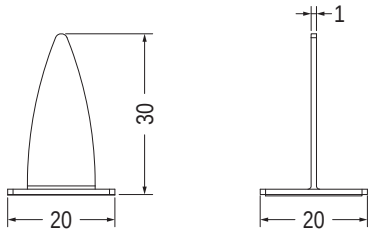

DOUBLE ADHESIVE TAPE


Part No.	Package
MCFP-7	1000

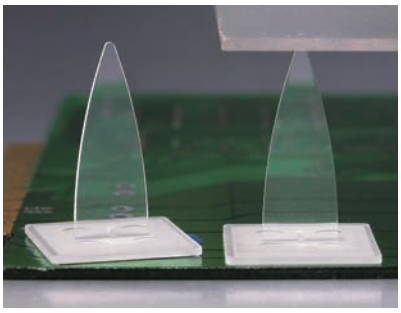


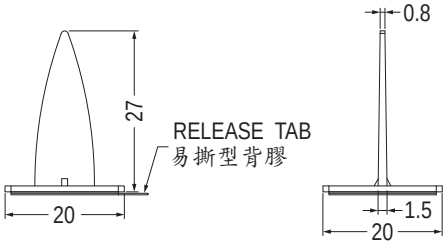

DOUBLE ADHESIVE TAPE


Part No.	Package
MCFP-18	1000

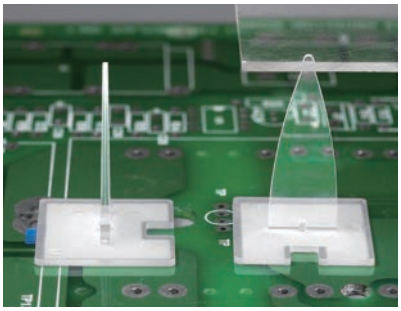


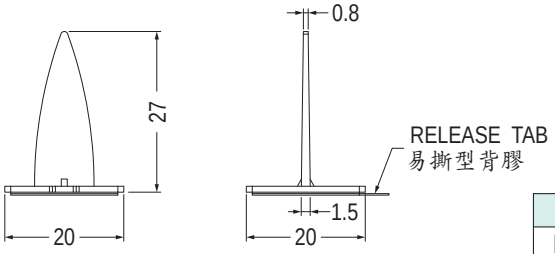

DOUBLE ADHESIVE TAPE


Part No.	Package
MCFP-29	1000

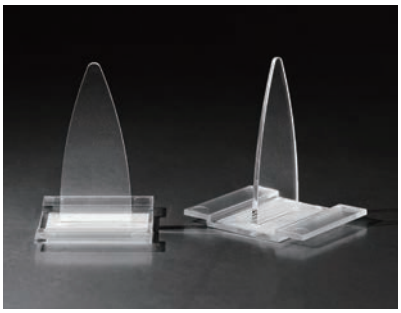


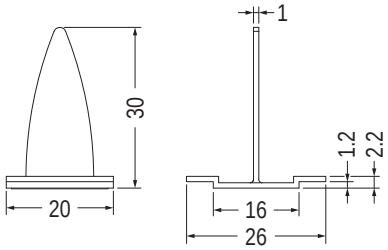

WHITE REFLECTION SHEET

Part No.	Package
MCFP-9	1000

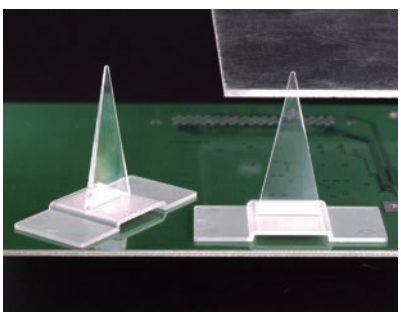


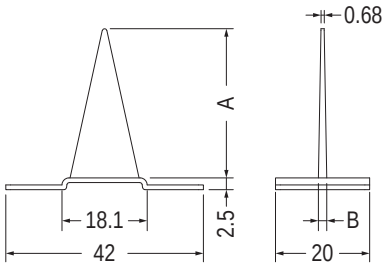


Part No.	A	B	Package
MCFP-31	31.7	1.78	500
MCFP-32	32.0	1.8	

M.2間隔柱 M.2 SSD SPACER


用途：適用於NGFF卡於機板上，免工具，易拆卸。

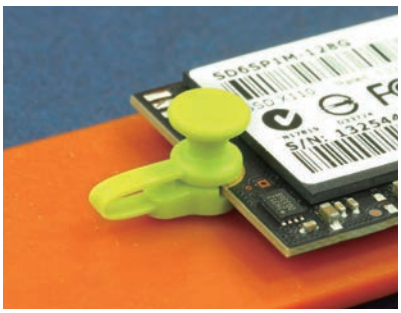


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black/Green/Blue
- Unit: mm




【 ULCN3.4-2.1 】



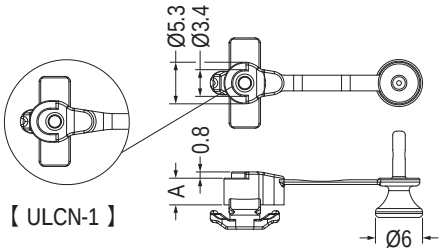


【 ULCN-1 】



MOUNTING HOLE
THICKNESS: T

Part No.	A	T	Package
ULCN-1	1.7	2.1~2.4	1000
ULCN1.7-2.4	1.7	2.1~2.4	
ULCN2.2-1.2	2.2	1.2	
ULCN2.5-1.6	2.5	0.8~1.6	
ULCN2.5-2.6	2.5	1.8~2.6	
ULCN2.5-2.9	2.5	2.1~2.9	
ULCN3.4-0.8	3.4	0.8	
ULCN3.4-2.1	3.4	2.13	
ULCN6.3-1.6	6.3	1.6	



MOUNTING HOLE
THICKNESS 0.6


- Flame Class: 94V-2
- Color: Green

Part No.	Package
ULCN-3	1000




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black/Green/Blue
- Unit: mm
- Patented（專利品）



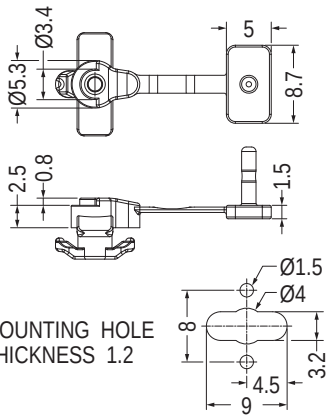


MOUNTING HOLE
THICKNESS 1.2

Part No.	Package
ULCN2.5-1.2	1000

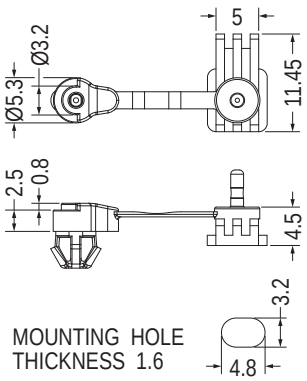


MOUNTING HOLE
THICKNESS 1.6

Part No.	Package
ULCW2.5-1.6	1000

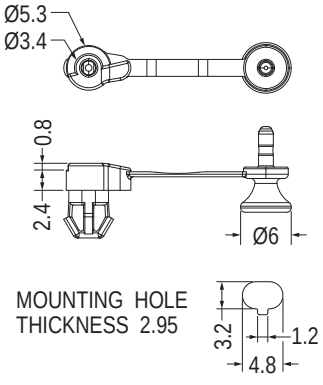

MOUNTING HOLE
THICKNESS 2.95

Part No.	Package
ULCO2.4A-3.1	1000

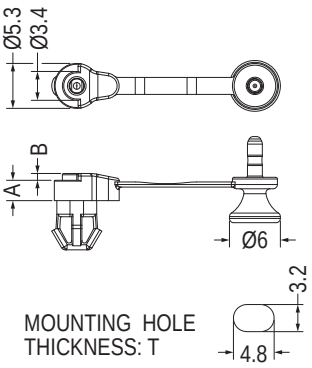

MOUNTING HOLE
THICKNESS: T


Part No.	A	B	T	Package
ULCO2.1-2	2.08	0.81	2.0	1000
ULCO2.4-2.1	2.4	0.8	2.1	
ULCO2.4-3.1	2.4	0.8	2.95	
ULCO2.5-1.6	2.5	0.8	1.6	
ULCO2.5-2.2	2.5	0.8	2.2	
ULCO2.5-2.4	2.5	0.8	2.4	
ULCO2.5-4.2	2.5	0.8	4.2	
ULCO6.6-2.6	6.6	0.8	2.46	

M.2間隔柱 M.2 SSD SPACER


用途：適用於NGFF卡於機板上，免工具，易拆卸。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black/Green/Blue
- Unit: mm
- Patented（專利品）

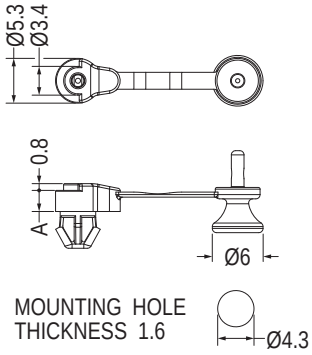


Part No.	A	Package
ULCOG2.5-1.6	2.5	1000
ULCOG6.3-1.6	6.3	

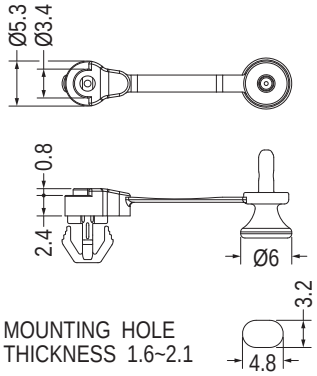


Part No.	Package
ULCOJ-1	1000

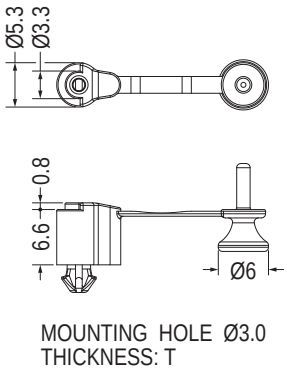


Part No.	T	Package
ULCN6.6-1.2	1.2	1000
ULCN6.6-1.6	1.5~1.6	

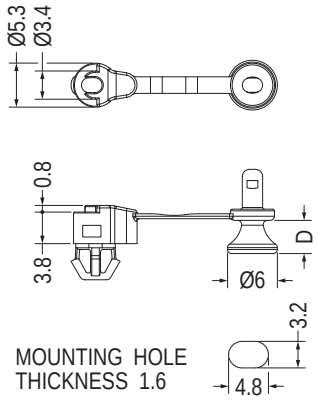


Part No.	D	Package
ULCO3.8-1.6S	2.5	1000
ULCO3.8-1.6	4.0	

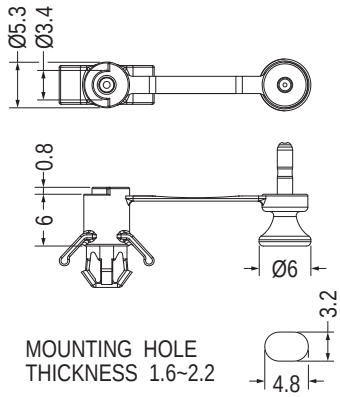


Part No.	Package
ULCOB-1	1000

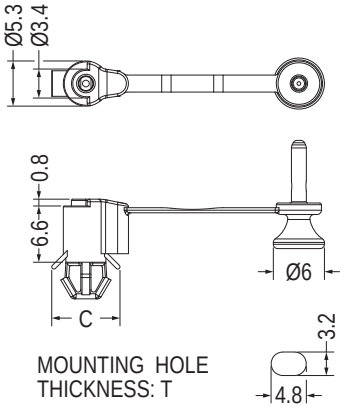


Part No.	C	T	Package
ULCO6.6-1.6	8.0	1.6	1000
ULCO6.6-2	8.0	1.9~2.1	
ULCO6.6-3.1	8.3	2.7~3.3	

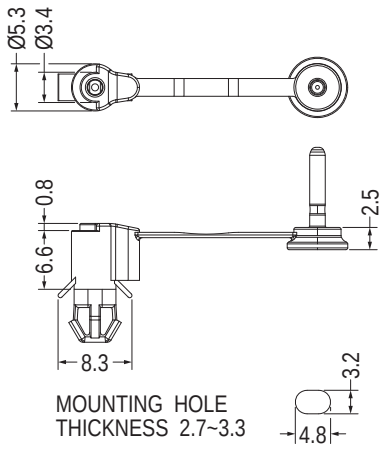

Part No.	Package
ULCO6.6-3.1S	1000

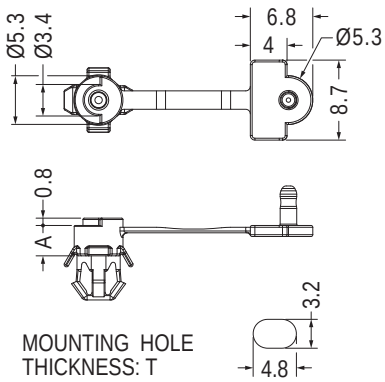


Part No.	A	T	Package
ULCOB3.3-2.3	3.3	2.27	1000
ULCOB6-1.6	6.0	1.6	
ULCOB6-2.3	6.0	2.27	

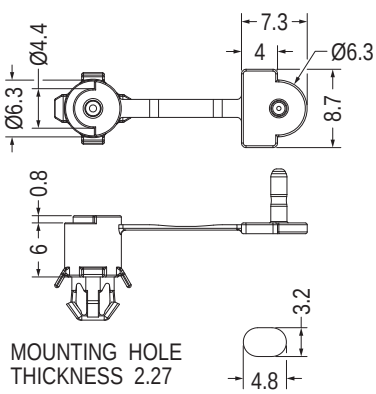

Part No.	Package
ULCOB-2	1000


M.2間隔柱 M.2 SSD SPACER

用途：適用於NGFF卡於機板上，免工具，易拆卸。

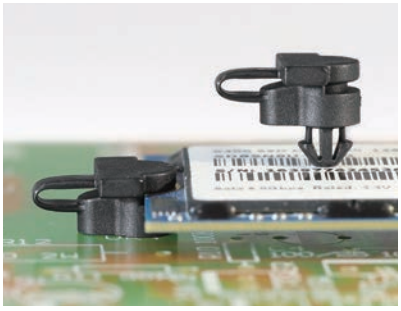




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black/Green/Blue
- Unit: mm
- Patented（專利品）

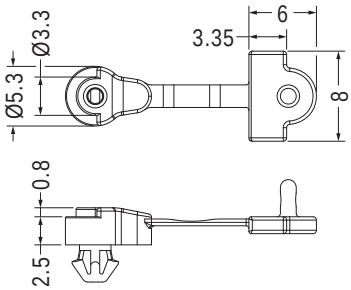

MOUNTING HOLE Ø3.0
THICKNESS 1.2


Part No.	Package
ULCNF2.5-1.2	1000

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

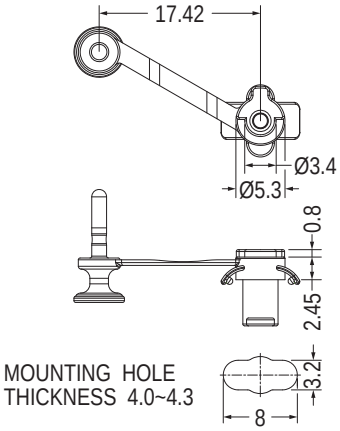


MOUNTING HOLE
THICKNESS 4.0~4.3

Part No.	Package
ULCNA2.5-4.3	1000

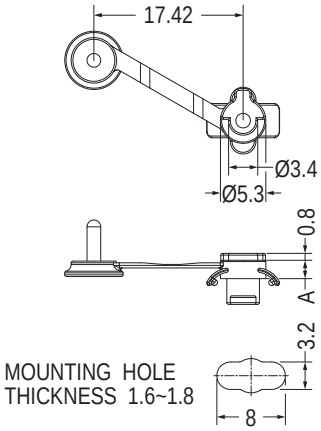


MOUNTING HOLE
THICKNESS 1.6~1.8

Part No.	A	Package
ULCNA2.5-1.8	2.15	1000
ULCNA2.5-1.8S	2.45	
ULCNA4-1.8	4.0	

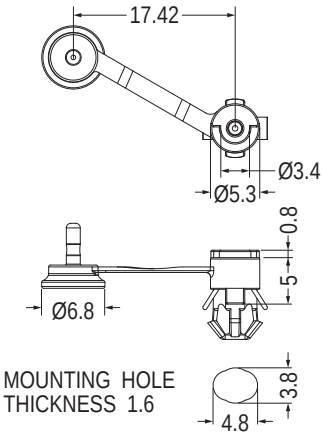


MOUNTING HOLE
THICKNESS 1.6


Part No.	Package
ULCOA5-1.6A	1000

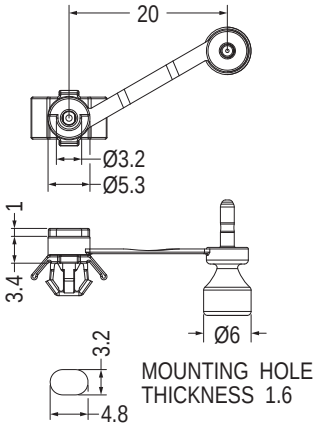

MOUNTING HOLE
THICKNESS 1.6


Part No.	Package
ULCOB3.4-1.6	1000

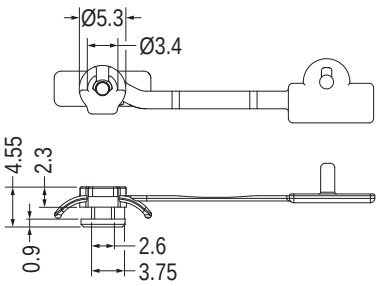



MOUNTING HOLE
THICKNESS 1.1


Part No.	Package
ULCND1.5-1.1	1000





MOUNTING HOLE
THICKNESS 1.6

Part No.	E	G	Package
ULCY-1	18.27	4.05	1000
ULCY3.9-1.6	24.1	4.0	




MOUNTING HOLE Ø3.4
THICKNESS 1.6

- Color: Black


Part No.	Package
ULCY-2	1000

M.2間隔柱 M.2 SSD SPACER

用途：適用NGFF卡於機板上，免工具，易拆卸。

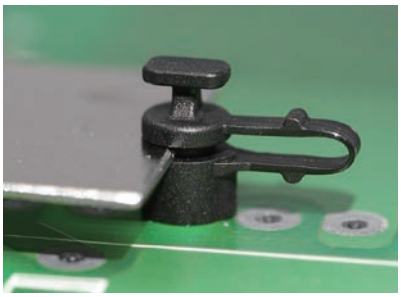


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black/Green/Blue
- Unit: mm
- Patented（專利品）

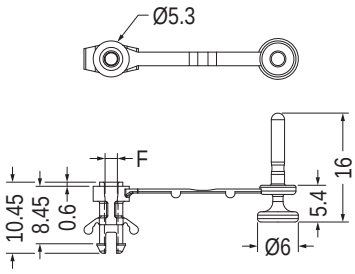


MOUNTING HOLE Ø3.5
THICKNESS 1.6~2.2

Part No.	F	Package
ULCOC-1	1.8	1000
ULCOC-9	1.77	

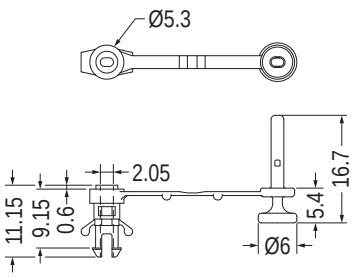


MOUNTING HOLE Ø3.5
THICKNESS 2.3~2.9

Part No.	Package
ULCOC-7L	1000

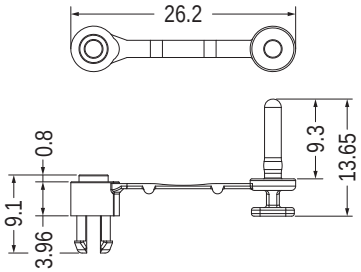


MOUNTING HOLE Ø4.0
THICKNESS 2.69

Part No.	Package
ULCOC-14	1000



MOUNTING HOLE Ø4.0
THICKNESS 1.6

Part No.	Package
ULCOC-2	1000




MOUNTING HOLE Ø4.0
THICKNESS 2.3~2.9


Part No.	Package
ULCOC-2L	1000

M.2導電間隔柱 M.2 SSD CONDUCTIVE SPACER

用途：適用NGFF卡於機板上，免工具，易拆卸，銅柱導電性佳，防E.M.I干擾。

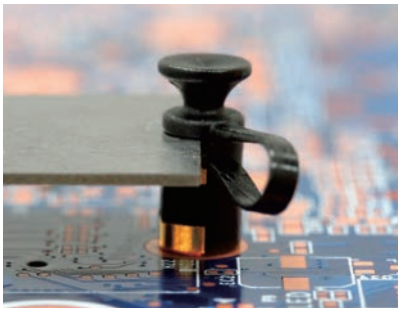


- Material: Nylon 66 (UL)
- Nut Material: Brass
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm
- Patented（專利品）

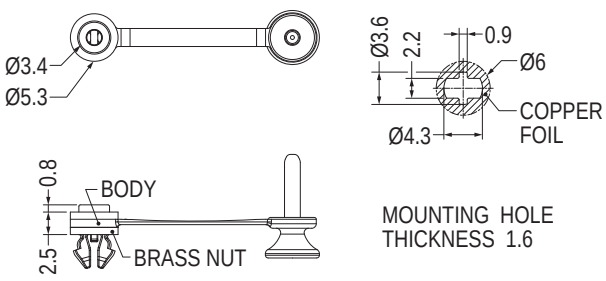

MOUNTING HOLE
THICKNESS 1.6

Part No.	Package
ULCOE-3ST	1000

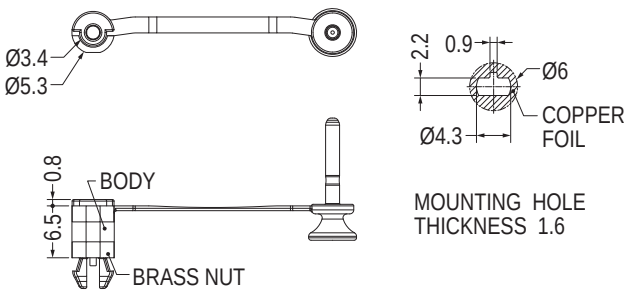


MOUNTING HOLE
THICKNESS 1.6


Part No.	Package
ULCOE-4ST	1000


M.2間隔柱 M.2 SSD SPACER


用途：適用NGFF卡於機板上，免工具，易拆卸。

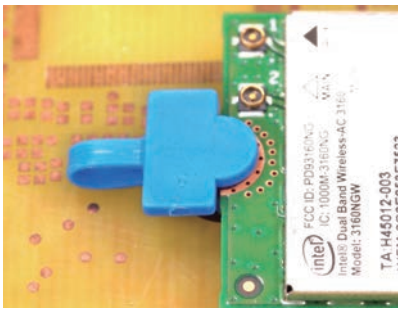


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black/Green/Blue
- Unit: mm
- Patented（專利品）

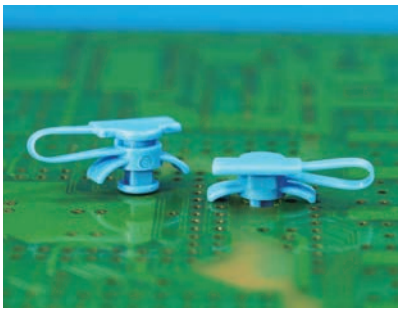

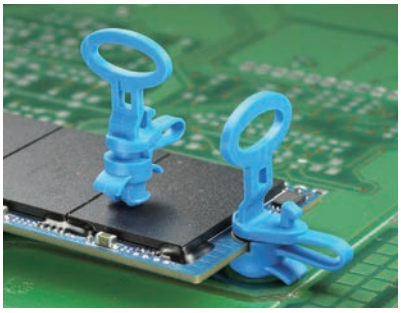


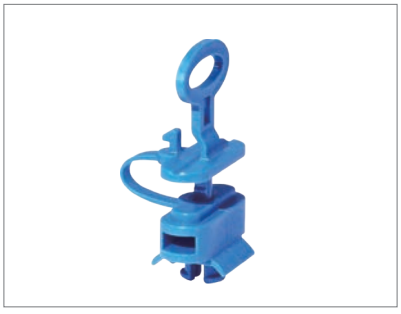




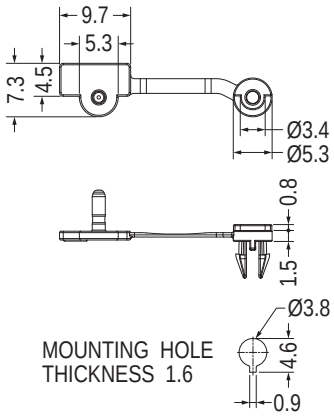


Part No.	Package
ULCOD1.5-1.6	1000

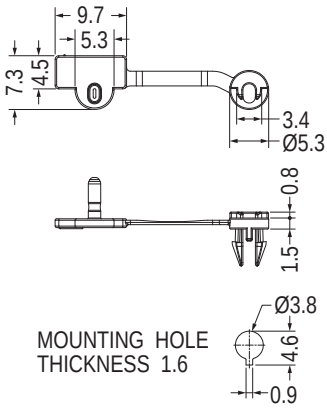

Part No.	Package
ULCOD-1	1000

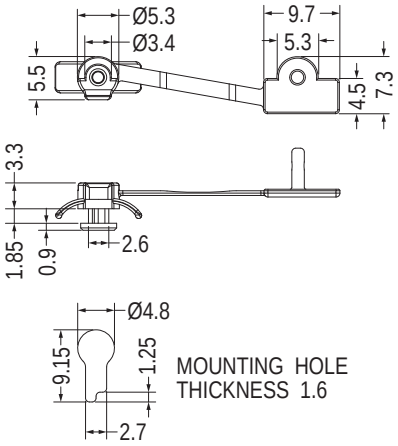


Part No.	Package
ULCND2.5-1.6	1000

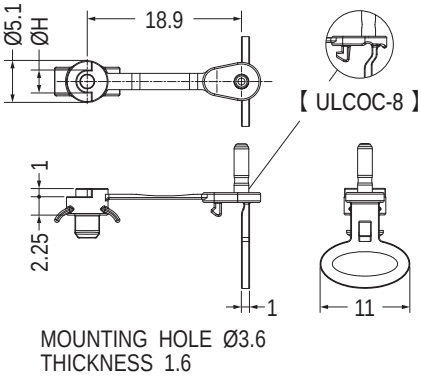


Part No.	H	Package
ULCOC-4	3.4	1000
ULCOC-8	2.8	

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black/Blue
- Unit: mm
- Patented（專利品）

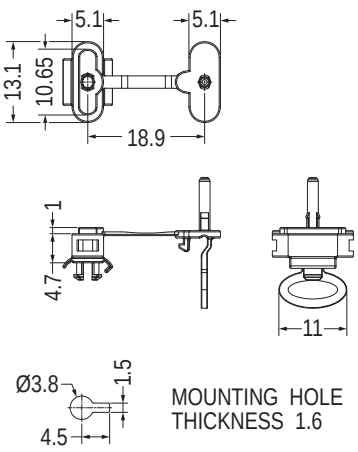

Part No.	Package
ULCOC-12	1000

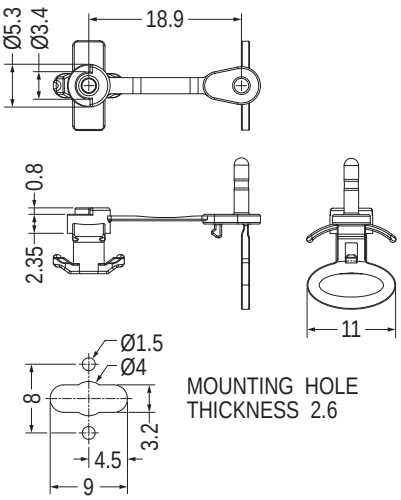


Part No.	Package
ULCOC2.4-2.6	1000

M.2間隔柱 M.2 SSD SPACER

用途：適用NGFF卡於機板上，免工具，易拆卸。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Green
- Unit: mm
- Patented（專利品）

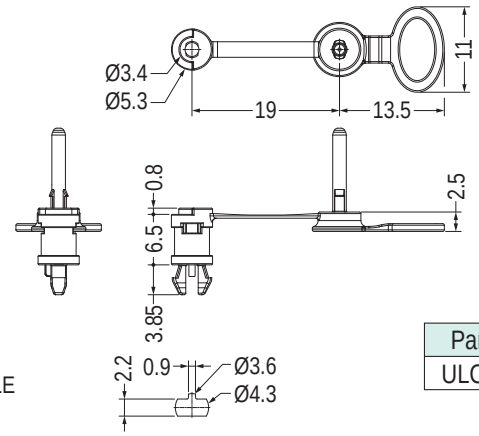


MOUNTING HOLE
THICKNESS 1.6


Part No.	Package
ULCOM-1	1000

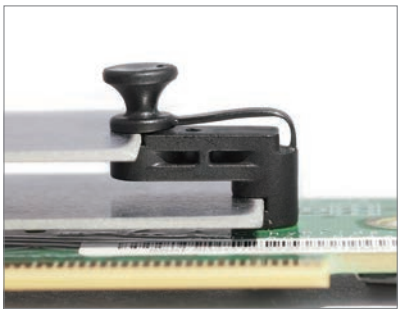

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm
- Patented（專利品）

用途：用於上下雙層NGFF卡之固定。

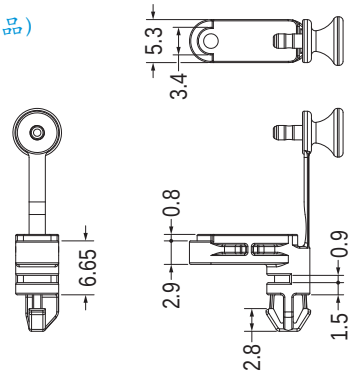




MOUNTING HOLE
THICKNESS 1.6


Part No.	Package
ULD-1	1000


使用說明
Installation Guide

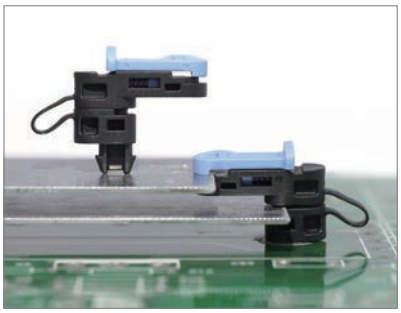


- Latch Base Material: Nylon 66 (UL)
- Latch Handle Material: Nylon 66 (UL)+GF
- Latch Spring Material: SWP Nickel Plated
- Flame Class: 94V-0
- Base Color: Black
- Handle Color: Blue
- Unit: mm
- Patented（專利品）

用途：適用上下雙層NGFF卡於機板上，免工具，易拆卸。







MOUNTING HOLE
THICKNESS: T




Assembly Diagram

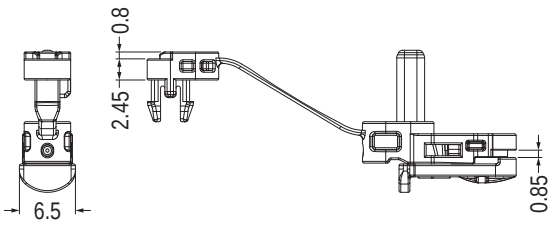


Part No.	T	Package
★ULCOF-9SF	1.6	1000
ULCOF-9MF	1.93	
ULCOF-9F	2.36	






MOUNTING HOLE
THICKNESS 1.6




Assembly Diagram

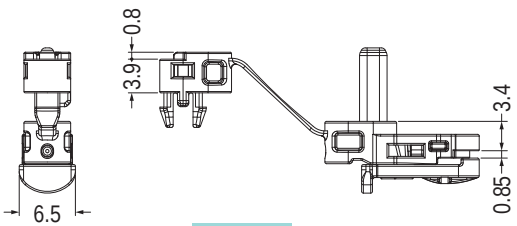


Part No.	Package
ULCOF-19F	1000


M.2間隔柱 M.2 SSD SPACER

用途：適用上下雙層NGFF卡於機板上，免工具，易拆卸。

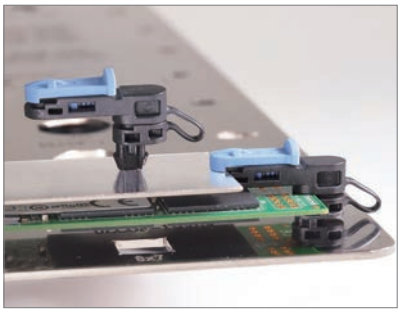


- Latch Base Material: Nylon 66 (UL)
- Latch Handle Material: Nylon 66 (UL)+GF
- Latch Spring Material: SWP Nickel Plated
- Flame Class: 94V-0
- Base Color: Black
- Handle Color: Blue
- Unit: mm
- Patented（專利品）







MOUNTING HOLE
THICKNESS 2.0

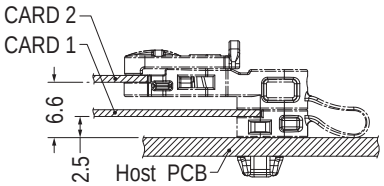


Assembly Diagram

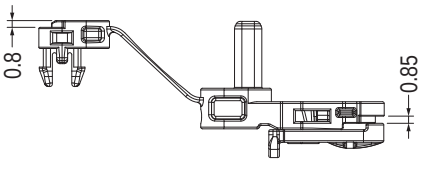


Part No.	Package
ULCOF-20F	1000






MOUNTING HOLE
THICKNESS 2.6



Assembly Diagram

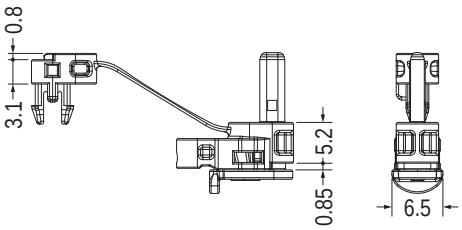


NEW


Part No.	Package
ULCOF-23F	1000





用途：適用NGFF卡於機板上，免工具，易拆卸。

- Material: Nylon 66 (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm
- Patented（專利品）











MOUNTING HOLE
THICKNESS 1.6


Part No.	Package
ULCOF-2F	1000




- Material: Nylon 66 (UL)
- Flame Class: 94V-0
- Latch Base Color: Black
- Latch Cover Color: Blue
- Unit: mm
- Patented（專利品）










MOUNTING HOLE
THICKNESS 1.6


Part No.	Package
ULCOF-10F	1000

M.2間隔柱 M.2 SSD SPACER


用途：適用NGFF卡於機板上，免工具，易拆卸。

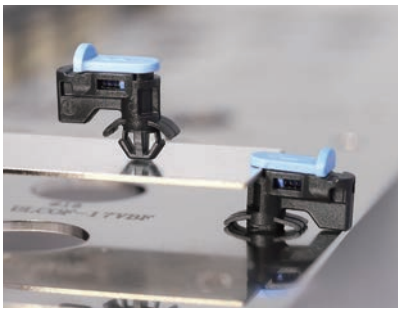


- Latch Base Material: Nylon 66 (UL)
- Latch Cover Material: Nylon 66 (UL)+GF
- Latch Spring Material: SWP Nickel Plated
- Flame Class: 94V-0
- Latch Base Color: Black
- Latch Cover Color: Blue
- Unit: mm
- Patented（專利品）

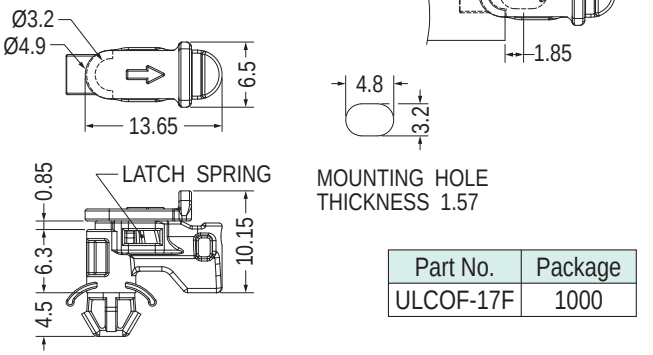



Part No.	Package
ULCOF-17F	1000

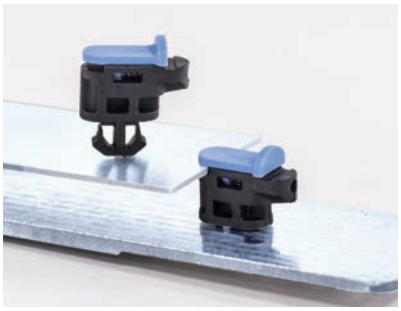

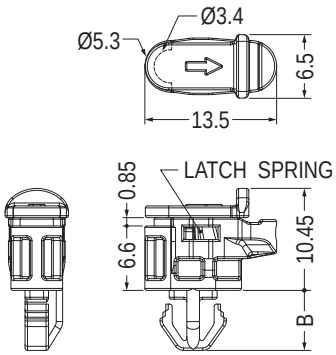



Part No.	B	T	Package
ULCOF-6SF	5.65	1.6	1000
ULCOF-6F	6.15	1.8, 2.2	
ULCOF-6LF	6.15	2.36~2.55	

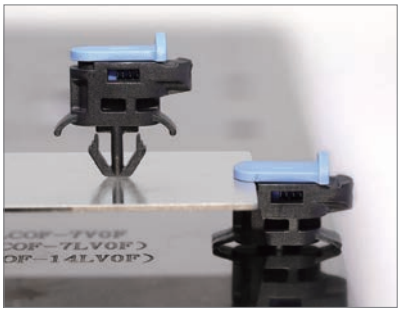

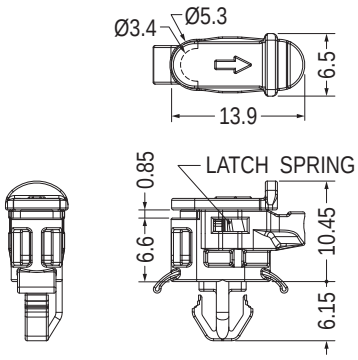

Part No.	T	Package
ULCOF-7F	1.93	1000
ULCOF-7LF	2.36~2.55	

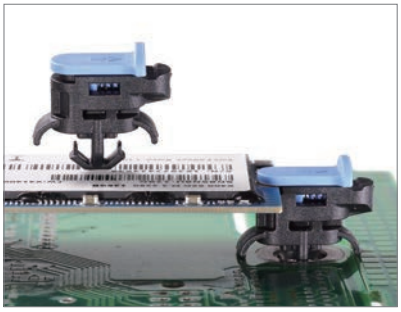


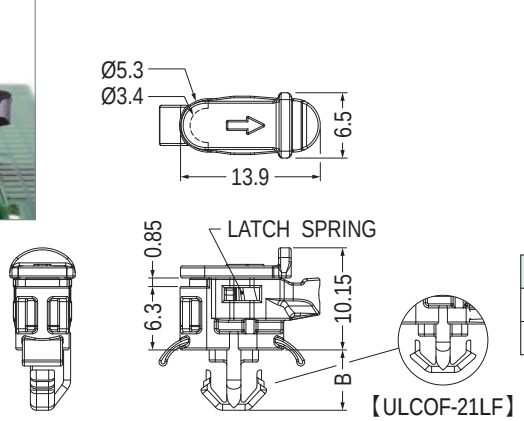

Part No.	B	T	Package
ULCOF-14LF	6.0	2.78	1000
ULCOF-21LF	4.8	1.93~2.4	


M.2間隔柱 M.2 SSD SPACER


用途：適用NGFF卡於機板上，免工具，易拆卸。

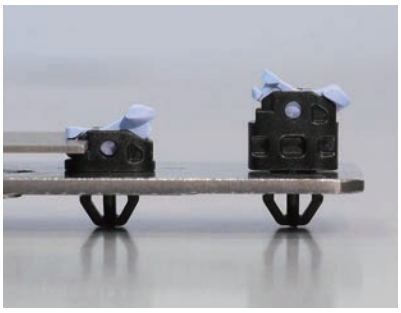


- Body Material: Nylon 66 (UL)
- Latch Material: Nylon 66 (UL)+GF
- Body Flame Class: 94V-2
- Latch Flame Class: 94V-0
- Body Color: Black
- Latch Color: Blue
- Unit: mm
- Patented（專利品）


使用說明
Installation Guide








CLOSE





CLOSE
【 ULCOI-2.4F 】




MOUNTING HOLE
THICKNESS 1.8~2.2


Part No.	A	Package
ULCOI-2.4F	2.4	1000
ULCOI-4F	4.0	
ULCOI-6.6F	6.6	

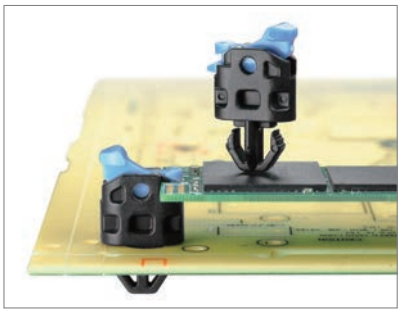




Assembly Diagram








MOUNTING HOLE
THICKNESS 1.8~2.2


NEW


Part No.	B	Package
ULCOI-6S(BU2)F	5.65	1000
ULCOI-6(BU2)F	6.15	

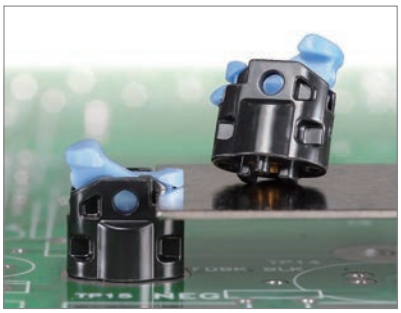


用途：用螺絲固定，適用NGFF卡於機板上，易拆卸。


- Body Material: Nylon 66 (UL)
- Latch Material: Nylon 66 (UL)+GF
- Body Flame Class: 94V-2
- Latch Flame Class: 94V-0
- Body Color: Black
- Latch Color: Blue
- Unit: mm
- Patented（專利品）








MOUNTING HOLE
THICKNESS 1.6~2.2



Assembly Diagram




NEW


Part No.	Package
ULCOI-8BU2F	1000


M.2間隔柱 M.2 SSD SPACER

用途：適用NGFF卡於機板上，免工具，易拆卸。

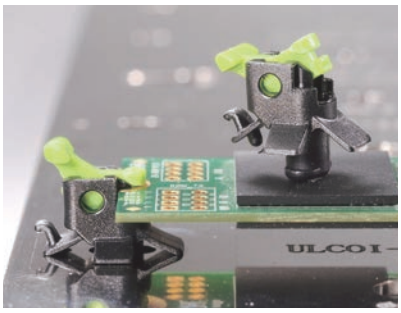


- Body Material: Nylon 66 (UL)
- Latch Material: Nylon 66 (UL)+GF
- Body Flame Class: 94V-2
- Latch Flame Class: 94V-0
- Body Color: Black
- Latch Color: Blue/Green
- Unit: mm
- Patented（專利品）






MOUNTING HOLE
THICKNESS: T

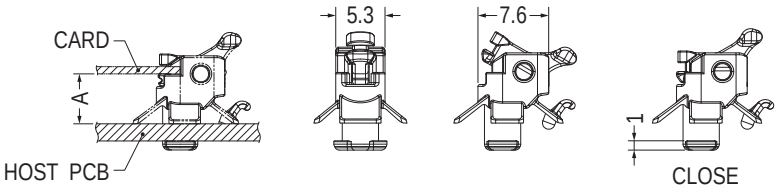

Assembly Diagram


Part No.	A	T	Package
ULCOI-3F	5.0	2.36~2.55	1000
★ULCOI3-6.6F	6.6	1.8~2.2	

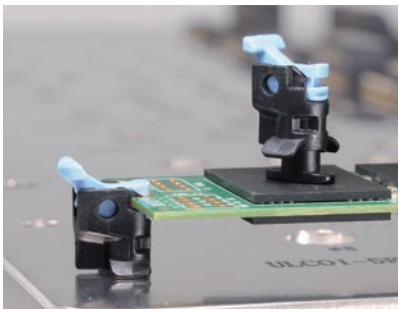


- Body Material: Nylon 66 (UL)
- Latch Material: Nylon 66 (UL)+GF
- Body Flame Class: 94V-2
- Latch Flame Class: 94V-0
- Body Color: Black
- Latch Color: Blue
- Unit: mm
- Patented（專利品）




MOUNTING HOLE
THICKNESS 1.9




INSTALLATION LOCATION




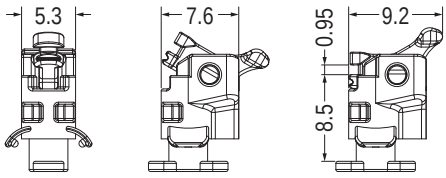


Part No.	Package
ULCOI-5F	1000

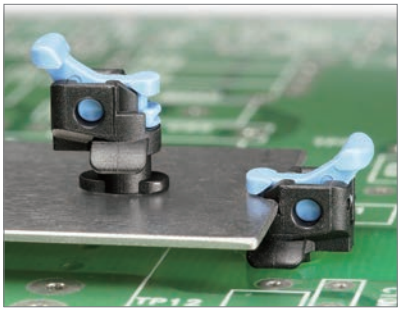


- Body Material: Nylon 66 (UL)
- Latch Material: Nylon 66 (UL)+GF
- Flame Class: 94V-0
- Body Color: Black
- Latch Color: Blue
- Unit: mm
- Patented（專利品）




MOUNTING HOLE
THICKNESS 1.6



INSTALLATION LOCATION



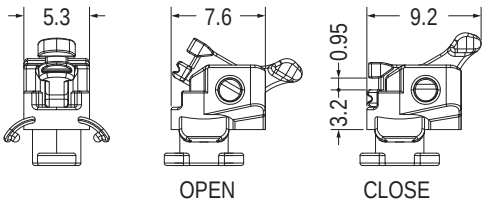


NEW


Part No.	Package
ULCOI-9F	1000

M.2間隔柱 M.2 SSD SPACER

用途：適用NGFF卡於機板上，免工具，易拆卸。

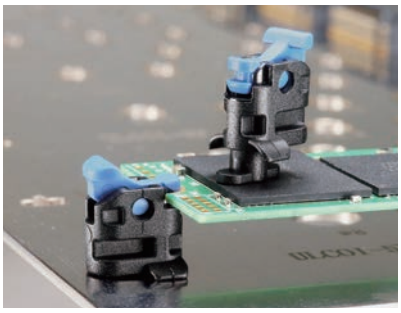


- Body Material: Nylon 66 (UL)
- Latch Material: Nylon 66 (UL)+GF
- Body Flame Class: 94V-2
- Latch Flame Class: 94V-0
- Body Color: Black
- Latch Color: Blue
- Unit: mm
- Patented（專利品）

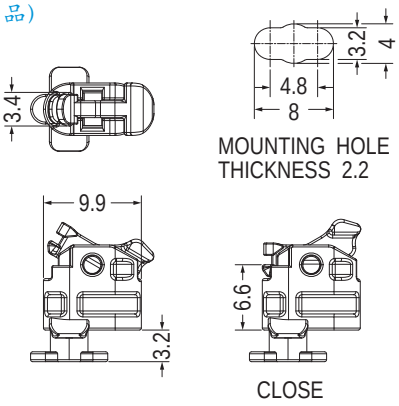


NEW

Part No.	Package
ULCOP-6.6F	1000

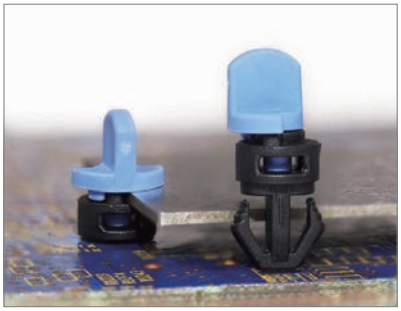


使用說明
Installation Guide

- Material: Nylon 66 (UL)
- Flame Class: 94V-0
- Latch Base Color: Black
- Latch Turn Handle Color: Blue/Gray
- Unit: mm
- Patented（專利品）

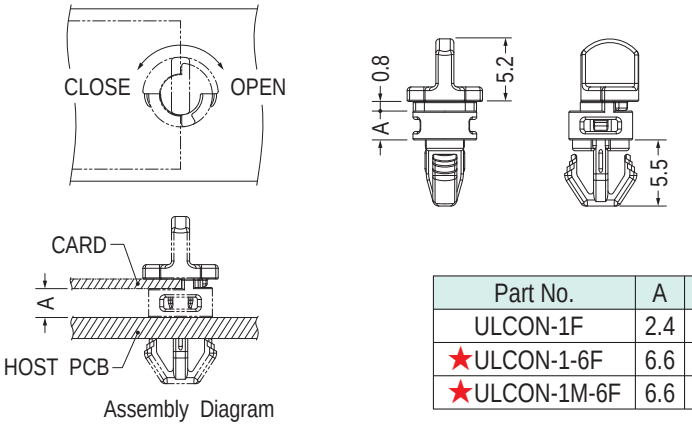


Assembly Diagram

Part No.	A	T	Package
ULCON-1F	2.4	1.6~2.1	1000
★ULCON-1-6F	6.6	1.6~2.1	
★ULCON-1M-6F	6.6	1.93~2.4	

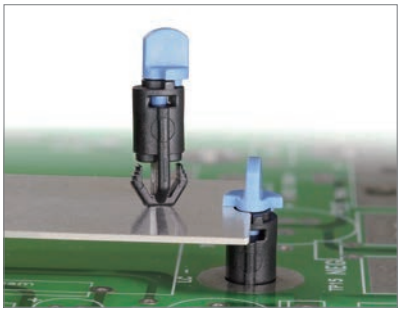

- Latch Base Material: Nylon 66 (UL)
- Latch Turn Handle Material: Nylon 66 (UL)+GF
- Flame Class: 94V-0
- Latch Base Color: Black
- Latch Turn Handle Color: Blue
- Unit: mm
- Patented（專利品）

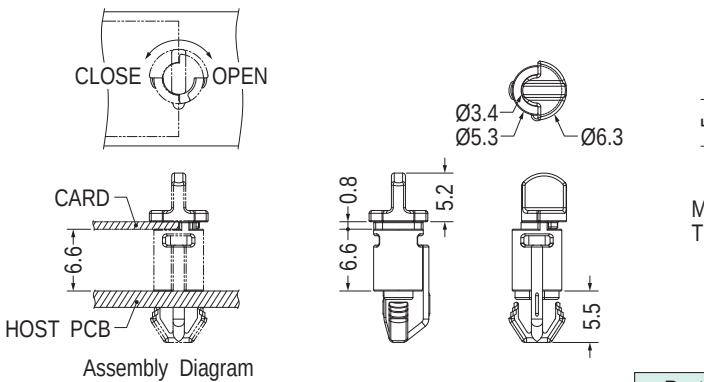

Assembly Diagram

NEW


Part No.	Package
ULCON-8F	1000


M.2間隔柱 M.2 SSD SPACER


用途：適用NGFF卡於機板上，免工具，易拆卸。





- Material: Nylon 66 (UL)
- Flame Class: 94V-0
- Latch Base Color: Black
- Latch Turn Handle Color: Gray
- Unit: mm
- Patented（專利品）













MOUNTING HOLE
THICKNESS 1.6~1.93




Assembly Diagram


NEW

Part No.	Package
ULCON-7F	1000

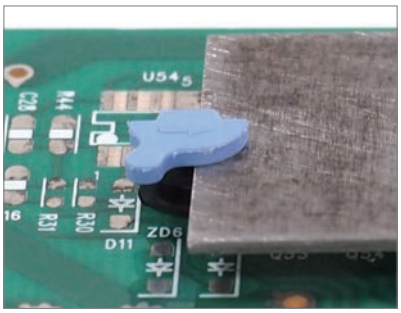


- Material: Nylon 66 (UL)
- Flame Class: 94V-0
- Latch Base Color: Black
- Latch Turn Handle Color: Blue
- Unit: mm
- Patented（專利品）







MOUNTING HOLE
THICKNESS 1.6

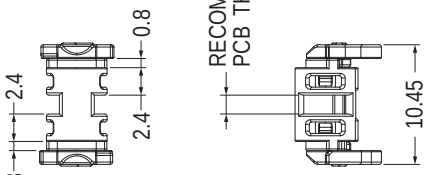


使用說明
Installation Guide







Assembly Diagram


Part No.	Package
ULCON-3F	1000

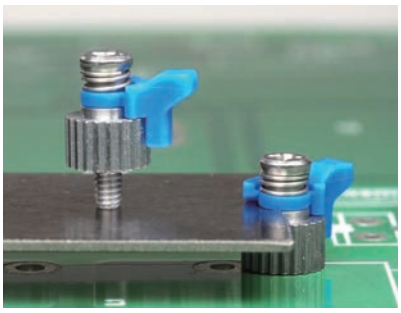



- Metal Material: Steel
- Insulator Material: POM
- Insulator Color: Blue
- Unit: mm
- Patented（專利品）












Assembly Diagram

Part No.	Package
ULF-1(BU)F	1000


M.2間隔柱 M.2 SSD SPACER

用途：適用NGFF卡於機板上，免工具，易拆卸。

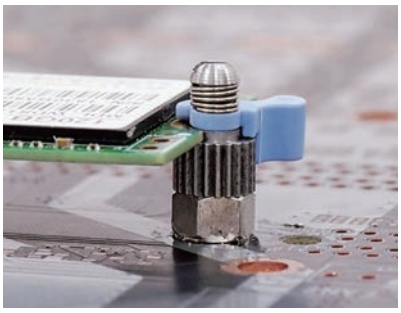

- Metal Material: Steel
- Insulator Material: Nylon 66 (UL)+GF
- Flame Class: 94V-0
- Insulator Color: Blue
- Unit: mm
- Patented（專利品）

使用說明
Installation Guide

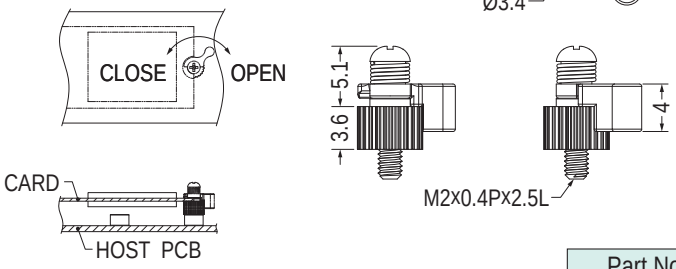

Assembly Diagram


Part No.	Package
ULF-3.6(BU)F	1000

WI-FI固定扣 WI-FI LOCK


用途：用於NGFF卡用之天線端子固定與保護。




- Material: Nylon 66 (UL)/PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Black/Transparent
- Unit: mm



Part No.	Package
UNCV-1	1000

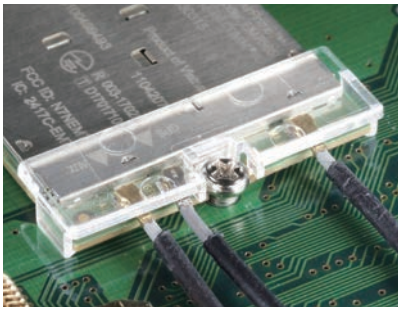


- Material: Nylon 66 (UL)
- Flame Class: 94V-2
- Color: Black
- Unit: mm




Part No.	Package
UNCV-2	1000


- Material: PC (UL)
- Flame Class: 94V-2
- Color: Transparent
- Unit: mm



Part No.	Package
UNCV-3	1000

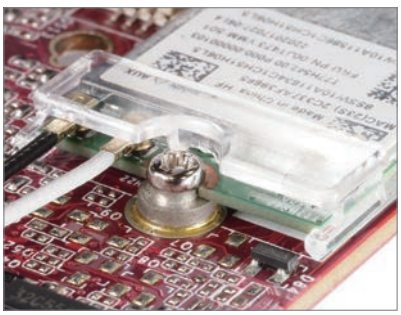


- Material: PC (UL)
- Flame Class: 94V-2
- Color: Transparent
- Unit: mm



Part No.	Package
★UNCV-4	1000

- Material: PC (UL)
- Flame Class: 94V-0
- Color: Transparent
- Unit: mm




Part No.	Package
★UNCV-6	1000




2

- LED間隔柱
  LED Spacers
- LED座/套
  LED Mounts & Sleeves
- LED導光罩
  LED Lens Caps
- LED導光柱
  Light Pipes
- LED遮光罩
  Light Pipe Masks
- LED導光座
  Light Pipe Mounts
- 光纖座
  Optical Fiber Mounts

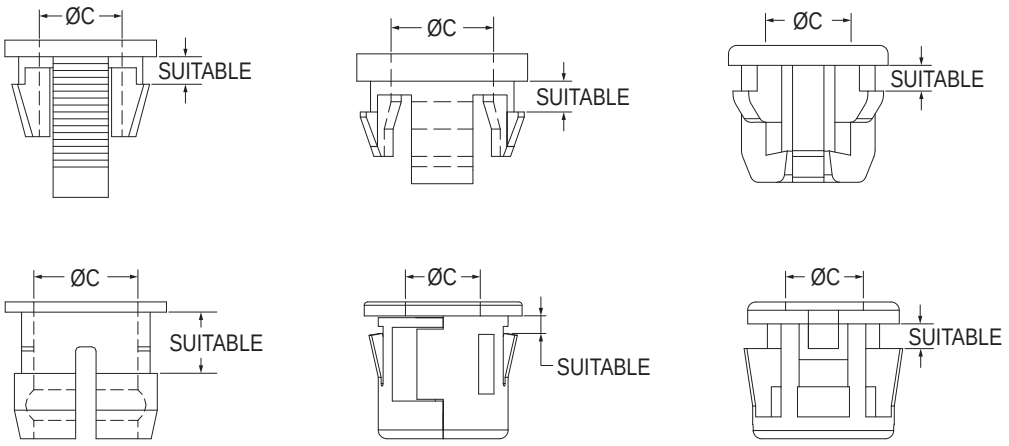

Part No.	Chassis	Suitable	ØC	Page
LED3-53	Ø4.2~Ø4.3	0.8	3.0	2-24
LED3-61	Ø4.3	0.7	3.0	2-23
LED3-29	Ø4.3	0.8	3.0	2-22
LED3-4	Ø4.5	0.8	3.0	2-22
LED3-6	Ø4.5	0.8	3.0	2-22
LED3-45	Ø4.5	0.8	3.0	2-24
LED3-1	Ø4.5	0.8~1.2	3.1	2-22
LED3-8	Ø4.5	0.8~1.2	3.1	2-22
LED3-20	Ø4.5	1.0	3.0	2-22
LED3-7	Ø4.5	1.6	3.0	2-22
LED3-2	Ø4.5	1.7	3.0	2-22
LED3-23	Ø4.8	0.8	3.0	2-23
LED3-38	Ø5.0	0.8	2.8	2-23
LED3-49	Ø5.0	0.8	2.87	2-30
LED3-50	Ø5.0	0.8	2.87	2-30
LED3-22	Ø5.0	0.8	3.0	2-23
LED3-37	Ø5.0	0.8	3.0	2-23
LED3-31	Ø5.0	0.8	3.0	2-29
LED3-44	Ø5.0	0.8	3.0	2-23
LED3-46	Ø5.0	0.8	3.0	2-24
LED3-5	Ø5.0	1.0~1.1	3.0	2-22
LED3-50L	Ø5.0	1.1	2.87	2-30
LED3-17-0.6	Ø5.2	0.6	2.9	2-29
LED3-18	Ø5.2	0.8	2.9	2-29
LED3-40S	Ø5.2	0.8	2.9	2-29
LED3-43	Ø5.2	0.8	2.9	2-29
LED3-55	Ø5.2	0.8	2.9	2-29
LED3-28	Ø5.2	0.8	3.0	2-23
LED3-25	Ø5.2	0.8	3.0	2-28
LED3-64	Ø5.2	0.8	3.0	2-29
LED3-18L	Ø5.2	0.8	3.1	2-29
LED3-40	Ø5.2	0.8~1.0	2.8	2-29
LED3-17	Ø5.2	0.8~1.0	2.9	2-28
LED3-35	Ø5.2	0.8~1.0	2.9	2-28
LED3-42	Ø5.2	0.8~1.0	2.95	2-29
LED3-59	Ø5.2	0.9	2.9	2-29
LED3-30	Ø5.2	1.1	3.0	2-29

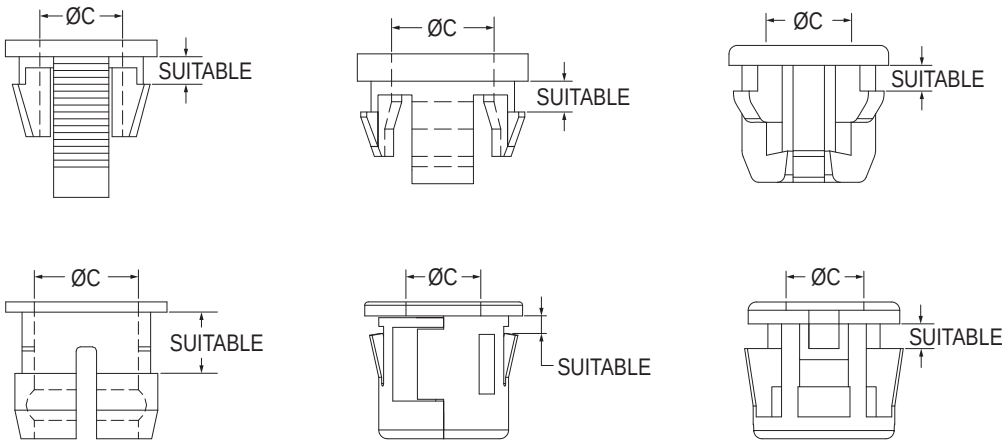


Part No.	Chassis	Suitable	ØC	Page
LED3-41	Ø5.2	1.2	2.8	2-29
LED3-24	Ø5.2	1.2	2.9	2-29
LED3-34	Ø5.3	0.8	3.1	2-23
LEQU3-1	Ø5.9	0.6~0.8	4.1	2-24
LEQU3-2	Ø5.9	0.6~0.8	4.1	2-24
LED5-11	Ø6.0	0.8~1.0	5.1	2-27
LED5-5	Ø6.0	1.8	5.1	2-25
LED5-13	Ø6.2	1.2~1.6	5.1	2-27
LED3-16	Ø6.35	0.6~1.0	3.0	2-28
LED5-8	Ø6.35	0.9	5.0	2-25
LED3-16M	Ø6.35	1.0~1.2	3.0	2-28
LED3-19	Ø6.35	2.0	3.1	2-23
LED3-33	Ø6.35~Ø6.4	0.8	3.0	2-28
LED3-15	Ø6.4	0.6~1.0	3.0	2-28
LED3-15M	Ø6.4	1.0~1.2	3.0	2-28
LED5-1S	Ø6.4	1.2	5.0	2-25
LED5-1	Ø6.4	1.5	5.0	2-25
LED5-2	Ø6.4	3.0	5.1	2-26
LED5-16S	Ø6.5	0.6~1.2	5.0	2-26
LED5-14	Ø6.5	0.8~1.0	5.0	2-27
LED5-28	Ø7.0	0.6~0.8	4.9	2-26
LED5-29	Ø7.0	0.8	5.0	2-26
LED5-9S	Ø7.0	0.8	5.1	2-26
LED5-24	Ø7.0	0.8~1.0	5.0	2-30
LED5-9	Ø7.0	0.8~1.4	5.1	2-26
LED5-28L	Ø7.0	1.0	4.9	2-26
LED5-24M	Ø7.0	1.2	5.0	2-30
LED5-24L	Ø7.0	1.6	5.0	2-30
LED5-6	7.0x6.0	1.0	5.8	2-25
LED5-25	Ø7.2	1.2	5.0	2-27
LED3-14	Ø7.5	0.6~1.0	3.0	2-27
LED5-18	Ø7.5	0.6~1.0	5.0	2-28
LED3-14M	Ø7.5	1.0~1.2	3.0	2-28
LED5-18M	Ø7.5	1.0~1.2	5.0	2-28
LED5-18L	Ø7.5	1.5	5.0	2-28
LED5-17	Ø9.0	0.6~1.0	5.0	2-28
LED5-17M	Ø9.0	1.0~1.2	5.0	2-28

90° LED座 90° LED MOUNT

用途：使Ø3 mm LED成90°焊於PC板上，高度一致，不斷腳。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm




MOUNTING HOLE

Part No.	Package
LED-301	2000




MOUNTING HOLE

Part No.	C	Package
LED-301A	3.4	2000
LED-301(B)	3.3	




MOUNTING HOLE

Part No.	Package
LED-312	2000




MOUNTING HOLE

Part No.	Package
LED-313	2000




MOUNTING HOLE

Part No.	Package
LED-314	2000




MOUNTING HOLE

Part No.	Package
LED-316	2000




MOUNTING HOLE


Part No.	Package
LED-326	1000



MOUNTING HOLE

Part No.	Package
LED-328	1000

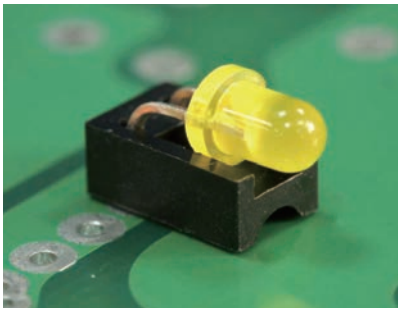

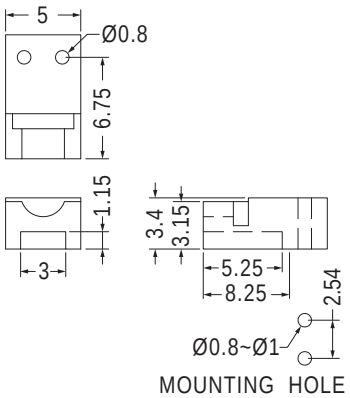


MOUNTING HOLE


Part No.	Package
LED-325	1000

90° LED座 90° LED MOUNT


用途：使Ø3 mm 3 PIN LED成90°焊於PC板上，高度一致，不斷腳。

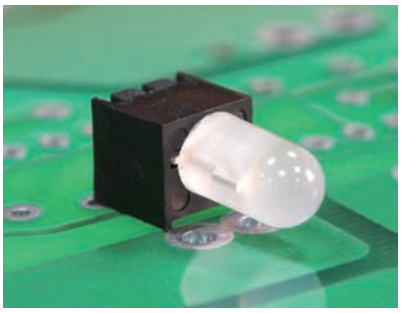


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm



Part No.	Package
LED-343	1000

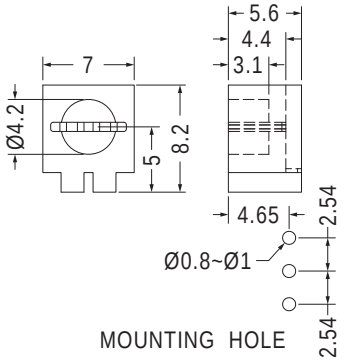



Part No.	Package
LED-319	1000

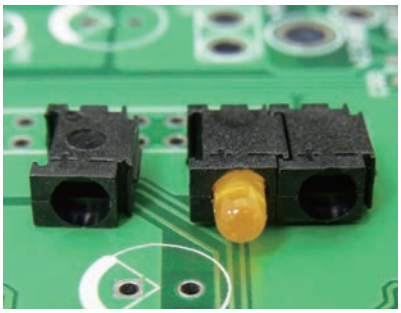


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm


用途：使Ø3 mm LED成90°焊於PC板上，高度一致，不斷腳，可組合使用。

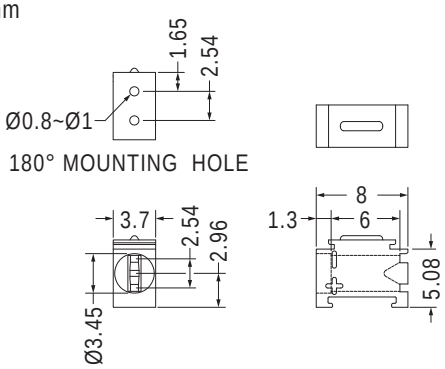



Part No.	Package
LED-344	1000

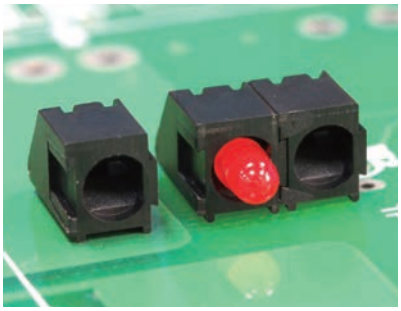

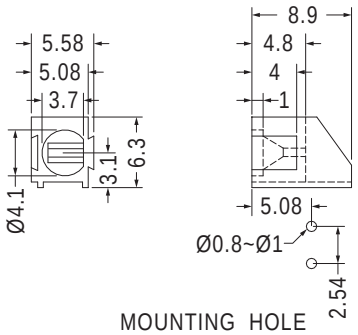


Part No.	Package
LED-6301	2000



- Material: ABS
- Color: Black
- Unit: mm


用途：可快速將Ø3 mm LED固定於機器面板上。




Part No.	Package
LED3-21	2000

45° LED座 45° LED MOUNT


用途：使Ø3 mm LED成斜角焊於PC板上，高度一致，不斷腳。

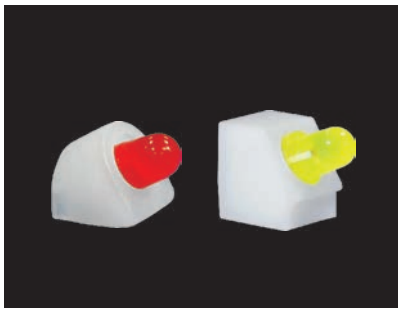


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

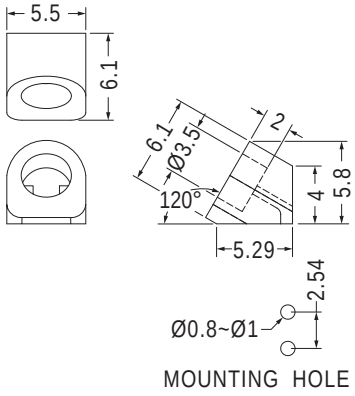

Part No.	Package
LEDA-5	1000

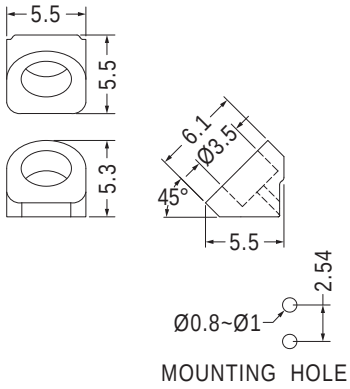

Part No.	Package
LEDA-6	1000

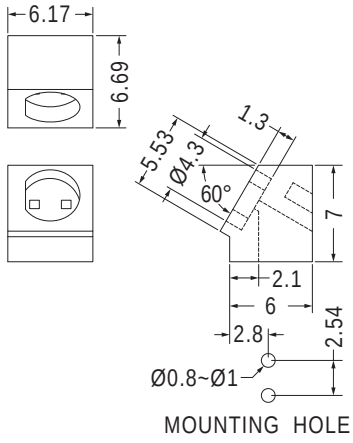


Part No.	Package
LEDA-4	1000

90° LED座 90° LED MOUNT


用途：使Ø3 mm LED成90°焊於PC板上，高度一致，有定位腳，不傾斜。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

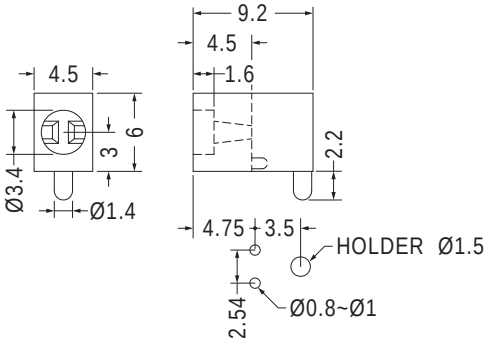


Part No.	Package
LEK-301	1000

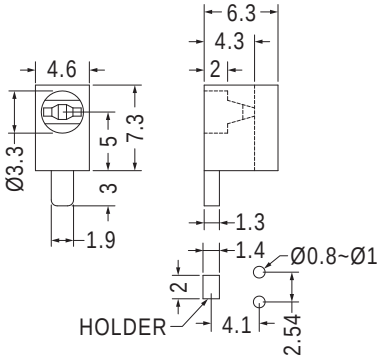

Part No.	Package
LEK-302	1000

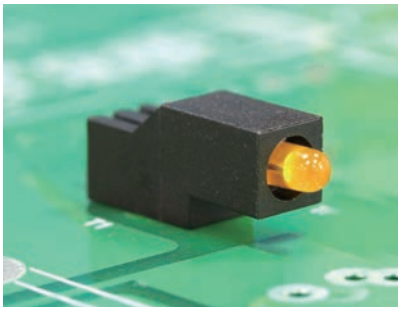


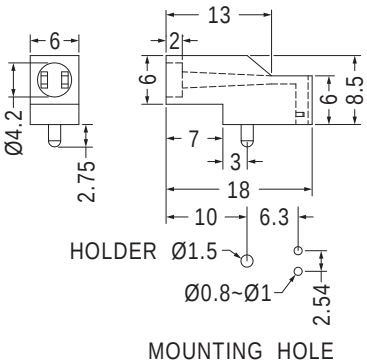


Part No.	Package
LEK-311	1000


90° LED座 90° LED MOUNT


用途：使Ø3 mm 3 PIN LED成90°焊於PC板上，高度一致，有定位腳，不傾斜。

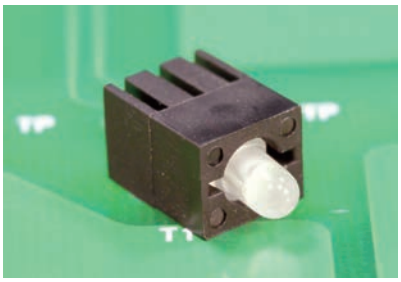

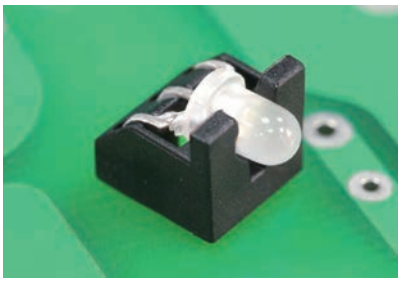


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

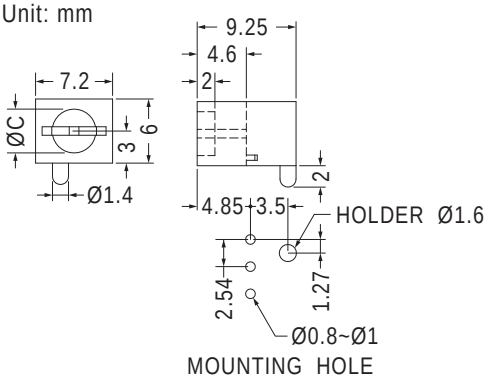




Part No.	C	Package
LEK-303	4.1	1000
LEK-303L	4.25	

Part No.	Package
LEJ3-5	1000

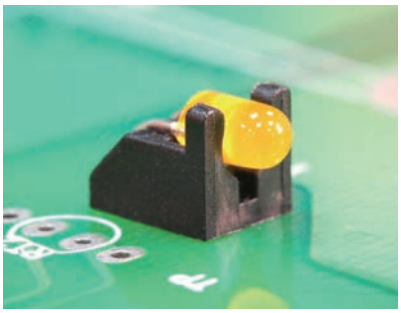


- Material: Nylon 66 (UL)/ABS (UL)
- Flame Class: 94HB/94V-2/94V-0
- Color: Black
- Unit: mm


用途：使Ø3 mm LED成90°焊於PC板上，高度一致，有定位腳，不傾斜。



Part No.	A	B	Package
LEJ-4	4.0	6.0	1000
LEJ-5	5.0	7.0	
LEJ-6	6.0	8.0	
LEJ-7	7.0	9.0	
LEJ-8	8.0	10.0	
LEJ-9	9.0	11.0	
LEJ-13	13.0	15.0	




Part No.	D	Package
LEJ-4S	1.8	1000
LEJ-4M	3.0	




- Material: PC+ABS (UL)
- Flame Class: 94V-2/94V-0

Part No.	Package
LEJT-4	1000




- 底部無定位腳

Part No.	Package
LEJN-4	1000

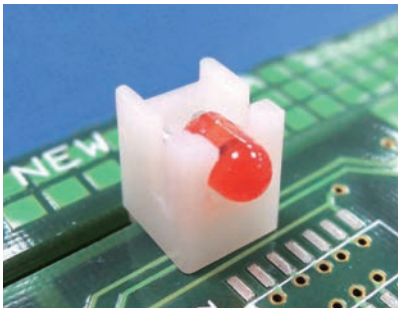

- Material: ABS (UL)
- Flame Class: 94HB
- Color: Natural
- Unit: mm




Part No.	Package
LEJA-5	2000

90° LED座 90° LED MOUNT

用途：使Ø3 mm LED成90°焊於PC板上，高度一致，有定位腳，不傾斜。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

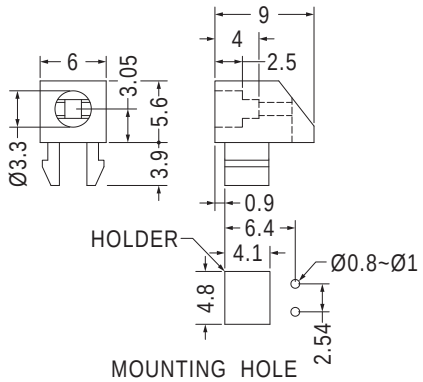


MOUNTING HOLE
THICKNESS 1.6

Part No.	Package
LEK-314	1000

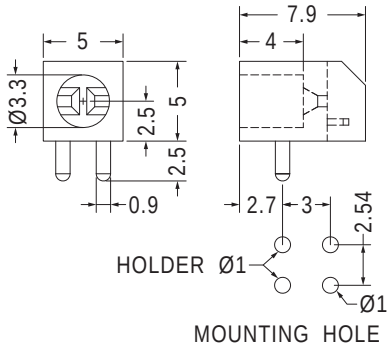

MOUNTING HOLE


Part No.	Package
LEK-3111	1000

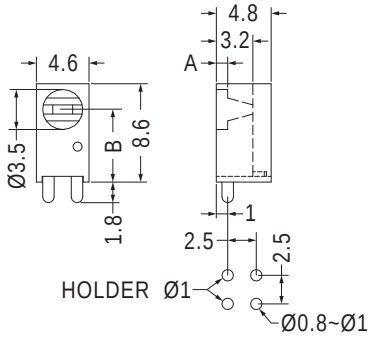

MOUNTING HOLE


Part No.	A	B	Package
LEK-304	1.0	6.4	1000
LEK-310	2.0	6.35	



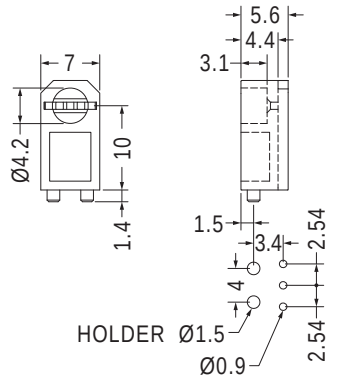


MOUNTING HOLE

Part No.	Package
LEK-555	1000

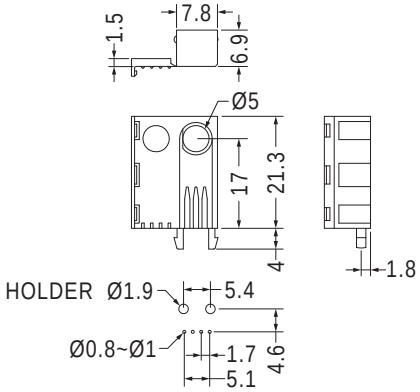


MOUNTING HOLE
THICKNESS 1.6

Part No.	Package
LEK54-17	1000

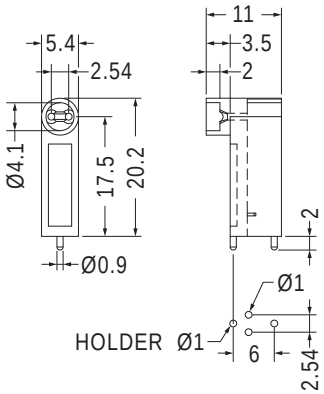

MOUNTING HOLE


Part No.	Package
LEAK-17.5	1000

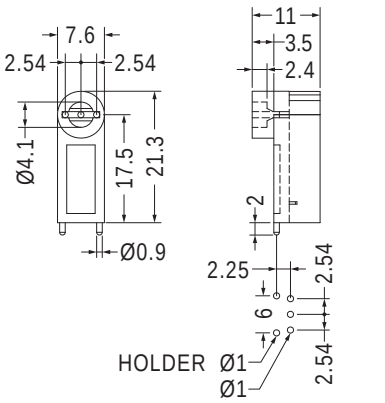

MOUNTING HOLE

- FOR 3 PIN LED

Part No.	Package
LEAK3-17.5	1000

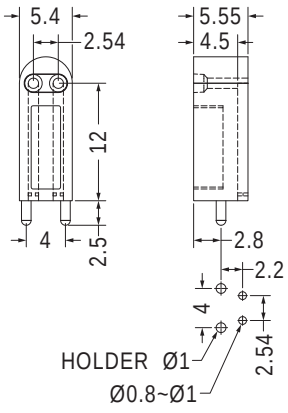


MOUNTING HOLE


Part No.	Package
LEKH-12	1000

90° LED座 90° LED MOUNT


用途：使Ø3 mm LED成90°焊於PC板上，高度一致，有定位腳，不傾斜。

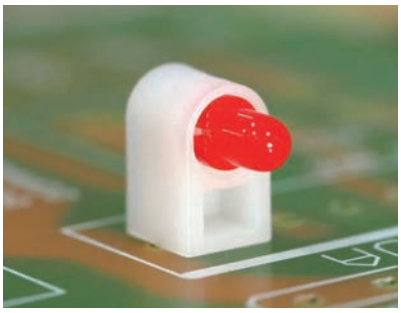

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

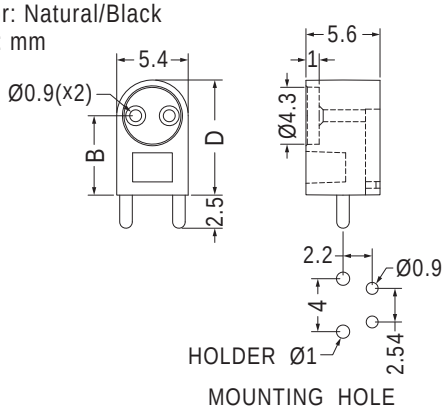


Part No.	B	D	Package
LEK-349	6.0	8.7	1000
LEK-350	8.0	10.7	

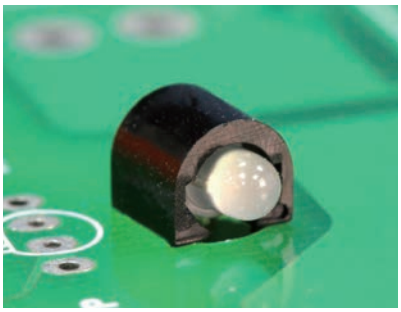

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm


用途：使Ø3 mm 3 PIN LED成90°焊於PC板上，高度一致，有定位腳，不傾斜。

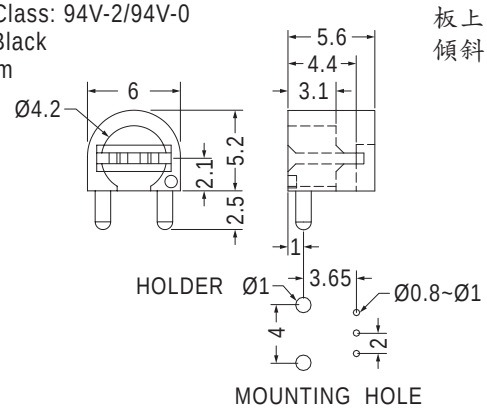


Part No.	Package
LEK-312	1000


45° LED座 45° LED MOUNT

用途：使Ø3 mm LED成斜角焊於PC板上，高度一致，有定位腳，不傾斜。

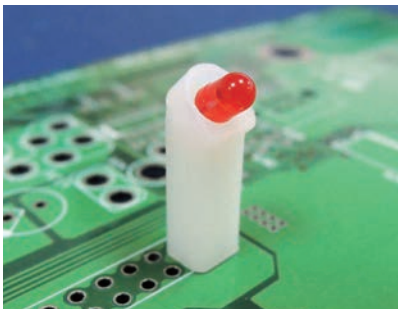

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

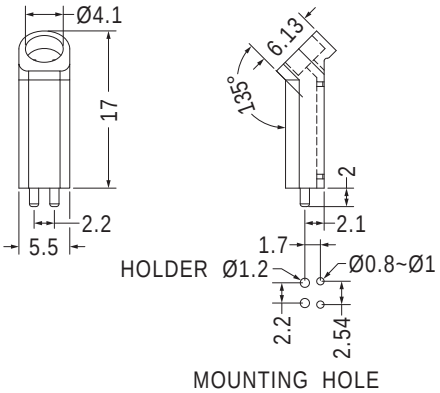




【 LEDA-17-1 】


Part No.	A	B	Package
LEDA-17			1000
LEDA-17-1	5.0	2.0	

90° LED座 90° LED MOUNT

用途：使Ø5 mm有帽沿LED成90°焊於PC板上，高度一致，不斷腳。

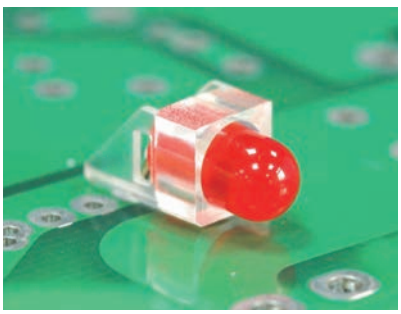


- Material: PC (UL)
- Flame Class: 94V-2
- Color: Transparent
- Unit: mm

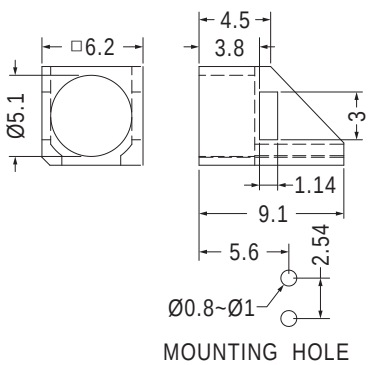


Part No.	Package
LED-505	1000

90° LED座 90° LED MOUNT

用途：使Ø5 mm LED成90°焊於PC板上，高度一致，不斷腳。

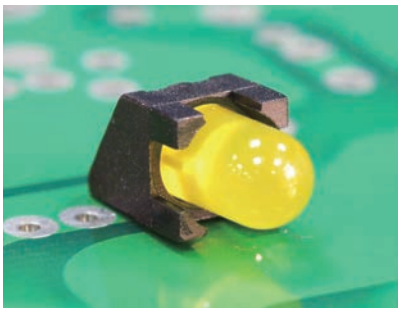


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

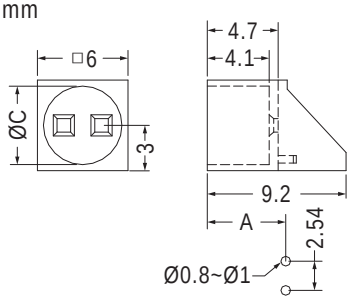


MOUNTING HOLE


Part No.	A	C	Package
LED-502	4.95	5.2	2000
LED-502S	5.0	4.9	

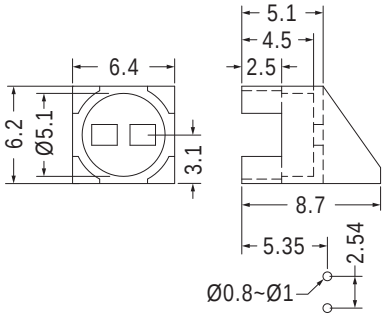

MOUNTING HOLE


Part No.	Package
LED1L-2.5	2000

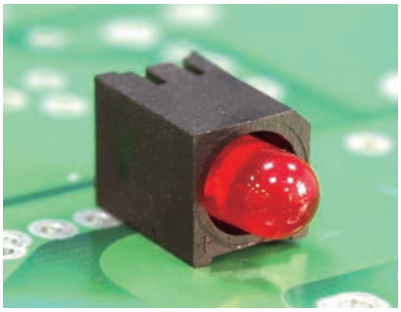

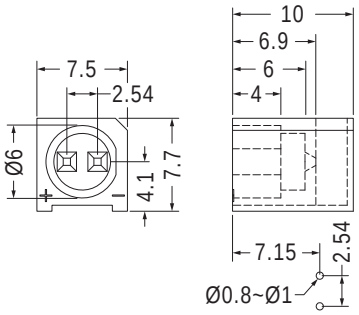


MOUNTING HOLE


Part No.	Package
LED-542	1000



MOUNTING HOLE


Part No.	Package
LED-504	1000

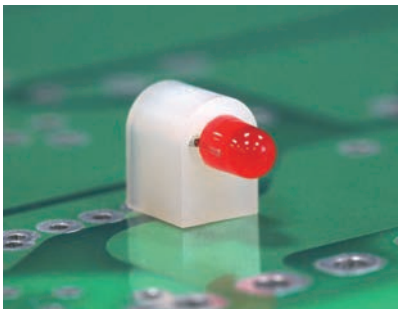

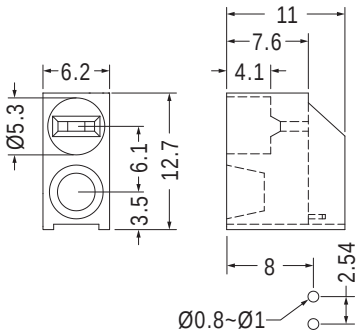

MOUNTING HOLE


Part No.	Package
LED-528	1000



MOUNTING HOLE


- Color: Natural/Black

Part No.	Package
LEAH-4.5	2000

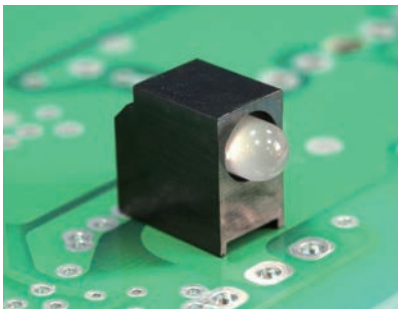

用途：使Ø5 mm 3 PIN LED成90°焊於PC板上，高度一致，不斷腳。

- Material: PC (UL)
- Flame Class: 94V-2
- Color: Black
- Unit: mm

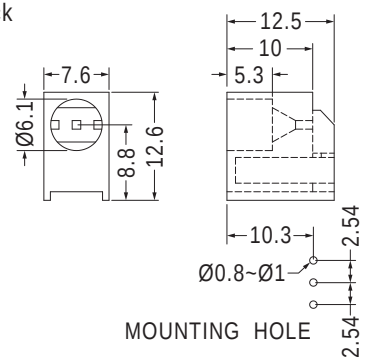

MOUNTING HOLE


Part No.	Package
LED-535	500

90° LED座 90° LED MOUNT


用途：使Ø5 mm 3 PIN LED成90°焊於PC板上，高度一致，不斷腳。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

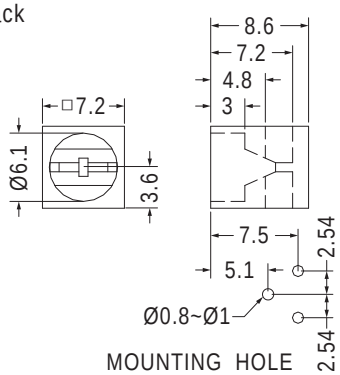

Part No.	Package
LED-503	1000

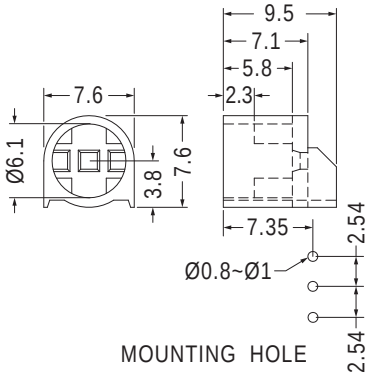


Part No.	Package
LED-501	1000

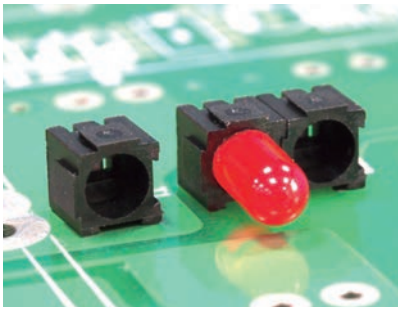

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm


用途：使Ø5 mm LED成90°焊於PC板上，高度一致，不斷腳，可組合使用。

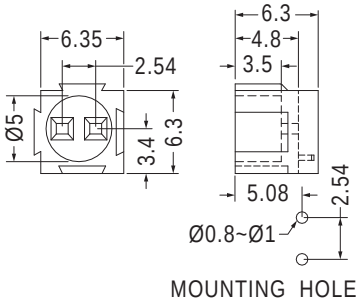


Part No.	Package
LED-6501	2000

LED座 LED MOUNT


用途：使Ø5 mm LED成斜角焊於PC板上，高度一致，不斷腳。

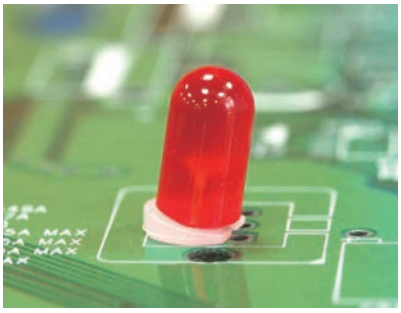


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

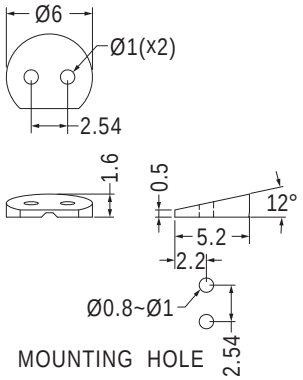

Part No.	Package
LEDA-7	1000

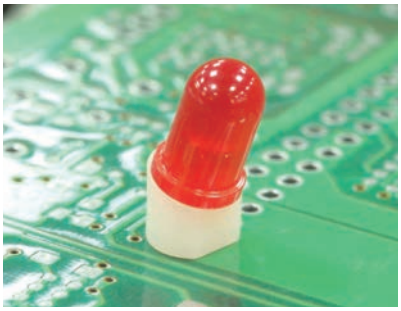

- Material: Nylon 66 (UL)/ABS (UL)
- Flame Class: 94HB/94V-2/94V-0
- Color: Natural/Black
- Unit: mm

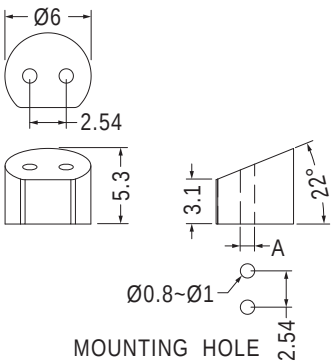


Part No.	A	Package
LEDA-2S	0.9	1000
LEDA-2	1.0	

LED座 LED MOUNT

用途：使Ø5 mm LED成斜角焊於PC板上，高度一致，有定位腳，不傾斜。




- Material: Nylon 66 (UL)/ABS (UL)
- Flame Class: 94HB/94V-2/94V-0
- Color: Natural/Black
- Unit: mm

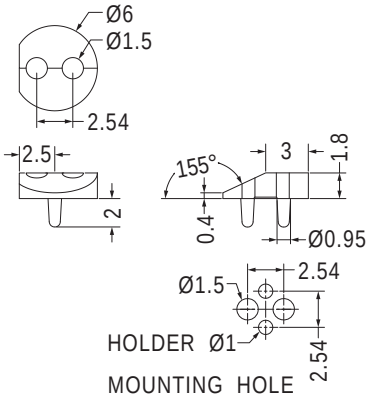


Part No.	Package
LEK-530	1000

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

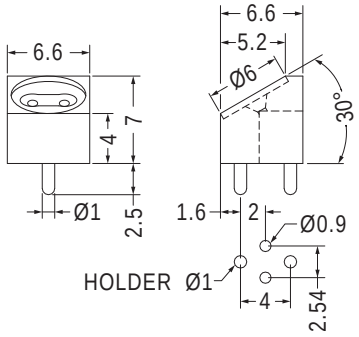


MOUNTING HOLE

Part No.	Package
LEK-513	2000

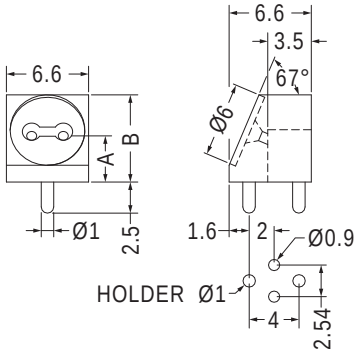

MOUNTING HOLE

Part No.	A	B	Package
LEK-509	3.3	7.0	1000
LEK-531	7.0	10.3	



MOUNTION HOLE


Part No.	Package
LEK-545	1000

90° LED座 90° LED MOUNT


用途：使Ø5 mm LED成90°焊於PC板上，高度一致，有定位腳，不傾斜。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm




Part No.	Package
LEK-541	1000

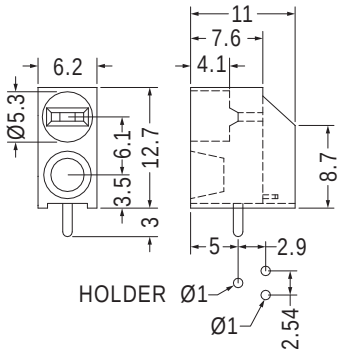


MOUNTING HOLE

Part No.	Package
LEK-525	1000

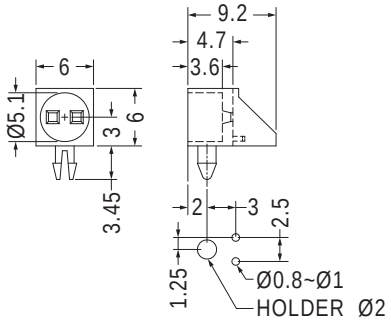

MOUNTING HOLE
THICKNESS 1.6

Part No.	Package
LEK-548	1000

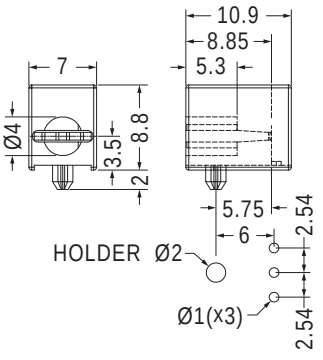

MOUNTING HOLE


Part No.	Package
LEK-551	1000

90° LED座 90° LED MOUNT

用途：使Ø5 mm LED成90°焊於PC板上，高度一致，有定位腳，不傾斜。




- Material: POM
- Color: Natural/Black
- Unit: mm

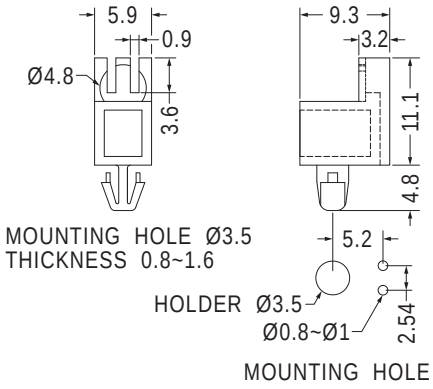


Part No.	Package
LEK-526	1000




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

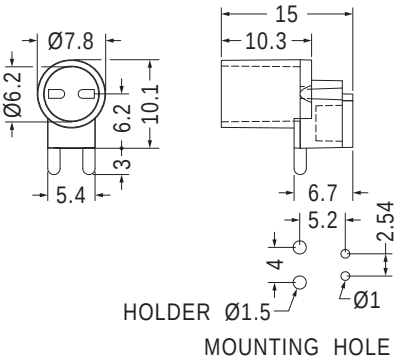


Part No.	Package
LEK-539	1000

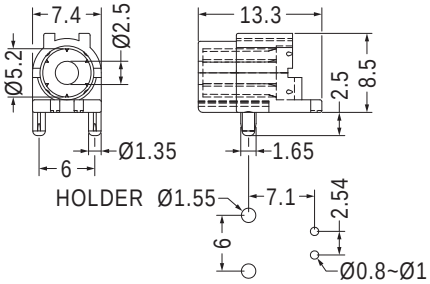


Part No.	Package
LEK-533	1000

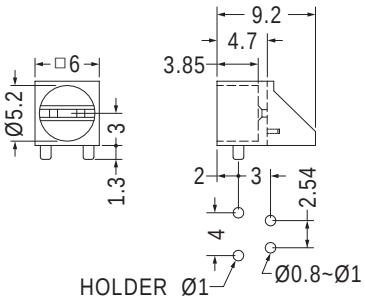


Part No.	Package
LEK-516	1000

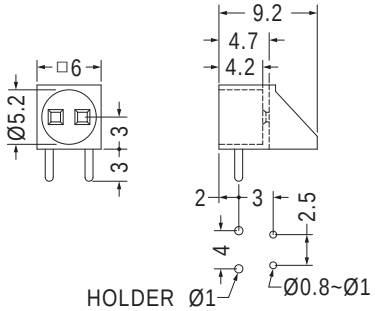


Part No.	Package
LEK-502	1000

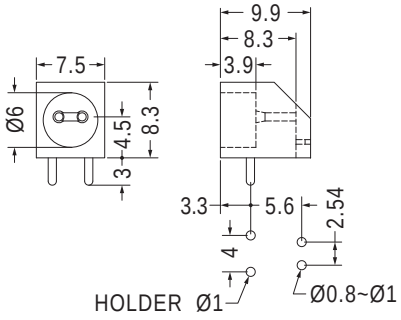

Part No.	Package
LEK-535	1000

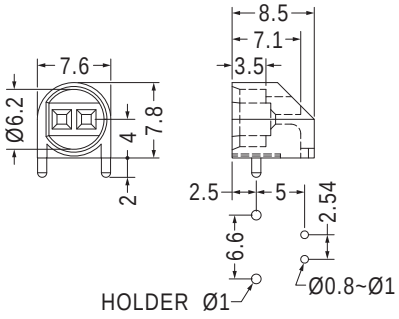


Part No.	Package
LEK-534	1000

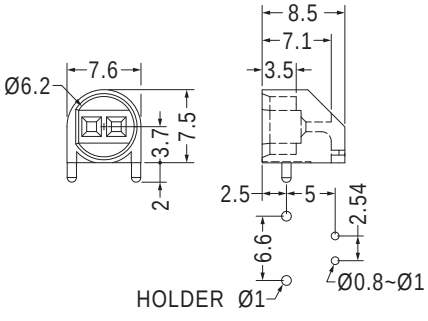


Part No.	Package
LEK-547	1000

90° LED座 90° LED MOUNT

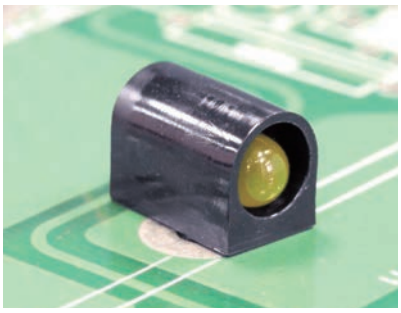


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

用途：用於Ø5 mm 2或3 PIN LED成90°焊於PC板上，高度一致，有定位腳，不傾斜。



2 PIN LED



3 PIN LED


MOUNTING HOLE

Part No.	Package
LEK-528	1000




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

用途：使Ø5 mm LED成90°焊於PC板上，高度一致，有定位腳，不傾斜。

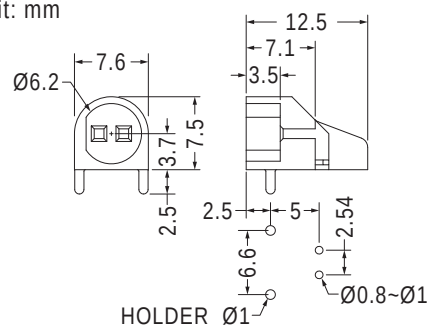

MOUNTING HOLE

Part No.	Package
LEK-560	1000

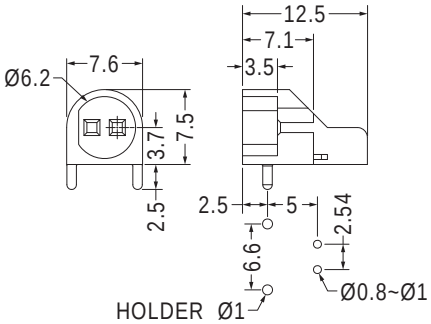


MOUNTING HOLE

Part No.	Package
LEK-561	1000




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

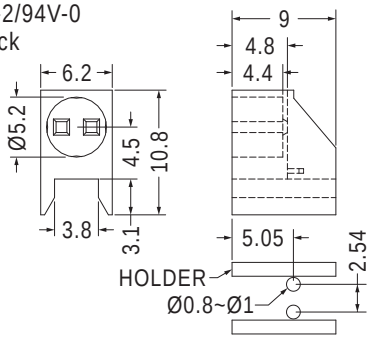


MOUNTING HOLE

Part No.	Package
LEK-507	1000

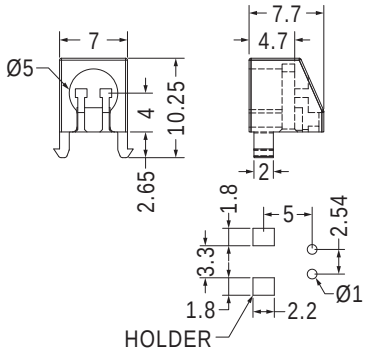


MOUNTING HOLE
THICKNESS 1.6

Part No.	Package
LEJB-4	1000

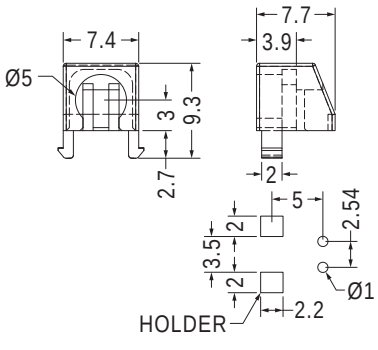

MOUNTING HOLE
THICKNESS 1.6

Part No.	Package
LEK-549	1000

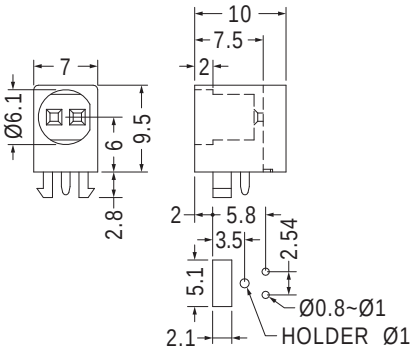

MOUNTING HOLE
THICKNESS 1.6


Part No.	Package
LEK-506	1000

90° LED座 90° LED MOUNT


用途：使Ø5 mm 3 PIN LED成90°焊於PC板上，高度一致，有定位腳，不傾斜。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

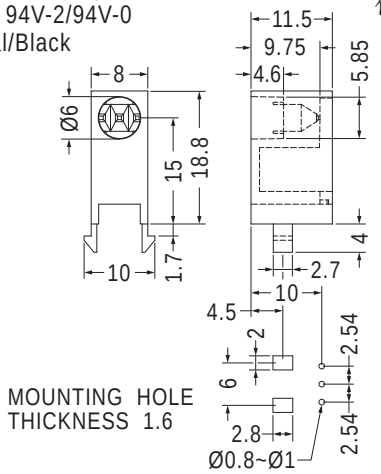


Part No.	Package
LEK-517	1000

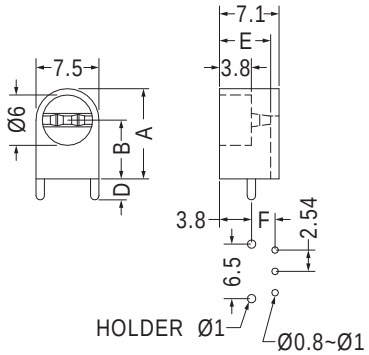


Part No.	A	B	D	E	F	Package
LEK503-7	10.75	7.0	2.5	6.1	2.8	1000
LEK503-18	21.75	18.0	3.1	5.9	2.6	

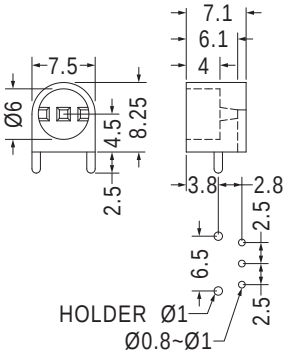


Part No.	Package
LEK-503	1000




Part No.	Package
LEK-501	1000

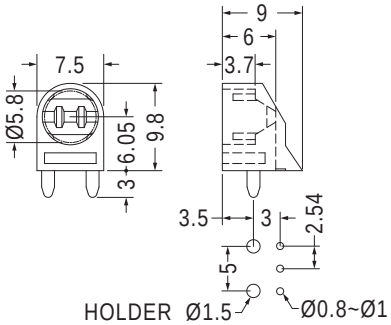

Part No.	Package
LEK-505	1000

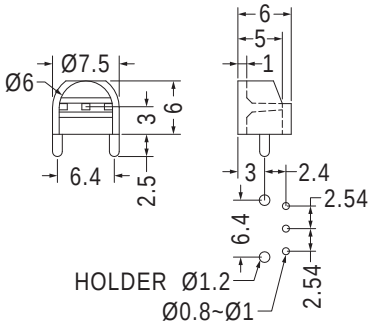


Part No.	Package
LEK-508	1000

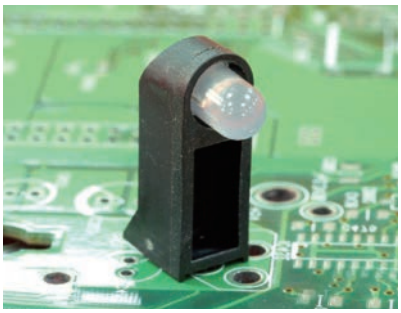


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

用途：使Ø5 mm LED成90°焊於PC板上，高度一致，有定位腳，不傾斜。

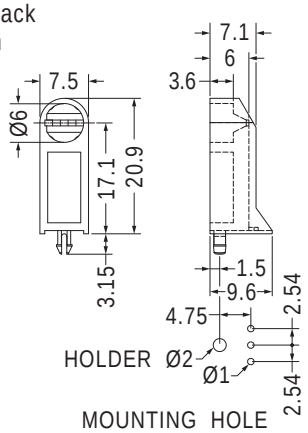

Part No.	Package
LEK-546	1000




- Color: Natural/Black


Part No.	Package
LEK-556	1000

90° LED座 90° LED MOUNT


用途：使Ø5 mm 3 PIN LED成90°焊於PC板上，高度一致，有定位腳，不傾斜。

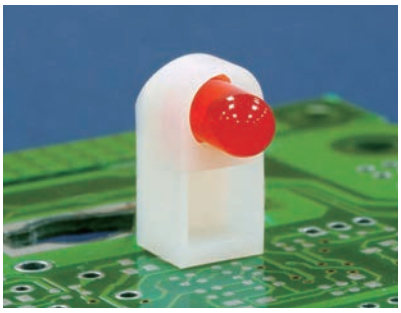


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
LED5L-12	1000




【 LED5L-5 】

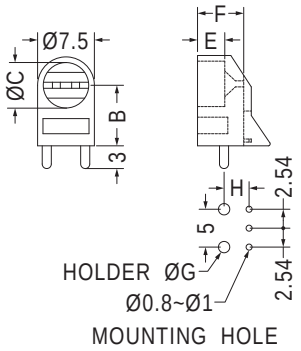


Part No.	B	C	E	F	G	H	Package
LED5L-5	5.0	6.1	3.6	6.0	1.0	3.3	1000
LED5L-8	8.0	6.05	3.7	6.0	1.5	3.3	
LED5L-11	11.0	6.1	3.6	6.1	1.5	3.0	
LED5L-14	14.0	6.05	3.7	6.1	1.5	3.3	
LED5L-17	17.5	6.2	3.6	6.1	1.2	3.0	

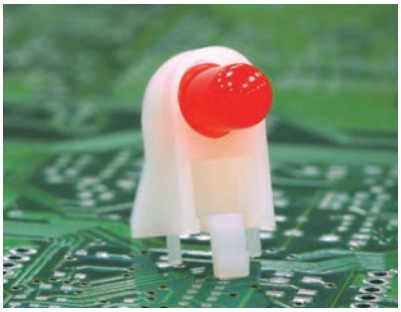


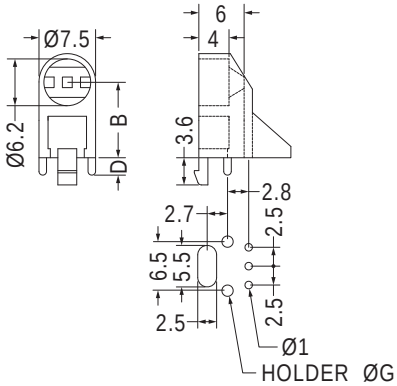

Part No.	B	D	G	Package
LED5L-7	7.0	2.5	1.7	1000
LED5L-10	10.0	2.3	1.5	
LED5L-13	13.5	2.3	1.5	

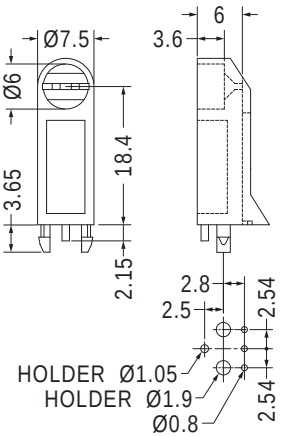


Part No.	Package
LED5L-18	1000

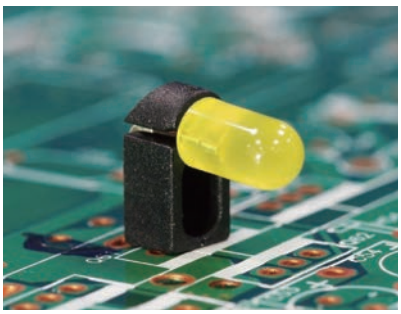


用途：使LED成90°焊於PC板上，高度一致，有定位腳，不傾斜。

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




【 LED1L-5 】




Part No.	A	B	Package
LED1L-5	5.0		2000
LED1L-6	6.0	3.0	
LED1L-7	7.0	3.0	
LED1L-8	8.0	3.0	1000
LED1L-9	9.0	3.0	
LED1L-10	10.0	2.5	

90° LED座 90° LED MOUNT


用途：使LED成90°焊於PC板上，高度一致，有定位腳，不傾斜。

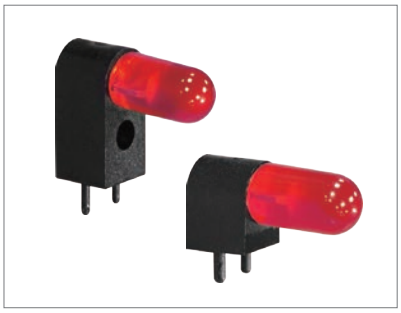


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

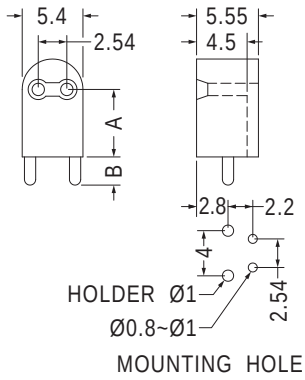

Part No.	A	B	Package
LEKH-3	3.0	2.9	1000
LEKH-6	6.0	2.5	
LEKH-7	7.0	2.5	

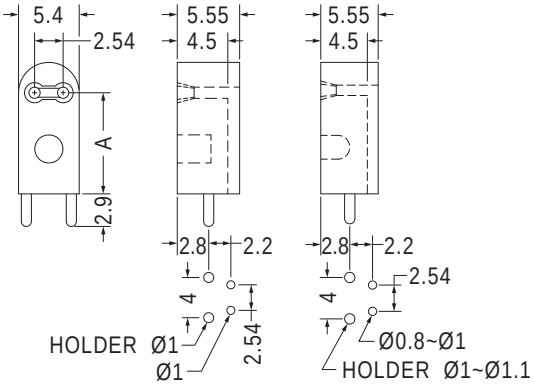



Part No.	A	Package
LEKH-9	9.0	1000
LEKH-10	10.0	



- Material: Nylon 66 (UL)/N6T (UL)


Part No.	B	Package
LEKH-4.5	2.5	1000
LEKH-4.5S	1.2	

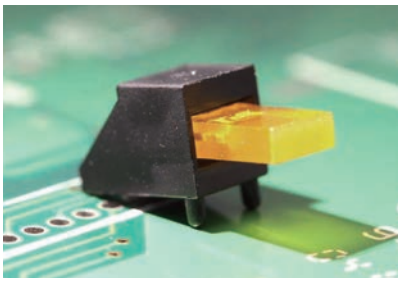

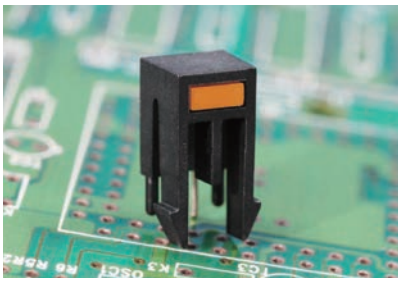


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm


用途：使方形LED成90°焊於PC板上，高度一致，有定位腳，不傾斜。

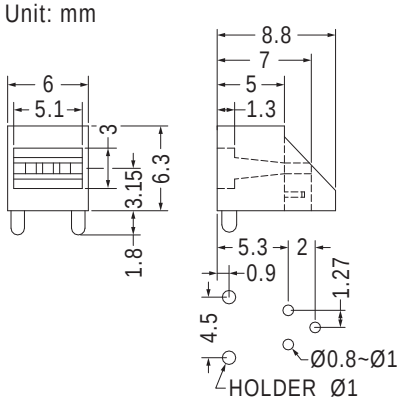

Part No.	Package
LEK-518	1000

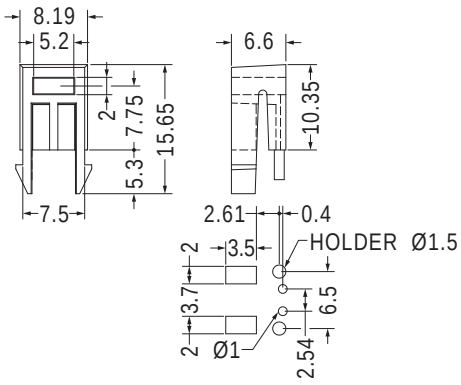


Part No.	Package
LEK-520	1000

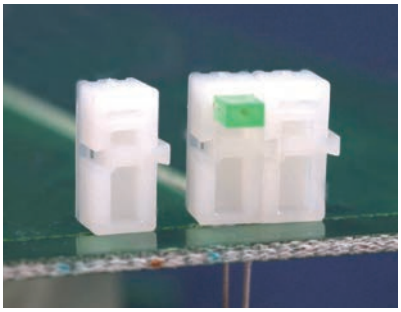

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


用途：使LED成90°焊於PC板上，高度一致，有定位腳，不傾斜，可組合使用。




Part No.	Package
LEKH-6301	1000

90° LED座 90° LED MOUNT


用途：使Ø3 mm LED成90°焊於PC板上，高度一致，不斷腳，可組合使用。

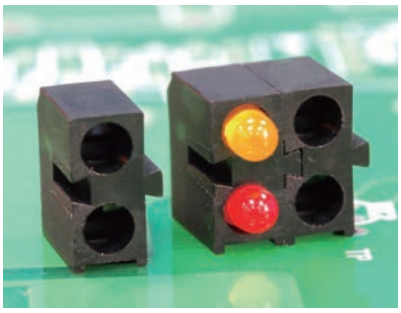


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

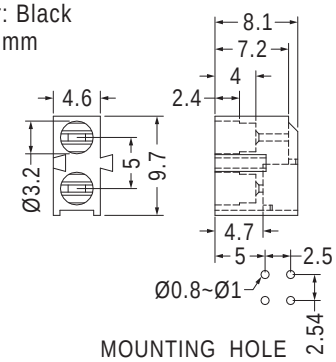

Part No.	Package
LED-6302	2000




Part No.	Package
LED-6303	2000

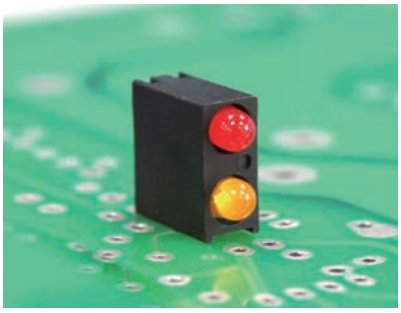


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm


用途：使Ø3 mm LED成90°焊於PC板上，高度一致，不斷腳。

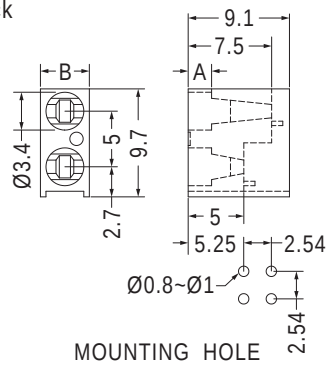


Part No.	A	B	Package
LED-306	2.1	4.4	1000
LED-306(A)	1.5	4.3	

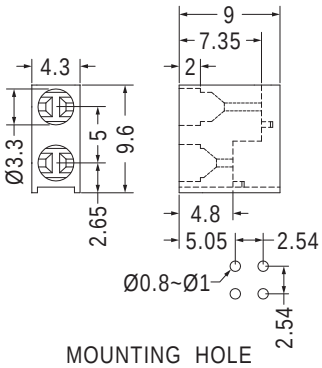


Part No.	Package
LED-306(B)	1000

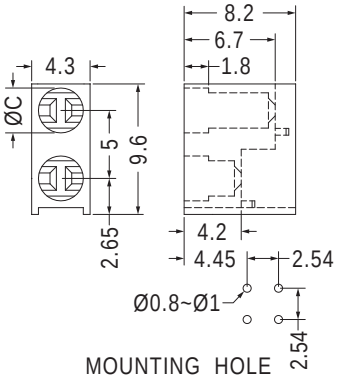


Part No.	C	Package
LED-307	3.3	1000
LED-307(A)	3.2	

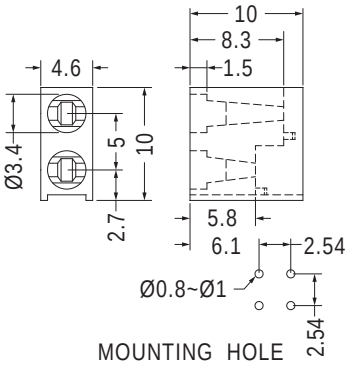


Part No.	Package
LED-308	1000

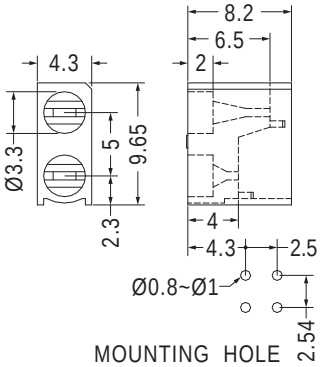

Part No.	Package
LED-322	1000

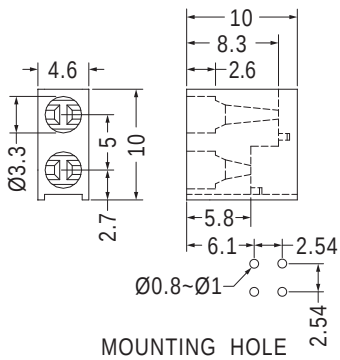


Part No.	Package
LED-324	1000

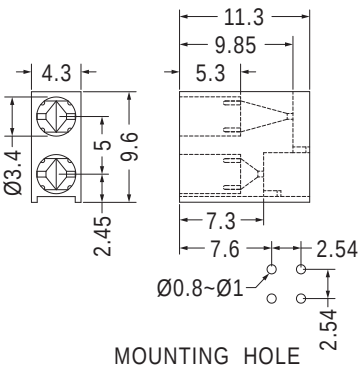


Part No.	Package
LED-323	1000

90° LED座 90° LED MOUNT

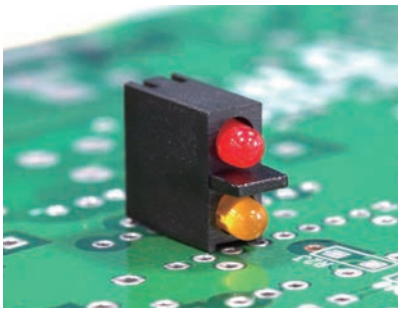


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm


用途：使Ø3 mm LED成90°焊於PC板上，高度一致，不斷腳。

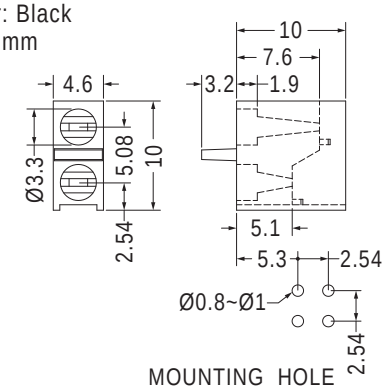

Part No.	Package
LED-305	1000

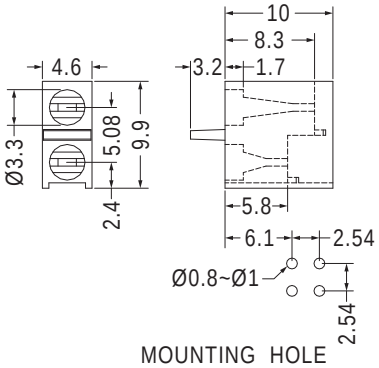


Part No.	Package
LED-317	1000

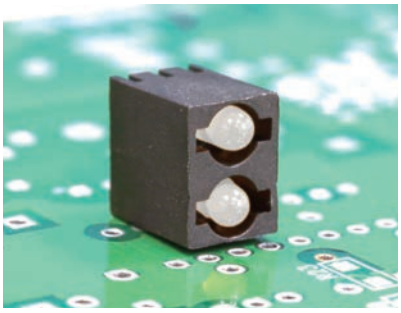


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

用途：使Ø3 mm 3 PIN LED成90°焊於PC板上，高度一致，不斷腳。

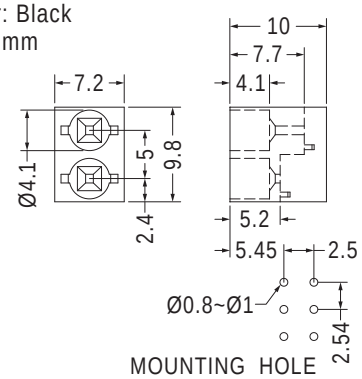

Part No.	Package
LED-310	1000

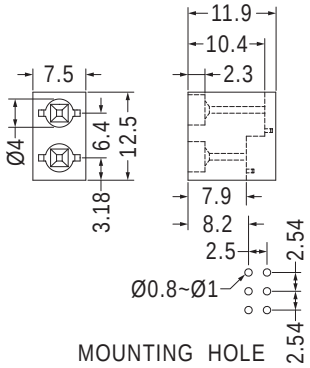


Part No.	Package
LED-342	1000




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

用途：使方形LED成90°焊於PC板上，高度一致，不斷腳。




Part No.	Package
LED-521	1000

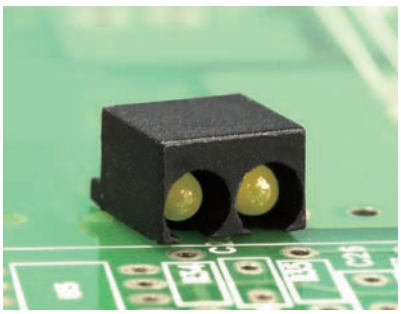


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

用途：使Ø3 mm 3 PIN LED成90°焊於PC板上，高度一致，有定位腳，不傾斜。

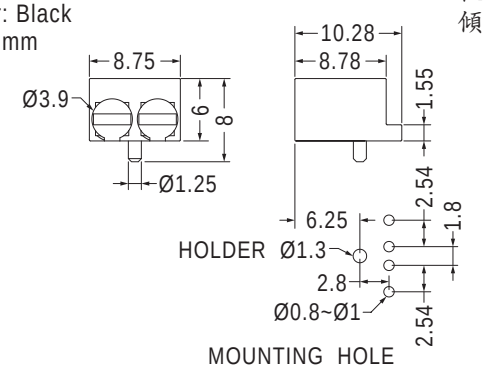


Part No.	Package
LEK-316	2000

90° LED座 90° LED MOUNT

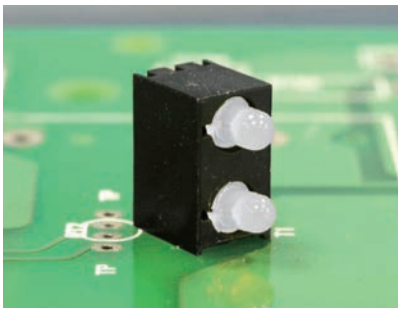


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

用途：使Ø3 mm 3 PIN LED成90°焊於PC板上，高度一致，有定位腳，不傾斜。

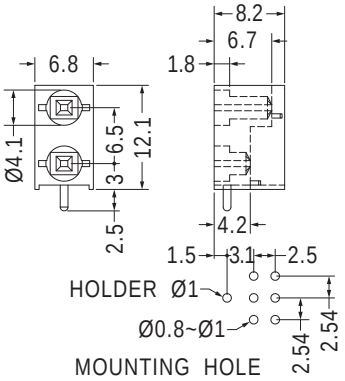


Part No.	Package
LEK-327	1000

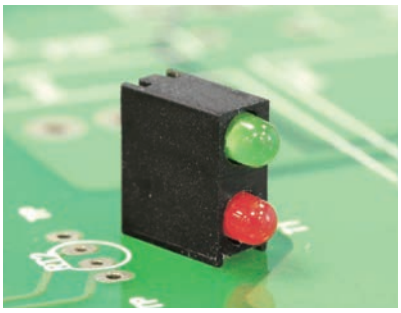


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

用途：使Ø3 mm LED成90°焊於PC板上，高度一致，有定位腳，不斷腳。

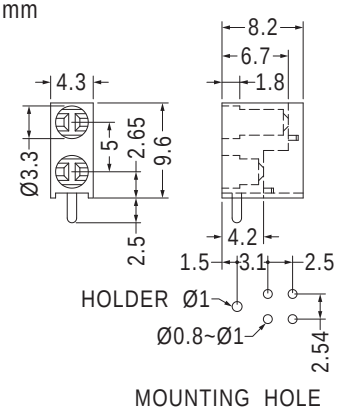


Part No.	Package
LEK-307	1000

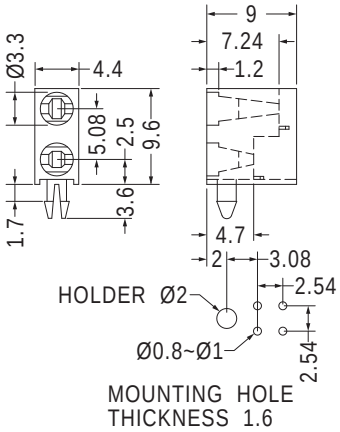


Part No.	Package
LEK-320	1000




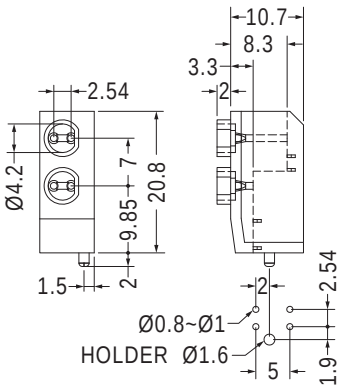

Part No.	Package
LEK-323	1000

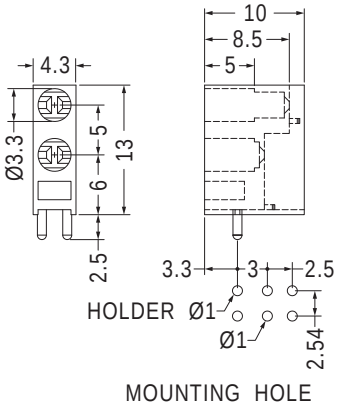

Part No.	Package
LEK-325	1000

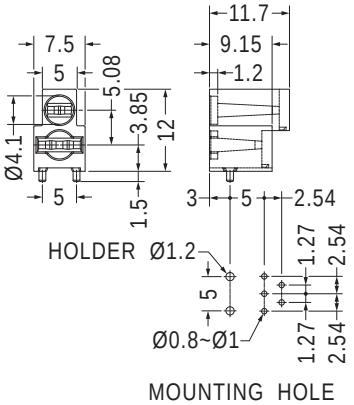


Part No.	Package
LEK-345	2000

90° LED座 90° LED MOUNT




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

用途：使Ø5 mm LED成90°焊於PC板上，高度一致，不斷腳。




MOUNTING HOLE

Part No.	Package
LED-525	1000

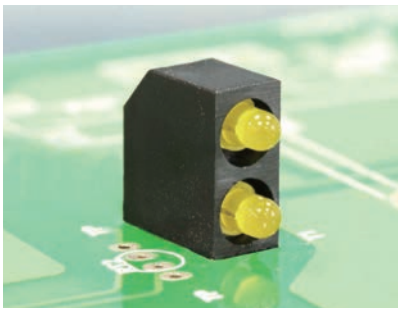


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

用途：使Ø5 mm LED成90°焊於PC板上，高度一致，有定位腳，不傾斜。

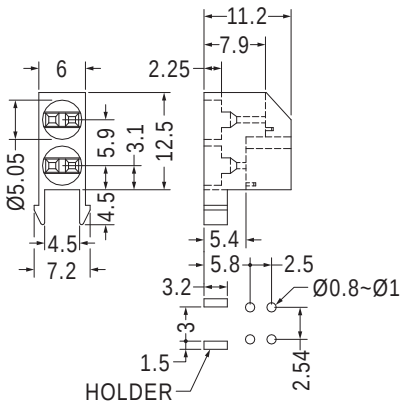


MOUNTING HOLE
THICKNESS 1.6

Part No.	Package
LEK-512	1000

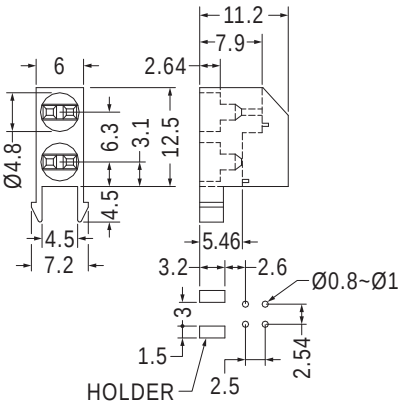


MOUNTING HOLE
THICKNESS 1.6

Part No.	Package
LEK-515	1000

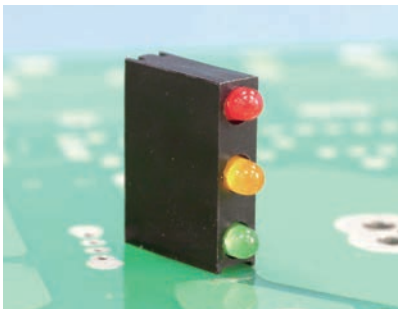


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

用途：使Ø3 mm LED成90°焊於PC板上，高度一致，不斷腳。

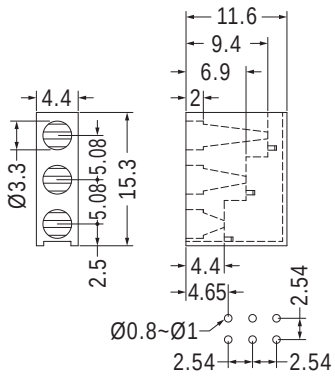

MOUNTING HOLE

Part No.	Package
LED-330	1000

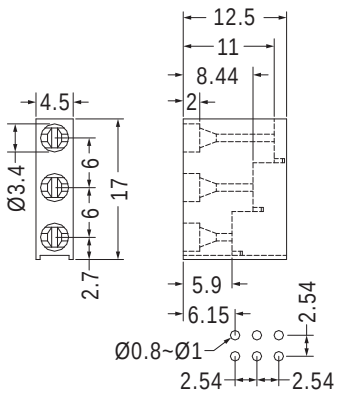

MOUNTING HOLE


Part No.	Package
LED-331	1000

90° LED座 90° LED MOUNT

用途：使Ø3 mm LED成90°焊於PC板上，高度一致，組合式子母套，焊腳不搖動。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

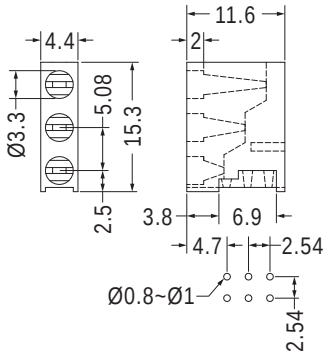


MOUNTING HOLE

Part No.	Package
LH-330	1000

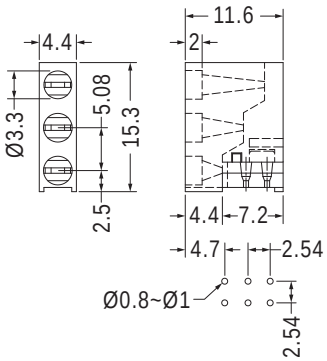

MOUNTING HOLE


Part No.	Package
KLH-330	1000

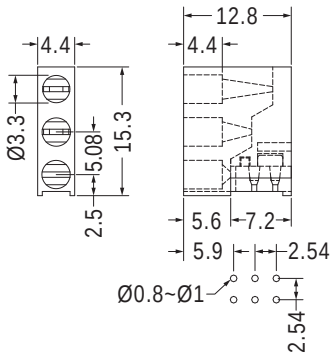


MOUNTING HOLE

Part No.	Package
KLH-331	1000

用途：使Ø3 mm LED成90°焊於PC板上，高度一致，有定位腳，不傾斜。

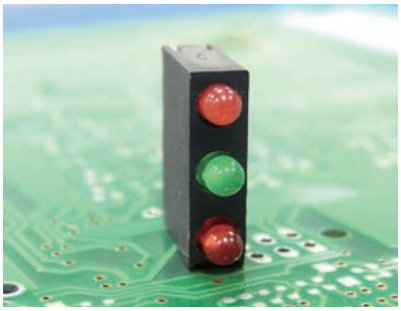


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

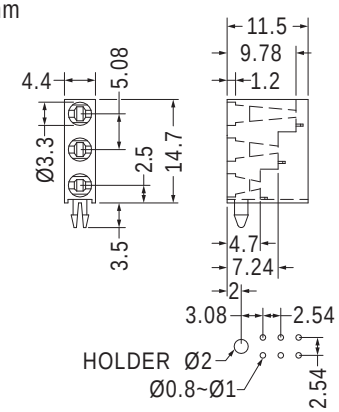


MOUNTING HOLE
THICKNESS 1.6


Part No.	Package
LEK-330	1000

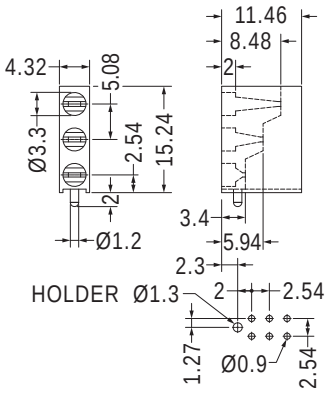


MOUNTING HOLE

Part No.	Package
LEK-331	1000

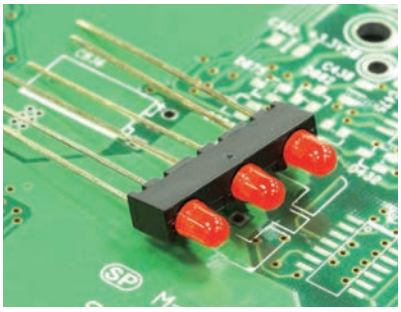

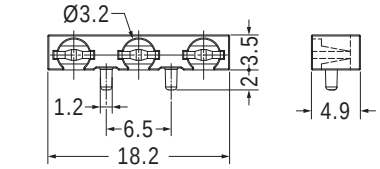




MOUNTING HOLE


Part No.	Package
LEK-348	1000

90° LED座 90° LED MOUNT

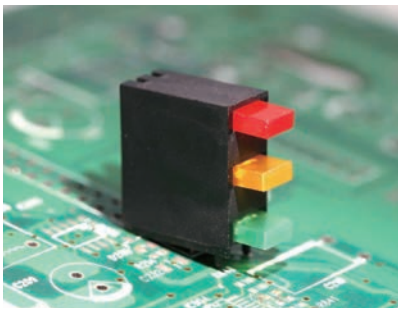


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

用途：使方形LED成90°焊於PC板上，高度一致，有定位腳，不傾斜。

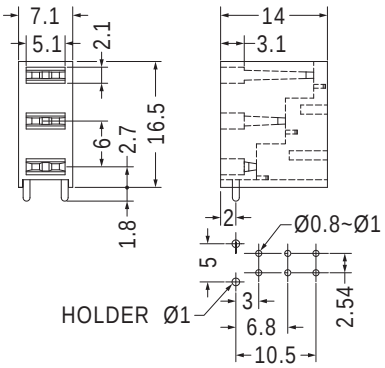


MOUNTING HOLE

Part No.	Package
LEK-315	1000

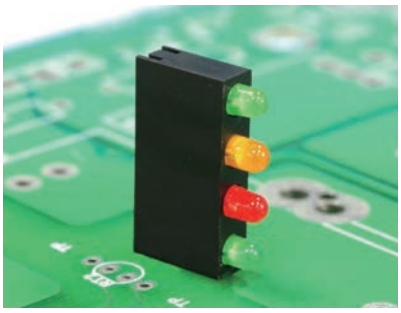


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

用途：使Ø3 mm LED成90°焊於PC板上，高度一致，不斷腳。

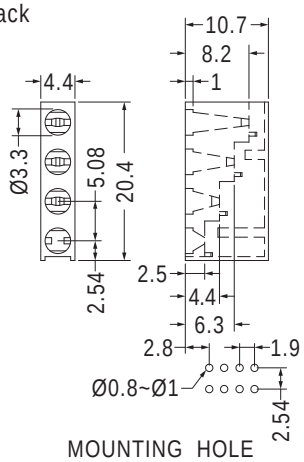


MOUNTING HOLE

Part No.	Package
LED-340	1000

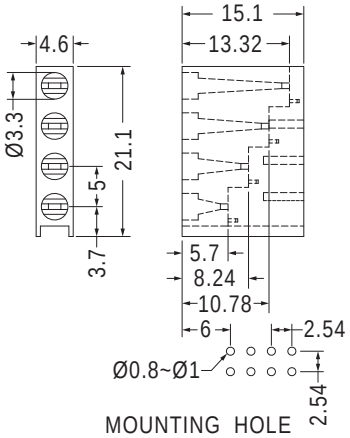


MOUNTING HOLE

Part No.	Package
LED-345	1000

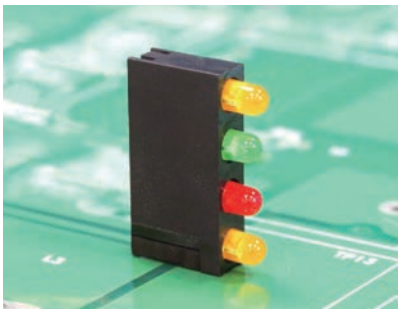


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

用途：使Ø3 mm LED成90°焊於PC板上，高度一致，組合式子母套，焊腳不搖動。

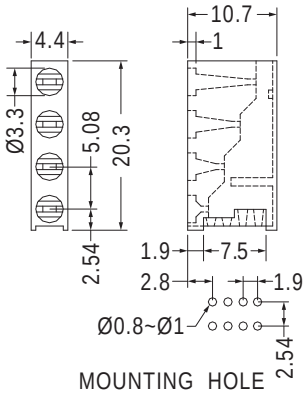


MOUNTING HOLE

Part No.	Package
LH-340	1000

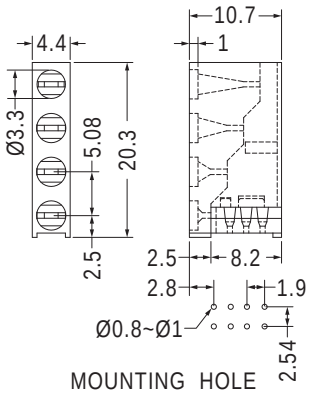


MOUNTING HOLE

Part No.	Package
KLH-340	1000

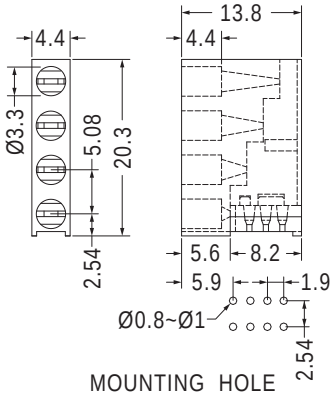

MOUNTING HOLE

Part No.	Package
KLH-341	1000

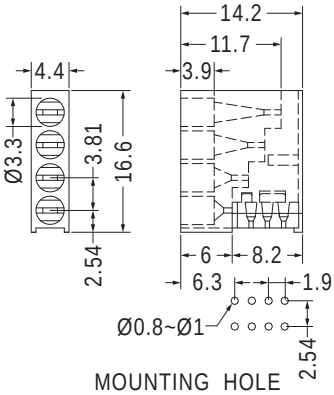


MOUNTING HOLE


Part No.	Package
KLH-342	1000

90° LED座 90° LED MOUNT

用途：使方形LED成90°焊於PC板上，高度一致，不斷腳。

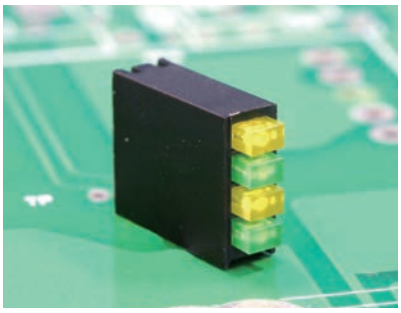

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

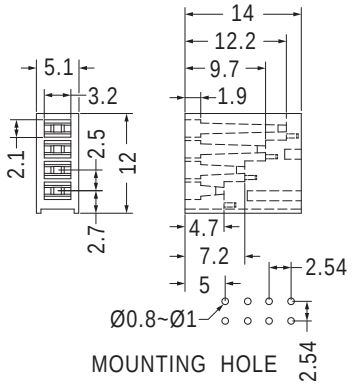


Part No.	Package
LED-341	1000



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm


用途：使Ø3 mm LED成90°焊於PC板上，高度一致，有定位腳，不傾斜。

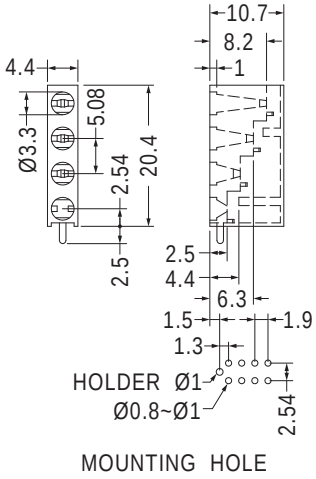


Part No.	Package
LEK-340	1000

LED座 LED MOUNT

用途：用於LED座。

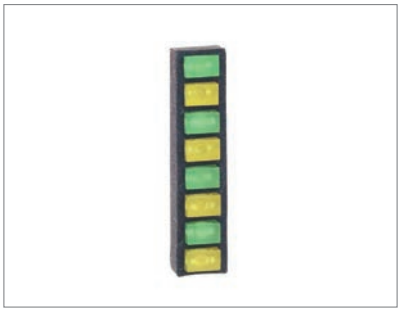

- Material: Silicon Rubber
- Color: Black
- Unit: mm




Part No.	Package
TF-1298	1000



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

用途：使方形5X2 LED 10顆預先組合，可快速固定於PC板上。





Part No.	Package
LED101	500



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm


用途：可快速將Ø3 mm LED固定於機器面板上，LED3-1B可加強LED3-2之固定或作為墊片使用。





MOUNTING HOLE Ø4.5
THICKNESS 1.7

Part No.	Package
LED3-2	2000




Part No.	Package
LED3-1B	2000



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm


用途：可快速將Ø3 mm LED固定於機器面板上。



MOUNTING HOLE Ø4.5
THICKNESS 0.8~1.2


Part No.	A	B	D	Package
LED3-1	5.6	5.0	3.8	2000
LED3-8	4.6	4.0	2.8	






MOUNTING HOLE Ø4.5
THICKNESS 0.8

Part No.	Package
LED3-4	2000




MOUNTING HOLE Ø4.5
THICKNESS 1.0

Part No.	Package
LED3-20	2000




MOUNTING HOLE Ø5.0
THICKNESS 1.0~1.1

Part No.	Package
LED3-5	2000



MOUNTING HOLE Ø4.5
THICKNESS 0.8


Part No.	Package
LED3-6	2000



MOUNTING HOLE Ø4.5
THICKNESS 1.6

Part No.	Package
LED3-7	2000



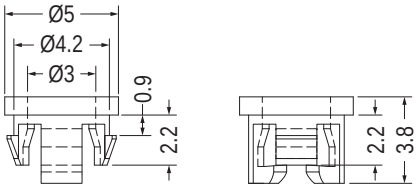


MOUNTING HOLE Ø4.3
THICKNESS 0.8


Part No.	Package
LED3-29	2000

LED座 LED MOUNT

用途：可快速將Ø3 mm LED固定於機器面板上。

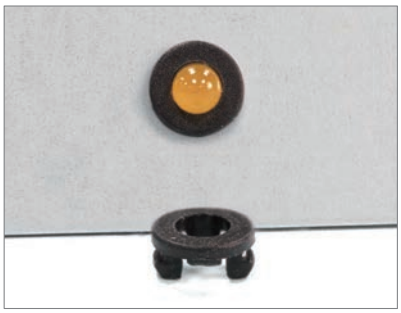


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

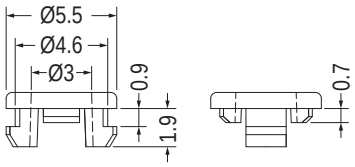

MOUNTING HOLE Ø4.8
THICKNESS 0.8


Part No.	Package
LED3-23	2000

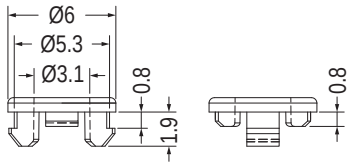

MOUNTING HOLE Ø5.3
THICKNESS 0.8


Part No.	Package
LED3-34	2000



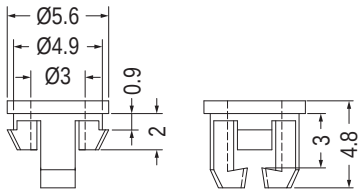

MOUNTING HOLE Ø5.0
THICKNESS 0.8


Part No.	Package
LED3-22	1000

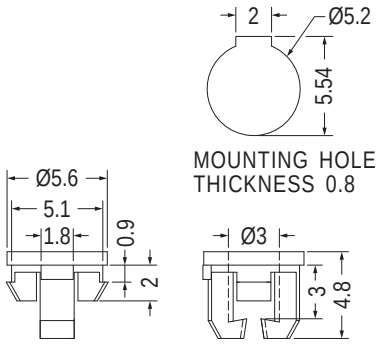

MOUNTING HOLE
THICKNESS 0.8


Part No.	Package
LED3-28	2000





MOUNTING HOLE Ø4.3
THICKNESS 0.7


Part No.	Package
LED3-61	1000




MOUNTING HOLE Ø5.0
THICKNESS 0.8

- Patented（專利品）


Part No.	A	C	Package
LED3-37	4.8	3.0	2000
LED3-38	4.8	2.8	
LED3-44	5.3	3.0	

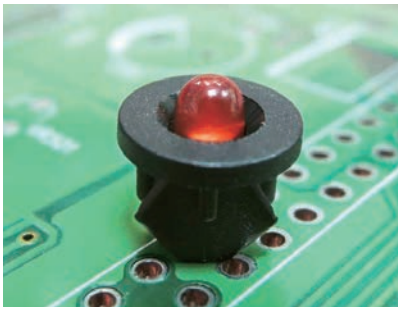




MOUNTING HOLE Ø6.35
THICKNESS 2.0

Part No.	Package
LED3-19	1000

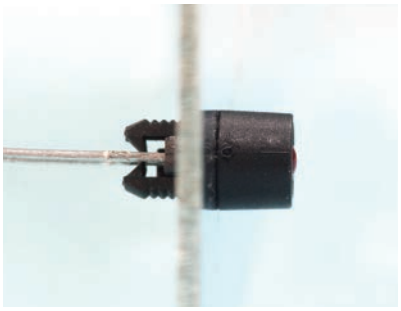


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

用途：可快速將Ø3 mm LED燈固定於機器面板上，有遮光，不干涉。



MOUNTING HOLE Ø4.5
THICKNESS 0.8

Part No.	Package
LED3-45	1000



MOUNTING HOLE Ø5.0
THICKNESS 0.8


- Patented (專利品)


Part No.	Package
LED3-46	1000



- Material: PC (UL)
- Flame Class: 94V-2
- Color: Black
- Unit: mm


用途：可快速將Ø3 mm LED固定於機器面板上。







MOUNTING HOLE
THICKNESS 0.8

Part No.	Package
LED3-53	1000

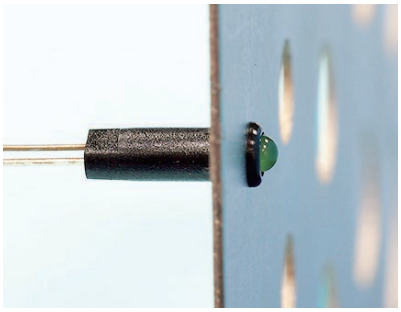


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm






MOUNTING HOLE Ø4.5




Part No.	Package
LED3-3	2000





- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm





MOUNTING HOLE
THICKNESS 0.6~0.8






Part No.	A	D	Package
LEQU3-1	12.8	8.0	2000
LEQU3-2	11.3	6.5	

LED座 LED MOUNT




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

用途：可快速將Ø5 mm LED固定於機器面板上。




MOUNTING HOLE Ø6.4
THICKNESS 1.2

Part No.	Package
LED5-1	2000




MOUNTING HOLE Ø6.4
THICKNESS 1.2

Part No.	Package
LED5-1S	2000

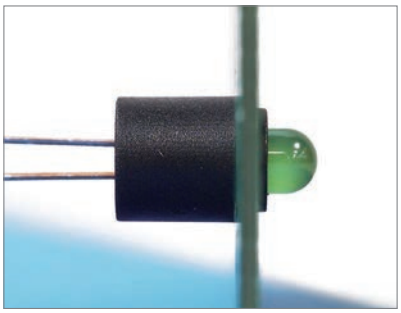


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

用途：可快速將Ø5 mm LED固定於機器面板上。LED5-8T可加強LED5-8之固定或作為墊片使用。



MOUNTING HOLE Ø6.35
THICKNESS 0.9

Part No.	Package
LED5-8	2000




Part No.	Package
LED5-8T	2000




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

用途：可快速將Ø5 mm LED固定於機器面板上，LED5-5T可加強LED5-5之固定或作為墊片使用。



MOUNTING HOLE Ø6.0
THICKNESS 1.8

Part No.	Package
LED5-5	2000





Part No.	Package
LED5-5T	2000



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

用途：可快速將橢圓LED固定於機器面板上。





MOUNTING HOLE
THICKNESS 1.0


Part No.	Package
LED5-6	2000

LED座 LED MOUNT




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

用途：可快速將Ø5 mm LED固定於機器面板上，或作為墊片使用。




Part No.	Package
LED5-27T	2000

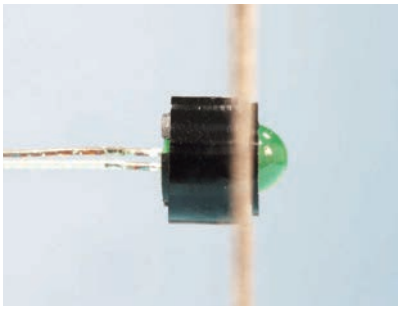


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

用途：可快速將Ø5 mm LED固定於機器面板上。LED5-2B可加強LED5-2之固定或作為墊片使用。




【 LED5-2A 】



【 LED5-2B 】


MOUNTING HOLE Ø6.4
THICKNESS 3.0

Part No.	Package
LED5-2	1000

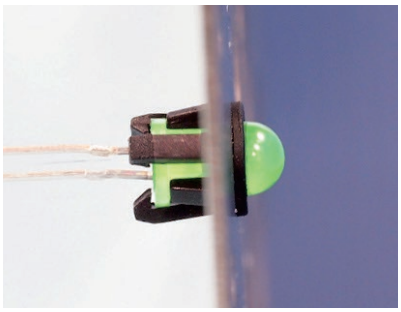


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm
- Patented（專利品）

用途：可快速將LED固定於機器面板上。




MOUNTING HOLE Ø7.0
THICKNESS: T

Part No.	A	B	C	D	T	Package
LED5-28	7.5	5.5	4.9	7.6	0.6~0.8	1000
★LED5-28L	7.5	5.5	4.9	7.6	1.0	
LED5-29	6.9	4.65	5.0	8.0	0.8	

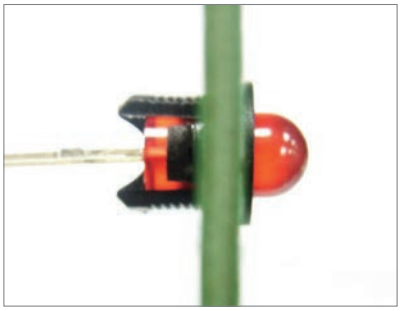


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

用途：可快速將Ø5 mm LED固定於機器面板上。



MOUNTING HOLE Ø6.5
THICKNESS 0.6~1.2

Part No.	Package
LED5-16S	2000




MOUNTING HOLE Ø7.0
THICKNESS: T


Part No.	A	T	Package
LED5-9	1.5	0.8~1.4	1000
LED5-9S	1.0	0.8	2000

LED座 LED MOUNT

用途：可快速將Ø5 mm LED固定於機器面板上。

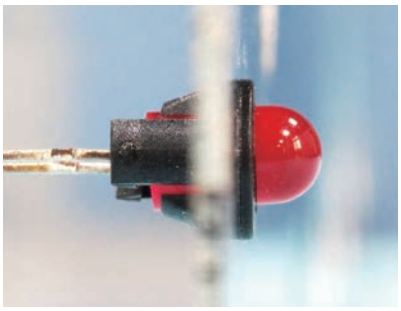


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm



MOUNTING HOLE: ØG
THICKNESS: T


Part No.	A	B	D	G	T	Package
LED5-11	6.3	1.1	3.3	6.0	0.8~1.0	2000
LED5-13	6.9	1.8	3.9	6.2	1.2~1.6	






MOUNTING HOLE Ø7.2
THICKNESS 1.2


Part No.	Package
LED5-25	500



MOUNTING HOLE Ø6.5
THICKNESS 0.8~1.0

Part No.	Package
LED5-14	2000

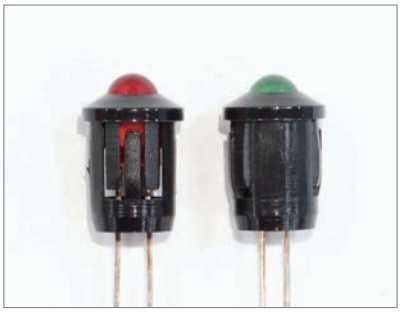




MOUNTING HOLE Ø8.0
THICKNESS 1.2~3.0


Part No.	Package
LED5-3	1000





MOUNTING HOLE Ø6.35
THICKNESS 0.8~1.4

Part No.	Package
LED5-4	1000




MOUNTING HOLE Ø6.4
THICKNESS 0.8~1.4

Part No.	Package
LED5-10	1000

用途：可快速將LED固定於機器面板上。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm




MOUNTING HOLE: ØG
THICKNESS: T

• 適用Ø3 LED帽緣款


Part No.	A	B	D	G	T	Suitable LED	Package
LED3-14	7.8	9.0	7.4	7.5	0.6~1.0	3 PIN	1000
LED3-14M	7.8	9.0	7.4	7.5	1.0~1.2	3 PIN	
LED3-15	6.5	7.2	6.3	6.4	0.6~1.0	2 PIN	
LED3-15M	6.5	7.2	6.3	6.4	1.0~1.2	2 PIN	





MOUNTING HOLE Ø6.35~Ø6.4
THICKNESS 0.8

Part No.	Package
LED3-33	1000




MOUNTING HOLE Ø6.35
THICKNESS: T

• 適用Ø3 LED帽緣款
• 適用於2 PIN、3PIN

Part No.	T	Package
LED3-16	0.6~1.0	1000
LED3-16M	1.0~1.2	






MOUNTING HOLE: ØG
THICKNESS: T

• 適用Ø5 LED帽緣款

Part No.	A	B	D	G	T	Suitable LED	Package
LED5-17	10.9	10.5	8.8	9.0	0.6~1.0	3 PIN	1000
LED5-17M	10.9	10.5	8.8	9.0	1.0~1.2	3 PIN	
LED5-18	9.5	9.0	7.4	7.5	0.6~1.0	2 PIN	
LED5-18M	9.5	9.0	7.4	7.5	1.0~1.2	2 PIN	
LED5-18L	9.5	9.0	7.4	7.6	1.5	2 PIN	






MOUNTING HOLE Ø5.2
THICKNESS 0.8~1.0

• 適用Ø3 LED帽緣款
• 適用於2 PIN

Part No.	Surface	Package
LED3-17	Matte	1000
LED3-35	Glossy	

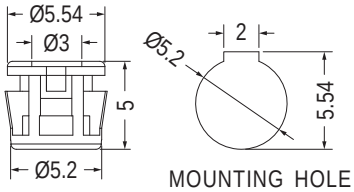

MOUNTING HOLE
THICKNESS 0.8

• 適用Ø3 LED帽緣款
• 適用於2 PIN、3 PIN


Part No.	Package
LED3-25	1000

LED座 LED MOUNT

用途：可快速將LED固定於機器面板上。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm



MOUNTING HOLE Ø5.2
THICKNESS 1.2


Part No.	Package
LED3-24	1000



MOUNTING HOLE Ø5.2
THICKNESS 0.8

- 適用Ø3 LED帽緣款
- 適用於2 PIN、3 PIN


Part No.	A	C	Package
LED3-18	5.7	2.9	1000
★LED3-18L	5.7	3.1	
LED3-43	5.5	2.9	
LED3-55	4.4	2.9	




MOUNTING HOLE Ø5.2
THICKNESS 0.8

- Patented (專利品)
- 適用Ø3 LED帽緣款
- 適用於2 PIN、3 PIN

Part No.	Package
LED3-59	1000

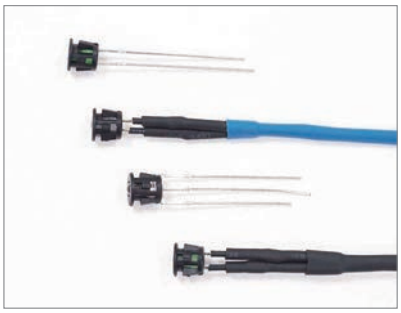


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm
- Patented (專利品)



MOUNTING HOLE: ØG
THICKNESS: T

- 適用Ø3 LED帽緣款
- 適用於2 PIN、3 PIN

Part No.	A	D	G	T	Package
LED3-30	5.0	5.2	5.2	1.1	1000
LED3-31	5.2	4.95	5.0	0.8	




MOUNTING HOLE Ø5.2
THICKNESS: T

- 適用於2 PIN、3 PIN

Part No.	A	C	T	適用LED帽緣款	Package
LED3-40	5.3	2.8	0.8~1.0	Ø2.8	1000
LED3-40S	5.3	2.8	0.8	Ø2.8	
LED3-41	5.3	2.8	1.2	Ø2.8	
LED3-42	5.7	2.95	0.8~1.0	Ø3.0	







MOUNTING HOLE Ø5.2
THICKNESS 0.6


- 適用Ø3 LED帽緣款
- 適用於2 PIN、3 PIN

Part No.	Package
LED3-17-0.6	1000

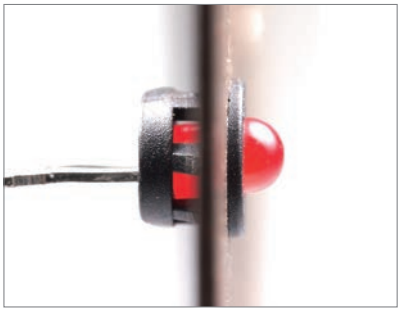


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm





MOUNTING HOLE
THICKNESS 0.8



RECOMMEND LED

NEW

- 適用Ø3 LED帽緣款
- 適用於2 PIN


Part No.	Package
LED3-64	1000

LED座 LED MOUNT

用途：可快速將LED固定於機器面板上。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

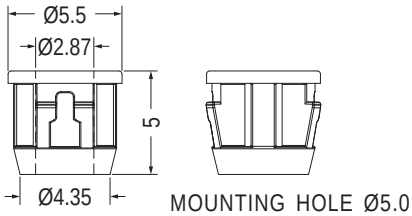

- 適用Ø2.8 LED帽緣款
- 適用於2 PIN

Part No.	Package
LED3-49	1000

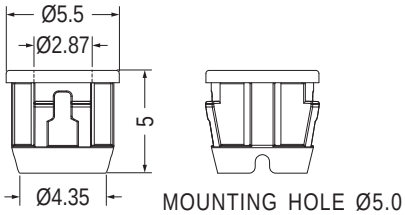


- 適用Ø2.8 LED帽緣款
- 適用於2 PIN、3 PIN

Part No.	T	Package
LED3-50	0.8	1000
LED3-50L	1.1	



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm
- Patented (專利品)

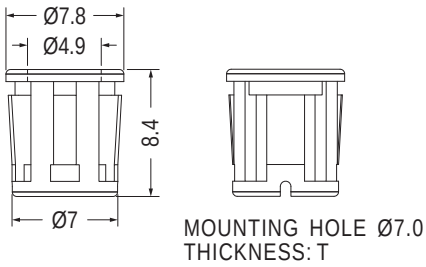

- 適用Ø5 LED帽緣款
- 適用於2 PIN、3 PIN


Part No.	T	Package
LED5-24	0.8	1000
LED5-24M	1.2	
LED5-24L	1.6	

LED套 LED SLEEVE


用途：用於LED的遮光。




- Material: Silicon Rubber
- Color: Black
- Unit: mm



Part No.	Package
LEDMK-1	2000




Part No.	A	C	E	F	Package
TF-263	5.8	2.6	5.3	1.9	2000
TF-444	6.0	2.8	5.45	1.3	

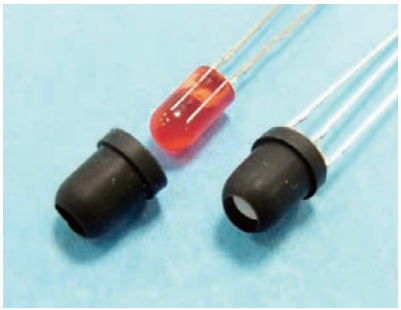

- Material: Silicon Rubber
- Color: Black
- Unit: mm

用途：用於LED的遮光，避免光干擾。



- 適用Ø3 LED、Ø5 LED
- 適用於2 PIN、3 PIN


Part No.	A	B	C	D	E	Package
LEDMK-3	5.1	3.7	2.2	4.1	5.4	2000
LEDMK-5	7.1	5.7	4.0	6.1	8.55	

LED座 LED MOUNT



- Body Material: PC (UL)
- Flame Class: 94V-2
- Color: Transparent/Natural
- Unit: mm

用途：快速固定Ø3 mm LED於面板上，需搭配M-6螺帽使用，可當電源指示燈。

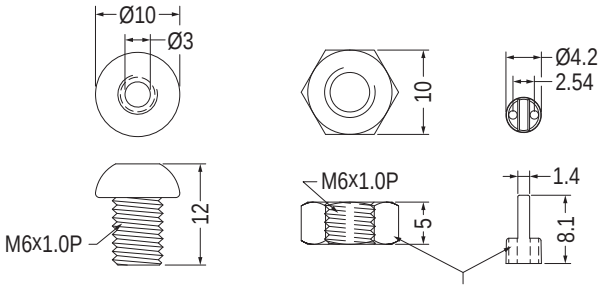


MOUNTING HOLE Ø6.4 (BODY) 【LELG-1A】

(NUT) 【M-6】


NYLON 66 UL94V-2 (LED SPACER) 【LELG-1B】

Part No.	Part No.	Package
LELG-1F	LELG-1A	2000
	LELG-1B	
	M-6	
	子母包：內容物包含右方零件	
	上述零件亦可單獨選購	

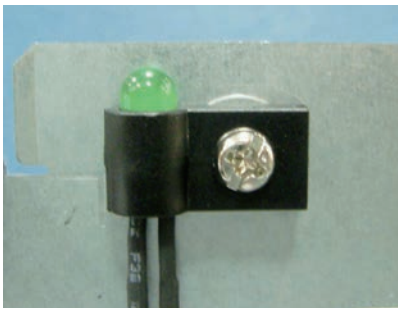

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

用途：可快速將LED固定於機器面板上。

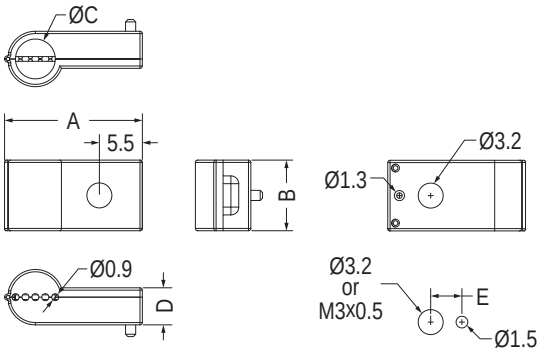

MOUNTING HOLE


- 適用於 2 PIN、3 PIN

Part No.	A	B	C	D	E	適用LED帽緣款	Package
LEKHD-1	17.65	9.05	5.1	4.75	4.0	Ø5	1000
LEKHD-2	14.05	6.0	3.1	4.25	3.0	Ø3	



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm
- Patented (專利品)

用途：可快速將Ø3 mm LED燈固定於機器面板上，有遮光，不干涉。

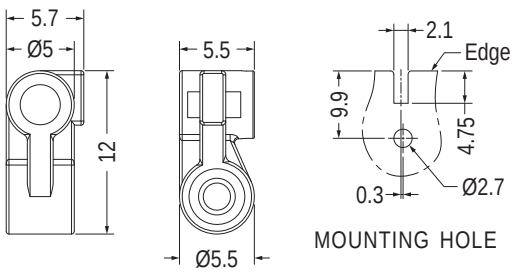

MOUNTING HOLE


Part No.	Package
LEKHA-1	1000

LED座 LED MOUNT




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

用途：可快速將LED固定於PC板上。

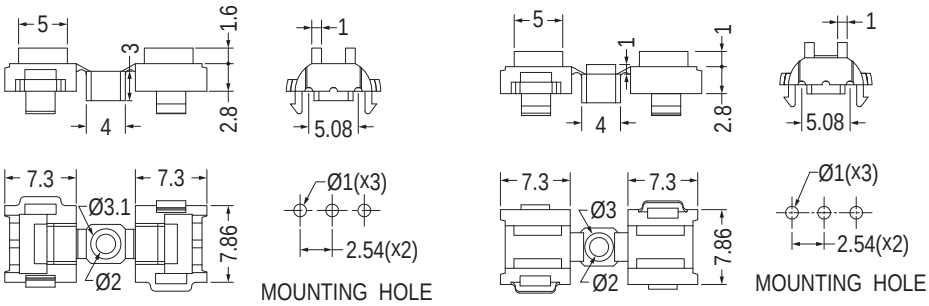


Part No.	Package
PMR-8	1000

Part No.	Package
PMR-15	1000

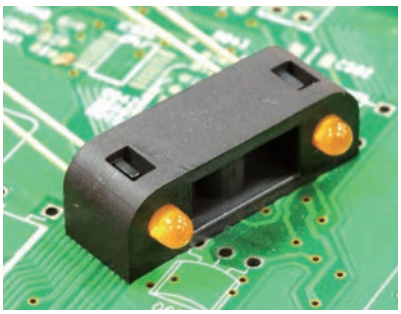


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

用途：配合螺絲，可將2 PIN、3 PIN Ø3 mm LED固定於機板上。





Part No.	Package
EMD-141	1000

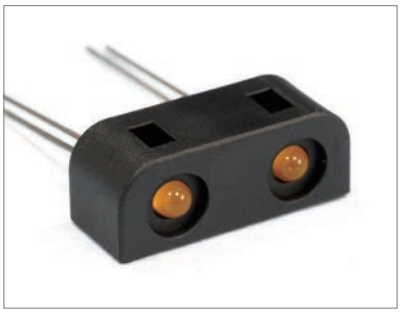

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

用途：配合螺絲，可將LED固定於機板上。






Part No.	Package
LED3-47	1000

Part No.	Package
LED3-48	1000



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm
- Patented（專利品）


用途：可快速將LED固定於機器面板上。

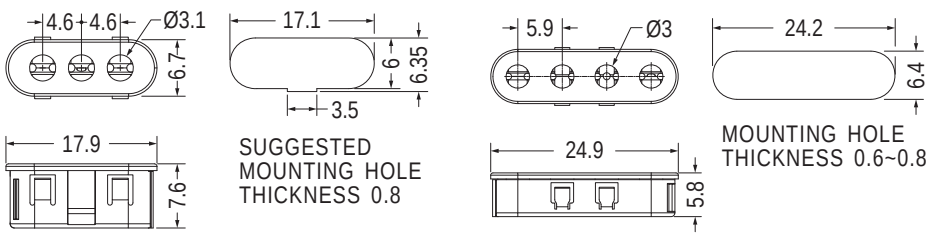

Part No.	Package
LED3-14-3S	1000


Part No.	Package
LED3-14-4S	1000


LED座 LED MOUNT

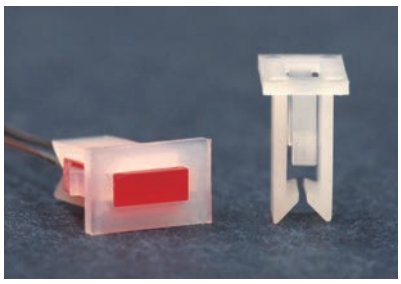

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

用途：可快速將5X2方形LED固定於機器面板上。

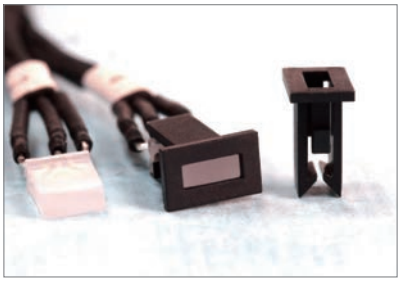

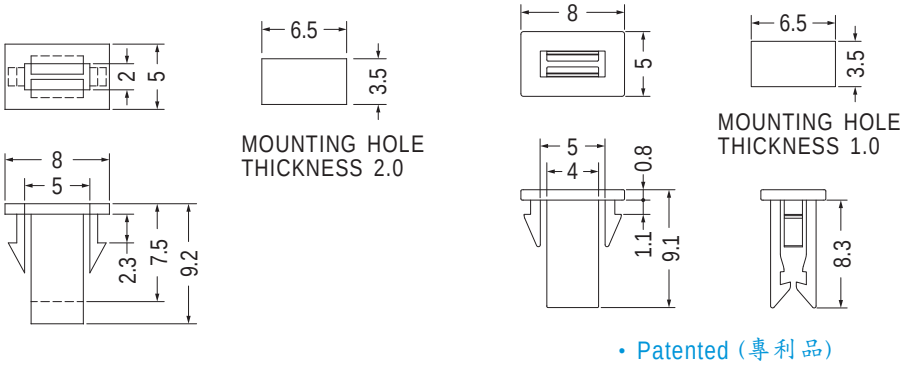

Part No.	Package
LEQ-1	2000


- Patented (專利品)

Part No.	Package
LEQ-3	2000




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

用途：可將方形LED固定於機器面板上，與LEQ-2T配合使用。

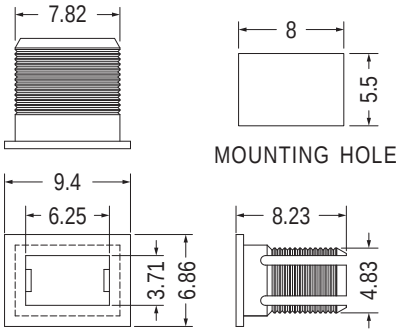


Part No.	Package
LEQ-2	1000

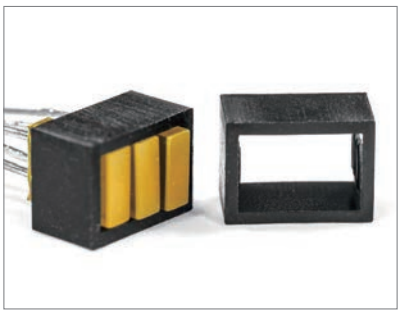


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

用途：可配合加強LEQ-2固定於機器面板上不脫落。

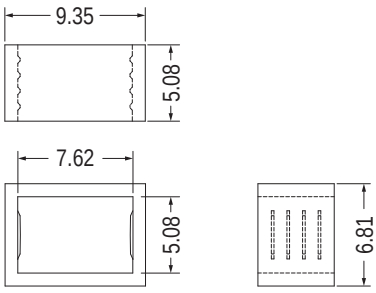


Part No.	Package
LEQ-2T	1000

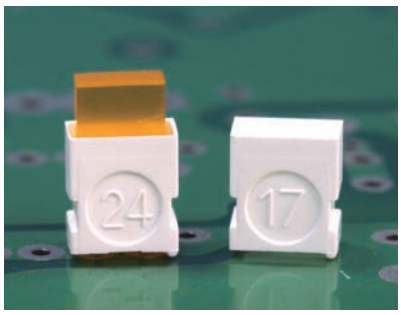


- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/White
- Unit: mm

用途：做為LED外殼。




Part No.	Package
ELED-1	2000


LED座 LED MOUNT

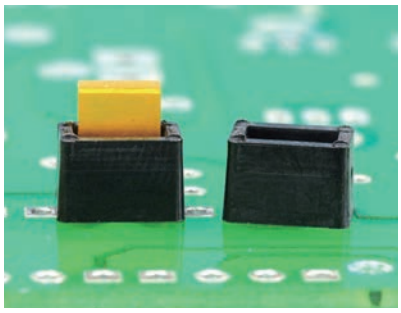

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm
- Patented（專利品）


用途：保護LED固定PC板上，使接腳不會彎曲、折斷、短路，並使LED高度一致。






Part No.	Package
LEF-1	2000


LED間隔柱 LED SPACER

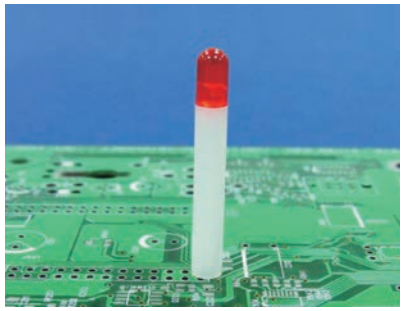


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

用途：用於保護Ø5 mm LED立於PC板上，使高度一致，接腳不會彎曲、折斷、短路。





【 LED-1 】




【 LED-1.5L 】

Part No.	A	Package
LED-1	1.0	2000
LED-1.5	1.5	
LED-1.5L	1.5	
LED-2	2.0	
LED-2.5	2.5	
LED-3	3.0	
LED-3.5	3.5	
LED-4	4.0	
LED-4.5	4.5	
LED-5	5.0	
LED-5.5	5.5	
LED-6	6.0	
LED-6.5	6.5	
LED-6.8	6.8	
LED-7	7.0	
LED-7.5	7.5	
LED-8	8.0	
LED-8.5	8.5	


Part No.	A	Package
LED-8.8	8.8	2000
LED-9	9.0	
LED-9.5	9.5	
LED-10	10.0	
LED-10S	10.0	
LED-10.5	10.5	
LED-11	11.0	
LED-11.5	11.5	
LED-12	12.0	
LED-12.5	12.5	
LED-13	13.0	
LED-13.5	13.5	
LED-14	14.0	1000
LED-14.5	14.5	
LED-15	15.0	
LED-15.5	15.5	
LED-16	16.0	
LED-16.5	16.5	

Part No.	A	Package
LED-17	17.0	1000
LED-17.5	17.5	
LED-17.7	17.7	
LED-18	18.0	
LED-18.5	18.5	
LED-19	19.0	
LED-19.5	19.5	
LED-20	20.0	
LED-20.5	20.5	
LED-21	21.0	
LED-21.5	21.5	
LED-22	22.0	
LED-22.5	22.5	
LED-23	23.0	
LED-23.5	23.5	
LED-24	24.0	
★LED-27	27.0	
LED-28	28.0	



Part No.	A	B	Package
LEDW-2	2.0	5.6	2000
LEDW-5	5.0	5.0	
LEDW-7.5	7.5	5.0	
LEDW-9	9.0	5.0	
LEDW-12	12.0	5.0	
LEDW-15	15.0	5.6	
LEDW-16	16.0	5.6	1000

Part No.	A	B	Package
LEDW-17	17.0	5.6	1000
LEDW-18.5	18.5	5.6	
LEDW-19	19.0	5.6	
LEDW-21	21.0	5.6	
LEDW-21.5	21.5	5.6	
LEDW-22	22.0	5.6	
LEDW-23.5	23.5	5.6	




Part No.	Package
LEDW-20	1000

LED間隔柱 LED SPACER




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


用途：用於保護Ø3 mm LED立於PC板上，使高度一致，中間隔板設計，接腳不會彎曲、折斷、短路。



Part No.	A	Package
LEDEW-5	5.0	1000
LEDEW-8.5	8.5	
LEDEW-15	15.0	
LEDEW-17	17.0	
LEDEW-17.5	17.5	




Part No.	Package
LEDSW-18.5	1000

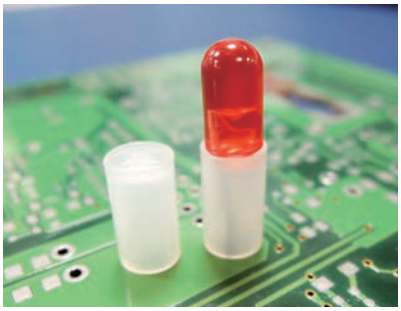


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


用途：使LED立於PC板上，高度一致，不斷腳。




Part No.	Package
LEDLA-9.8	2000



Part No.	Package
LEDSB-11	2000




Part No.	Package
LEDE-17.5	1000

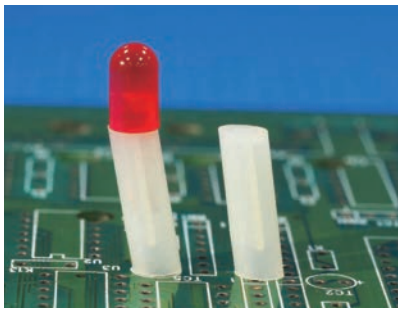

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


用途：使LED成80.5°焊於PC板上，高度一致，不斷腳，中間有隔板不短路。

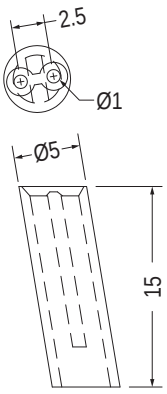


Part No.	Package
LEDA-15	1000

LED間隔柱 LED SPACER


用途：用於保護Ø3 mm LED立於PC板上，接腳不會彎曲、折斷、短路，且使LED高度一致，免用治具，尺寸齊全。

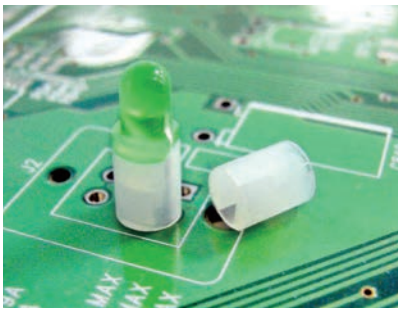

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




【 LEDS-0.8~LEDS-3.5 】



Part No.	A	Package
LEDS-0.8	0.8	2000
LEDS-1	1.0	
LEDS-1.5	1.5	
LEDS-2	2.0	
LEDS-2.5	2.5	
LEDS-3	3.0	
LEDS-3.5	3.5	
LEDS-4	4.0	
LEDS-4.5	4.5	
LEDS-5	5.0	
LEDS-5.5	5.5	
LEDS-6	6.0	
LEDS-6.5	6.5	

Part No.	A	Package
LEDS-7	7.0	2000
LEDS-7.5	7.5	
LEDS-8	8.0	
LEDS-8.5	8.5	
LEDS-9	9.0	
LEDS-9.5	9.5	
LEDS-9.8	9.8	
LEDS-10	10.0	
LEDS-10.5	10.5	
LEDS-11	11.0	
LEDS-11.5	11.5	
LEDS-12	12.0	
LEDS-12.5	12.5	
LEDS-13	13.0	
LEDS-13.5	13.5	
LEDS-14	14.0	
LEDS-14.5	14.5	
LEDS-15	15.0	

Part No.	A	Package
LEDS-15.5	15.5	2000
LEDS-16	16.0	
LEDS-16.5	16.5	1000
LEDS-17	17.0	
LEDS-17.5	17.5	
LEDS-18	18.0	
LEDS-18.5	18.5	
LEDS-19	19.0	
LEDS-19.5	19.5	
LEDS-20	20.0	
LEDS-20.5	20.5	
LEDS-21	21.0	
LEDS-21.5	21.5	
LEDS-22	22.0	
LEDS-22.5	22.5	
LEDS-23	23.0	
LEDS-23.5	23.5	
LEDS-24	24.0	



Part No.	A	Package
LEDS-3S	3.0	2000
LEDS-4S	4.0	
LEDS-4.5S	4.5	
LEDS-5S	5.0	
LEDS-5.5S	5.5	
LEDS-6S	6.0	
LEDS-6.5S	6.5	
LEDS-7S	7.0	
LEDS-7.5S	7.5	
LEDS-8S	8.0	
LEDS-8.5S	8.5	
LEDS-9S	9.0	
LEDS-9.5S	9.5	
LEDS-10S	10.0	
LEDS-11S	11.0	
LEDS-11.5S	11.5	
LEDS-12S	12.0	
LEDS-12.5S	12.5	


Part No.	A	Package
LEDS-13S	13.0	2000
LEDS-13.5S	13.5	
LEDS-14.5S	14.5	
LEDS-15S	15.0	
LEDS-15.5S	15.5	
LEDS-16S	16.0	
LEDS-16.5S	16.5	
LEDS-17S	17.0	1000
LEDS-17.5S	17.5	
LEDS-18S	18.0	
LEDS-18.5S	18.5	
LEDS-19S	19.0	
LEDS-20S	20.0	
LEDS-20.5S	20.5	
LEDS-21S	21.0	
LEDS-21.5S	21.5	
LEDS-22S	22.0	
LEDS-22.5S	22.5	
LEDS-23S	23.0	

LED間隔柱 LED SPACER




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


用途：使Ø3 mm LED立於PC板上，高度一致，不斷腳。



Part No.	Package
LEDL-3	2000




Part No.	Package
LEDL-5.5	2000

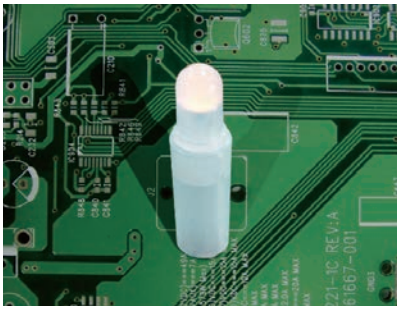


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

用途：使3 PIN Ø3 mm LED立於PC板上，高度一致，不斷腳。





Part No.	Package
LEH3-16	2000

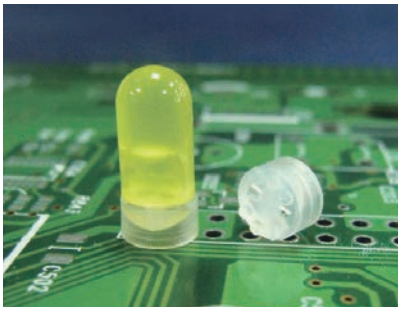


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


用途：使Ø5 mm LED固定於PC板上，高度一致，不斷腳。








Part No.	Package
LED2M-3.6	2000

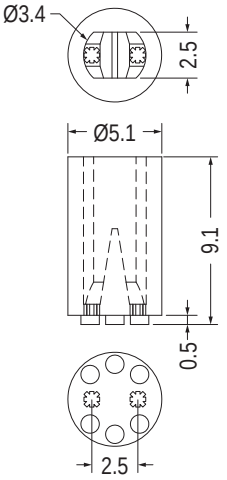

Part No.	Package
LED2M-9.1	2000





- 適用Ø5 LED帽緣款
- 適用於2 PIN、3 PIN


Part No.	Package
LEDF-2	2000

LED間隔柱 LED SPACER




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

用途：使LED固定於PC板上，高度一致，不斷腳。





Part No.	Package
LEDF-3	2000






Part No.	Package
COC8-5	2000

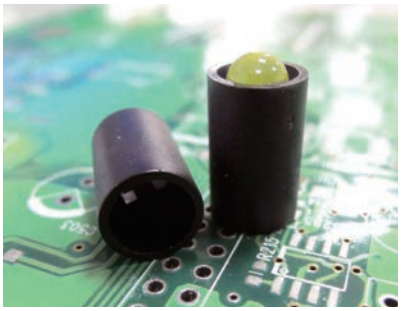




Part No.	Package
LEDD-12	1000

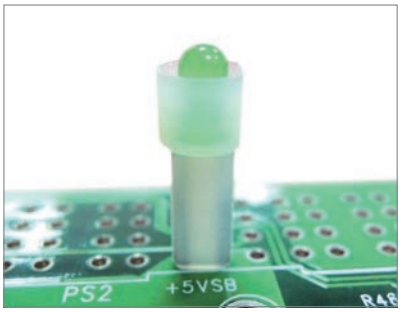


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

用途：用於保護Ø3 mm LED立於PC板上，高度一致，不斷腳，有遮光效果，不漏光。




Part No.	Package
LEDZ3-9	2000

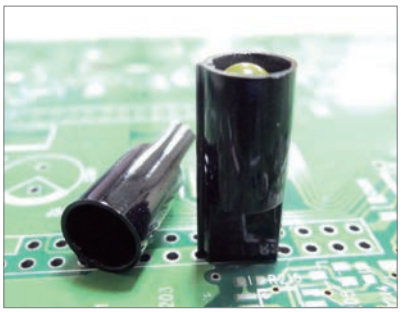


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

用途：用於保護Ø5 mm LED立於PC板上，高度一致，不斷腳，有遮光效果，不漏光。

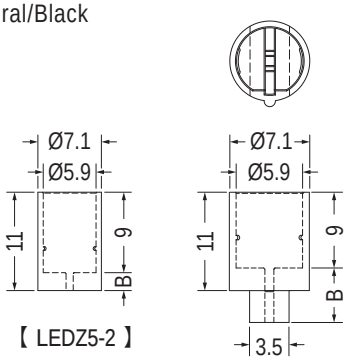


Part No.	B	Package
LEDZ5-2	2.0	2000
LEDZ5-3	3.0	
LEDZ5-4	4.0	
LEDZ5-5	5.0	
LEDZ5-6	6.0	
LEDZ5-7	7.0	
LEDZ5-8	8.0	
LEDZ5-9	9.0	
LEDZ5-10	10.0	

LED間隔柱 LED SPACER

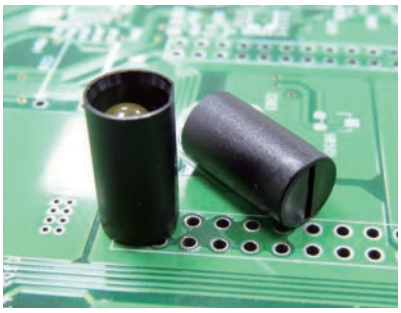



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




用途：用於保護Ø5 mm LED立於PC板上，高度一致，不斷腳，有遮光效果，不漏光。

Part No.	A	Package
LEDX5-1	9.0	2000
LEDX5-2	12.5	1000

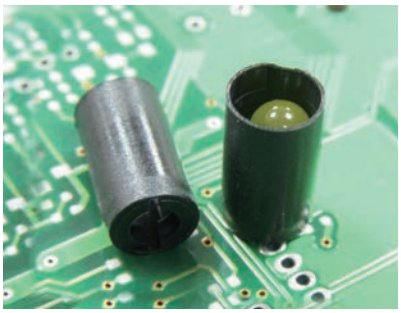




Part No.	Package
LEDXA5-2	1000

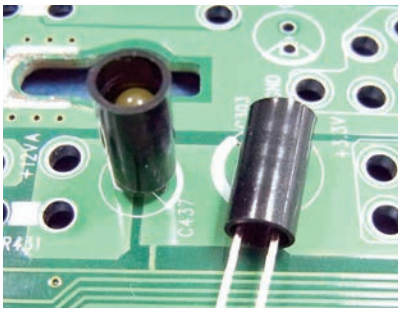


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




用途：用於保護Ø3 mm LED立於PC板上，高度一致，不斷腳，不漏光。

Part No.	A	B	Package
LEDX3-1	9.5	1.0	1000
LEDX3-3	8.0	5.0	

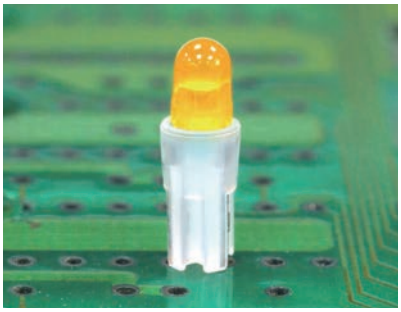



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



用途：使LED立於PC板上，高度一致，不斷腳。

Part No.	Package
LEDXB-7.5	1000

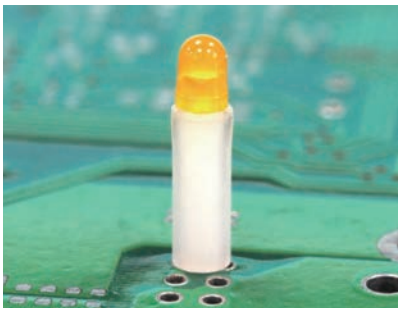




Part No.	Package
LEDBF-10	1000

LED間隔柱 LED SPACER




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




用途：使LED立於PC板上，高度一致，不斷腳。

Part No.	A	Package
LEDO-6	6.5	2000
LEDO-9.5	9.5	
LEDO-15.5	15.5	1000







Part No.	A	Package
LEDXV-4.8	4.8	2000
LEDXV-6.5	6.5	
LEDXV-9.5	9.5	
LEDXV-12.7	12.7	
LEDXV-19.1	19.1	
LEDXV-22.2	22.2	
LEDXV-25.4	25.4	

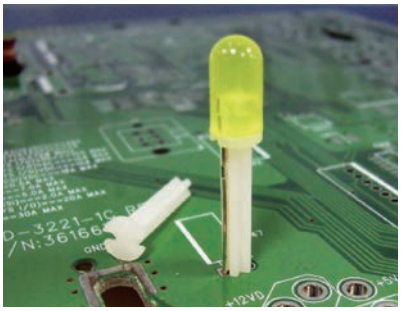


- Material: ABS (UL)
- Flame Class: 94HB
- Color: Natural
- Unit: mm

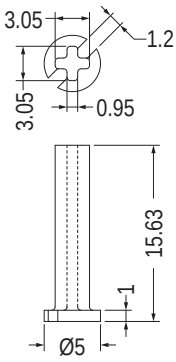

Part No.	Package
LEDXA-15.6	2000

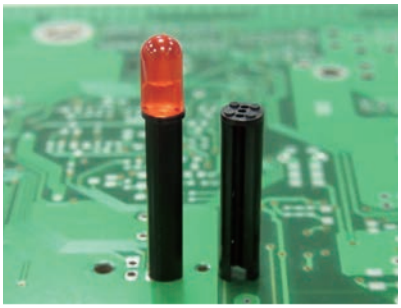

- Material: PBT (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm

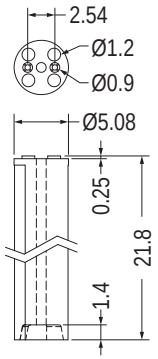


用途：用於保護Ø5 mm LED立於PC板上，高度一致，接腳不彎曲，折斷、短路。

Part No.	Package
LEDAA-22	1000



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



用途：使3 PIN Ø3 mm LED固定於PC板上，高度一致，不斷腳。


Part No.	A	B	Package
LEDM-3	3.0	1.0	2000
LEDM-4	4.0	1.0	
LEDM-5	5.0	1.5	
LEDM-8	8.0	5.0	
LEDM-16	16.0	13.0	1000

LED間隔柱 LED SPACER




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


用途：使3 PIN Ø3 mm LED固定於PC板上，高度一致，不斷腳。



Part No.	Package
LEDQ-5	2000

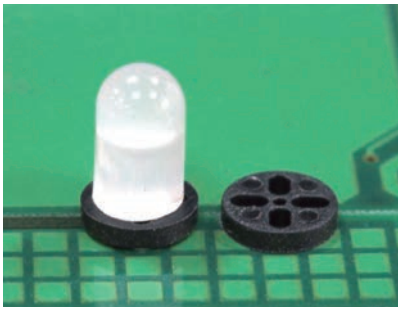


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
LEDAJ-5	2000

用途：使LED固定於PC板上，高度一致，不斷腳。


- Material: TPE
- Color: Black
- Unit: mm




Part No.	A	Package
LEDAJ-1.3	1.3	2000
LEDAJ-7.9	7.9	

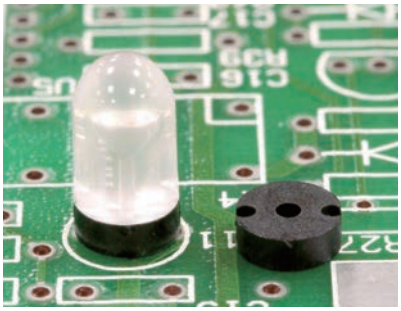




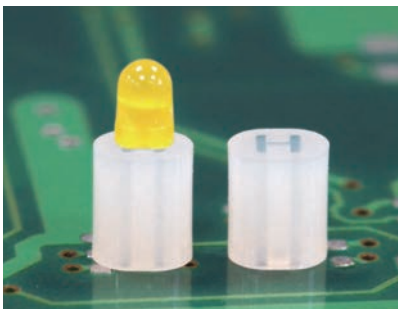


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
LEDHB-2.3	2000




Part No.	Package
LEDBA-2.5	1000



Part No.	Package
LEDBC-1.6	2000




Part No.	Package
LEDBB-3	2000




Part No.	Package
LEDBD-4.8	1000

LED間隔柱 LED SPACER


用途：使LED立於PC板上，高度一致，不斷腳。

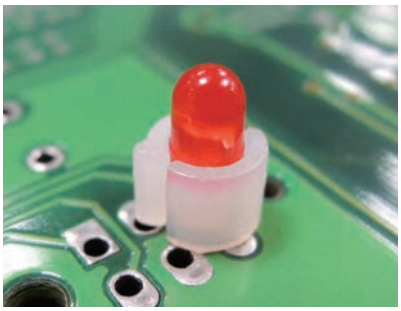


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
LEDHC-4	2000

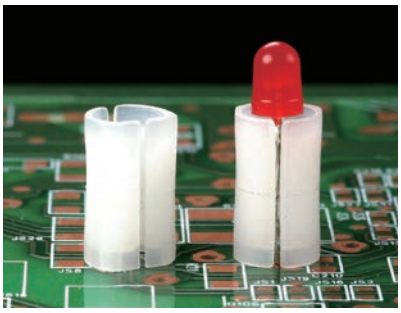





NEW

Part No.	Package
LEDHG-8	2000

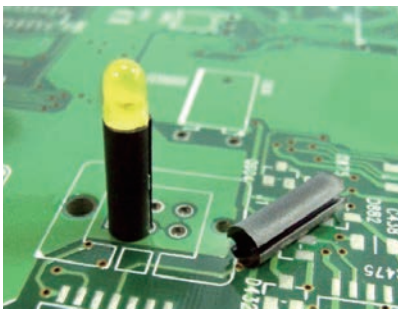




Part No.	A	Package
LEDG-3	3.0	2000
LEDG-10	10.1	




Part No.	Package
LEDG-4	2000






Part No.	Package
LEDV-5.5	2000




Part No.	Package
LEDV-42	1000






Part No.	Package
LEDHA-4	2000




Part No.	Package
LEDH-2S	2000


LED間隔柱 LED SPACER

用途：使LED立於PC板上，高度一致，不斷腳。

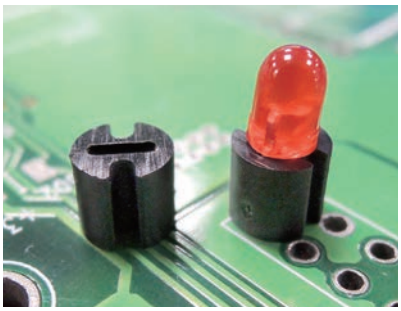

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

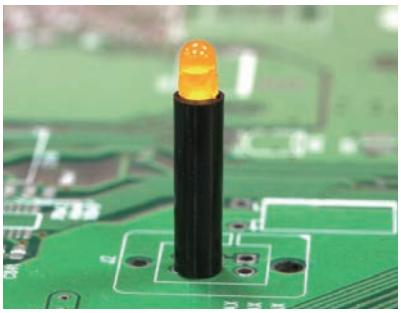





Part No.	A	Package
LEDH-1	1.0	2000
LEDH-1.5	1.5	
LEDH-2	2.0	
LEDH-2.5	2.5	
LEDH-3	3.0	
LEDH-3.5	3.5	
LEDH-4	4.0	
LEDH-4.5	4.5	
LEDH-5	5.0	
LEDH-5.5	5.5	
LEDH-6	6.0	
LEDH-6.5	6.5	
LEDH-7	7.0	
LEDH-7.5	7.5	
LEDH-8	8.0	
LEDH-8.5	8.5	
LEDH-9	9.0	

Part No.	A	Package
LEDH-9.5	9.5	2000
LEDH-10	10.0	
LEDH-10.5	10.5	
LEDH-11	11.0	
LEDH-11.5	11.5	
LEDH-12	12.0	
LEDH-12.5	12.5	
LEDH-13	13.0	
LEDH-13.5	13.5	
LEDH-14	14.0	
LEDH-14.5	14.5	
LEDH-15	15.0	
LEDH-15.5	15.5	
LEDH-16	16.0	
LEDH-17	17.0	
LEDH-17.5	17.5	
LEDH-18	18.0	





【 LEDT-5~LEDT-14.5 】




- Material: TPE
- Color: Black

Part No.	Package
LEDT-6.4S	1000


Part No.	A	B	Package
LEDT-2.4	2.4	4.0	2000
LEDT-5S	5.0	4.0	1000
LEDT-7S	7.0	3.7	2000
LEDT-5	5.0	5.0	1000
LEDT-5.5	5.5	5.0	
LEDT-8	8.0	5.0	
LEDT-9	9.0	5.0	
LEDT-11	11.0	5.0	

Part No.	A	B	Package
LEDT-14.5	14.5	5.0	1000
LEDT-16.1	16.1	5.0	
LEDT-16.4	16.4	5.0	
LEDT-17.5	17.5	5.0	
LEDT-20	20.2	5.0	
LEDT-22	22.0	5.0	
LEDT-22.7	22.7	5.0	
LEDT-23.5	23.5	5.0	
LEDT-26	26.0	5.0	




- Material: TPE
- Color: Black


Part No.	Package
LEDAK-9.5	2000



Part No.	A	Package
LEDAC-14.5	14.5	2000
LEDAC-18	18.0	




Part No.	A	Package
LEDSH-2	2.0	2000
LEDSH-3.5	3.5	
LEDSH-6	6.0	




Part No.	Package
LEDSA-6	2000


LED間隔柱 LED SPACER

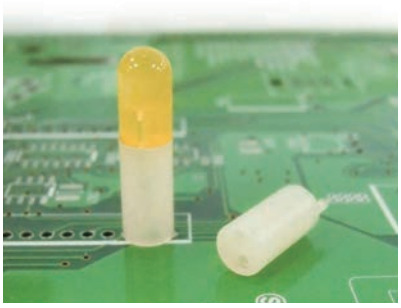

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

用途：用於保護Ø5 mm LED立於PC板上，使高度一致，中間隔板設計，接腳不會彎曲、折斷、短路，有定位腳，不歪斜。

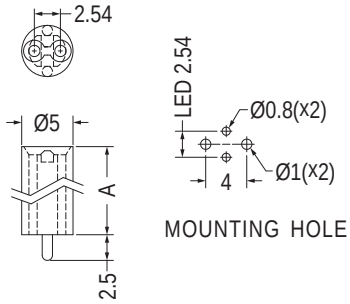


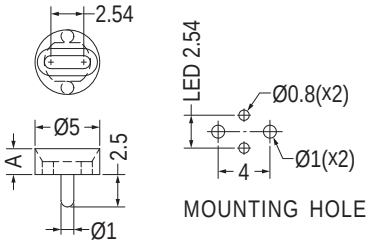


Part No.	A	Package
LEDK-2	2.0	2000
LEDK-3	3.0	

Part No.	A	Package
LEDK-4	4.0	2000
LEDK-6	6.0	
LEDK-7	7.0	
LEDK-8	8.0	
LEDK-9	9.0	
LEDK-10	10.0	
LEDK-11	11.0	1000


Part No.	A	Package
LEDK-11.5	11.5	1000
LEDK-12	12.0	
LEDK-12.5	12.5	
LEDK-13	13.0	
LEDK-14	14.0	
LEDK-18	18.0	
LEDK-20	20.0	

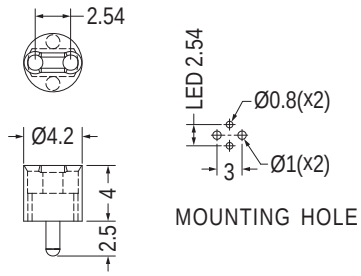

Part No.	Package
LEDK-4S	1000

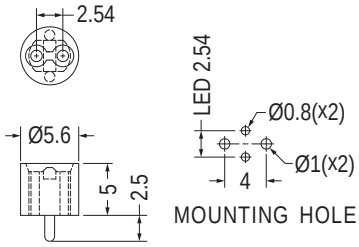

Part No.	Package
LEDK-5	1000

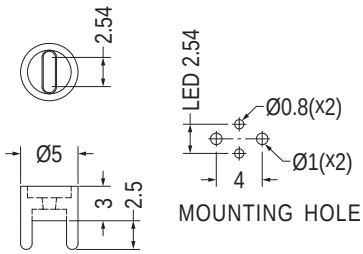


Part No.	Package
LEDKU-2	1000




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

用途：用於保護Ø3 mm LED立於PC板上，使高度一致，中間隔板設計，接腳不會彎曲、折斷、短路，有定位腳，不歪斜。

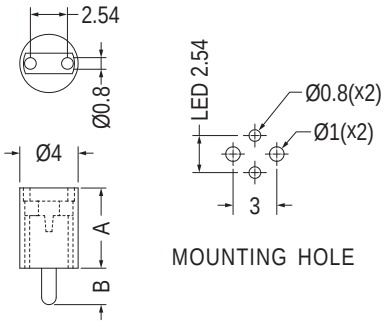


Part No.	A	B	Package
LEDWK-5.5	5.5	2.5	1000
LEDWK-6	6.0	2.5	
LEDWK-7	7.0	2.5	
LEDWK-8.5	8.5	2.5	
LEDWK-9	9.0	2.5	
★LEDWK-10S	10.0	1.6	
LEDWK-10	10.0	2.5	
LEDWK-11	11.0	2.5	
LEDWK-12	12.0	2.5	
LEDWK-13	13.0	2.5	
LEDWK-14	14.0	2.5	
LEDWK-15	15.0	2.5	
LEDWK-17	17.0	2.5	
LEDWK-23	23.0	2.5	

LED間隔柱 LED SPACER

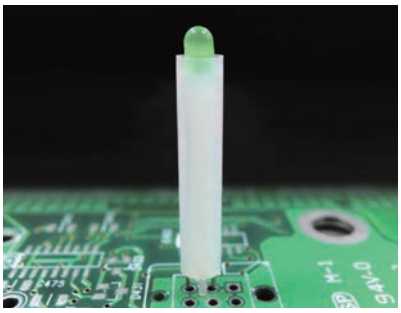


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

用途：用於保護LED焊於PC板上，高度一致，有定位腳，不歪斜。

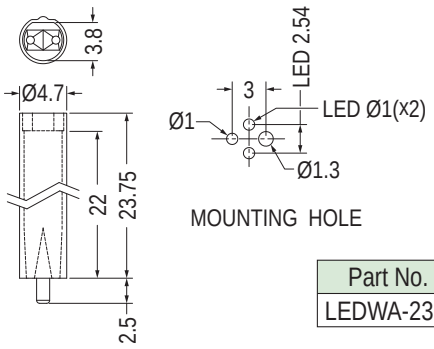


Part No.	Package
LEDWA-23.7	1000

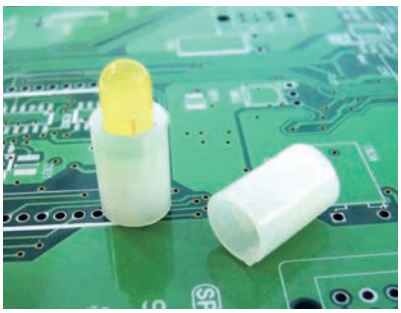


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

用途：用於保護3 PIN Ø5 mm LED焊於PC板上，高度一致，不斷腳，有定位腳，不歪斜。

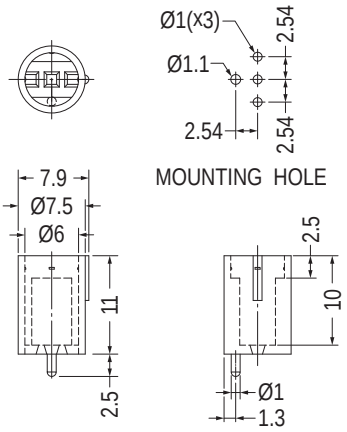

Part No.	Package
LECC-8.5	1000

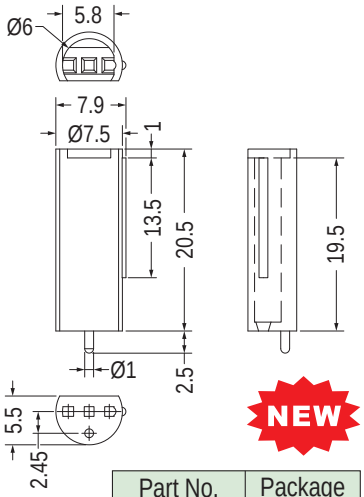


Part No.	Package
LECA-19.5	1000




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

用途：用於保護4 PIN Ø5 mm LED焊於PC板上，高度一致，有定位腳，不歪斜。

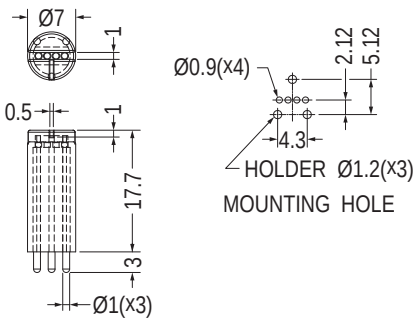



Part No.	Package
LEDKB-17.7	1000

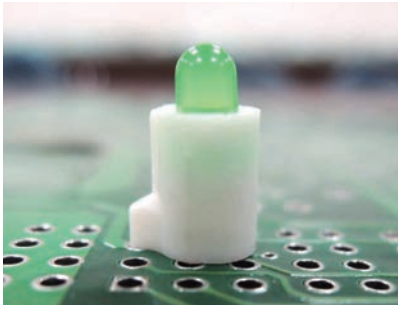

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm
- Patented（專利品）


用途：用於保護2 PIN Ø3 mm LED焊於PC板上，高度一致，有定位腳，不歪斜。

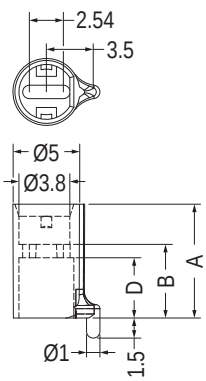




Part No.	A	B	D	Package
LEDXK3-4.5	6.9	4.5	3.5	1000
LEDXK3-5.5	8.5	5.5	4.5	

LED間隔柱 LED SPACER

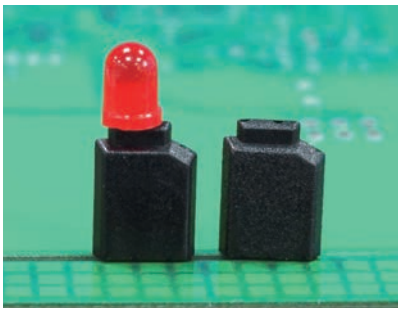


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

用途：固定LED焊於PC板上，高度一致，有定位腳，不傾斜。

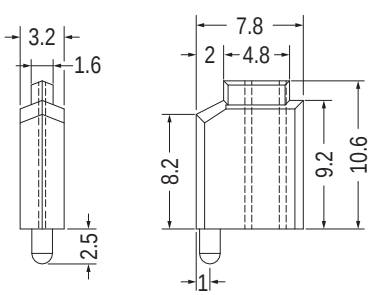


Part No.	Package
LEDR-1	1000

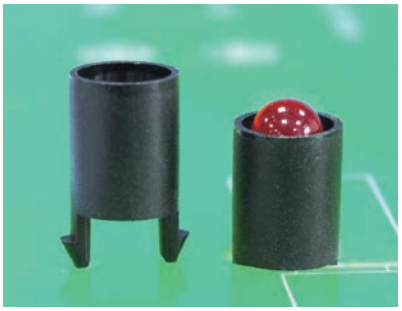

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

用途：可快速將Ø5 mm LED固定於機板上。

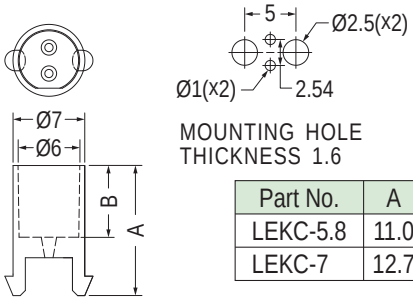


Part No.	A	B	Package
LEKC-5.8	11.0	5.8	2000
LEKC-7	12.7	7.0	





- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

用途：使3 PIN Ø5 mm LED固定於PC板上，高度一致，不斷腳。




Part No.	A	B	Package
LEDU-4	4.0	3.0	2000
LEDU-6	6.0	5.0	
LEDU-9.5	9.5	8.5	
LEDU-11.5	11.5	10.5	

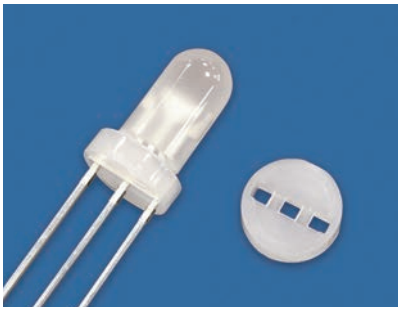




Part No.	Package
LEDU-2	2000




Part No.	Package
LEDU-1.5	2000

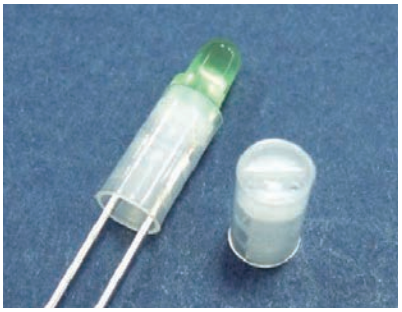


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

用途：用於保護Ø3 mm LED立於PC板上，高度一致，接腳不會彎曲、折斷、短路。



Part No.	A	Package
LEDMU-8.5	8.5	1000
LEDMU-10	10.0	
LEDMU-15	15.0	
★LEDMU-18.5	18.5	
LEDMU-20	20.0	


LED間隔柱 LED SPACER

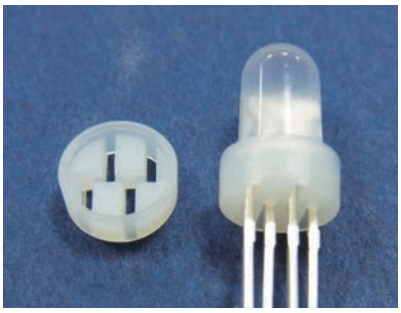


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

用途：使4 PIN變色LED固定於PC板上，高度一致，不斷腳。






MOUNTING HOLE




【 LED54-2.5~LED54-5 】




MOUNTING HOLE

Part No.	A	Package
LED54-2	2.0	2000
LED54-2.5	2.5	1000
LED54-3	3.0	
LED54-3.5	3.5	
LED54-4	4.0	
LED54-4.5	4.5	
LED54-5	5.0	
LED54-5.5	5.5	
LED54-6	6.0	
LED54-6.5	6.5	
LED54-7	7.0	
LED54-7.5	7.5	
LED54-8	8.0	
LED54-8.5	8.5	
LED54-9	9.0	
LED54-9.5	9.5	
LED54-10	10.0	

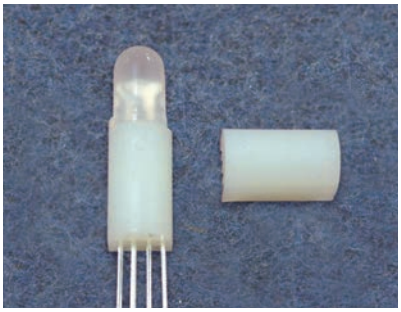


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

用途：使LED立於PC板上，高度一致，不斷腳。




Part No.	Package
LD54-10.5	2000

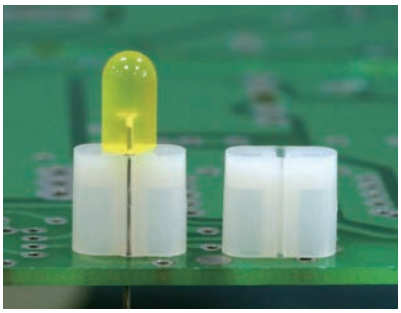


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

用途：可配合LED使用。




Part No.	Package
LEDMU-9	1000

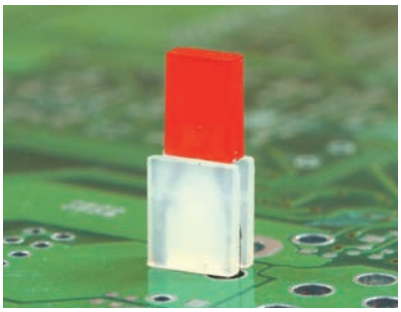


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

用途：保護LED固定於PC板上，使接腳不會彎曲、折斷、短路，並使LED高度一致。



Part No.	Package
LED2X7.5	2000




Part No.	Package
LEDSC-2	1000

LED間隔柱 LED SPACER

用途：保護雙色LED(3 PIN)固定於PC板上，使接腳不會彎曲、折斷、短路，並使LED高度一致。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	A	B	Package
LED3X3	3.0	5.7	2000
LED3X3.5	3.5	5.7	
LED3X4	4.0	5.7	
LED3X4.5	4.5	5.7	
LED3X5	5.0	5.7	
LED3X5.5	5.5	5.7	
LED3X6	6.0	5.7	
LED3X6.5	6.5	5.7	
LED3X7	7.0	5.7	
LED3X7.5	7.5	5.7	
LED3X8	8.0	5.7	
LED3X8.5	8.5	5.7	

Part No.	A	B	Package
LED3X9	9.0	5.7	1000
LED3X9.5	9.5	5.7	
LED3X10	10.0	5.7	
LED3X10.5	10.5	5.7	
LED3X11	11.0	6.0	
LED3X11.5	11.5	5.7	
LED3X12	12.0	5.7	
LED3X12.5	12.5	5.7	
LED3X13	13.0	5.7	
LED3X13.6	13.5	5.7	
LED3X14	14.0	5.7	
LED3X14.5	14.5	5.7	
LED3X15	15.0	7.0	
LED3X15.5	15.5	5.7	
LED3X16	16.0	5.7	
LED3X16.5	16.5	5.7	
LED3X17	17.0	5.7	
LED3X17.5	17.5	5.7	
LED3X18	18.0	5.7	
LED3X18.5	18.5	5.7	
LED3X19	19.0	5.7	
LED3X19.5	19.5	5.7	
LED3X22	22.0	5.7	




- Material: Nylon 6T (UL)
- Flame Class: 94V-0
- Color: Natural


Part No.	Package
LED3X6-1	2000




Part No.	A	B	C	D	E	F	Package
LED3X13-1	13.0	7.0	0.8	8.0	3.5	4.2	1000
LED3X16-1	16.0	6.0	0.9	11.5	3.9	4.3	



Part No.	Package
LED3X8R	2000





Part No.	Package
LED3X1.5R	2000

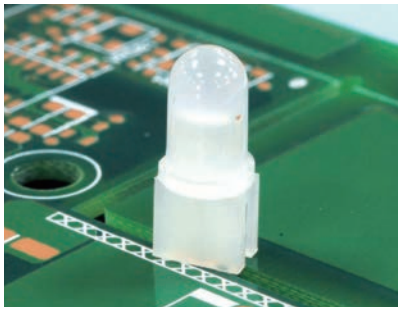

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

用途：用於3 PIN LED之墊高及固定，有定位腳，不歪斜。



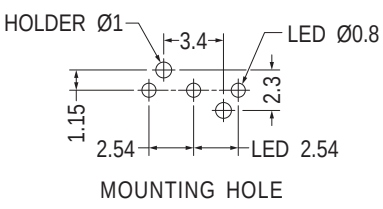


Part No.	Package
LEK3X5.3	1000


LED間隔柱 LED SPACER



- Material: Nylon 46 (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm




用途：保護LED固定於PC板上，使接腳不會彎曲、折斷、短路，並使LED高度一致。




MOUNTING HOLE

Part No.	Package
LED3A-9	1000

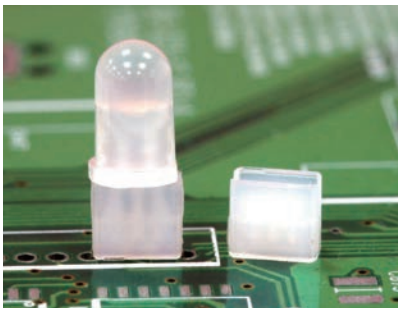


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
LED4AX5	2000


用途：保護4 PIN LED固定於PC板上，使接腳不會彎曲、折斷、短路，並使LED高度一致。



Part No.	Package
LED4X7	2000

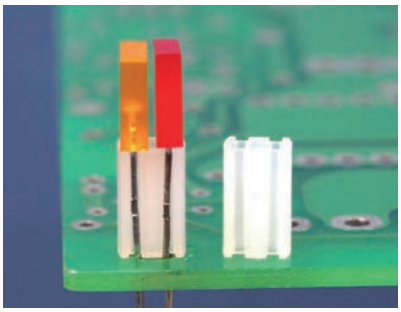


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm





用途：使LED固定於PC板上，高度一致，不斷腳。可用於2個方形LED燈並排。

Part No.	Package
LED-208	2000

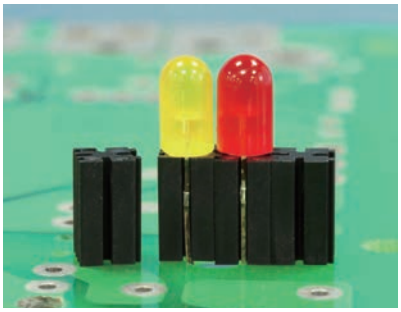


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm





用途：保護LED固定於PC板上，使接腳不會彎曲、折斷、短路，可連接多個LED座，並使LED高度一致。




- 產品可組合使用
- Products are combinable

Part No.	A	Package
LEDP-3	3.0	2000
LEDP-4	4.0	
LEDP-5	5.0	
LEDP-6	6.0	
LEDP-7	7.0	
LEDP-8	8.0	
LEDP-9	9.0	
LEDP-9.5	9.5	
LEDP-10	10.0	


Part No.	A	Package
LEDP-11	11.0	2000
LEDP-12	12.0	
LEDP-13	13.0	
LEDP-14	14.0	
LEDP-15	15.0	
LEDP-16	16.0	
LEDP-17	17.0	
LEDP-18	18.0	
LEDP-19	19.0	
LEDP-20	20.0	

LED間隔柱 LED SPACER


用途：使LED固定於PC板上，高度一致，不斷腳。

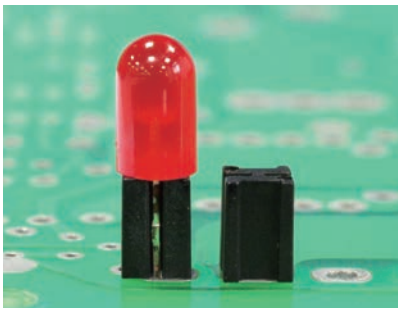


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm





Part No.	Package
LEDP3-6.4	500

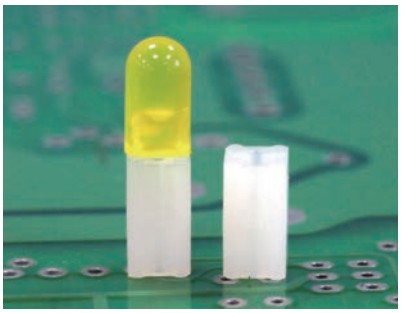

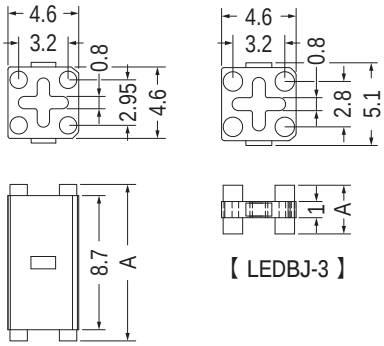



Part No.	A	Package
LEDBJ-3	3.0	2000
LEDBJ-9	9.15	1000
LEDBJ-10	10.15	

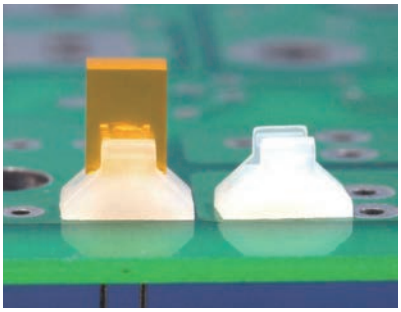

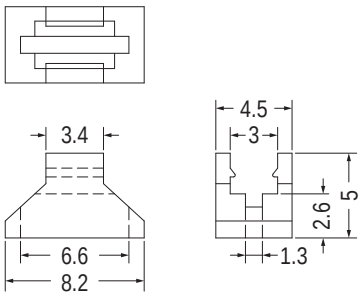


Part No.	Package
LEC-1	2000

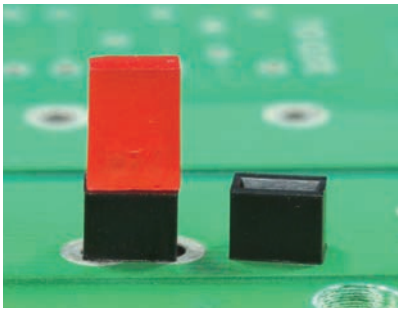





Part No.	A	Package
LEDJ-4	4.0	2000
LEDJ-4.5	4.5	




Part No.	A	Package
LEDJ-7.5	7.5	2000
LEDJ-8	8.0	
LEDJ-8.5	8.5	

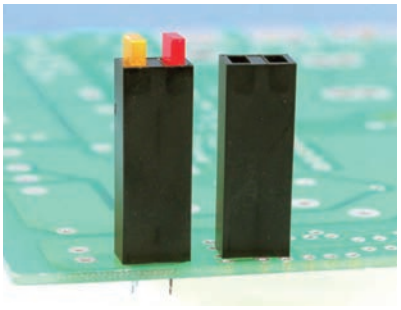

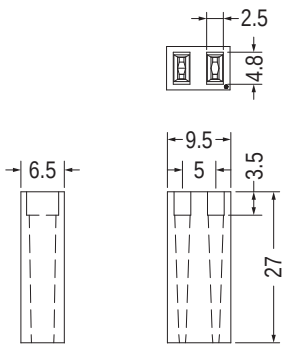


Part No.	Package
ELH2-27	500

LED間隔柱 LED SPACER

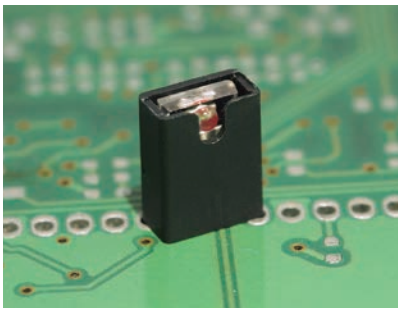


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm


用途：使LED固定於PC板上，高度一致，不斷腳。

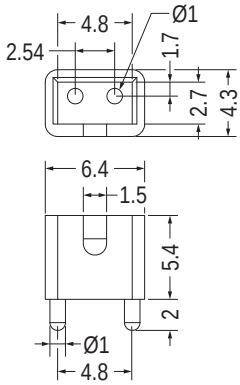

Part No.	Package
LEDUA-5.4	2000

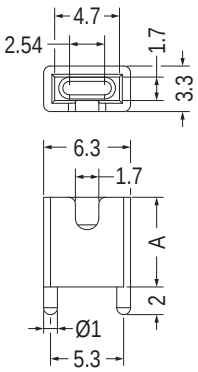


Part No.	A	Package
LEDUA-6.5	6.5	2000
LEDUA-8	8.0	

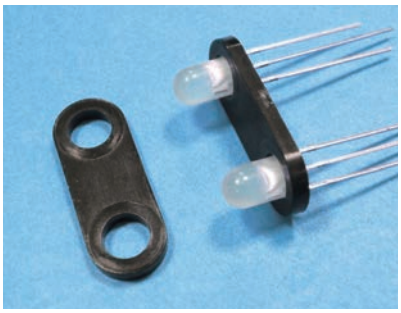


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


用途：可配合LED定位。



Part No.	Package
PUCP-1	1000





Part No.	Package
LEDI3-3	1000

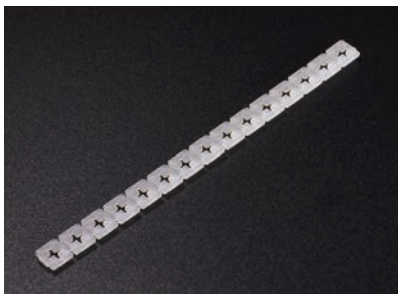

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural
- Unit: mm


用途：LED墊高，可固定間隔，客戶可依需求自行裁切。

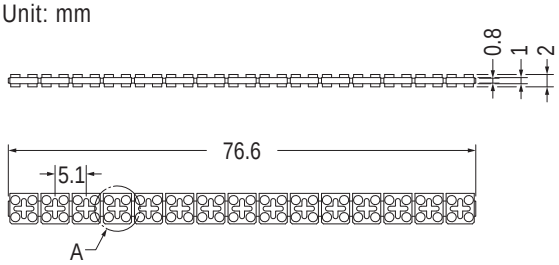




DETAIL A SCALE 6:1

Part No.	Package
★LEDBJ-2-15	1000

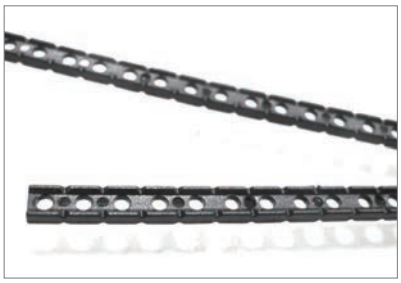

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

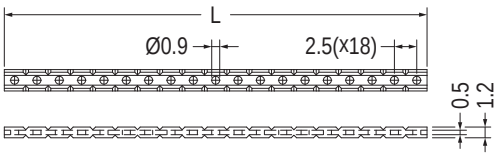


Part No.	L	Package
EM-45	47.3	1000
EM-45-2	4.9	
EM-45-3	7.4	
EM-45-4	9.9	
EM-45-5	12.4	

Part No.	L	Package
EM-45-6	14.9	1000
EM-45-7	17.4	
EM-45-8	19.9	
EM-45-9	22.4	
EM-45-10	24.9	
EM-45-11	27.4	


Part No.	L	Package
EM-45-12	29.9	1000
EM-45-13	32.4	
EM-45-14	34.9	
EM-45-15	37.4	
EM-45-16	39.9	
EM-45-17	42.4	

LED間隔柱 LED SPACER

用途：可快速將8字型LED固定墊高於PC板上。

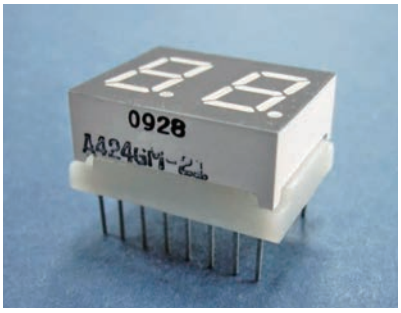

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	A	Package
LEDSS-4	4.0	1000
LEDSS-5	5.0	
LEDSS-6	6.0	
LEDSS-7	7.0	
LEDSS-8	8.0	

LED套 LED SLEEVE

用途：LC3-1T可加強LC3-1之固定，或做為墊片使用。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	A	B	Package
LC3-1T	6.8	5.2	2000
LC3-2T	6.4	4.95	
LC3-3T	6.4	5.0	




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

用途：LC5-1T、LC5-2T可加強LC5-1之固定，或作為墊片使用。



Part No.	Package
LC5-1T	1000




Part No.	Package
LC5-2T	1000

LED導光罩 LED LENS CAP

用途：將LED導光於機殼面板上，使光度均勻、柔和。搭配LC3-1T、LC3-2T、LC3-3T更緊密穩固。




- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm




MOUNTING HOLE Ø4.4
THICKNESS 1.57~3.2

Part No.	Package
LC3-1	2000



MOUNTING HOLE Ø4.4
THICKNESS 1.2

Part No.	Package
LC3-6	2000



MOUNTING HOLE Ø4.4
THICKNESS 0.7


Part No.	Package
LC3-13	2000

LED導光罩 LED LENS CAP

用途：置LED導光於機殼面板上，使光度均勻、柔和。




- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm



MOUNTING HOLE Ø6.35
THICKNESS 3.0


Part No.	Package
LC5-2	1000



MOUNTING HOLE Ø6.4
THICKNESS 3.0


Part No.	Package
LC5-9	1000





MOUNTING HOLE Ø6.4
THICKNESS 0.8~6.35


Part No.	Package
LC5-1	1000



MOUNTING HOLE Ø6.4
THICKNESS 0.8


Part No.	Package
LC5-4	1000





MOUNTING HOLE Ø6.4~Ø6.45
THICKNESS 0.8~6.35


Part No.	Package
LC5-5	2000



MOUNTING HOLE Ø6.4~Ø6.45
THICKNESS 0.8~6.35


Part No.	Package
LC5-6	1000





MOUNTING HOLE Ø6.3


Part No.	Package
LEM-149	1000



MOUNTING HOLE Ø6.35


Part No.	Package
LC5-3	1000





MOUNTING HOLE Ø3.7~Ø3.8
THICKNESS 0.8~1.6

Part No.	Package
LC3-8	1000




MOUNTING HOLE Ø4.0
THICKNESS: T


Part No.	A	B	T	Package
LC3-14	2.7	0.9	0.8	1000
LC3-14L	2.9	1.1	1.0	

LED導光罩 LED LENS CAP

用途：置LED導光於機殼面板上，使光度均勻、柔和。

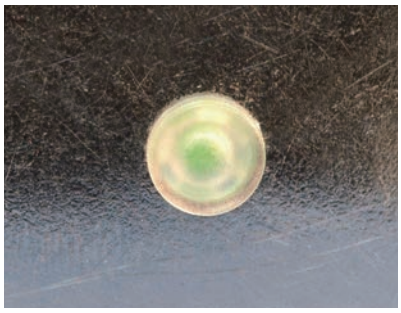


- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm



MOUNTING HOLE Ø4.6
THICKNESS 2.0


Part No.	Package
LEM-123	1000






MOUNTING HOLE Ø5.0
THICKNESS 1.3

Part No.	Package
LC5-8	1000




MOUNTING HOLE Ø6.35
THICKNESS 0.8

Part No.	Package
LC5-7	1000

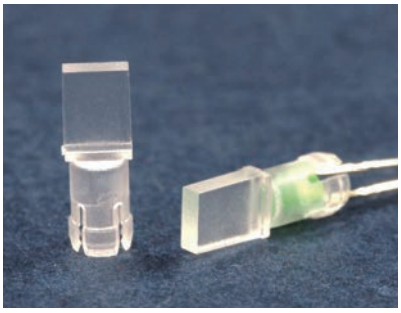


- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm




MOUNTING HOLE Ø4.4
THICKNESS 1.57~3.2

Part No.	A	Package
LC3-2	6.3	1000
LC3-7	2.5	




MOUNTING HOLE Ø4.4
THICKNESS 1.57~3.2

Part No.	Package
LC3-12	1000

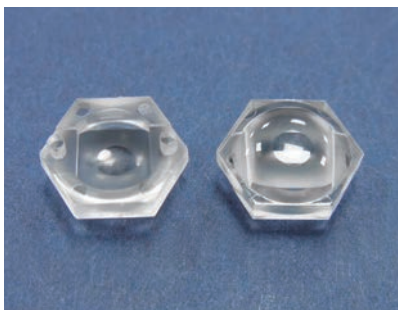

- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm

用途：使用於LED之導光。



Part No.	Package
LEMA-1	1000


紅外線燈罩 INFRARED RAYS LAMPSHADE

用途：固定於LED TV機殼上，做為紅外線遙控接收器導光面板，過濾無效光源，動作穩定。






- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Purple
- Unit: mm




Part No.	Package
IRCV-1	1000




Part No.	Package
IRCV-2	1000

LED導光柱 LIGHT PIPE

用途：置LED導光於機殼面板上，使光度均勻、柔和。

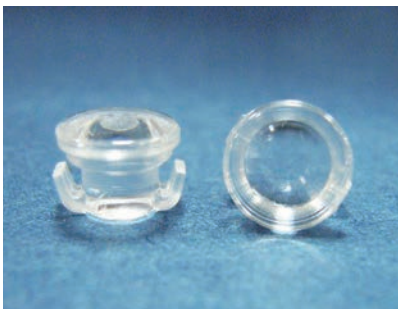

- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm

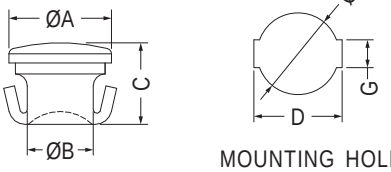


Part No.	A	B	C	D	E	G	T	Package
LEM-7	5.6	3.6	4.5	5.4	5.0	1.7	1.2	1000
LEM-7S	5.6	3.0	4.5	5.4	5.0	1.7	1.2	
LEM-29	4.8	3.2	4.5	5.0	4.3	1.8	1.2	
LEM-161	6.9	4.5	3.8	6.75	6.3	2.1	0.7	



- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm

用途：可將LED導光到機器面板。

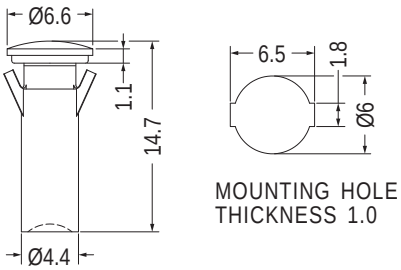


Part No.	Package
LEM-54	1000




- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm

用途：置LED導光於機殼面板上，使光度均勻、柔和。

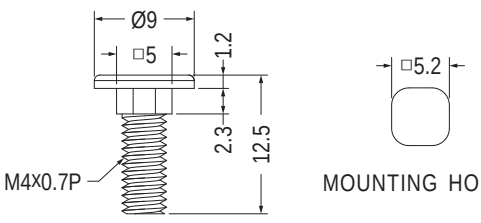

Part No.	Package
LEMA-5	1000

LED導光柱 LIGHT PIPE

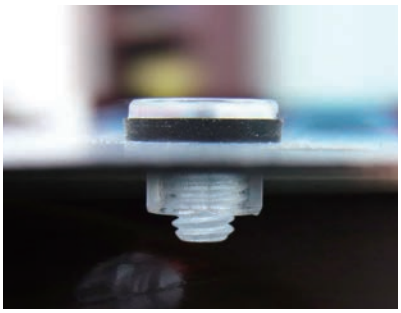


- Material: PC (UL)
- Flame Class: 94V-2
- Color: Transparent
- Unit: mm

用途：配合M4螺帽，使LED導光於面板上，使光線均勻、柔和、防水，方便使用。


✓ 通過IP68防水測試






MOUNTING HOLE


Part No.	Part No.	Package
LEMA-2F	LEMA-2	1000
	TF-807	
	M-4	
	子母包：內容物包含右方零件	
	上述零件亦可單獨選購	




(NUT)
【 M-4 】



(SILICON WASHER)
【 TF-807 】




(LIGHT PIPE)



MOUNTING HOLE


Part No.	Package
LEMA-2	2000

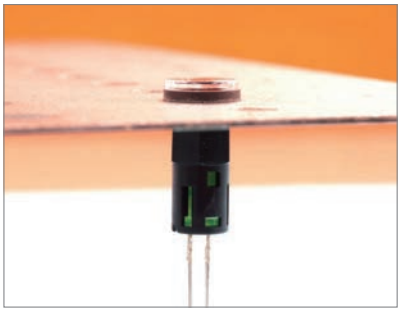


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm
- Patented (專利品)

用途：可快速將Ø5 mm LED固定於機器面板上，防水性佳。

✓ 通過IP68防水測試







MOUNTING HOLE

- 適用Ø5 LED帽緣款
- 適用於2 PIN、3 PIN


Part No.	Part No.	Package
LEMA-3F	LEMA-2	1000
	LEMA-3A	
	TF-807	
	子母包：內容物包含右方零件	
	上述零件亦可單獨選購	




(SILICON WASHER)
【 TF-807 】



(LED MOUNT)
【 LEMA-3A 】




(LIGHT PIPE)



MOUNTING HOLE


Part No.	Package
LEMA-2	2000

LED導光柱 LIGHT PIPE

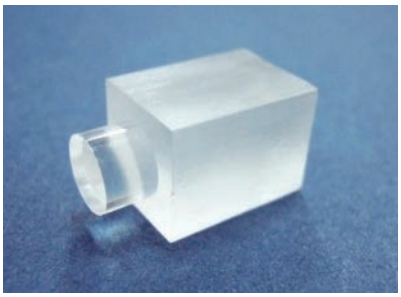


- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm

用途：置LED導光於機殼面板上，使光度均勻、柔和。




Part No.	Package
LEM-55	2000

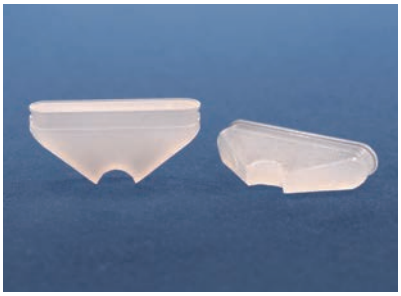

- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm

用途：用於LED導光柱。

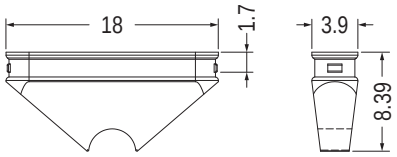


Part No.	Package
LEM-30	1000





- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm

用途：置LED導光於機殼面板上，使光度均勻、柔和。

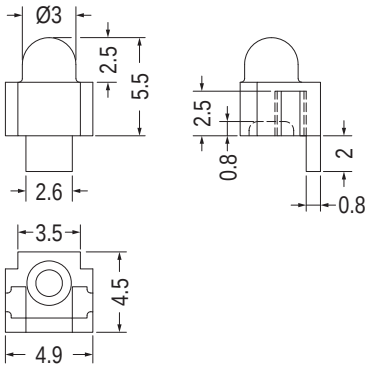



Part No.	Package
LEM-244	2000

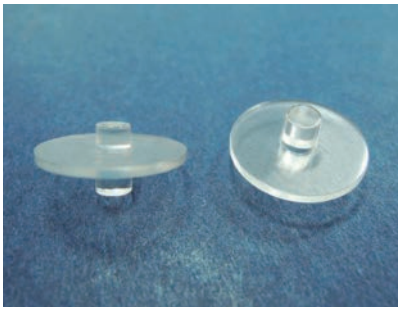



Part No.	Package
LEM-79	1000

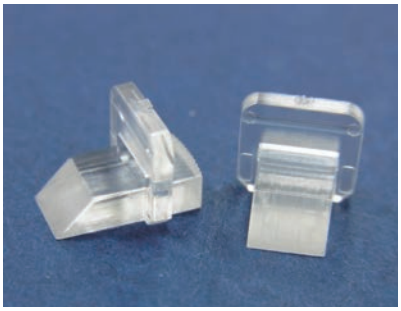

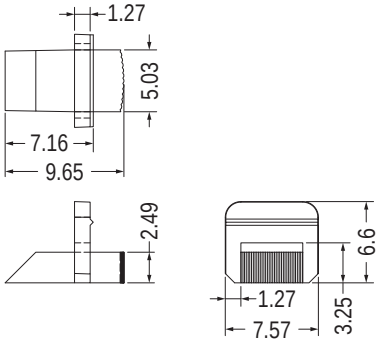


Part No.	Package
LEM-96	1000

LED導光柱 LIGHT PIPE


用途：置LED導光於機殼面板上，使光度均勻、柔和。




- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm




Part No.	Package
LEM-151	500

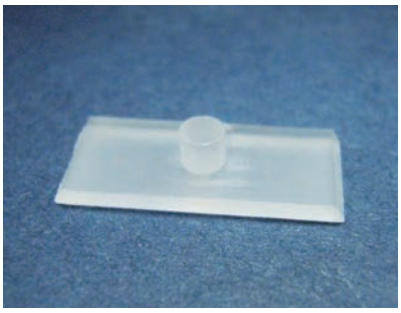


- Material: PMMA
- Color: Transparent
- Unit: mm




Part No.	Package
LEM-2	1000




Part No.	Package
LEM-1	1000

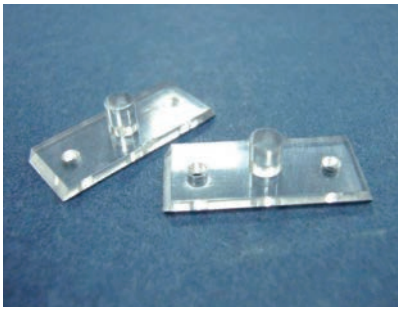

- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm




Part No.	A	Package
LEM-9	3.0	1000
LEM-62	3.7	



- Material: PMMA
- Color: Transparent


Part No.	Package
LEM-16	1000





Part No.	Package
LEM-36	1000






Part No.	A	Package
LEM-3	1.8	1000
LEM-3L	2.2	


LED導光柱 LIGHT PIPE

用途：置LED導光於機殼面板上，使光度均勻、柔和。




- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm

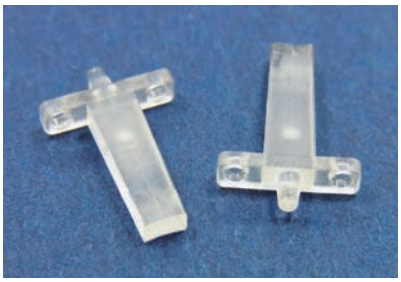





Part No.	Package
LEM-12	1000





Part No.	Package
LEM-131	500

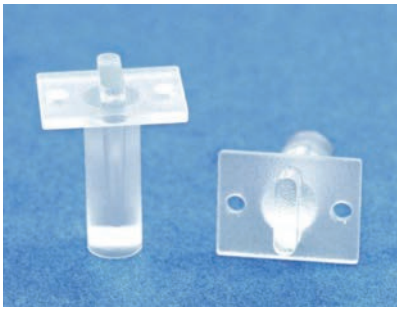

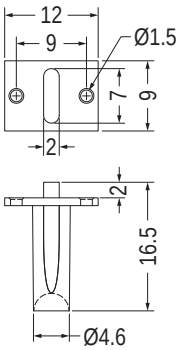


Part No.	Package
LEM-210	1000

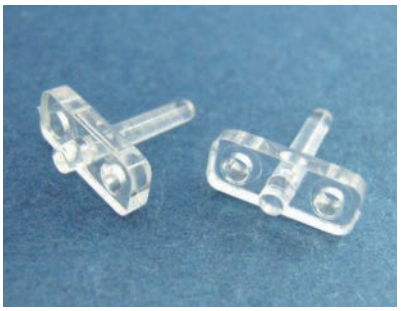





Part No.	Package
LEM-63	1000



Part No.	Package
LEM-73	1000

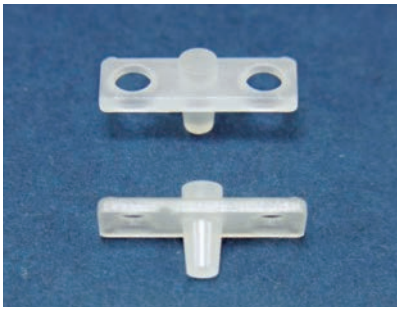


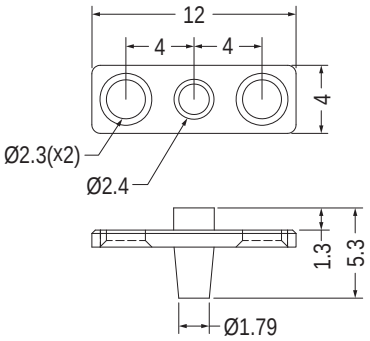


Part No.	Package
LEM-108	1000

LED導光柱 LIGHT PIPE


用途：置LED導光於機殼面板上，使光度均勻、柔和。

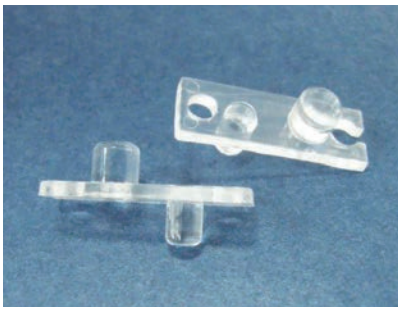


- Material: PMMA
- Color: Transparent
- Unit: mm




Part No.	Package
LEM-6	1000

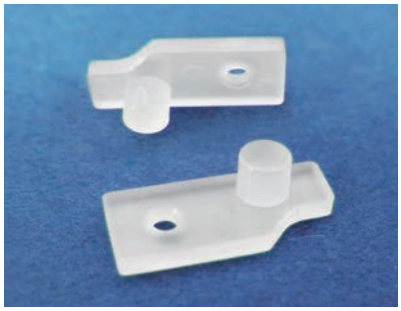





Part No.	Package
LEM-122	500

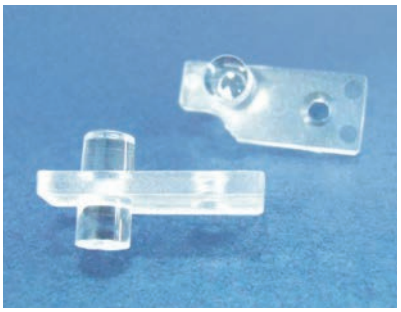


- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm





Part No.	Package
LEM-40	500

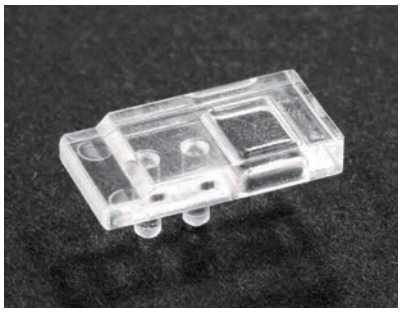



Part No.	Package
LEM-205	1000

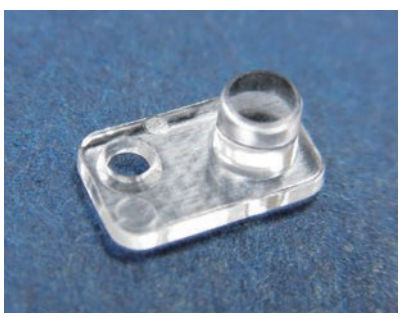





Part No.	Package
LEM-137	2000

LED導光柱 LIGHT PIPE

用途：置LED導光於機殼面板上，使光度均勻、柔和。

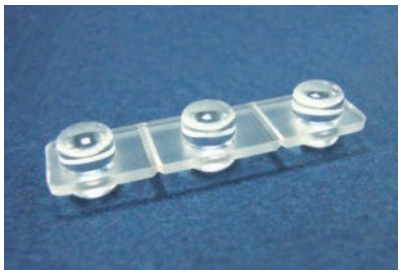


- Material: PMMA
- Color: Transparent
- Unit: mm




Part No.	Package
LEM-4	500




- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm




Part No.	Package
LEM-11	1000

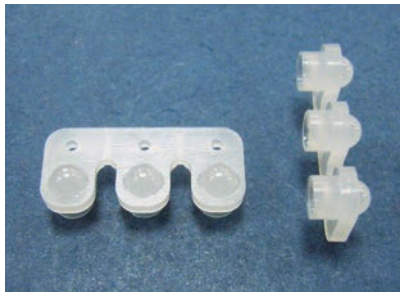




Part No.	Package
LEM-18	1000







Part No.	Package
LEM-92	1000






Part No.	Package
LEM-212	1000

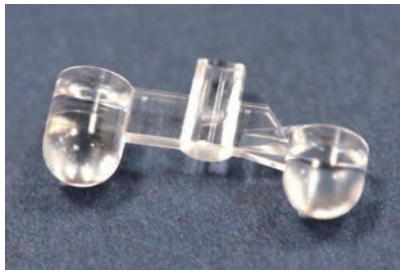




Part No.	Package
LEM-213	1000

LED導光柱 LIGHT PIPE

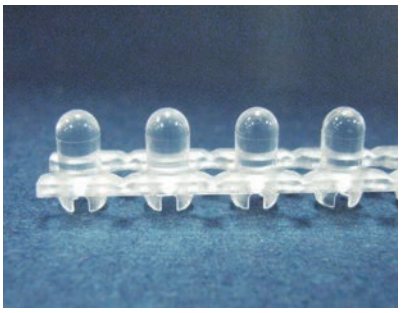

- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm

用途：LED墊高，可固定間隔，客戶可依需求自行裁切。

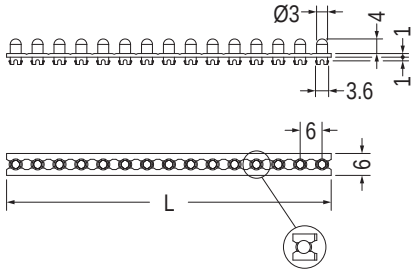

(1PCS)


【 LEM-24-1 】

Part No.	L	Package
LEM-24	89.0	500
LEM-24-1	5.5	
LEM-24-2	11.5	
LEM-24-3	17.5	
LEM-24-4	23.5	
LEM-24-11	65.5	
LEM-24-12	71.5	
LEM-24-14	83.5	




- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm


用途：用於LED導光柱。



Part No.	Package
LEM-33	1000




Part No.	Package
LEM-20	1000



Part No.	Package
LEM-52	1000






MOUNTING HOLE Ø3.0

Part No.	Package
LEM-103	1000




- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm

用途：置LED導光於機殼面板上，使光度均勻、柔和。



Part No.	Package
LEM-114	1000





MOUNTING HOLE Ø3.0


Part No.	A	Package
LEM-5	13.5	1000
LEM-5-57	57.0	500
LEM-93	8.7	1000

LED導光柱 LIGHT PIPE

用途：置LED導光於機殼面板上，使光度均勻、柔和。




- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm




MOUNTING HOLE Ø3.0


Part No.	A	Package
EMP1-3.2	3.2	2000
EMP1-6	6.0	
EMP1-6.4	6.4	
EMP1-8.9	8.9	
EMP1-9.5	9.5	1000
EMP1-11.7	11.68	
EMP1-12.7	12.7	
EMP1-15.9	15.9	
EMP1-19	19.0	
EMP1-21	21.0	



MOUNTING HOLE Ø5.05

Part No.	A	Package
EMP5-3.2	3.2	1000
EMP5-6.4	6.4	2000
EMP5-8.9	8.9	1000
EMP5-9.5	9.5	2000
EMP5-12.7	12.7	1000
EMP5-15.9	15.9	
EMP5-19	19.0	
EMP5-25.4	25.4	
EMP5-29.3	29.3	
EMP5-31.8	31.8	
EMP5-38.1	38.1	

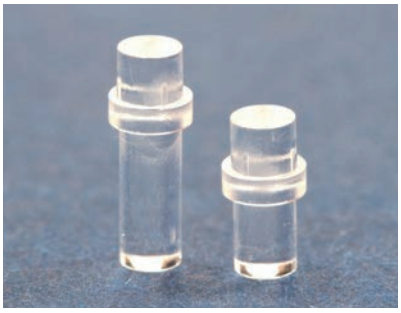




MOUNTING HOLE Ø3.05

Part No.	A	Package
EMP1-2.5-F	2.5	1000
EMP1-3.2-F	3.2	2000
EMP1-4.8-F	4.8	


Part No.	A	Package
EMP1-5-F	5.0	2000
EMP1-6.4-F	6.4	
EMP1-7-F	7.0	
EMP1-8-F	8.0	
EMP1-8.9-F	8.9	
EMP1-9.5-F	9.5	1000
EMP1-10-F	10.0	
EMP1-12.7-F	12.7	
EMP1-15.9-F	15.9	
EMP1-19-F	19.0	
EMP1-21-F	21.1	





Part No.	A	B	Package
LEM-13	14.1	3.53	1000
LEM-23	15.75	3.4	





MOUNTING HOLE Ø3.0


Part No.	Package
LEM-144	2000

LED導光柱 LIGHT PIPE

用途：置LED導光於機殼面板上，使光度均勻、柔和。



- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm




MOUNTING HOLE: ØG


Part No.	A	G	Package
EMP2-2.5	2.5	3.0	2000
★EMP2-3	3.0	3.0	
EMP2-3.2	3.2	3.0	
EMP2-4	4.0	3.05	
EMP2-4.8	4.8	3.0	
EMP2-5	5.0	3.0	
EMP2-5.5	5.5	3.0	
EMP2-6	6.0	3.0	

Part No.	A	G	Package
EMP2-6.4	6.4	3.0	2000
EMP2-7	7.0	3.0	
EMP2-8	8.0	3.05	
EMP2-8.9	8.9	3.0	
EMP2-9.5	9.5	3.0	
EMP2-10	10.0	3.0	
EMP2-12.7	12.7	3.0	
EMP2-15.9	15.9	3.0	
EMP2-19	19.0	3.0	
EMP2-22.2	22.2	3.0	
EMP2-24	24.0	3.0	1000
EMP2-25.4	25.4	3.05	
EMP2-30.5	30.5	3.0	





MOUNTING HOLE Ø4.0





MOUNTING HOLE Ø3.1
THICKNESS >1.4

NEW

Part No.	A	Package
EMP3-2.5	2.5	1000
EMP3-3.1	3.1	
EMP3-4.5	4.5	


Part No.	A	Package
EMP5-2-3.2	3.2	1000
EMP5-2-6.4	6.4	2000
EMP5-2-8.9	8.9	1000
EMP5-2-9.5	9.5	
EMP5-2-12.7	12.7	
EMP5-2-15.9	15.9	
EMP5-2-19	19.0	
EMP5-2-22	22.0	
EMP5-2-25.4	25.4	
EMP5-2-31.8	31.8	
EMP5-2-38.1	38.1	

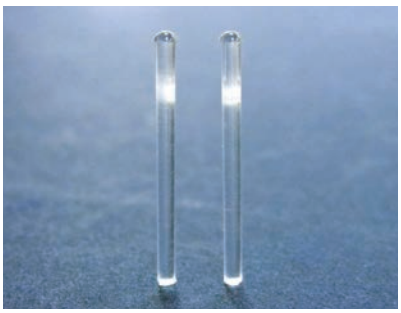




MOUNTING HOLE Ø1.55

Part No.	A	Package
LEM-132	20.0	2000
LEM-141	21.8	
LEM-193	29.2	
LEM-199	10.16	



MOUNTING HOLE Ø3.0

Part No.	A	Package
★LEM-87-15	15.0	2000
LEM-87	18.0	



MOUNTING HOLE Ø3.0


Part No.	A	Package
LEM-235-7.2	7.2	2000
LEM-235	12.2	

LED導光柱 LIGHT PIPE

用途：置LED導光於機殼面板上，使光度均勻、柔和。




- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm



MOUNTING HOLE Ø3.0


Part No.	A	Package
LEM-67	6.0	2000
LEM-67-13	13.0	
LEM-67-17.5	17.5	
LEM-67-20.5	20.5	1000
LEM-67-27.5	27.5	






MOUNTING HOLE Ø3.8

Part No.	Package
LEM-156	1000

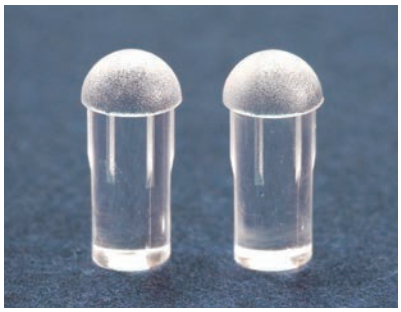



MOUNTING HOLE: ØG




MOUNTING HOLE Ø4.4

Part No.	Package
LEM-262M	1000


Part No.	A	G	Package
LEM-53	21.55	4.3	2000
LEM-53-7	7.0	4.2	
LEM-53-8.5	8.5	4.2	
LEM-53-16.5	16.5	4.2	
LEM-53-19	19.0	4.2	1000
LEM-53-24	24.0	4.2	
LEM-191	43.5	4.3	
LEM-191-36	36.0	4.3	
LEM-191-37.5	37.5	4.3	
LEM-198	30.0	4.3	
LEM-202	54.0	4.3	






MOUNTING HOLE Ø2.8

Part No.	Package
LEM-248	1000



MOUNTING HOLE Ø4.3

Part No.	Package
LEM-266	500




MOUNTING HOLE Ø6.5


Part No.	Package
LEM-233	500

LED導光柱 LIGHT PIPE


用途：置LED導光於機殼面板上，使光度均勻、柔和。

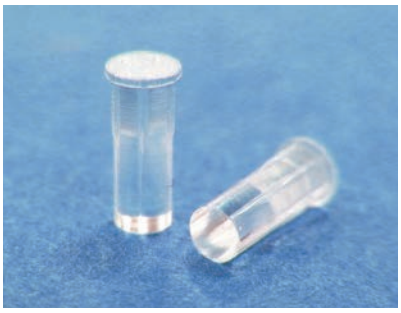


- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm




MOUNTING HOLE: ØG




HOLE IN PANEL



HOLE IN PANEL






HOLE IN PANEL

Part No.	A	Package
LEM-90	23.6	2000
LEM-91	8.0	
LEM-192	25.85	


Part No.	A	B	C	D	G	Package
LEM-97	21.0	4.0	0.5	5.0	4.2	1000
LEM-97S	8.5	4.0	0.5	5.0	4.2	
LEM-98	28.0	4.0	0.5	5.0	4.2	
LEM-135	7.0	2.6	0.4	3.2	3.0	2000
LEM-135-4.8	4.8	2.6	0.4	3.2	3.0	
LEM-167	10.05	2.5	0.45	3.2	2.8	
LEM-167-11	11.0	2.5	0.45	3.2	2.8	
LEM-167-15	15.0	2.5	0.45	3.2	2.8	
LEM-189	25.0	2.6	0.4	3.2	3.0	





PLASTIC MOUNTING HOLE Ø2.8
METAL MOUNTING HOLE Ø3.0

Part No.	A	Package
LEM-88	7.0	2000
★LEM-88-5	5.0	




MOUNTING HOLE Ø4.3

Part No.	A	Package
LEM-196	4.0	1000
LEM-197	8.5	



- Material: PC
- Color: Transparent
- Unit: mm




MOUNTING HOLE Ø2.7~Ø2.8

Part No.	Package
LEM-208	2000



- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm



MOUNTING HOLE Ø3.5


Part No.	A	B	Package
LEM-150	4.0	3.5	2000
LEM-150-3	3.0	3.5	
LEM-150-3.5	3.5	3.5	
LEM-240	4.0	3.45	

LED導光柱 LIGHT PIPE

用途：置LED導光於機殼面板上，使光度均勻、柔和。



- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm




MOUNTING HOLE Ø1.5

Part No.	Package
LEM-133	2000




- Material: PMMA
- Color: Transparent
- Unit: mm




MOUNTING HOLE Ø4.4

Part No.	Package
LEM-223	1000

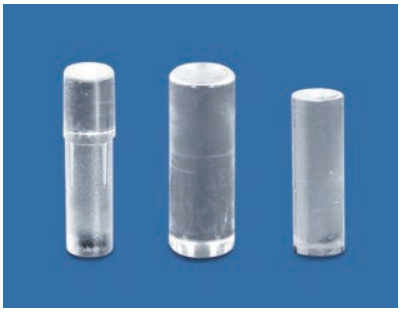


- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm




MOUNTING HOLE Ø1.6

Part No.	Package
LEM-185	2000




Part No.	Package
LEM-200	2000




Part No.	Package
LEM-261	2000





Part No.	Package
LEM-253	1000



MOUNTING HOLE Ø3.5


Part No.	Package
LEM-221	1000

LED導光柱 LIGHT PIPE




- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm

用途：置LED導光於機殼面板上，使光度均勻、柔和。




Part No.	A	B	Package
LEM-70	24.0	29.0	1000
LEM-95	29.0	34.0	
LEM-107	20.5	25.5	






Part No.	Package
LEM-110	1000





Part No.	A	B	Package
LEM-99	4.7	31.0	1000
LEM-115	1.7	28.0	

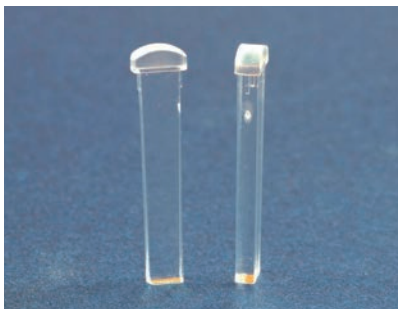

- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm


用途：置SMT LED導光於機殼面板上，使光度均勻、柔和。






MOUNTING HOLE

Part No.	A	B	C	Package
LEM-188	25.4	27.9	5.1	1000
LEM-188-17	17.0	19.5	5.15	

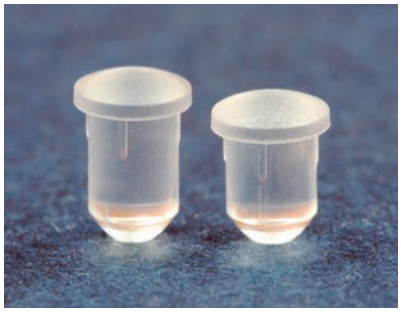

- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm

用途：置LED導光於機殼面板上，使光度均勻、柔和。




MOUNTING HOLE Ø3.96


Part No.	A	Package
LEM4W-3.2	3.2	2000
LEM4W-4	4.0	
LEM4W-5	5.0	
LEM4W-6	6.0	
LEM4W-8	8.0	
LEM4W-10	10.0	
LEM4W-12.7	12.7	

LED導光柱 LIGHT PIPE


用途：置LED導光於機殼面板上，使光度均勻、柔和。

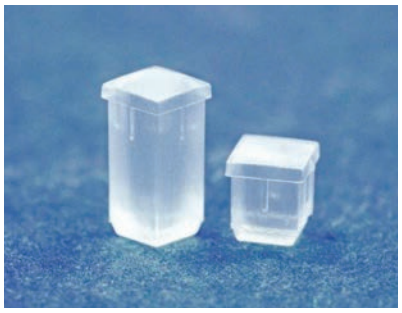

- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm

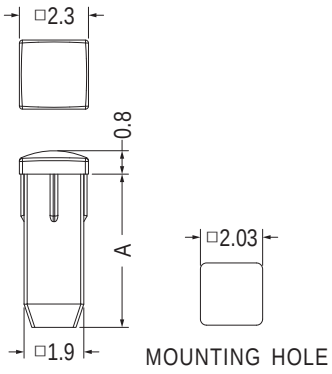


Part No.	A	Package
LEMC1-3	3.0	2000
LEMC1-4.8	4.8	
LEMC1-5	5.0	
LEMC1-9	9.0	
LEMC1-12.7	12.7	

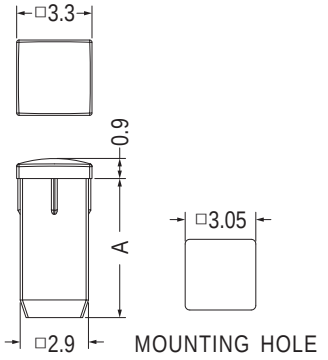


Part No.	A	Package
LEMC2-2.5	2.5	2000
LEMC2-3	3.0	
LEMC2-5	5.0	
LEMC2-6	6.0	
LEMC2-7	7.0	




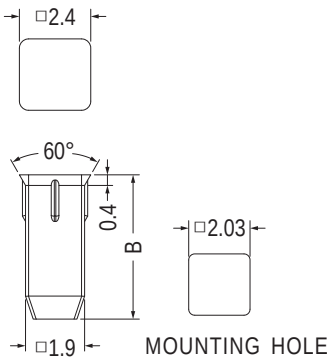


Part No.	B	Package
LEMD1-2.5	2.5	2000
LEMD1-3	3.0	
LEMD1-3.2	3.2	
LEMD1-4.8	4.8	
LEMD1-10	10.0	

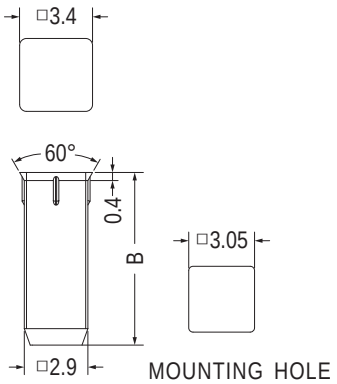

Part No.	B	Package
LEMD2-3	3.0	2000
LEMD2-8	8.0	
★LEMD2-12.7	12.7	

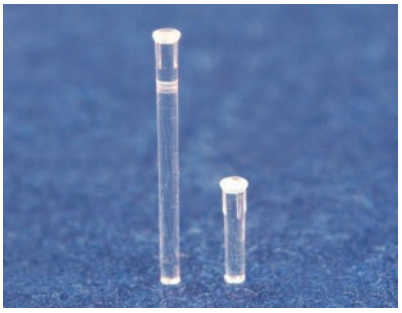





Part No.	B	Package
LEMB1-2.5-F	2.5	2000
LEMB1-3-F	3.0	
LEMB1-4-F	4.0	
LEMB1-4.8-F	4.8	
LEMB1-5-F	5.0	
LEMB1-6-F	6.0	
LEMB1-6.4-F	6.4	
★LEMB1-7.9-F	7.9	
LEMB1-10-F	10.0	
LEMB1-12.7-F	12.7	
LEMB1-13.7-F	13.7	

LED導光柱 LIGHT PIPE

用途：置LED導光於機殼面板上，使光度均勻、柔和。

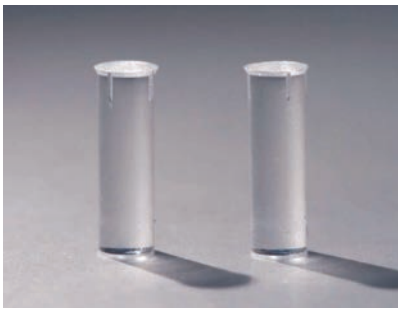


- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm




MOUNTING HOLE Ø3.05

Part No.	B	Package
LEMB3-2.5-F	2.5	2000
LEMB3-3-F	3.0	
LEMB3-3.2-F	3.2	
LEMB3-5-F	5.0	
LEMB3-6-F	6.0	
LEMB3-7-F	7.0	
LEMB3-8-F	8.0	
LEMB3-9.5-F	9.5	
LEMB3-10-F	10.0	
LEMB3-12.7-F	12.7	




MOUNTING HOLE Ø1.98

Part No.	B	Package
LEMB2-2-F	2.0	2000
LEMB2-2.5-F	2.5	
LEMB2-3-F	3.0	
LEMB2-3.2-F	3.2	
LEMB2-4-F	4.0	
LEMB2-4.8-F	4.8	
LEMB2-5-F	5.0	
LEMB2-6.4-F	6.4	
LEMB2-7-F	7.0	
LEMB2-8-F	8.0	
LEMB2-9-F	9.0	
LEMB2-10-F	10.0	
LEMB2-20-F	20.0	1000





MOUNTING HOLE Ø3.5

Part No.	Package
LEMB3.5-2-F	2000

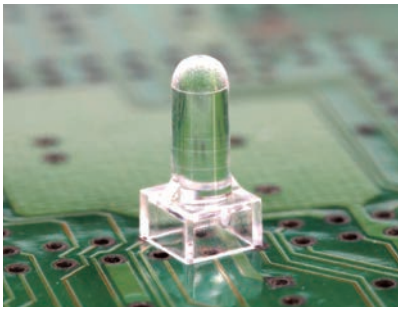


- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm






MOUNTING HOLE


Part No.	A	Package
PL1-5.1	5.1	2000
PL1-7.6	7.6	1000
PL1-8.9	8.9	
PL1-10.2	10.2	
PL1-11.4	11.4	
PL1-12.7	12.7	
PL1-13.9	13.9	
PL1-16.5	16.5	
PL1-21.5	21.5	

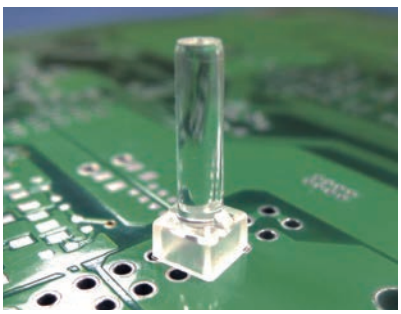

用途：置SMT LED導光於機殼面板上，使光度均勻、柔和。

- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm






MOUNTING HOLE
THICKNESS 1.6


Part No.	A	B	C	Package
PL2-6.4-F	6.4	3.6	0.61	2000
PL2-9.5-F	9.5	3.3	0.65	
PL2-12.7-F	12.7	3.3	0.65	1000
PL2-13.9-F	13.9	3.3	0.65	

LED導光柱 LIGHT PIPE

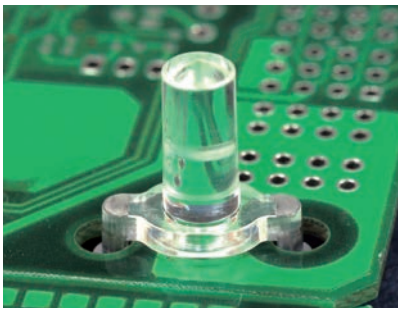


- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm

用途：置LED導光於機殼面板上，使光度均勻、柔和。




Part No.	Package
LEM-184	1000

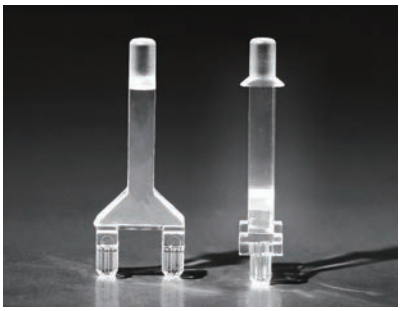


- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm

用途：置SMT LED導光於機殼面板上，使光度均勻、柔和。

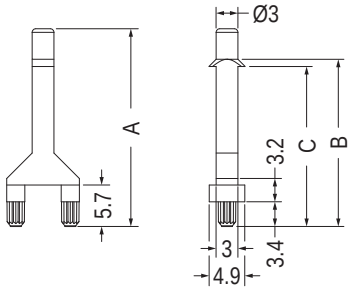


Part No.	A	B	C	Package
LEM-69	27.2	23.0	22.0	500
★LEM-289	13.9	9.7	8.7	
★LEM-290	33.4	29.2	28.2	



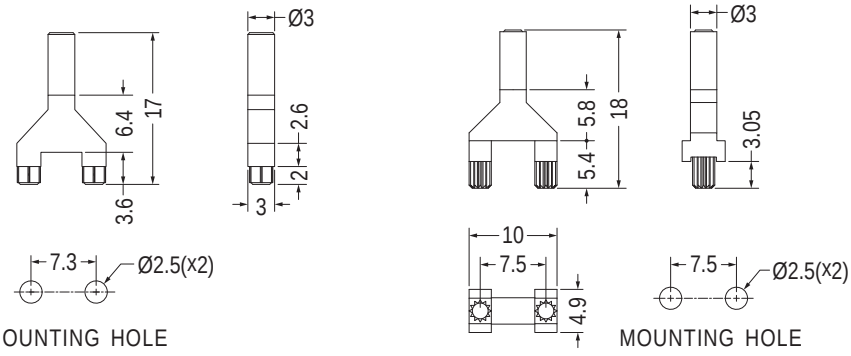


Part No.	Package
LEM-180	2000

Part No.	Package
LEM-270	1000

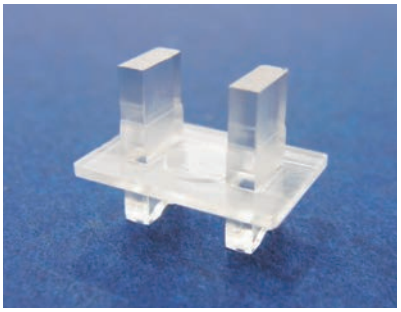


- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm

用途：置LED導光於機殼面板上，使光度均勻、柔和。

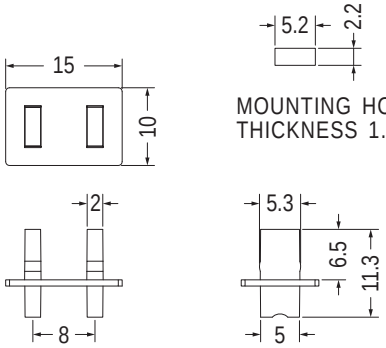


Part No.	Package
LEM-106	500

LED導光柱 LIGHT PIPE

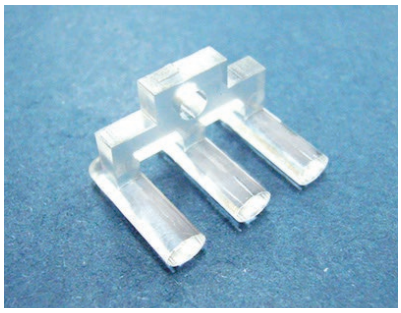


- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm

用途：置LED導光於機殼面板上，使光度均勻、柔和。

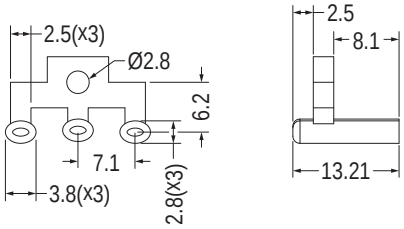



Part No.	Package
LEM-28	500



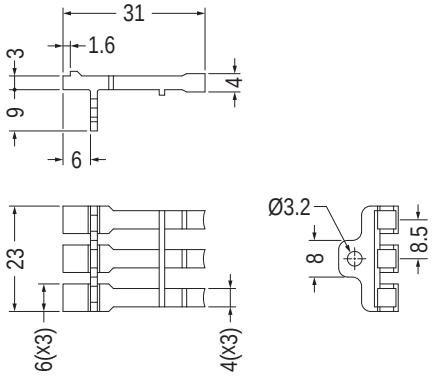

Part No.	Package
LEM-267	1000

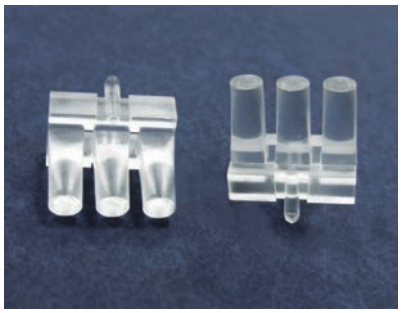

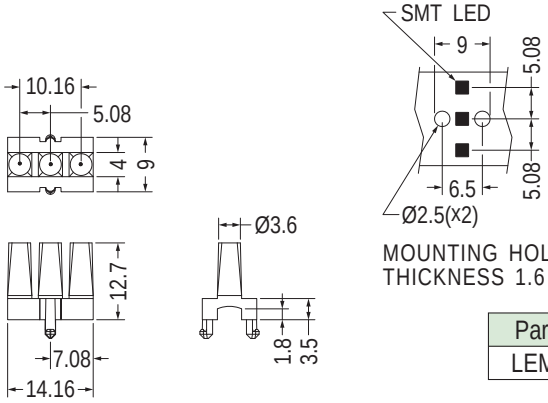


Part No.	Package
LEM-113	500




- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm

用途：置SMT LED導光於機殼面板上，使光度均勻、柔和。

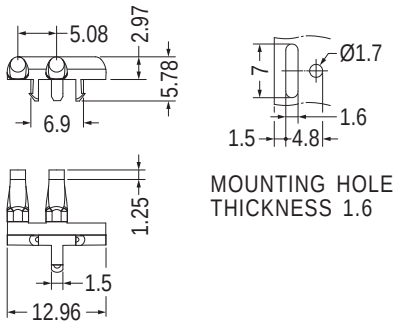


Part No.	Package
LEM-61	2000

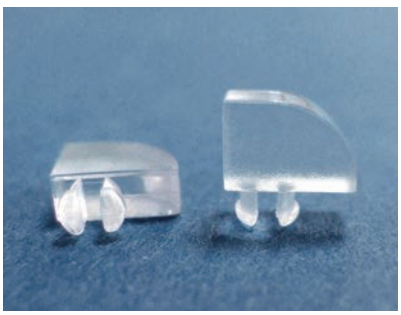

- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm


用途：置LED導光於機殼面板上，使光度均勻、柔和。




Part No.	Package
LEM-145	2000


LED導光柱 LIGHT PIPE


用途：置LED導光於機殼面板上，使光度均勻、柔和。

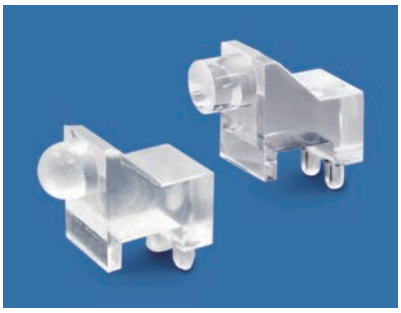

- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm

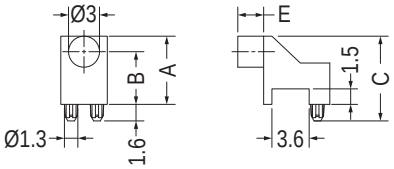


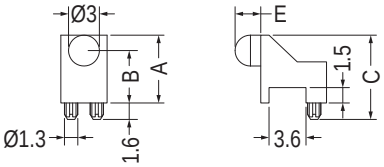



MOUNTING HOLE


【 LEM-136-F, LEM-225-F, LEM-260-F 】




MOUNTING HOLE

Part No.	A	B	C	D	E	Package
LEM-136	6.6	5.1	8.2	1.2	2.5	2000
LEM-136-F	6.6	5.1	8.2	1.2	2.5	
LEM-225	5.3	3.8	6.9	1.17	2.5	1000
LEM-225-F	5.3	3.8	6.9	1.17	2.5	
LEM-260-F	5.3	3.8	6.9	1.17	3.8	2000



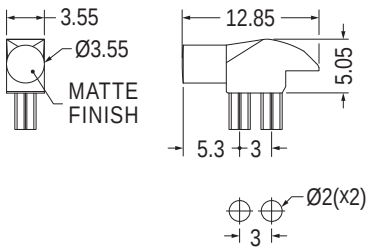


MOUNTING HOLE

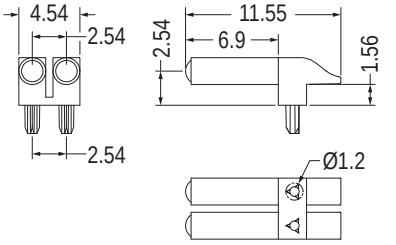

MOUNTING HOLE 1.1


Part No.	Package
LEM-195	1000

Part No.	Package
LEM-269	2000

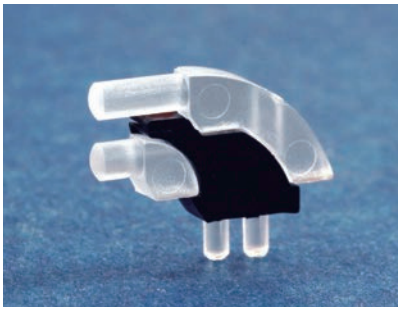


用途：置LED導光於機殼面板上，使光度均勻、柔和。LEM-207B遮蔽導光柱，可免鄰近LED光線干擾，配合LEM-207使用。

- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm



MOUNTING HOLE




- Material: Nylon 66 (UL)
- Color: Natural/Black

Part No.	Package
LEM-207	1000


Part No.	Package
LEM-207B	1000

LED導光柱 LIGHT PIPE

用途：置SMT LED導光於機殼面板上，使光度均勻、柔和。

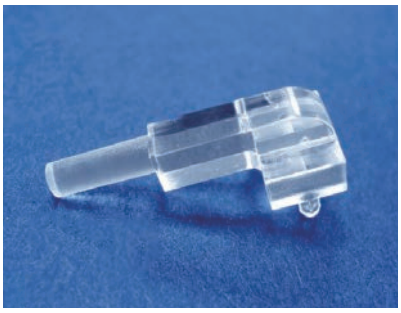



- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm

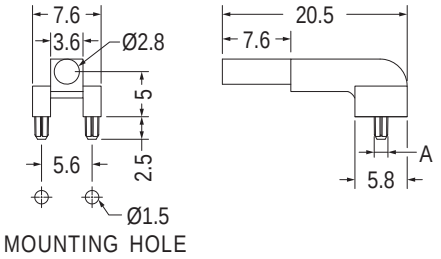

MOUNTING HOLE

Part No.	A	Package
LPE1-5-20.5	1.7	1000
LPE1-5-20.5S	1.52	

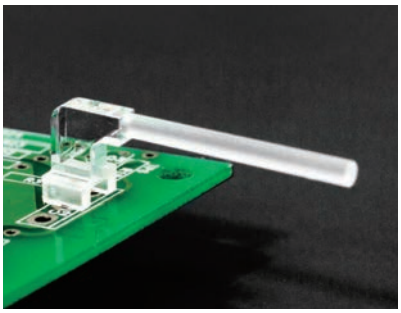


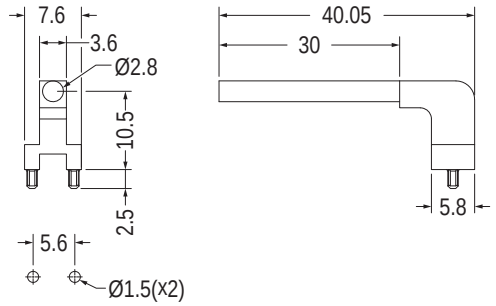

MOUNTING HOLE


Part No.	Package
LPE1-10.5-40	1000




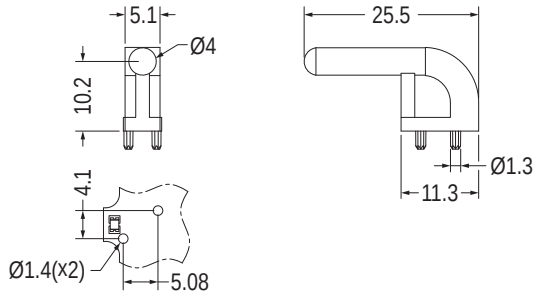


MOUNTING HOLE
THICKNESS 1.6

Part No.	Package
LPE1-10.2-25.5	1000

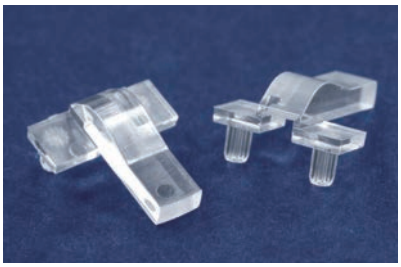


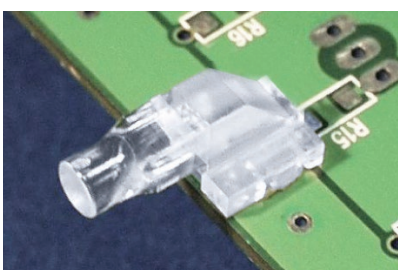

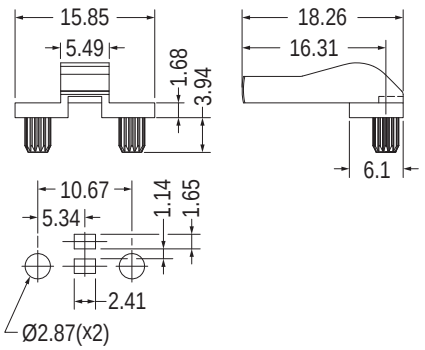

MOUNTING HOLE

Part No.	Package
SLP-3	1000

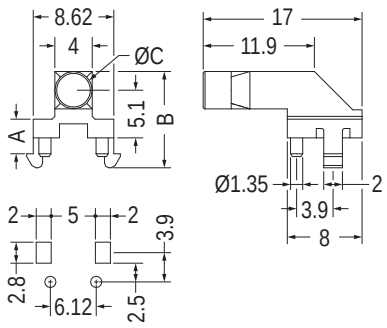


MOUNTING HOLE


Part No.	A	B	C	Package
LPF1-517	3.7	10.3	4.0	2000
LPF1-518	4.1	10.7	2.6	

LED導光柱 LIGHT PIPE

用途：置SMT LED導光於機殼面板上，使光度均勻、柔和。

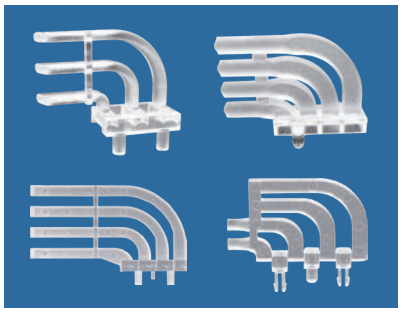


- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm

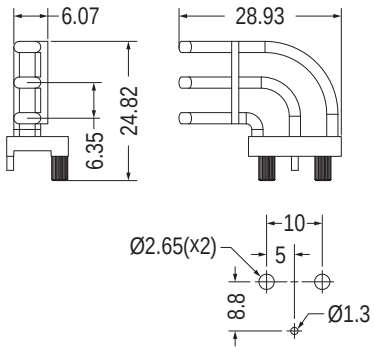


MOUNTING HOLE

Part No.	Package
LPE3-7.8	500

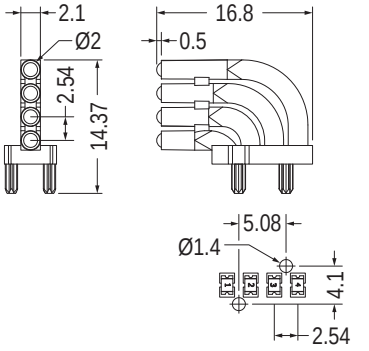


MOUNTING HOLE
THICKNESS 1.6

Part No.	Package
LPE4-3.6	500

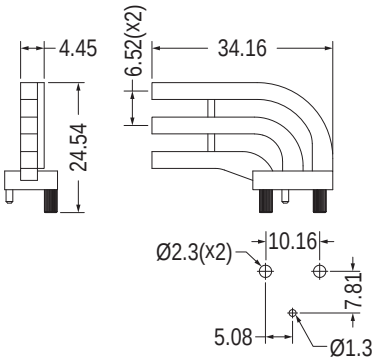


MOUNTING HOLE

Part No.	Package
LPEB3-1	500

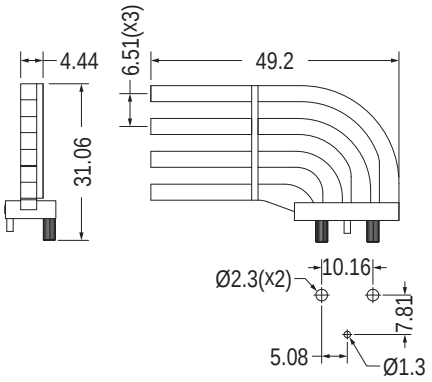

MOUNTING HOLE

Part No.	Package
LPEB4-1	500

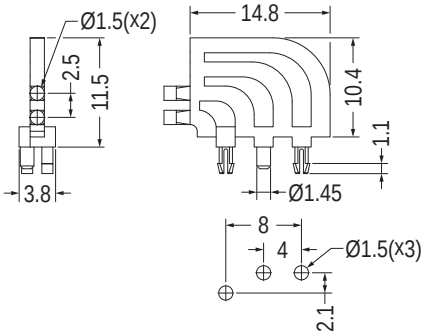


MOUNTING HOLE
THICKNESS 1.6

Part No.	Package
LPED2-1	1000




- Material: PC (UL)
- Holder Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Holder Color: Black
- Unit: mm

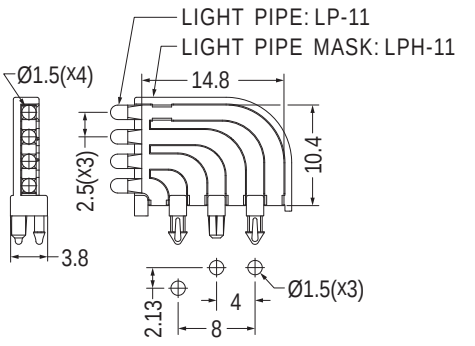

MOUNTING HOLE
THICKNESS 1.6

Part No.	Package
LP-11F	1000

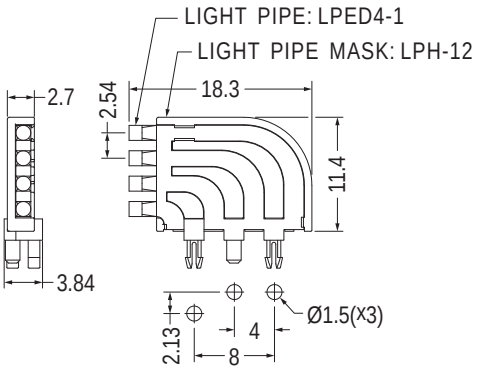


MOUNTING HOLE
THICKNESS 1.6


Part No.	Package
LPED4-1F	1000

LED導光柱 LIGHT PIPE

用途：置SMT LED導光於機殼面板上，使光度均勻、柔和。

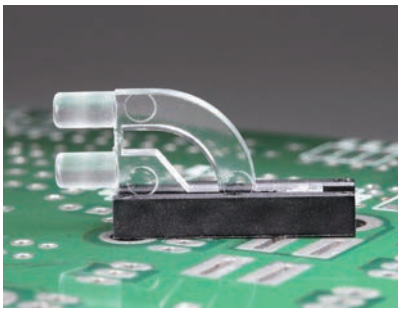


- Material: PC (UL)
- Holder Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Holder Color: Black
- Unit: mm

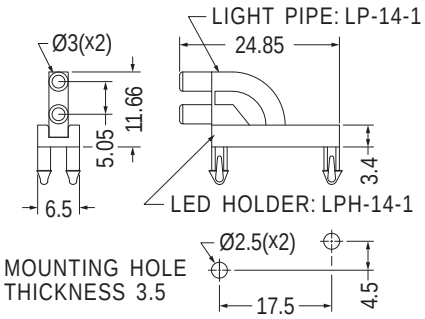



Part No.	Package
LP-14-1F	1000



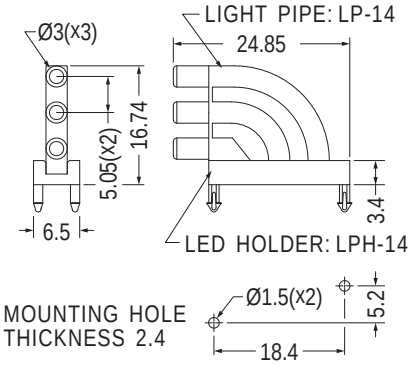


Part No.	Package
LP-14F	1000

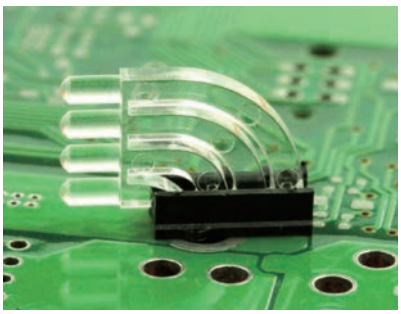


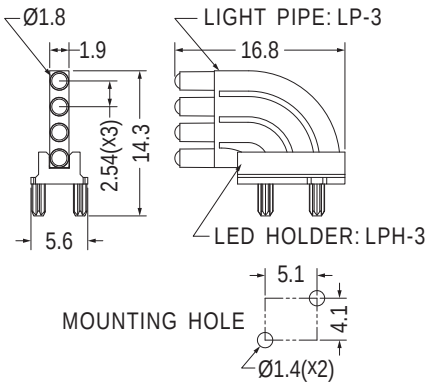


Part No.	Package
LP-3F	1000

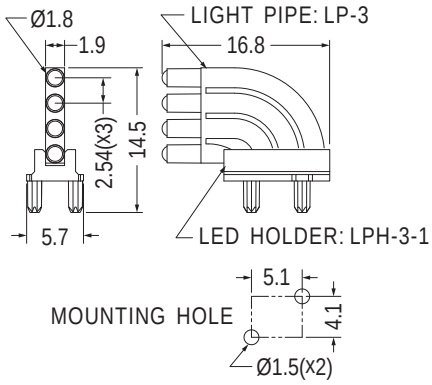

Part No.	Package
LP-3-1F	1000

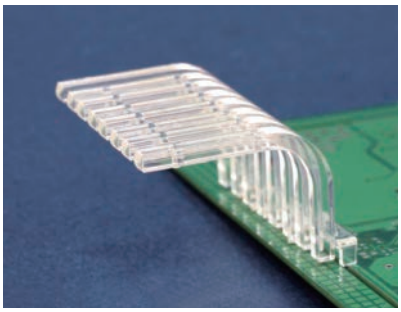


- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm

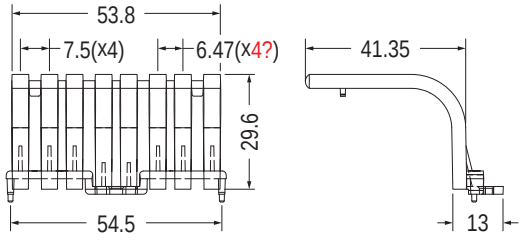


Part No.	Package
LEM-166	50

LED導光柱 LIGHT PIPE

用途：用於LED導光柱。

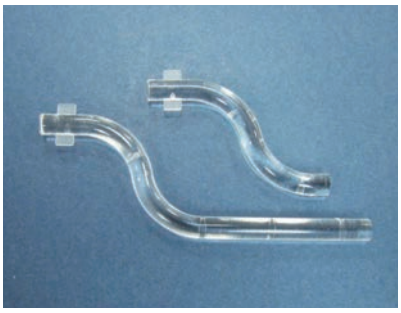


- Material: PMMA
- Color: Transparent
- Unit: mm




Part No.	A	B	Package
LPG-1	41.5	1.3	250
LPG-2	76.5	1.2	100



- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm




Part No.	Package
LPG-3	250

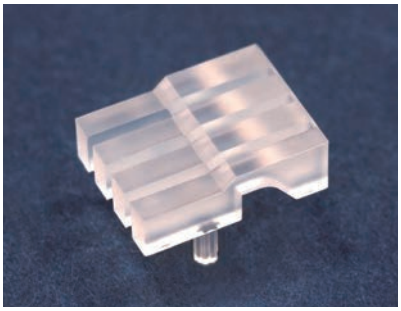


- Material: PMMA (UL)/PC (UL)
- Flame Class: 94HB/94V-2/94V-0
- Color: Transparent
- Unit: mm

用途：置LED導光於機殼面板上，使光度均勻、柔和。LPH-2B可遮敝導光柱，免鄰近LED光線干擾，配合LP-2使用。

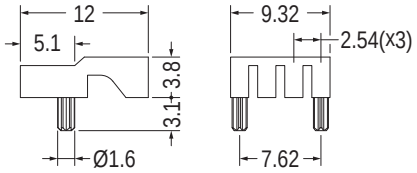


MOUNTING HOLE Ø1.5

Part No.	Package
LP-2	2000

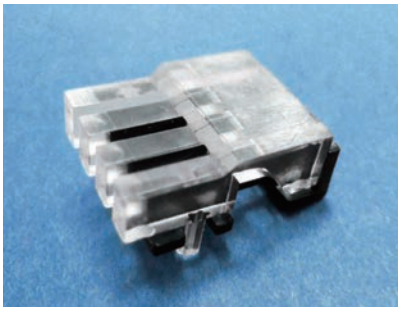


- Material: PC (UL)
- Flame Class: 94V-2
- Color: Black
- Unit: mm




Part No.	Package
LPH-2B	2000

LED遮光罩 LIGHT PIPE MASK


用途：遮蔽導光柱，避免鄰近LED光線干擾，搭配LPE2-5-19使用。

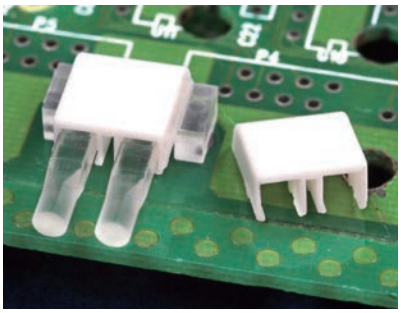

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

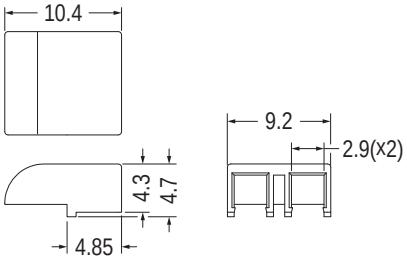


Part No.	Package
LPE2-5-19C	1000

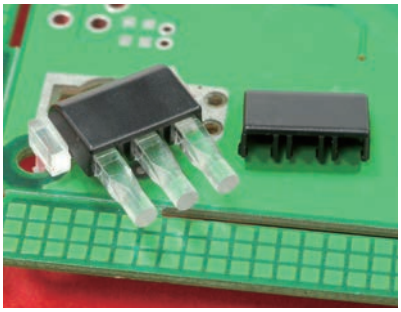


- Material: PC+ABS (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm

用途：遮蔽導光柱，避免鄰近LED光線干擾，配合LPE3-5-22使用。

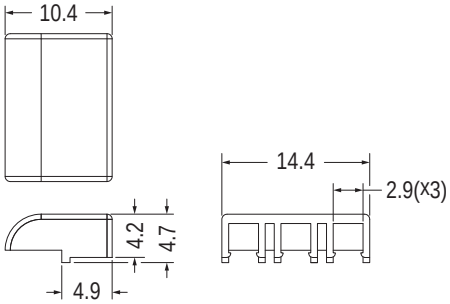


Part No.	Package
LPE3-5-22C	1000

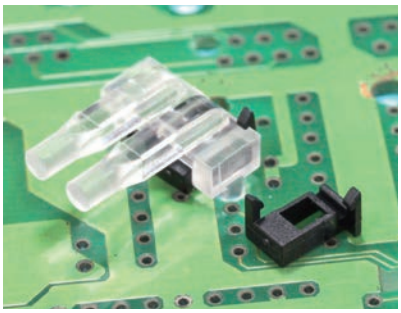


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

用途：遮蔽導光柱，避免鄰近LED光線干擾，配合LPE系列使用。




Part No.	Package
LPH-4	2000




Part No.	Package
LPH-4-1	2000


LED導光柱 LIGHT PIPE

用途：置SMT LED導光於機殼面板上，使光度均勻、柔和。

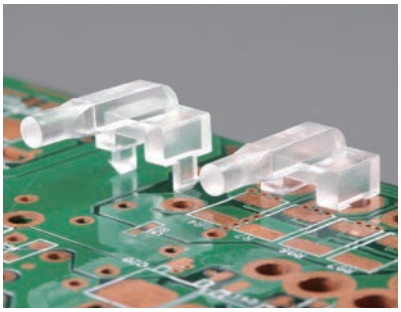

- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm

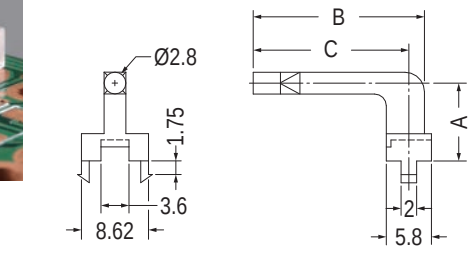




PCB LAYOUT


Part No.	A	B	C	Package
LPE1-5-16	5.0	16.0	14.0	1000
LPE1-5-19	5.0	19.0	17.0	
LPE1-5-22	5.0	22.0	20.0	
LPE1-10-16	10.0	16.0	14.0	
LPE1-10-19	10.0	19.0	17.0	
LPE1-10-22	10.0	22.0	20.0	
LPE1-10-26	10.0	27.0	25.0	
LPE1-15-16	15.0	16.0	14.0	
LPE1-15-19	15.0	19.0	17.0	
LPE1-15-22	15.0	22.0	20.0	

LED導光柱 LIGHT PIPE

用途：置SMT LED導光於機殼面板上，使光度均勻、柔和。

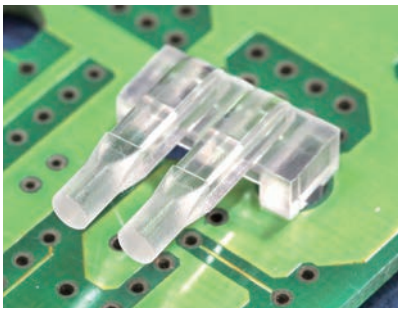


- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm

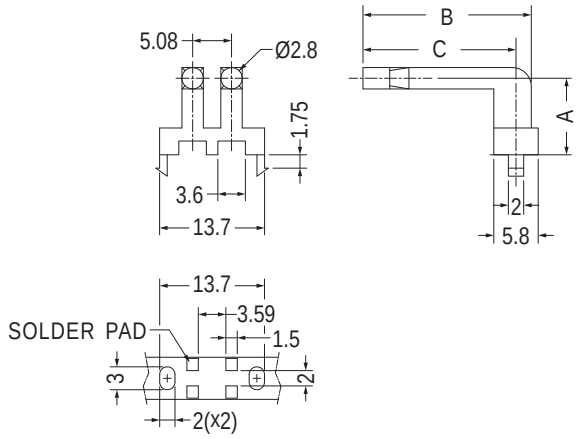


PCB LAYOUT

Part No.	A	B	C	Package
LPE2-5-16	5.0	16.0	14.0	1000
LPE2-5-19	5.0	19.0	17.0	
LPE2-5-22	5.0	22.0	20.0	
LPE2-10-16	10.0	16.0	14.0	
LPE2-10-19	10.0	19.0	17.0	
LPE2-10-22	10.0	22.0	20.0	
LPE2-15-16	15.0	16.0	14.0	
LPE2-15-19	15.0	19.0	17.0	
LPE2-15-22	15.0	22.0	20.0	

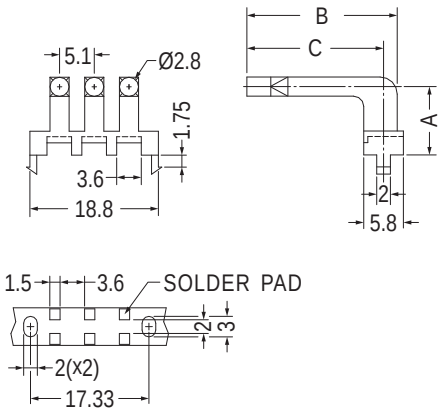


PCB LAYOUT

Part No.	A	B	C	Package
LPE3-5-14	5.0	14.0	12.0	500
LPE3-5-16	5.0	16.0	14.0	
LPE3-5-19	5.0	19.0	17.0	
LPE3-5-22	5.0	22.0	20.0	
LPE3-10-16	10.0	16.0	14.0	
LPE3-10-19	10.0	19.0	17.0	
LPE3-10-22	10.0	22.0	20.0	
LPE3-15-16	15.0	16.0	14.0	
LPE3-15-19	15.0	19.0	17.0	
LPE3-15-22	15.0	22.0	20.0	

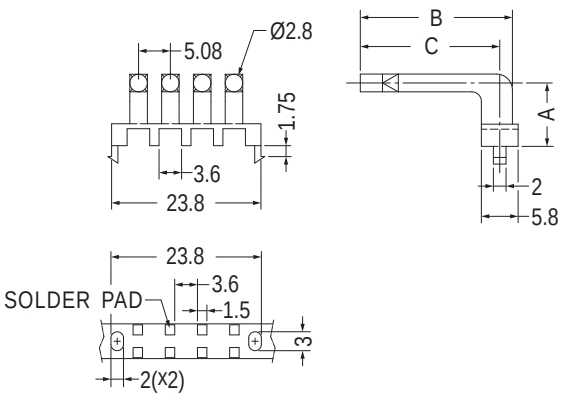

PCB LAYOUT

Part No.	A	B	C	Package
LPE4-5-18	5.0	18.0	16.0	100
LPE4-10-24	10.0	24.0	22.0	

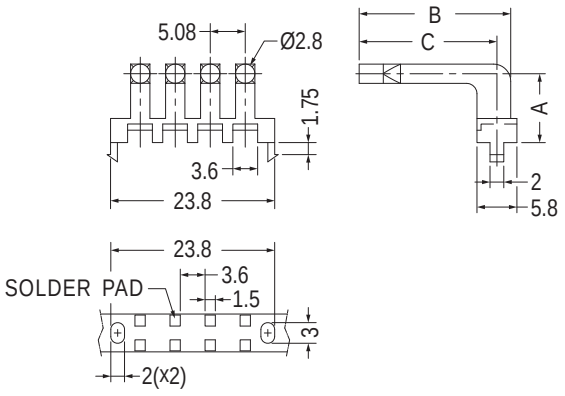


PCB LAYOUT


Part No.	A	B	C	Package
LPE4-5-16	5.0	16.0	14.0	500
LPE4-5-19	5.0	19.0	17.0	
LPE4-5-22	5.0	22.0	20.0	
LPE4-10-16	10.0	16.0	14.0	
LPE4-10-19	10.0	19.0	17.0	
LPE4-10-22	10.0	22.0	20.0	
LPE4-15-16	15.0	16.0	14.0	
LPE4-15-19	15.0	19.0	17.0	
LPE4-15-22	15.0	22.0	20.0	


光纖座 OPTICAL FIBER MOUNT

用途：配合光纖將LED光導到機器面板。

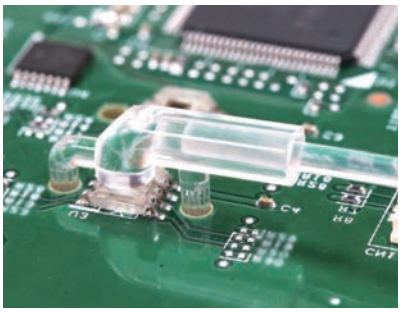

- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm

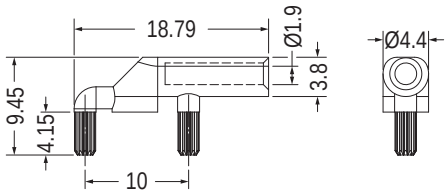



MOUNTING HOLE


Part No.	Package
PMR-11	1000

LED導光柱 LIGHT PIPE

用途：可配合光纖將LED光導到機器面板。




- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm



MOUNTING HOLE Ø4.5
THICKNESS 1.6

Part No.	Package
LEU-4	1000




MOUNTING HOLE Ø3.5
THICKNESS 0.8~1.0


Part No.	A	Surface	Package
LEU-1	1.1	Bright	2000
LEU-2	1.05	Matte	


光纖座 OPTICAL FIBER MOUNT


用途：配合光纖及LEU-1將LED光導到機器面板。

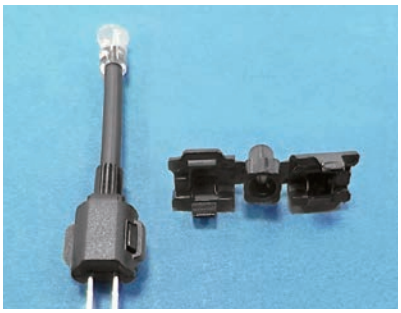

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm





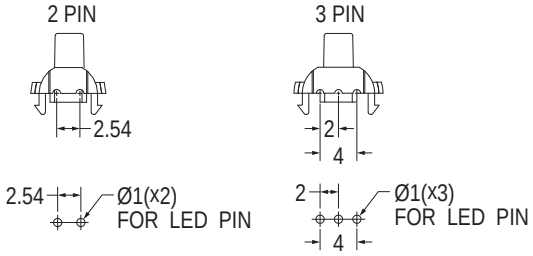

MOUNTING HOLE
RECOMMEND FOR REFERENCE ONLY

【 PMR-1 】 【 PMR-2 】


Part No.	A	Package
PMR-1	6.4	2000
PMR-2	7.86	


光纖座 OPTICAL FIBER MOUNT

用途：配合光纖將SMT LED光導到機器面板。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

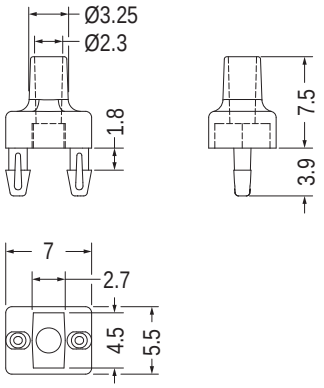





MOUNTING HOLE
THICKNESS 1.6

Part No.	Package
PMR-3	2000

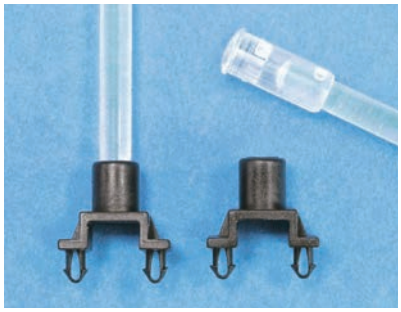


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

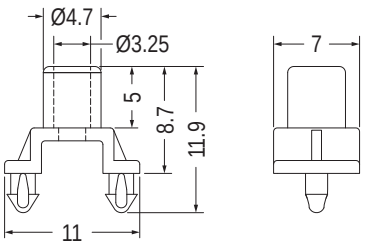





MOUNTING HOLE
THICKNESS 1.6


Part No.	Package
PMR-10	1000

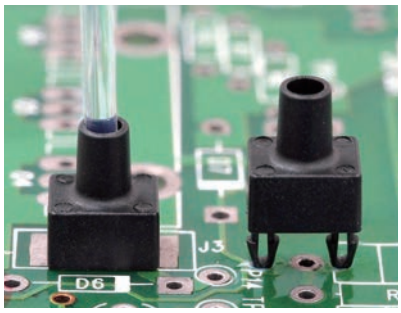

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm







MOUNTING HOLE
THICKNESS 1.6


Part No.	Package
PMR-13	2000


光纖座 OPTICAL FIBER MOUNT

用途：配合光纖將LED光導到機器面板。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm







MOUNTING HOLE
THICKNESS 1.6




Part No.	Package
PMR-6	2000

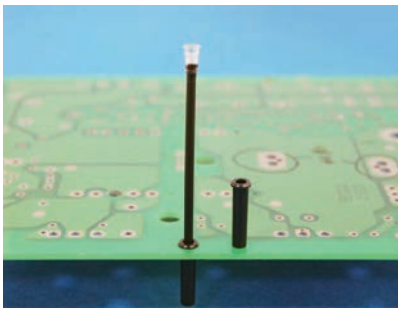


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm







MOUNTING HOLE Ø4.0

Part No.	Package
PMR-14	1000

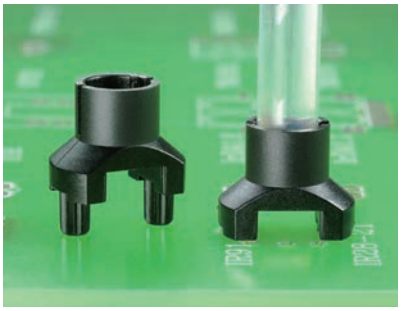



- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm





MOUNTING HOLE







Part No.	Package
PMR-7	1000

LED導光座 LIGHT PIPE MOUNT



- Material: Nylon 66 (UL)/PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent/Black
- Unit: mm
- Patented (專利品)






MOUNTING HOLE
THICKNESS 0.8

使用說明
Installation Guide


用途：可快速將LED固定於機器面板上，使LED導光於機殼面板上，使光線均勻、柔和。




- 適用Ø3 LED帽緣款
- 適用於2 PIN、3 PIN


Part No.	Part No.	Package
LEMA-6F	LED3-52	1000
	LEM-234	
	子母包：內容物包含右方零件	
	上述零件亦可單獨選購	

光纖座 OPTICAL FIBER MOUNT

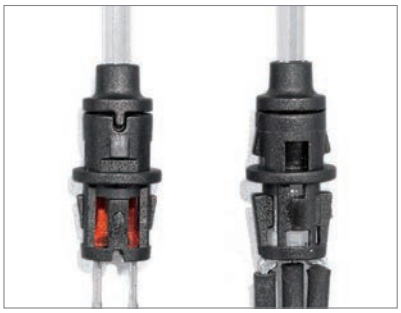


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm
- Patented (專利品)

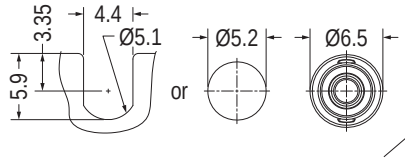

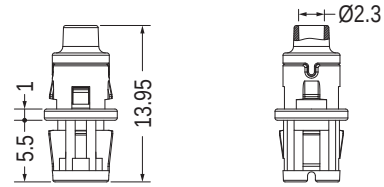

MOUNTING HOLE
THICKNESS 0.8


【 PMR-12F 】



【 PMR-12-1F 】

使用說明
Installation Guide


用途：配合光纖將LED光導到機器面板上。



- 適用Ø3 LED帽緣款
- 適用於2 PIN、3 PIN

Part No.	Part No.	Package
PMR-12F	LED3-52	1000
	PMR-12	
PMR-12-1F	LED3-52	
	PMR-12-1	
子母包：內容物包含右方零件		
上述零件亦可單獨選購		


- Material: Nylon 66 (UL)
- Flame Class: 94V-2
- Color: Black
- Unit: mm
- Patented (專利品)

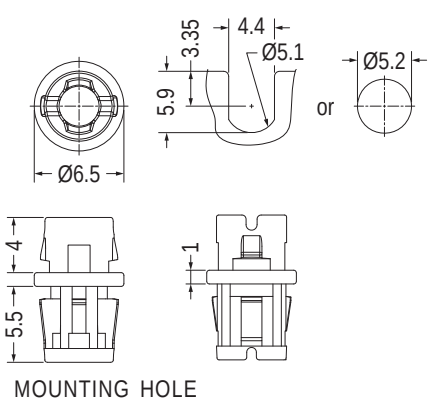

MOUNTING HOLE
THICKNESS 0.8

【 LED3-52 】


- Material: PC (UL)
- Flame Class: 94V-2
- Color: Transparent
- Unit: mm
- Patented (專利品)

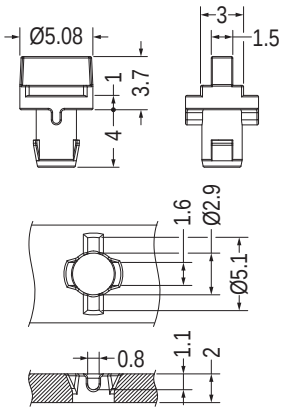

MOUNTING HOLE

【 LEM-234 】

- Material: Nylon 66 (UL)
- Flame Class: 94V-2
- Color: Black
- Unit: mm
- Patented (專利品)

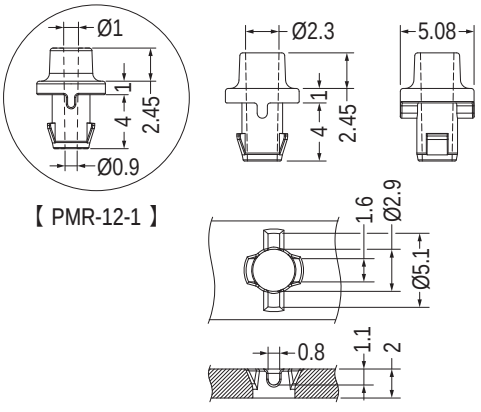

【 PMR-12-1 】

MOUNTING HOLE


【 PMR-12 】



3


- PCB導槽
  PCB Card Guides
- PCB拉柄
  PCB Card Pullers
- 拉柄蓋
  Latch Caps
- 拉柄
  Latchs
- 把手
  Handles
- 外箱把手
  Box Handles
- 紙箱配件
  Packaging Accessories

PCB導槽 PCB CARD GUIDE

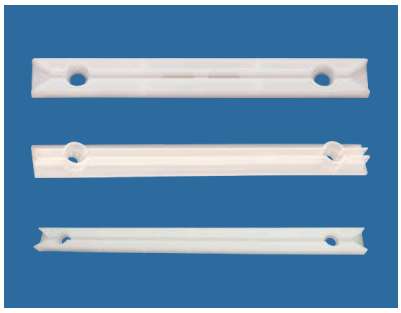


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


用途：用螺絲鎖於機板，固定PC板於機殼上，安裝方便。

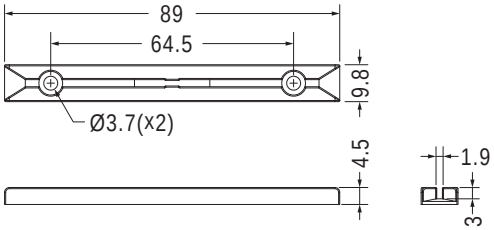

Part No.	Package
CGBC-89	250

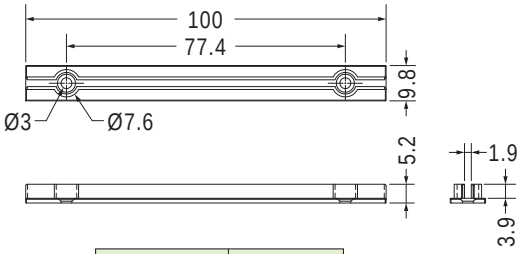


Part No.	Package
CGBB-100	250

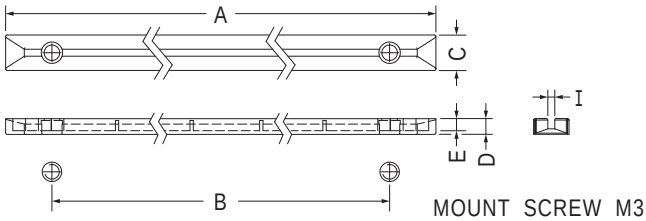


MOUNT SCREW M3

Part No.	A	B	C	D	E	I	Package
CGB-100L	100.0	77.0	10.0	7.2	5.4	2.2	250
CGB-120	119.0	94.5	9.8	4.5	3.0	1.9	
CGB-140	139.8	114.5	9.7	4.3	2.8	1.9	
CGB-160	158.7	135.0	9.7	4.3	2.8	1.9	

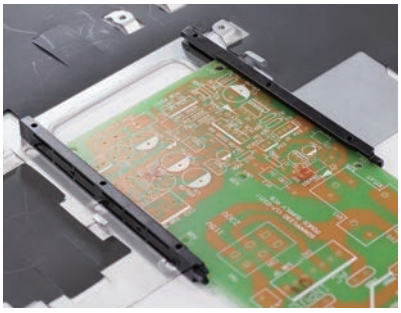


- Material: PC+ABS (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm

用途：固定OCP3.0板於機殼或PC板上，安裝方便。

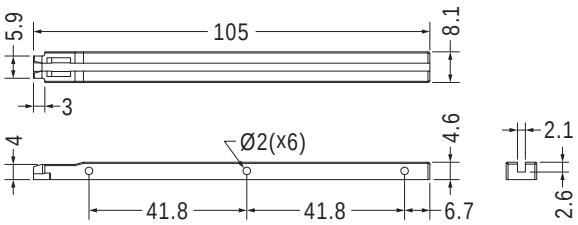


Part No.	Package
CGQ-105	250

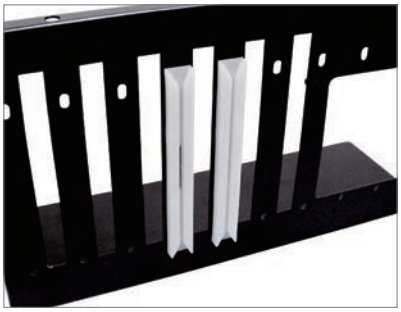

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


用途：固定PC板於機殼上，安裝方便，免螺絲。



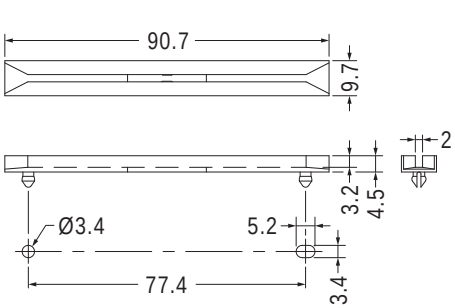

MOUNTING HOLE
THICKNESS 1.2

Part No.	Package
CG-9A	250

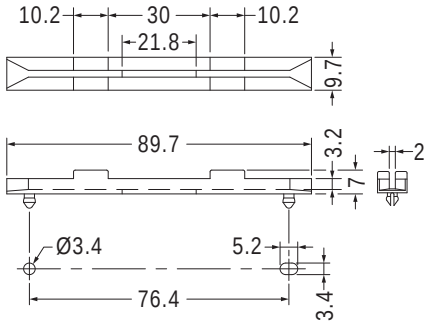


MOUNTING HOLE
THICKNESS 1.2


Part No.	Package
CG-9AL	250

用途：固定PC板於機殼上，安裝方便，免螺絲。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

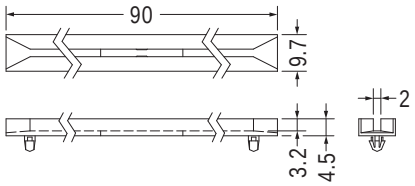




MOUNTING HOLE
THICKNESS 1.2


Part No.	Package
CG-9B	250







MOUNTING HOLE
THICKNESS 0.8

Part No.	Package
CG-25	500

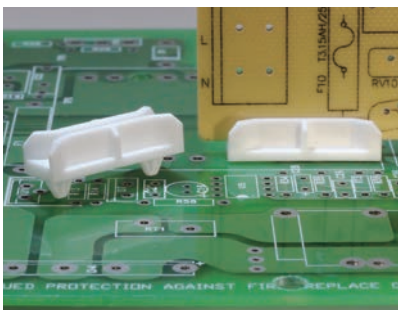


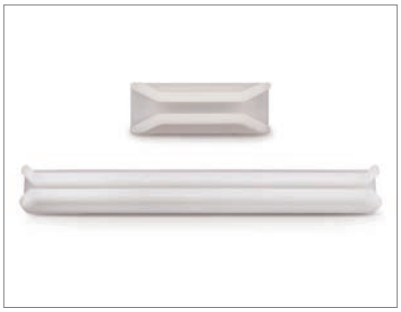



MOUNTING HOLE
THICKNESS 1.2


Part No.	Package
CG-26	500

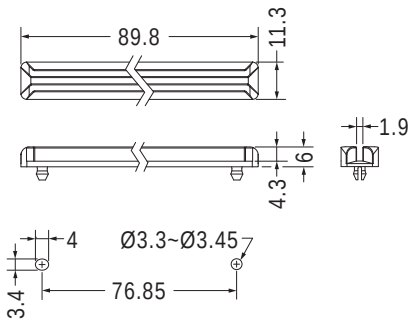

MOUNTING HOLE
THICKNESS 1.2~2.3

Part No.	Package
CG-9D	500



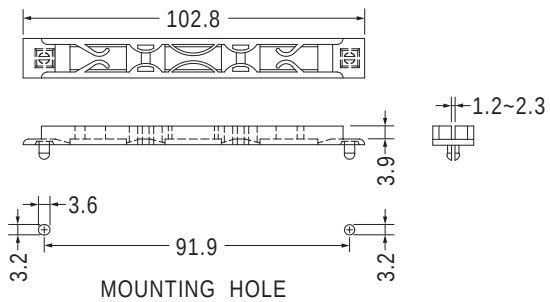


MOUNTING HOLE
THICKNESS 1.6~2.2

Part No.	Package
CG-10A	250




- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

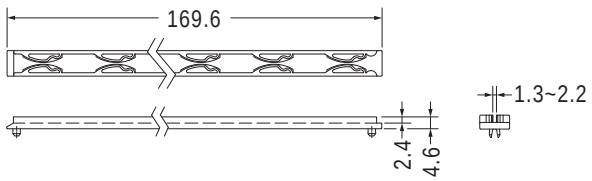


MOUNTING HOLE
THICKNESS 1.5~1.8

Part No.	Package
CGE-169	500

用途：固定PC板於機殼上，安裝方便，免螺絲。

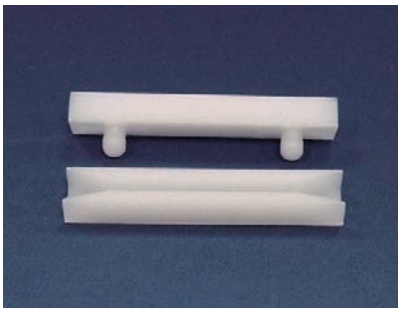



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

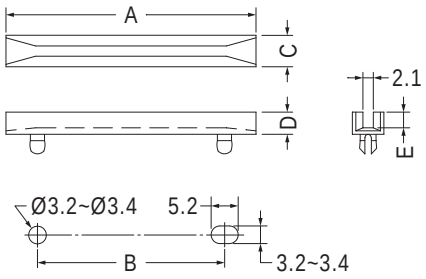

MOUNTING HOLE
THICKNESS: T


Part No.	A	B	C	D	E	T	Package
CG-38	38.0	25.4	6.4	4.5	3.2	0.8~1.2	500
CG-38L	38.0	25.4	9.6	4.6	3.0	1.0~1.6	
CG-50	50.8	38.0	6.4	4.5	3.2	0.8~1.2	
CG-50S	50.8	38.0	6.4	2.5	1.2	0.8~1.2	
CG-90S	88.9	76.2	6.4	2.8	1.5	0.8~1.2	

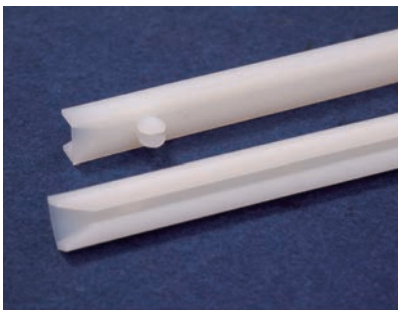

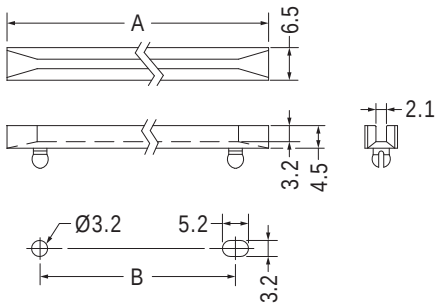


MOUNTING HOLE
THICKNESS 0.8~1.2

Part No.	A	B	Package
CG-250	63.5	50.8	500
CG-300	76.2	63.5	
CG-350	88.9	76.2	250
CG-400	101.6	88.9	
CG-450	114.3	101.6	200
CG-500	127.0	114.3	
CG-550	139.7	127.0	
CG-600	152.4	139.7	

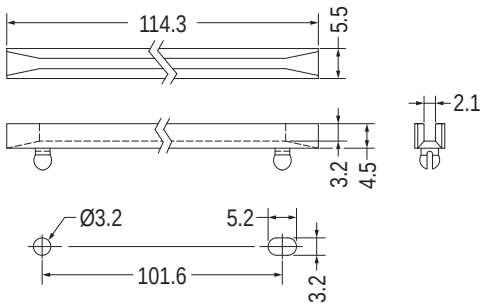


MOUNTING HOLE
THICKNESS 0.8~1.2


Part No.	Package
CG-450S	500

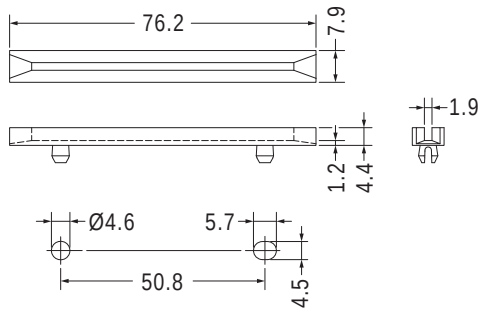


MOUNTING HOLE
THICKNESS 1.2~2.3

Part No.	Package
CG-300L	500

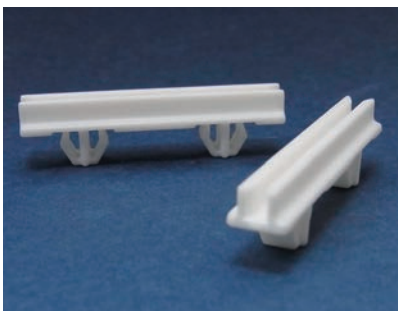

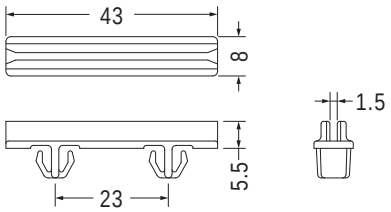





MOUNTING HOLE
THICKNESS 1.2


Part No.	Package
CGC-43	500

用途：固定PC板於機殼上，安裝方便，免螺絲。

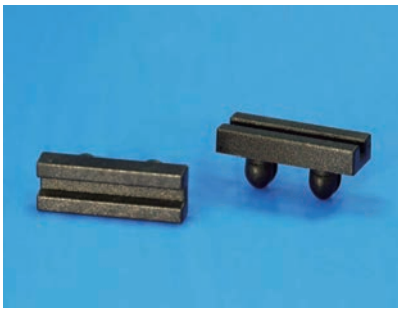


- Material: PC (UL)
- Flame Class: 94V-2
- Color: Black
- Unit: mm






MOUNTING HOLE
THICKNESS 1.0

Part No.	Package
CG-15	1000

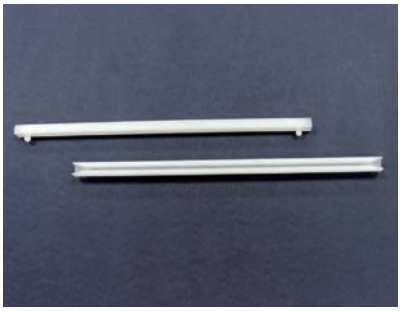


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

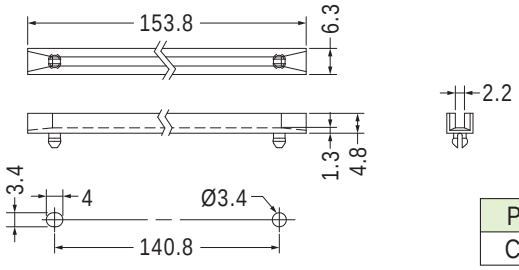


MOUNTING HOLE
THICKNESS 1.2


Part No.	Package
CG-153	100

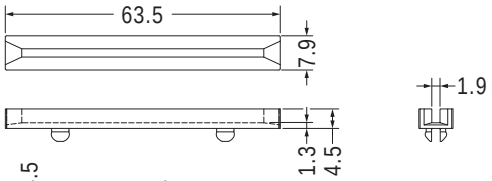

MOUNTING HOLE
THICKNESS 0.8


Part No.	Package
CG-63	500

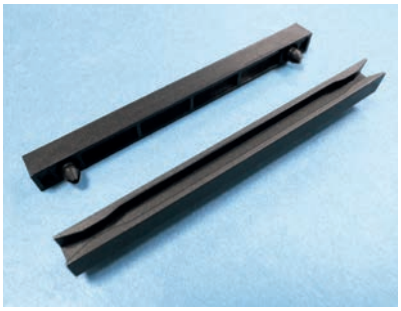


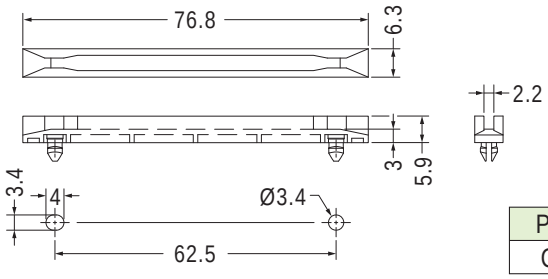

MOUNTING HOLE
THICKNESS 1.0

Part No.	Package
CG-77	500

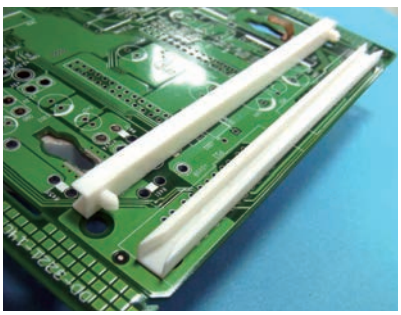

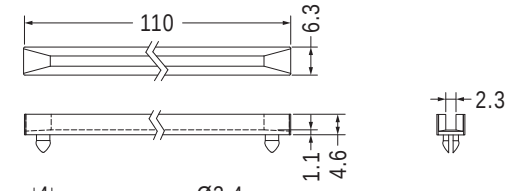

MOUNTING HOLE
THICKNESS 0.8~1.2


Part No.	Package
CG-110	100

PCB導槽 PCB CARD GUIDE

用途：固定PC板於機殼上，安裝方便，免螺絲。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

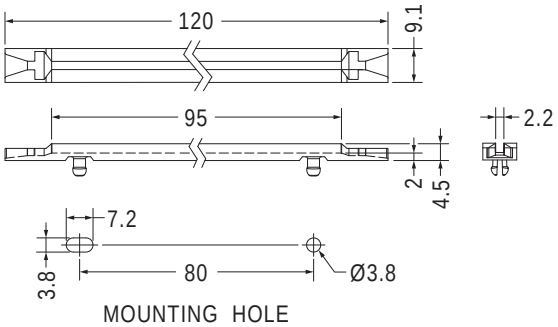


MOUNTING HOLE
THICKNESS 1.6

Part No.	Package
CG-120	100

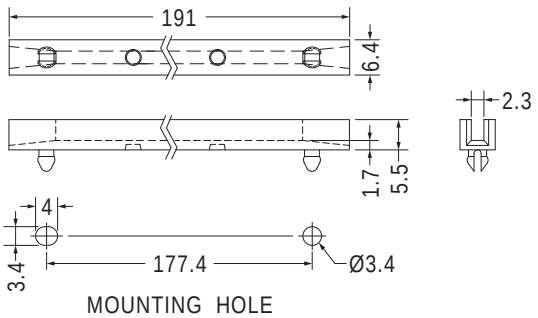


MOUNTING HOLE
THICKNESS 1.2

Part No.	Package
CG-191	100

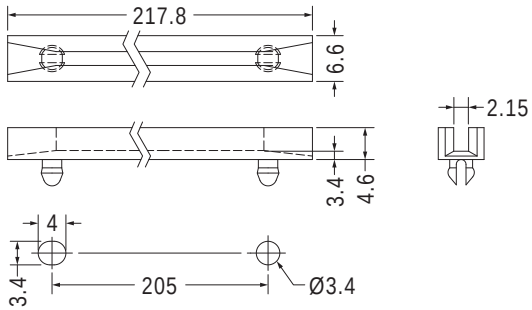

MOUNTING HOLE
THICKNESS 1.2


Part No.	Package
CG-218	100

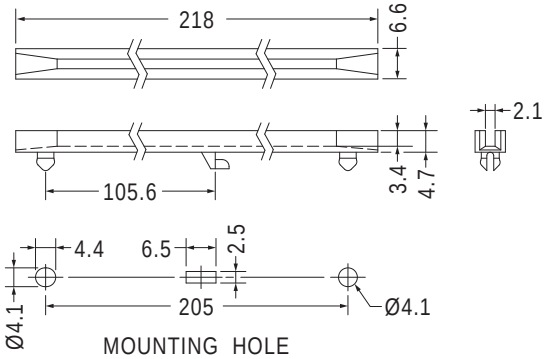


MOUNTING HOLE
THICKNESS 1.2

- Material: PC
- Color: Black

Part No.	Package
CGF-218	100

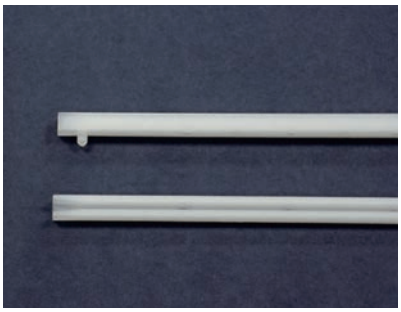

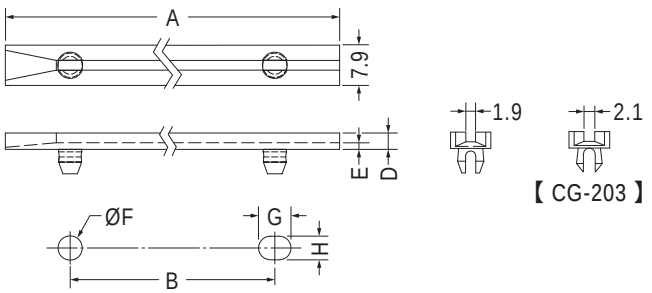


【 CG-203 】


MOUNTING HOLE
THICKNESS 1.2~2.3

Part No.	A	B	D	E	F	G	H	Package
CG-203	203.2	177.8	3.2	1.9	4.6	5.4	4.6	100
CG-600A	152.4	127.0	3.2	1.3	4.75	6.4	4.62	200
CG-650	164.1	139.7	4.4	1.2	4.57	5.71	4.47	
CG-700	177.8	152.4	3.2	1.3	4.75	6.35	4.62	100
CG-700A	177.8	152.4	3.2	1.3	4.5	5.6	4.4	
CG-750	190.5	165.1	3.2	1.3	4.57	5.71	4.47	

用途：固定PC板於機殼上，安裝方便，免螺絲。

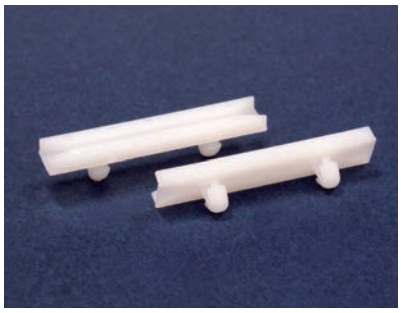


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

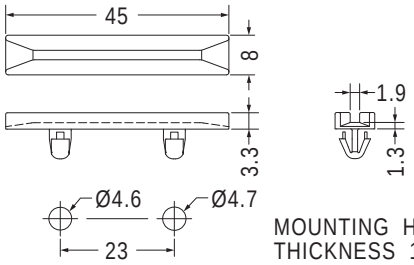


Part No.	Package
CG-45	1000




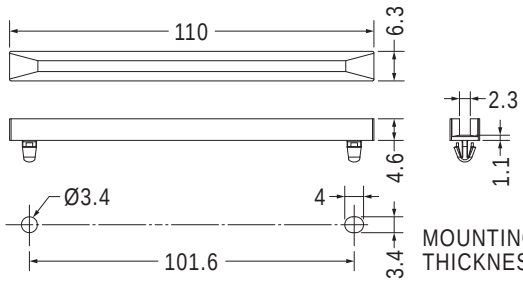

Part No.	Package
CGLJ-110	500

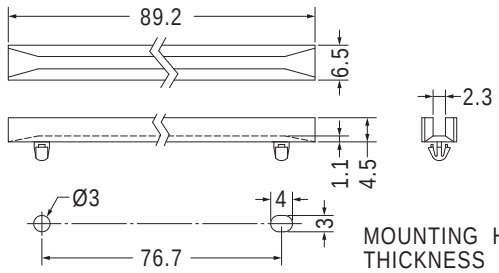


Part No.	Package
CGDLA-350	250

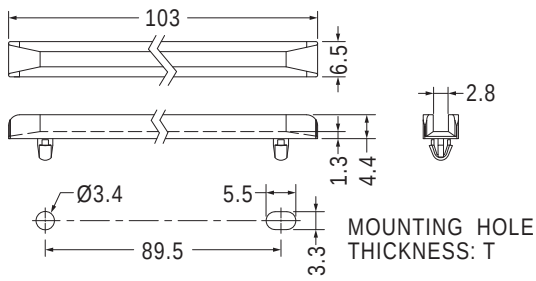



Part No.	T	Package
CGDLA-102	1.0	500
CGDLA-102L	1.5	



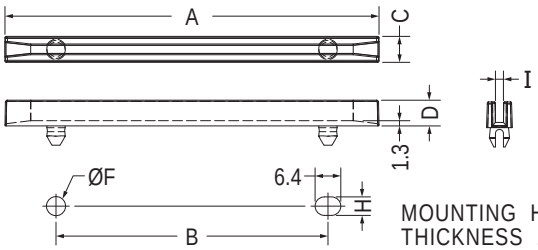


Part No.	A	B	C	D	F	H	I	Package
BCG-250	63.5	38.1	6.35	6.35	4.8	4.8	2.2	500
BCG-450	114.3	88.9	6.4	6.4	4.75	4.6	2.0	

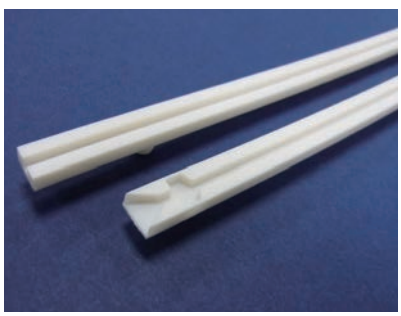

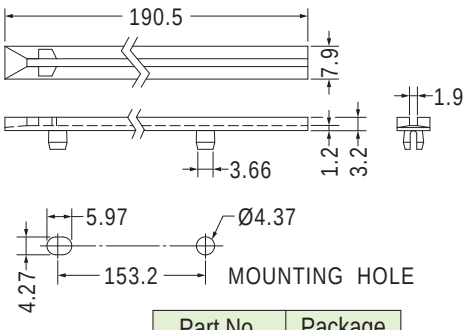


Part No.	Package
FR-190	500

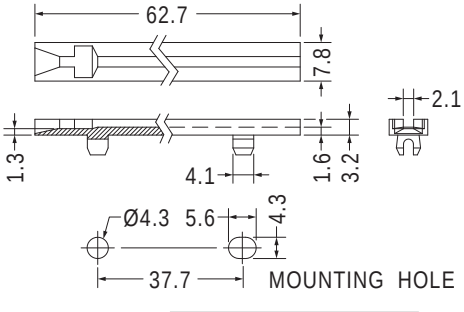


Part No.	Package
FR-250	500

PCB導槽 PCB CARD GUIDE

用途：固定PC板於機殼上，安裝方便，免螺絲。

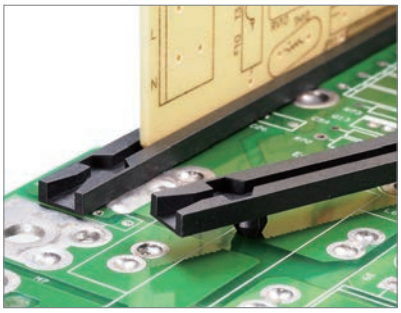


- Material: Nylon 66 (UL)
- Flame Class: 94V-0+GF
- Color: Black
- Unit: mm

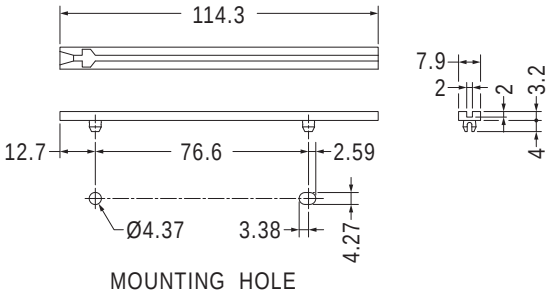


MOUNTING HOLE

NEW

Part No.	Package
CGG-114	250

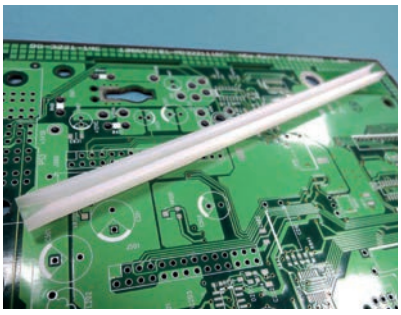



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

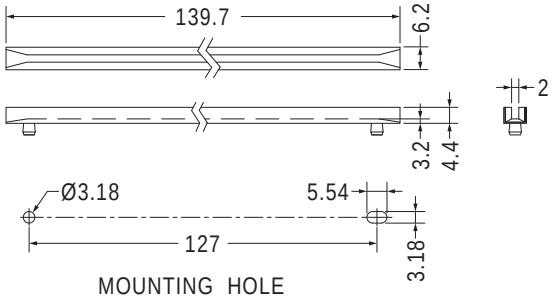

MOUNTING HOLE
THICKNESS 0.8~2.0


Part No.	Package
CG-140	250

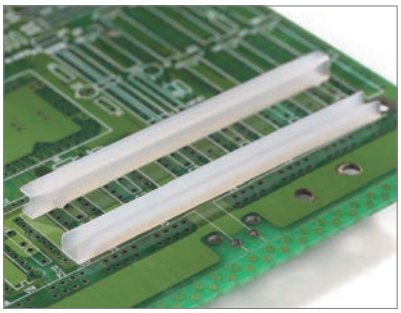


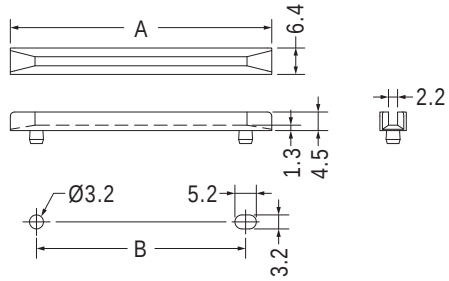

MOUNTING HOLE
THICKNESS 1.6


Part No.	A	B	Package
CGA-63	63.5	50.8	500
CGA-89	88.9	76.2	

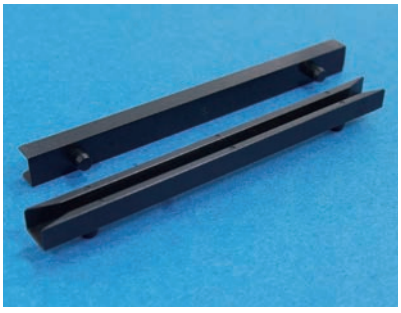

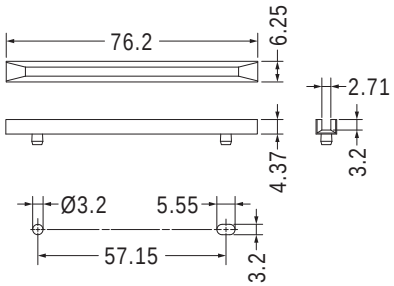

MOUNTING HOLE
THICKNESS 1.6

Part No.	Package
CGA-76	500

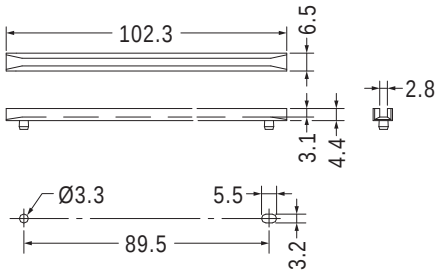


MOUNTING HOLE
THICKNESS 1.2~2.2

Part No.	Package
CGA-102	250




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

用途：固定PC板於機殼上，安裝方便，免螺絲。

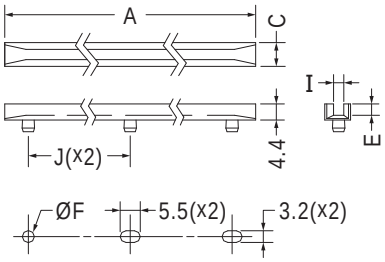

MOUNTING HOLE
THICKNESS: T

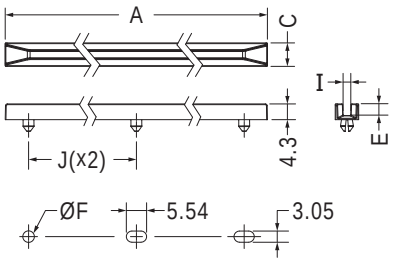

MOUNTING HOLE
THICKNESS: T


【CGA-178S】

Part No.	A	C	E	F	I	J	T	Package
CGA-178S	177.8	6.4	3.2	3.18	2.0	82.55	1.2~2.2	200
CGA-178	178.5	6.5	3.1	3.3	2.8	83.0	1.2~2.2	
CGA-203	203.2	6.2	3.2	3.2	2.0	95.2	1.2~2.0	100
CGA-217	217.0	6.5	3.1	3.3	2.8	102.0	1.2~2.2	200




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

用途：用螺絲鎖於機板，固定PC板於機殼上，安裝方便。

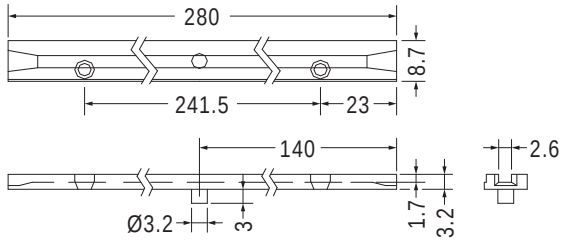


Part No.	Package
CGS-280	100

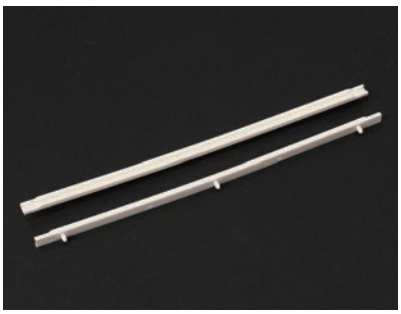

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


用途：固定PC板於機殼上，安裝方便，免螺絲。

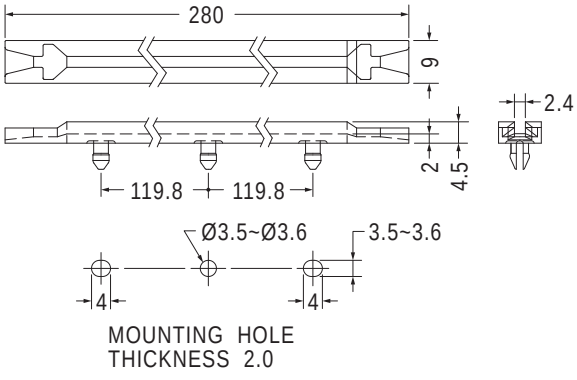

MOUNTING HOLE
THICKNESS 2.0

Part No.	Package
CG-280	100




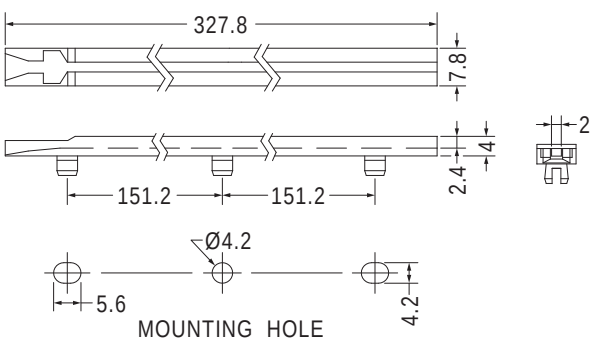


MOUNTING HOLE

Part No.	Package
FR-1300	100

用途：固定PC板於機殼上，安裝方便，免螺絲。

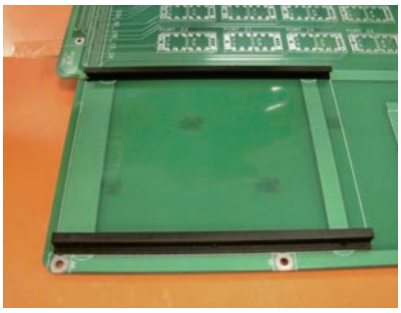



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

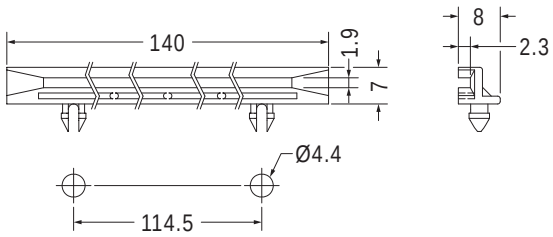

MOUNTING HOLE
THICKNESS 1.6


Part No.	Package
CGA-140	100

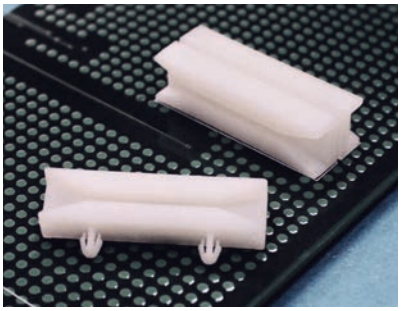

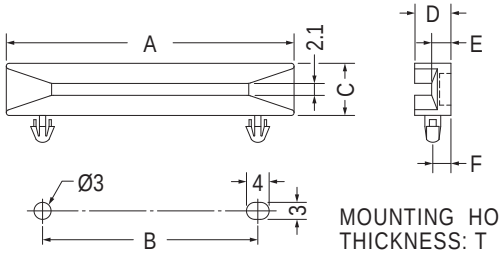


MOUNTING HOLE
THICKNESS: T

Part No.	A	B	C	D	E	F	T	Package
CGLA-4	38.4	20.0	9.2	6.4	3.4	3.2	1.6~1.7	500
CGLA-4(1)	38.4	20.0	9.2	6.4	3.4	3.2	1.0	
CGLA-4(2)	38.4	20.0	9.2	6.4	3.4	3.2	2.0	
CGLA-4S	40.0	20.0	8.0	6.0	3.0	3.0	1.6	
CGLA-6	51.0	38.2	9.2	6.4	3.4	3.2	1.6~1.7	
CGLA-8	81.0	60.0	8.0	6.0	3.0	3.0	1.6~1.8	250
CGLA-8(2)	81.0	60.0	8.0	6.0	3.0	3.0	1.8~2.1	
CGLA-8(8)	81.0	60.0	8.0	6.0	3.0	3.0	1.8	
CGLA-8(25)	81.0	60.0	8.0	6.0	3.0	3.0	2.5	
CGLA-9(1)	91.5	71.0	8.0	6.0	3.0	3.0	1.6~1.8	
CGLA-9(2)	91.5	71.0	8.0	6.0	3.0	3.0	1.8~2.1	

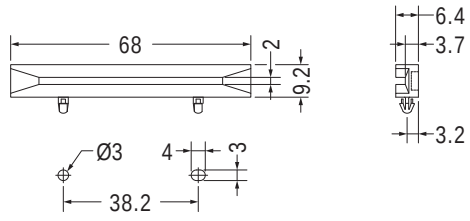


MOUNTING HOLE
THICKNESS 1.6

Part No.	Package
CGLA-10	200

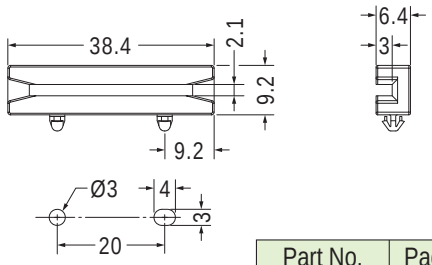


MOUNTING HOLE
THICKNESS 1.0

Part No.	Package
CGLA-11	500

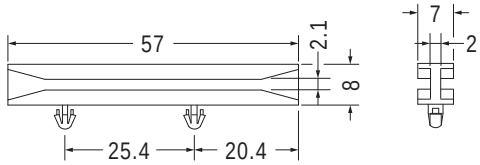

MOUNTING HOLE Ø3.0
THICKNESS 1.8

Part No.	Package
CGDLA-57	500

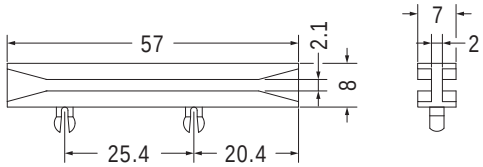


MOUNTING HOLE Ø3.0
THICKNESS 1.8


Part No.	Package
CGDLB-57	500

PCB導槽 PCB CARD GUIDE


用途：固定PC板於機殼上，安裝方便，免螺絲。

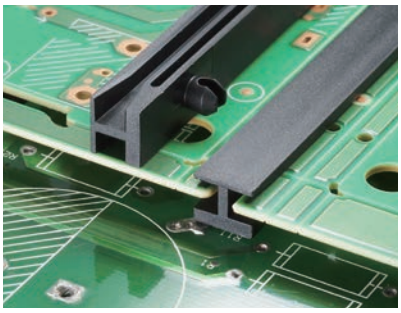

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm




MOUNTING HOLE



Assembly Diagram


NEW


Part No.	Package
CGDLA152L	200

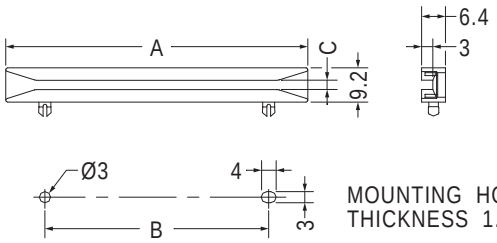

MOUNTING HOLE
THICKNESS 1.3


Part No.	A	B	C	Package
CGL-4	38.4	20.0	2.0	500
CGL-8	81.0	60.0	2.5	250

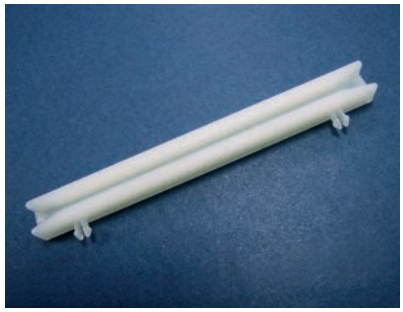

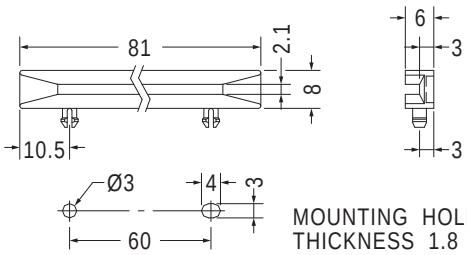


MOUNTING HOLE
THICKNESS 1.8

Part No.	Package
CGLC-8	500

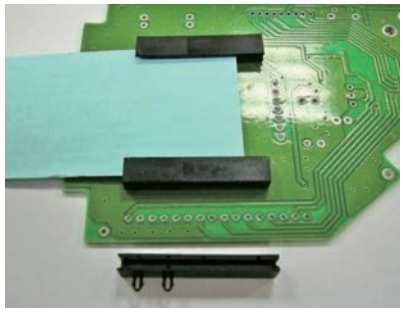


用途：固定IC卡於PC板上，安裝方便，免螺絲。

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

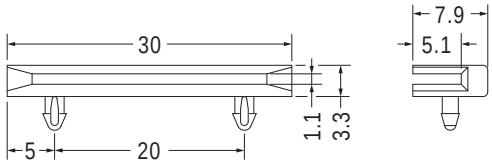


MOUNTING HOLE Ø2.0
THICKNESS 1.6

Part No.	Package
CGLC-30	500

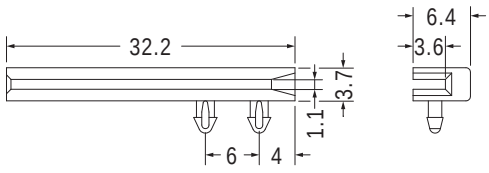

MOUNTING HOLE Ø2.0
THICKNESS 1.6

Part No.	Package
CGLC-32-1	500

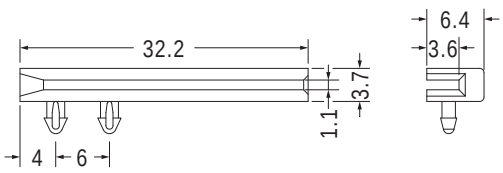


MOUNTING HOLE Ø2.0
THICKNESS 1.6


Part No.	Package
CGLC-32-2	500

PCB導槽 PCB CARD GUIDE

用途：固定PC板於機殼上，安裝方便，免螺絲。

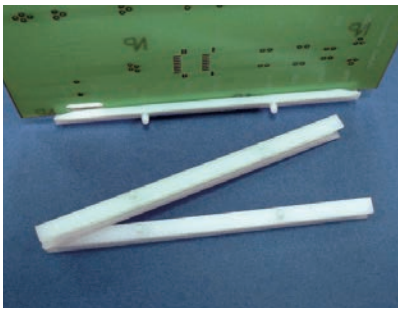



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

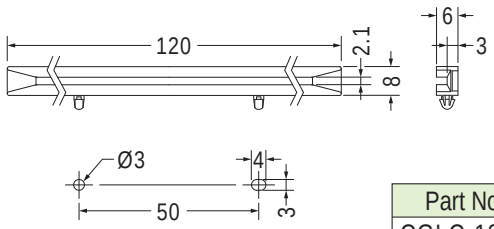

MOUNTING HOLE
THICKNESS: T


Part No.	T	Package
CGLC-120	1.6~1.8	200
CGLC-120S	1.0	

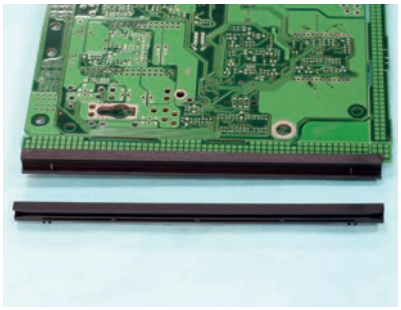

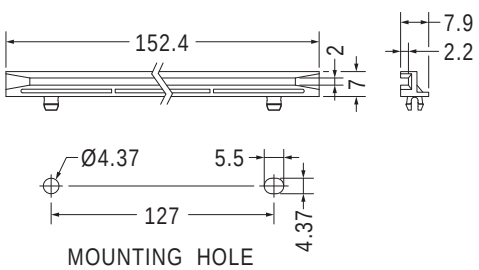


MOUNTING HOLE
THICKNESS 1.2~2.0


Part No.	Package
CGLQ-153	250

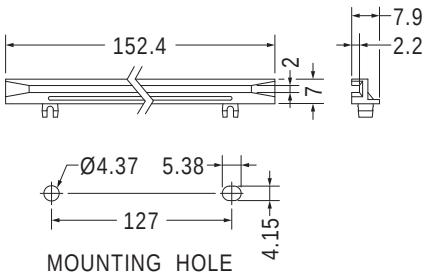

MOUNTING HOLE
THICKNESS 1.2~2.3

Part No.	Package
CGLC-153	250

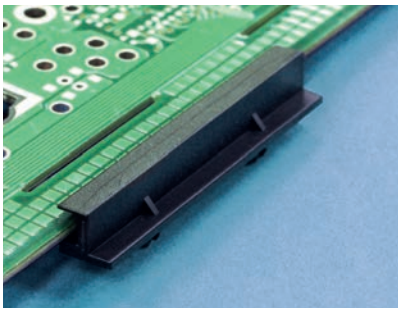

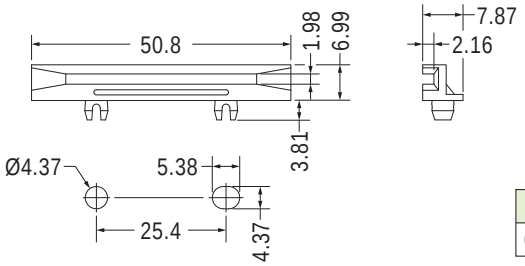


MOUNTING HOLE
THICKNESS 1.2~2.3

Part No.	Package
CGLC-50.8	1000




- Material: ABS (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm

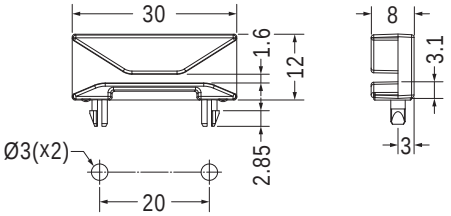


MOUNTING HOLE
THICKNESS 1.6

Part No.	Package
CG-30	500

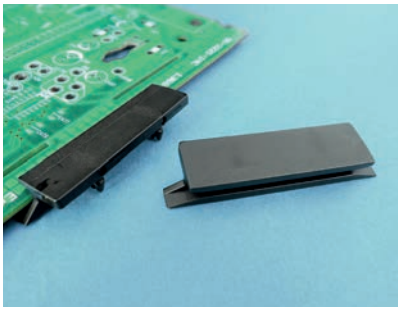


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

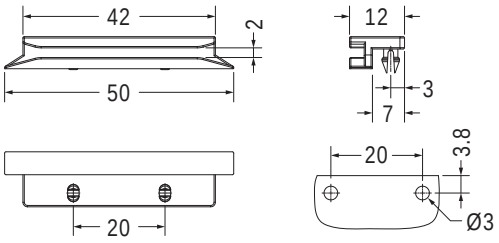


MOUNTING HOLE
THICKNESS 1.6

Part No.	Package
CGLD-50	500


用途：固定PC板於機殼上，安裝方便，免螺絲。

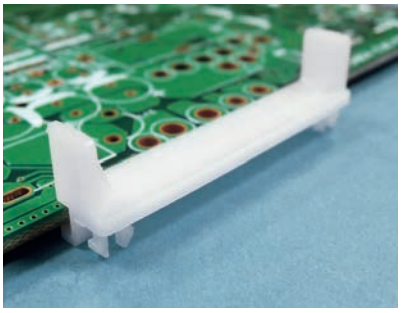


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

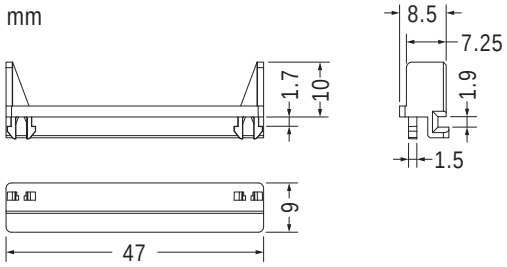


Part No.	Package
CGLG-47	1000

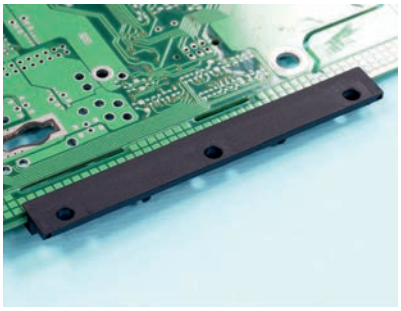

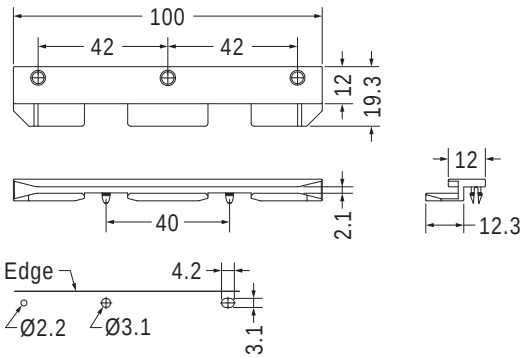


RECOMMEND MOUNTING HOLE
RECOMMEND THICKNESS 1.6

Part No.	Package
CGLI-100	1000

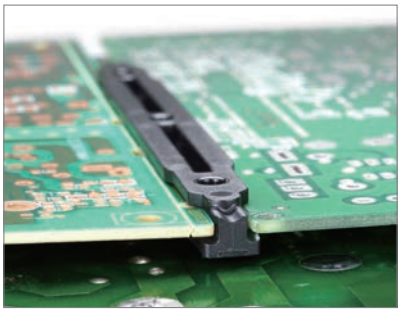

用途：固定OCP3.0板於機殼或PC板上，安裝方便。


- Body Material: PC+ABS (UL)
- Nut Material: Brass
- Flame Class: 94V-0
- Color: Black
- Unit: mm

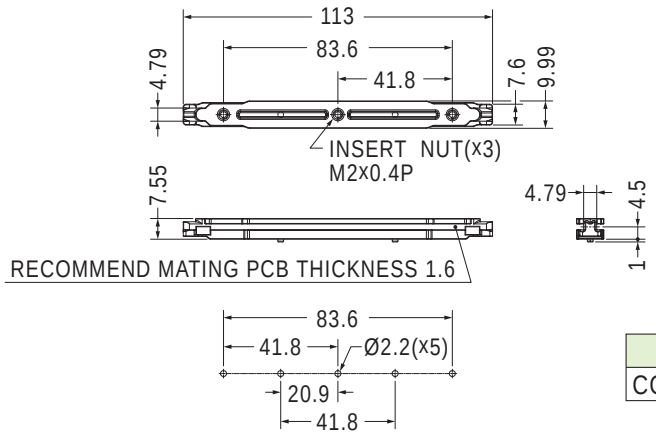


RECOMMEND MOUNTING HOLE IN HOST PCB

NEW

Part No.	Package
CGLM-7-M2	250

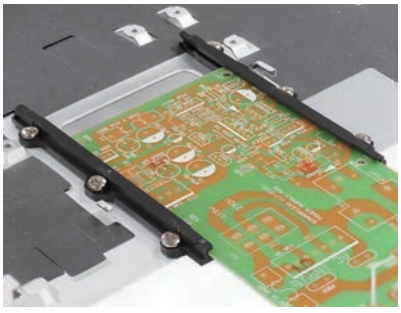


- Material: Nylon 66 (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm

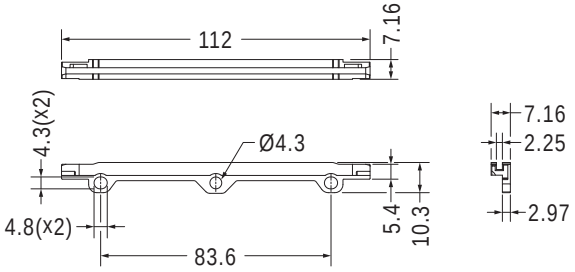


Part No.	Package
CGLN-9	250


用途：固定OCP3.0板於機殼或PC板上，安裝方便。

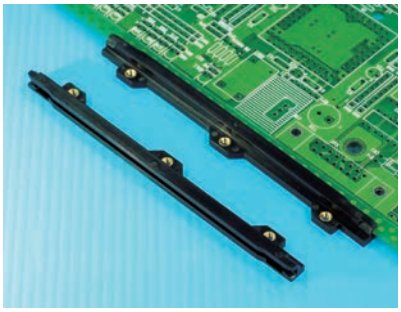


- Material: PC+ABS (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm

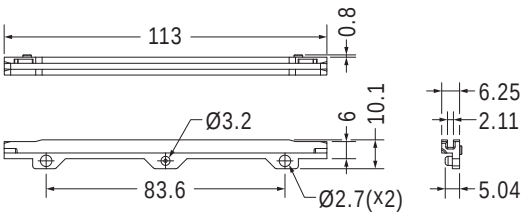


Part No.	Package
CGLM-1N	250

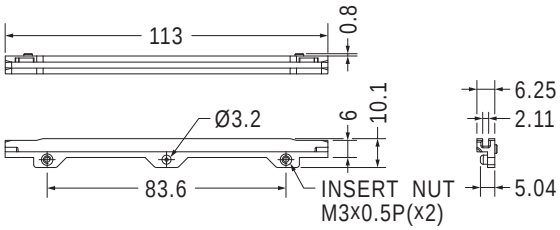


Part No.	Package
CGLM-1	250

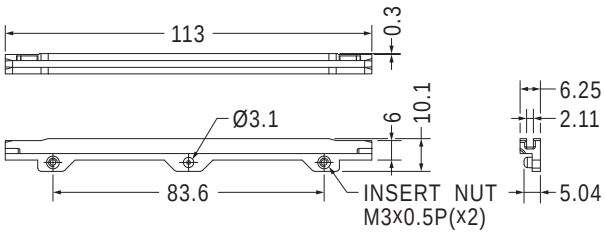


Part No.	Package
CGLM-2	250

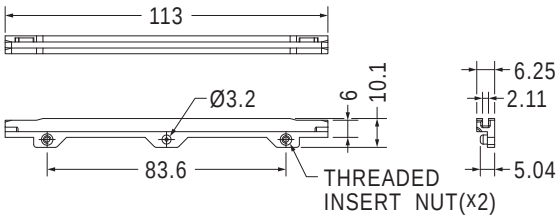


Part No.	Thread	Package
CGLM-113	M3x0.5P	250
CGLM-113-M2	M2x0.4P	

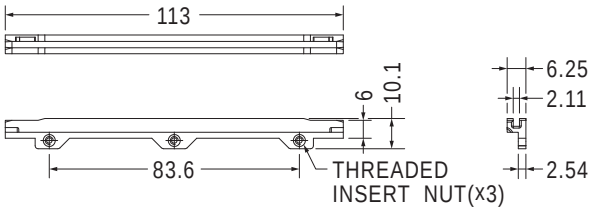

Part No.	Thread	Package
CGLN-113	M3x0.5P	250
CGLN-113-M2	M2x0.4P	

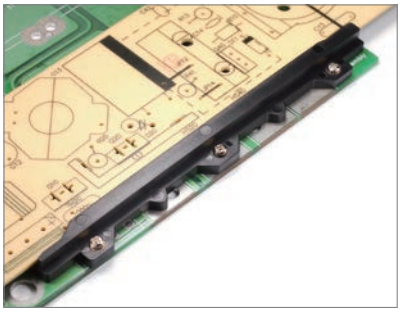


- Body Material: PC+ABS (UL)
- Nut Material: Brass
- Flame Class: 94V-0
- Color: Black
- Unit: mm

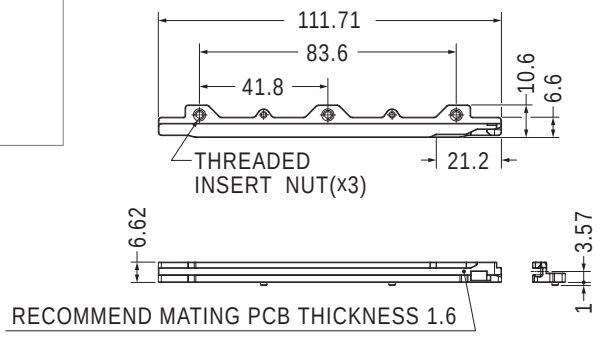


NEW

Part No.	Thread	Package
CGLM-5	M3x0.5P	250
CGLM-5-M2	M2x0.4P	




RECOMMEND MOUNTING HOLE IN HOST PCB


用途：固定OCP3.0板於機殼或PC板上，安裝方便。

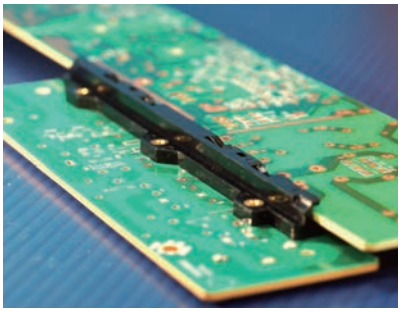


- Material: PC+ABS (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm

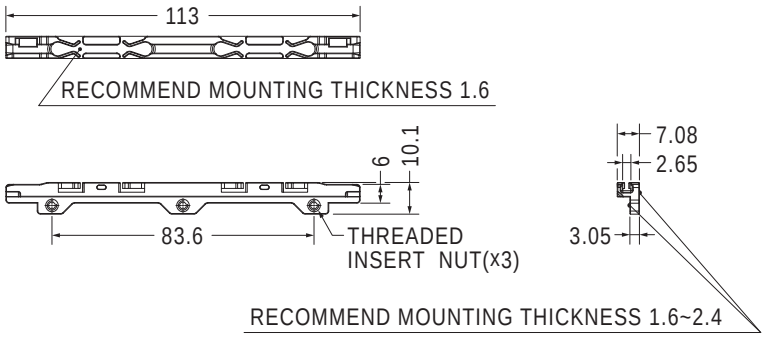


Part No.	Thread	Package
CGLN-2	M3x0.5P	250
CGLN-2-M2	M2x0.4P	

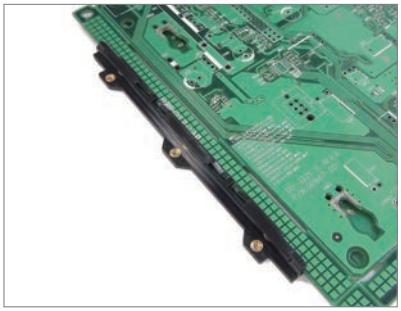


- Material: PC+ABS (UL)
- Nut Material: Brass
- Flame Class: 94V-0
- Color: Black
- Unit: mm

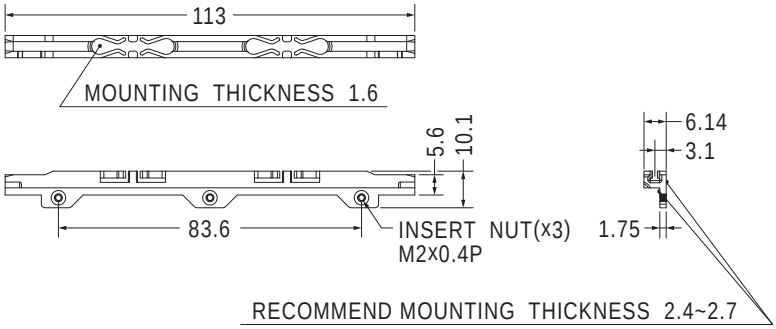


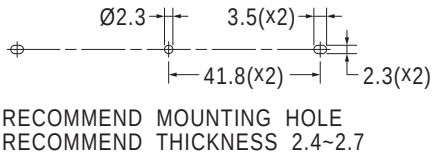

Part No.	Package
CGLN-6-M2	250

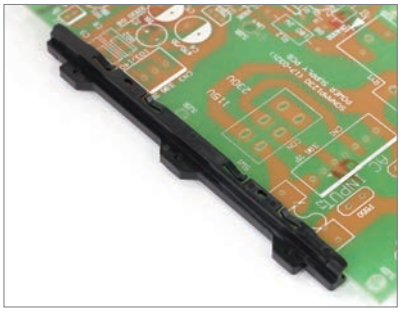


- Material: PC+ABS (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm

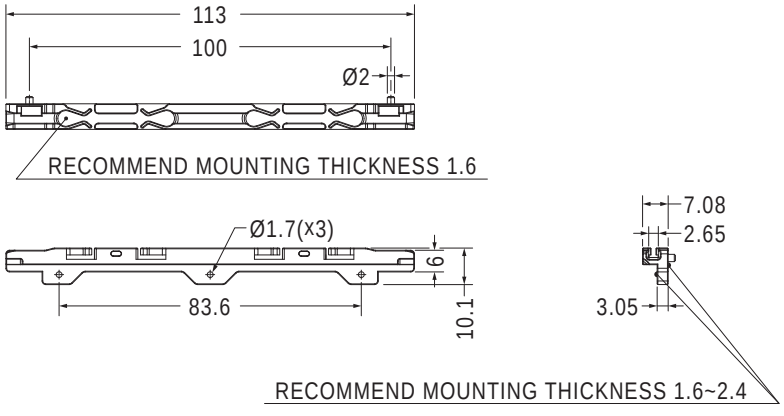


Part No.	Package
CGLN-3	250

PCB導槽 PCB CARD GUIDE


用途：固定OCP3.0板於機殼或PC板上，安裝方便。

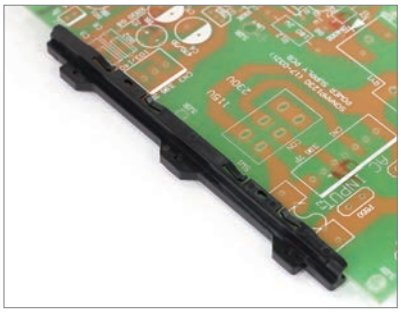

- Material: PC+ABS (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm

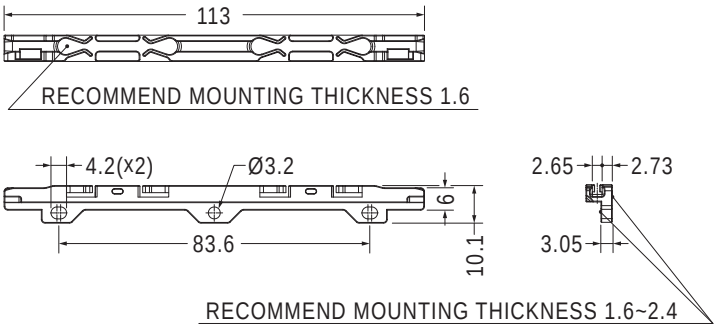


Part No.	Package
CGLN-5	250

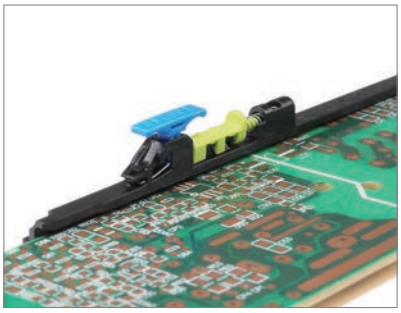



- Material: PC+ABS (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm
- Patented（專利品）

使用說明
Installation Guide

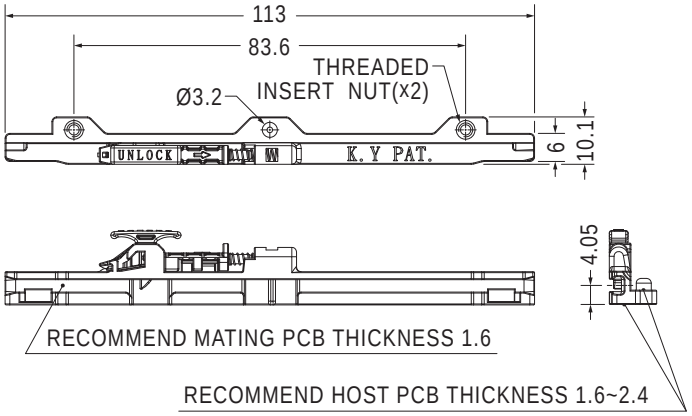

Part No.	Thread	Package
★CGLP-3F	M3x0.5P	100
CGLP-3F-M2	M2x0.4P	

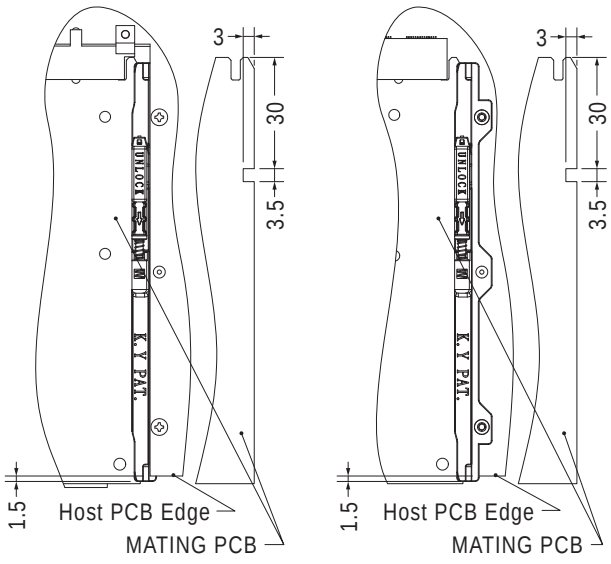


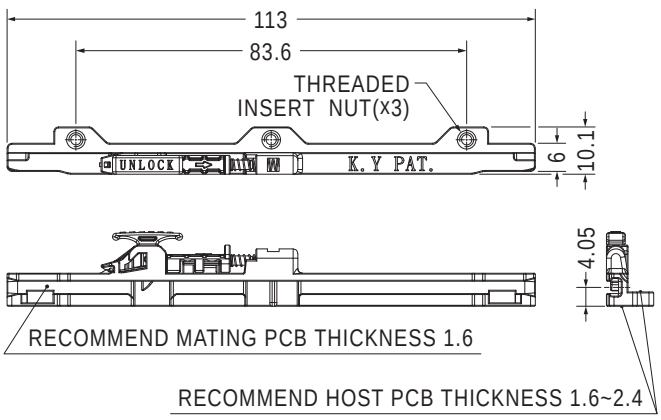


Part No.	Thread	Package
★CGLP-5F	M3x0.5P	100
CGLP-5F-M2	M2x0.4P	

PCB導槽 PCB CARD GUIDE


用途：固定OCP3.0板於機殼或PC板上，安裝方便。

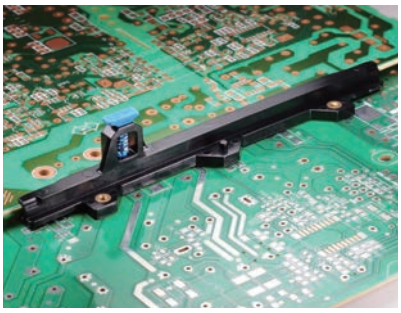

- Material: PC+ABS (UL)
- Pin Material: Nylon 66 (UL)
- Flame Class: 94V-0
- Nut Material: Brass
- Spring Material: Nickel Plated SWP
- Color: Black
- Pin Color: Blue
- Unit: mm
- Patented（專利品）

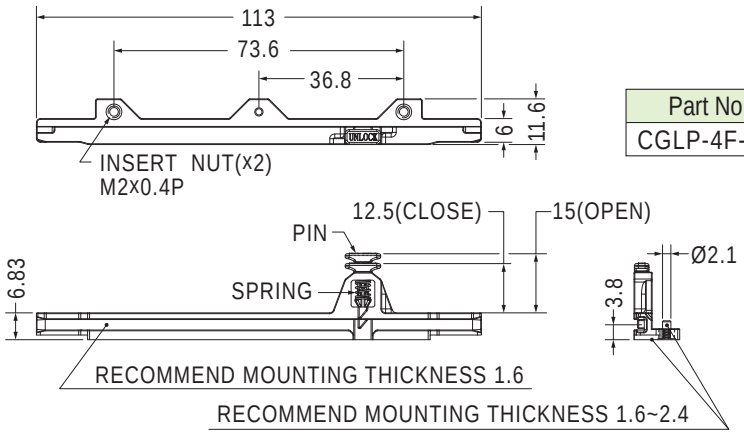


Part No.	Package
CGLP-4F-M2	100

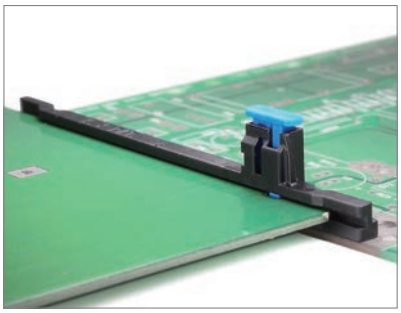


使用說明
Installation Guide

- Material: PC+ABS (UL)
- Flame Class: 94V-0
- Nut Material: Brass
- Body Color: Black
- Pin Color: Blue
- Unit: mm
- Patented Under Process（專利申請中）

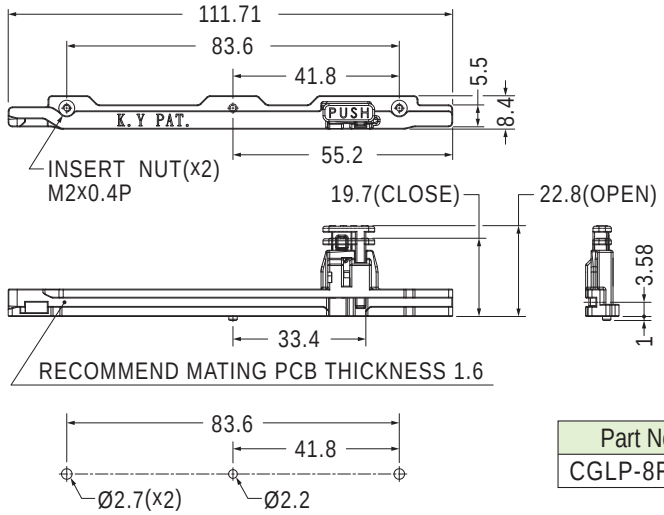


NEW

Part No.	Package
CGLP-8F-M2	100

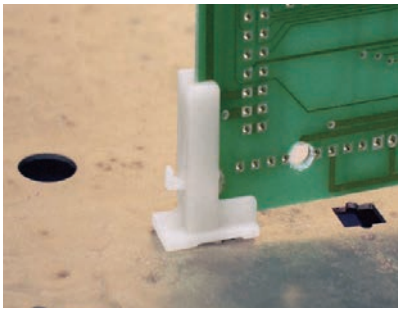


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

用途：固定PC板於機殼或PC板上，安裝方便，免螺絲。

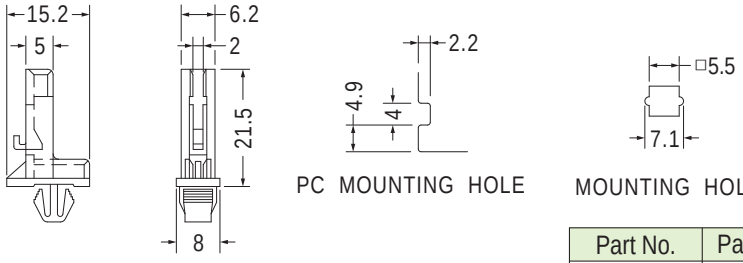


Part No.	Package
CGH-1	500


用途：固定PC板於機殼或PC板上，安裝方便，免螺絲。

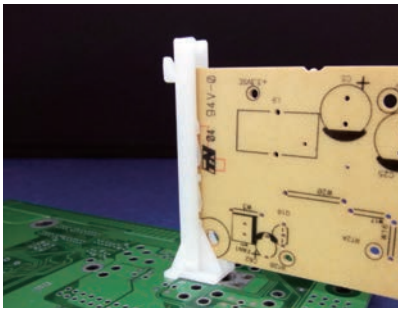


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
CGHI-1	500

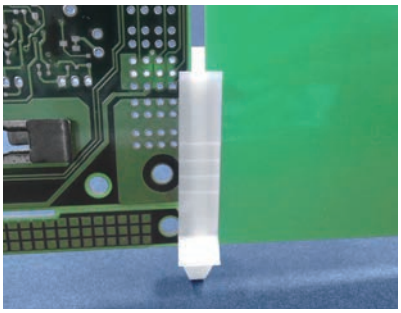


PCB THICKNESS 1.6

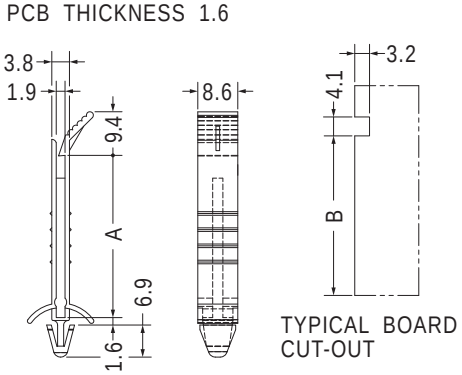


Part No.	A	B	Package
CGHE-22.4	22.4	22.0	500
CGHE-34.9	34.9	34.5	
CGHE-47.5	47.5	47.1	
CGHE-73	73.0	72.6	

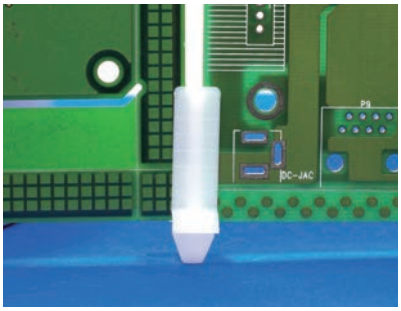

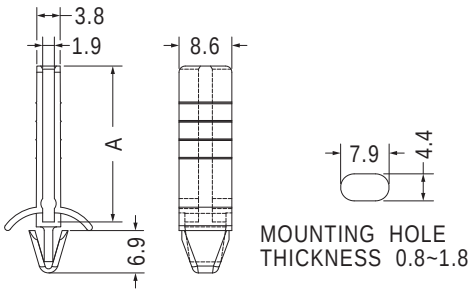


Part No.	A	Package
CGHC-25.4	25.4	500
CGHC-38.1	38.1	
CGHC-50.8	50.8	
CGHC-76.2	76.2	200



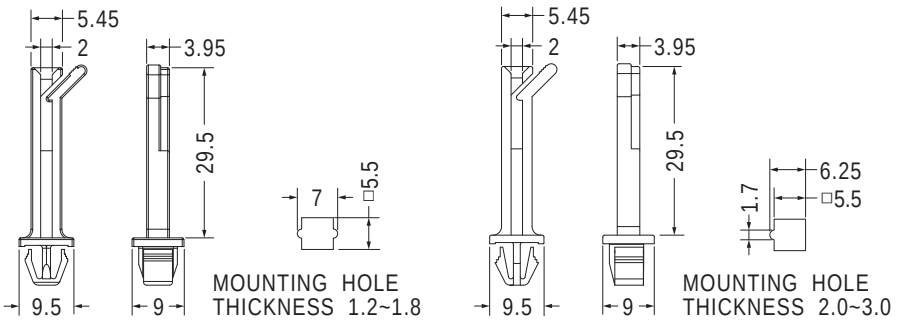


Part No.	Package
CGH-31	500


Part No.	Package
CGH-31L	500

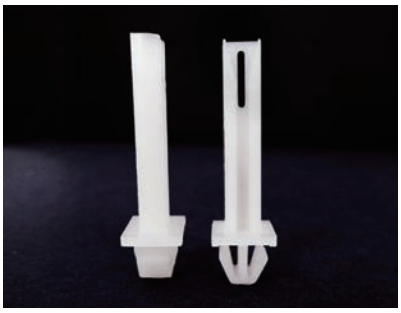


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


用途：固定PC板於機殼或PC板上，安裝方便，免螺絲。

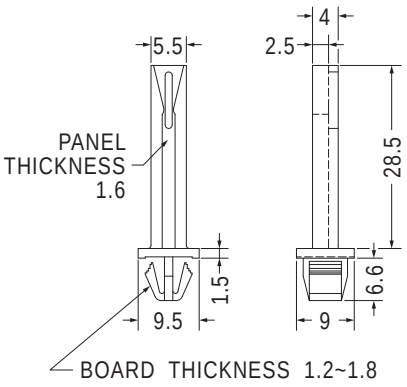

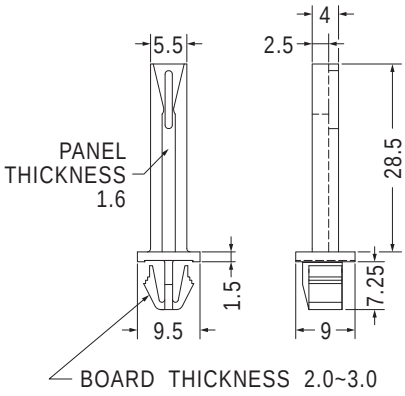




MOUNTING HOLE




MOUNTING HOLE

Part No.	Package
CGH-37	1000

Part No.	Package
CGH-37L	1000

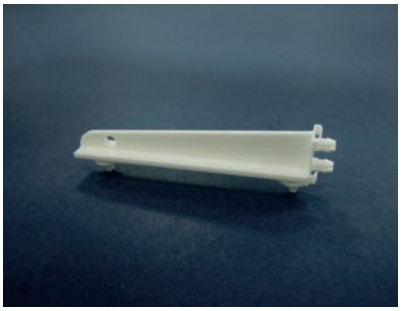

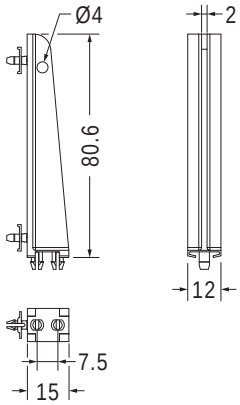




MOUNTING HOLE

Part No.	Package
CGC-1	250



- Material: PC+ABS (UL)
- Flame Class: 94V-2
- Color: Black/Blue
- Unit: mm


用途：配合螺絲固定PC板於機殼或PC板上，安裝牢固，不脫落。







MOUNTING HOLE




MOUNTING HOLE
THICKNESS 1.6


Part No.	Package
CGHA-65	500


PCB導槽 PCB CARD GUIDE

用途：配合螺絲固定PC板於機殼或PC板上，安裝牢固，不脫落。

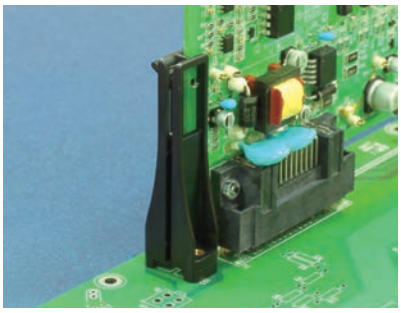


- Material: PC+ABS (UL)
- Flame Class: 94V-2/94V-0
- Color: Black/Blue
- Unit: mm

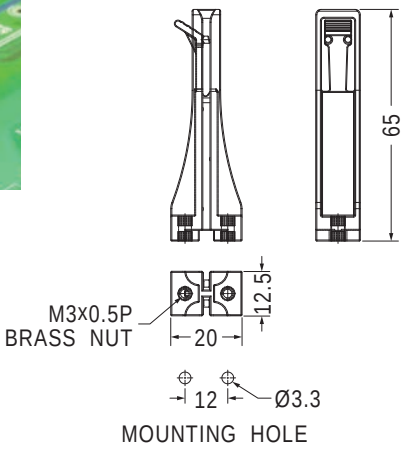

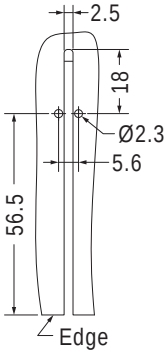



MOUNTING HOLE
THICKNESS 1.6

Part No.	Package
CGHB-65	500

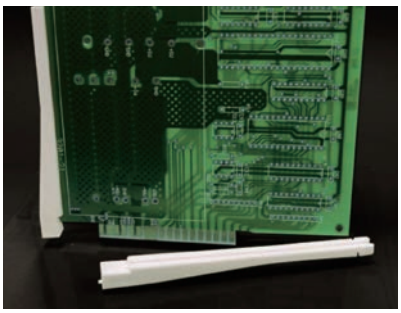


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

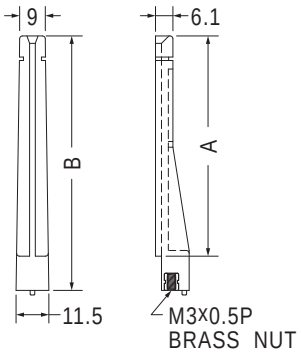





MOUNTING HOLE

Part No.	A	B	Package
CGH-90	77.2	89.2	200
CGH-130	118.5	130.0	100

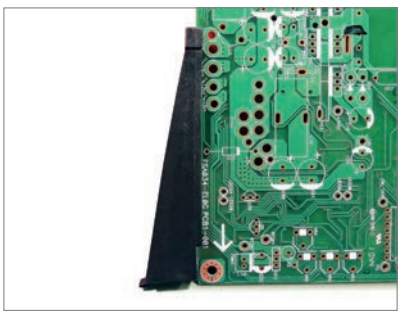


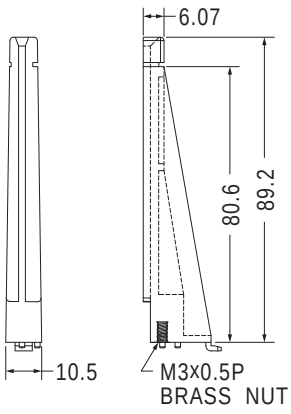




MOUNTING HOLE
THICKNESS 0.8~1.0


Part No.	Package
CGHB-90	1000

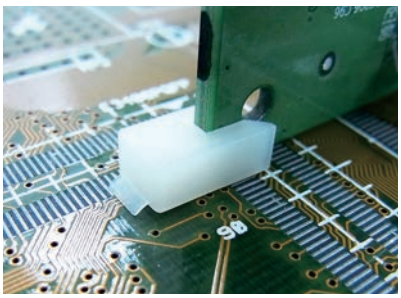

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

用途：固定PC板於機板上，成90°不晃動。





MOUNTING HOLE
THICKNESS 1.6~1.8


Part No.	Package
ULCG-1	1000

PCB導槽 PCB CARD GUIDE

用途：固定PC板於機殼上，安裝方便，免螺絲。





- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

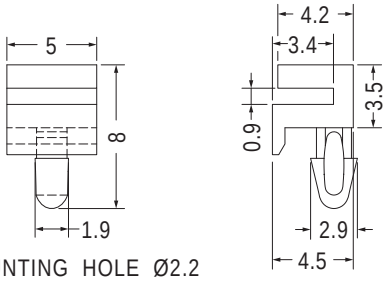

MOUNTING HOLE Ø2.2
THICKNESS 1.6


Part No.	Package
ULCG-2	1000

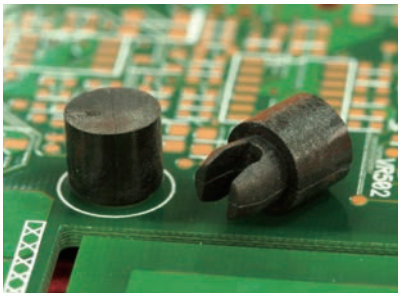



MOUNTING HOLE Ø4.3
THICKNESS 1.6~2.0

Part No.	A	Package
CGB-2	2.0	2000
CGB-6	4.8	




MOUNTING HOLE Ø4.5
THICKNESS 1.6

- Flame Class: 94HB
- Color: Black

Part No.	Package
CGB-3.2	2000



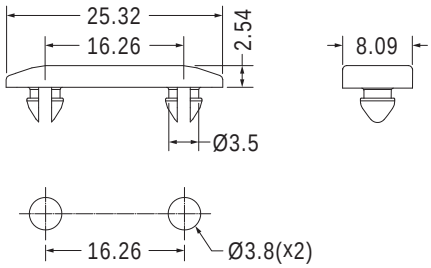


MOUNTING HOLE
THICKNESS 1.2


Part No.	Package
INTEC-1	500


PCB拉柄 PCB CARD PULLER

用途：與PCB導槽配合，可快速將PC板拉出與壓入。

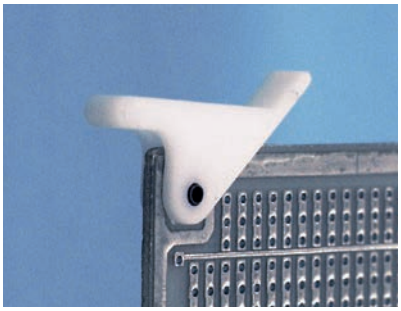

- Material: POM (UL)
- Flame Class: 94HB
- Pin Material: Steel
- Color: Natural
- Unit: mm






MOUNTING HOLE PIN


Part No.	Package
CP-15	1000

PCB拉柄 PCB CARD PULLER

用途：與PCB導槽配合，可快速將PC板拉出與壓入。

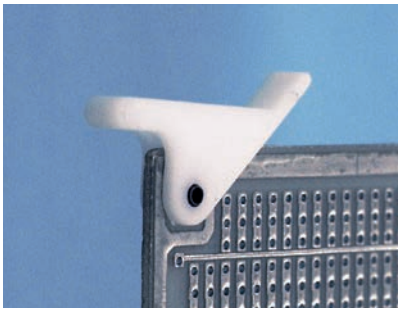


- Material: Nylon 66 (UL)/POM (UL)
- Flame Class: 94HB/94V-2/94V-0
- Pin Material: Steel
- Color: Natural/Black
- Unit: mm

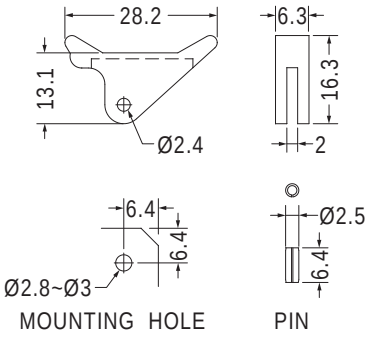


Part No.	Package
CP-25	1000


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Pin Material: Steel
- Color: Natural/Black

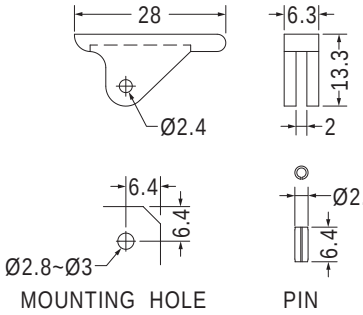


Part No.	Package
CP-20	1000

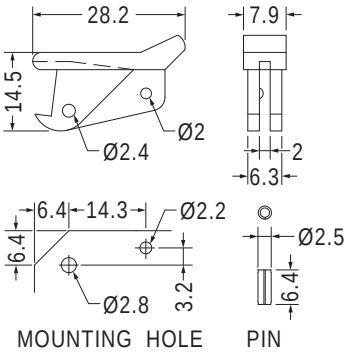


Part No.	Package
CP-30	1000

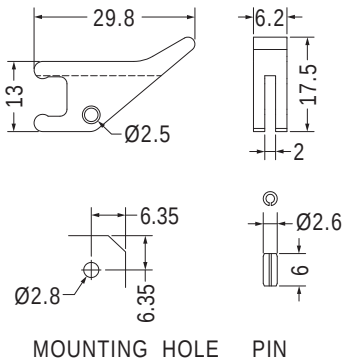


Part No.	Package
CP-90	1000

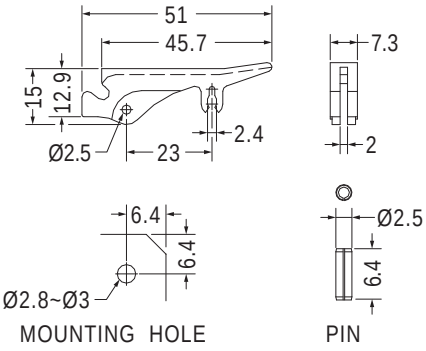


Part No.	Package
CP-37	500

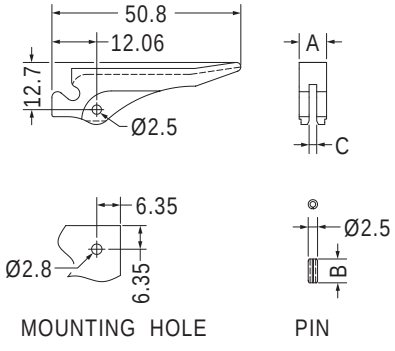


Part No.	A	B	C	Package
CP-38	7.3	6.4	2.0	500
CP-38L	8.8	8.0	3.5	

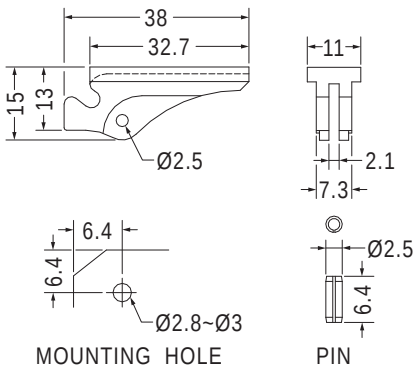

Part No.	Package
CP-47	500

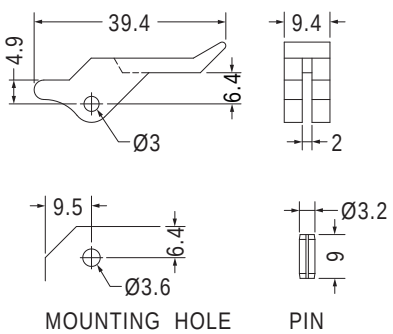

Part No.	Package
CP-50	500

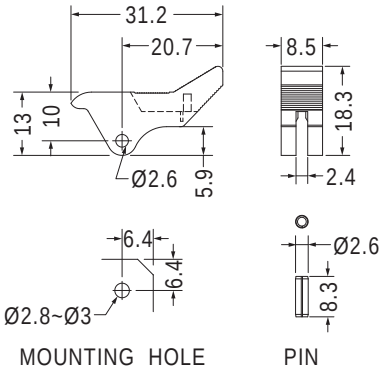


Part No.	Package
CP-70	1000


PCB拉柄 PCB CARD PULLER

用途：與PCB導槽配合，可快速將PC板拉出與壓入。



- Material: POM (UL)
- Flame Class: 94HB
- Pin Material: Steel
- Color: Black
- Unit: mm






PIN


Part No.	Package
CP-72	500






- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Pin Material: Steel
- Color: Natural/Black
- Unit: mm









MOUNTING HOLE PIN

Part No.	Package
CP-82	1000





PIN


Part No.	Package
CP-84	1000

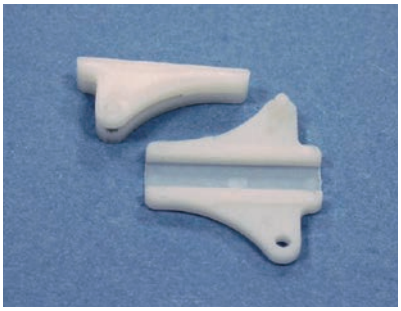

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm








MOUNTING HOLE


Part No.	Package
CP-35	500



- Material: PC+ABS (UL)
- Flame Class: 94V-0
- Color: Gray/Orange
- Unit: mm




Part No.	Package
CP-76	1000




Part No.	Package
CP-77	1000

拉柄蓋 LATCH CAP


用途：用於機殼之拉拔。

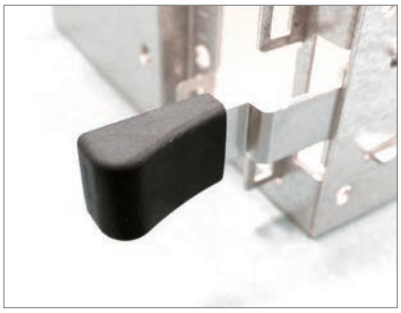

- Material: TPR
- Color: Black
- Unit: mm



Assembly Part




Part No.	Package
HANE-59	500


裝配件尺寸，僅供參考
Assembly parts are for reference only.



- Material: TPE (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm




Assembly Part




Part No.	A	B	C	Package
HANE-21	15.52	8.64	4.06	250
HANE-21L	15.2	9.2	3.9	


裝配件尺寸，僅供參考
Assembly parts are for reference only.

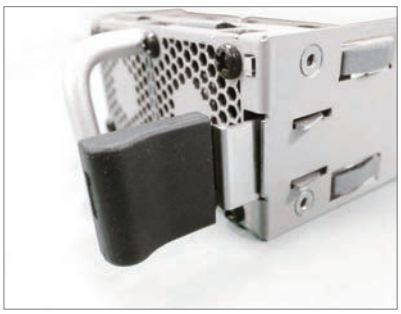

- Material: Santoprenr
- Color: Black
- Unit: mm




Assembly Part




THICKNESS 0.8

Part No.	Package
HANE-35	250


裝配件尺寸，僅供參考
Assembly parts are for reference only.

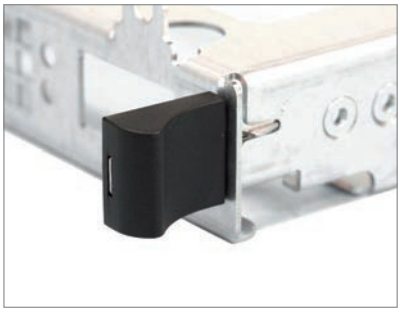

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm



Assembly Part




Part No.	Package
HANE-77	250


裝配件尺寸，僅供參考
Assembly parts are for reference only.

拉柄蓋 LATCH CAP


用途：用於機殼之拉拔。

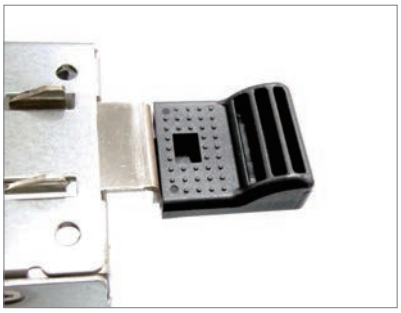


- Material: PC+ABS (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm




Assembly Part



Part No.	Package
HANE-24	250

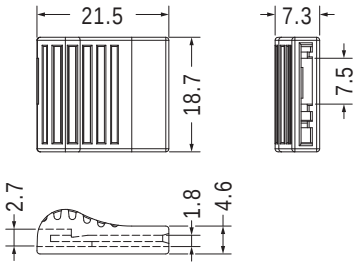


Assembly Part




- Color: Black/Green


Part No.	Package
HANE-40	1000

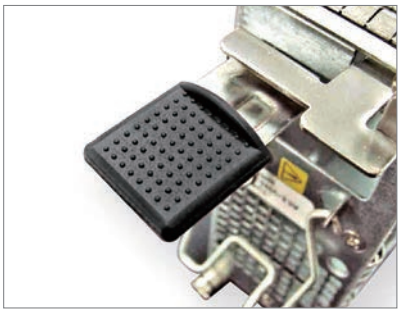


- Material: PC+ABS (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

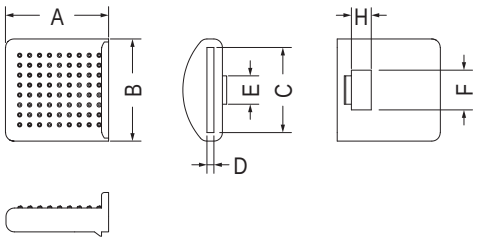


Assembly Part




Part No.	A	B	C	D	E	F	H	T	Package
HANE18	18.47	18.29	15.24	1.24	5.08	7.11	3.56	1.0	250
HANE18LV	18.47	18.29	15.24	1.4	5.08	7.11	3.56	1.2	
HANE29	18.5	18.3	15.1	1.2	5.1	7.0	3.2	1.0	

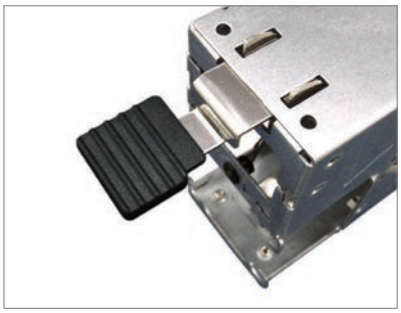




Assembly Part




Part No.	Package
HANE-32	1000

拉柄蓋 LATCH CAP

用途：用於機殼之拉拔。

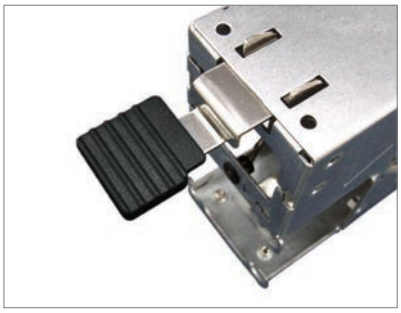



- Material: PC+ABS (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

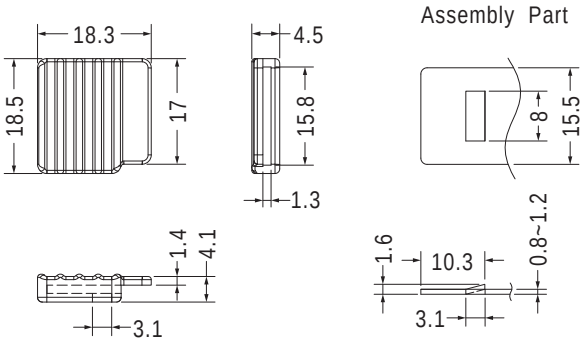

裝配件尺寸，僅供參考
Assembly parts are for reference only.

Part No.	Package
HANE-33	1000

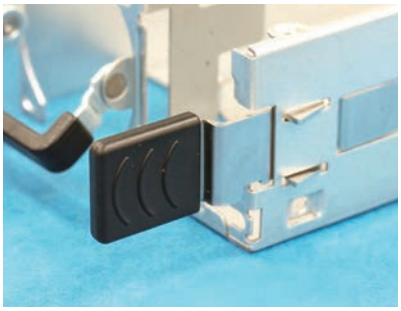


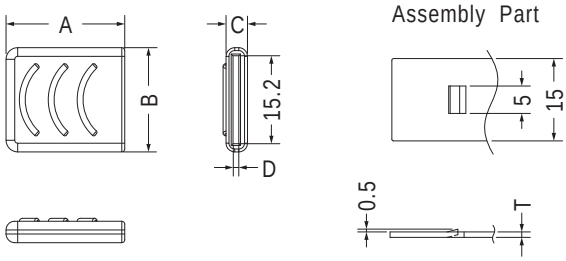


裝配件尺寸，僅供參考
Assembly parts are for reference only.

- Color: Black/Blue/Purple/Green

Part No.	A	B	C	D	T	Package
HANE-36	20.5	18.0	4.0	1.0	0.8~1.0	1000
HANE-48	20.5	18.0	4.0	1.2	1.2	
HANE-55	20.5	18.0	3.7	1.0	0.8~1.0	
HANE-69	20.7	18.2	4.0	1.0	1.0	

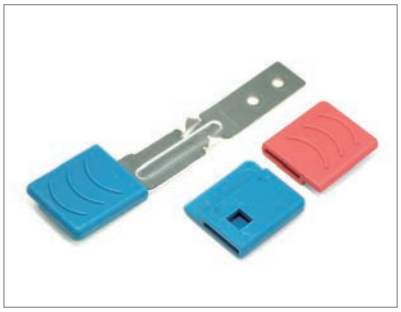


- Material: PC (UL)
- Flame Class: 94V-0
- Color: Red/Blue
- Unit: mm

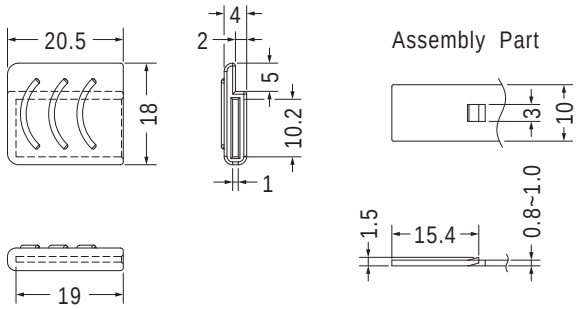


裝配件尺寸，僅供參考
Assembly parts are for reference only.

Part No.	Package
HANE-113	1000

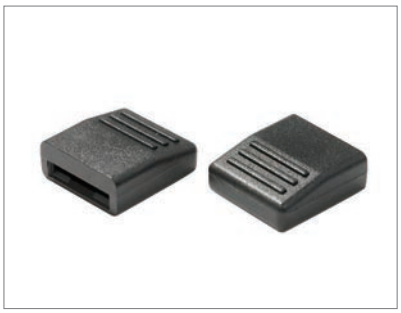

- Material: PC+ABS (UL)
- Flame Class: 94V-2
- Color: Black/Gray
- Unit: mm

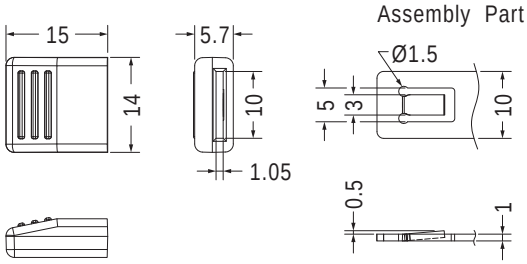

裝配件尺寸，僅供參考
Assembly parts are for reference only.


Part No.	Package
HANE-58	1000

拉柄蓋 LATCH CAP


用途：用於機殼之拉拔。



- Material: TPE
- Color: Black/Orange
- Unit: mm




Assembly Part




Part No.	Package
HANE-23	1000


装配件尺寸，僅供參考
Assembly parts are for reference only.

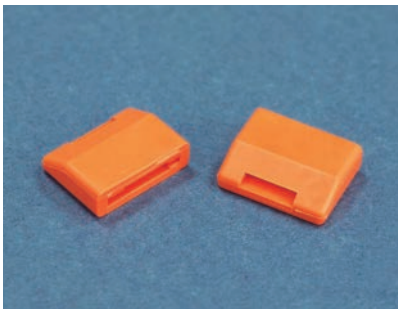

- Material: TPE (UL)
- Flame Class: 94V-0
- Color: Black/Orange
- Unit: mm



Assembly Part




THICKNESS 0.8


Part No.	Package
HANE-37	1000

装配件尺寸，僅供參考
Assembly parts are for reference only.






Assembly Part




Part No.	Package
HANE-75	1000

装配件尺寸，僅供參考
Assembly parts are for reference only.

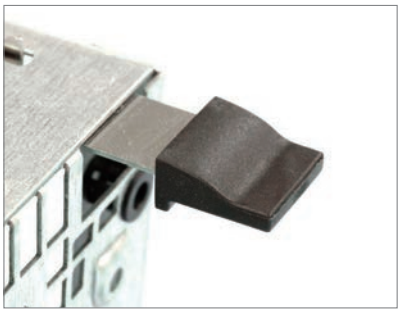


用途：用於機殼之拉拔。

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm



Assembly Part




Part No.	Package
HANE-26	1000

装配件尺寸，僅供參考
Assembly parts are for reference only.


拉柄蓋 LATCH CAP

用途：用於機殼之拉拔。

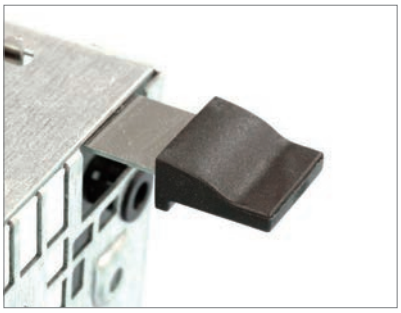


裝配件尺寸，僅供參考
Assembly parts are for reference only.

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

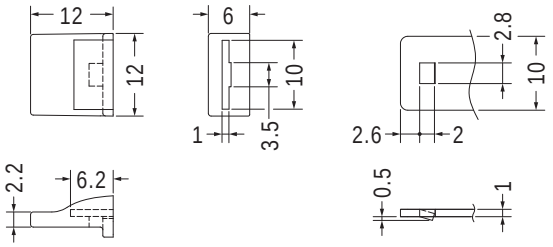


Part No.	Package
HANE-38	1000

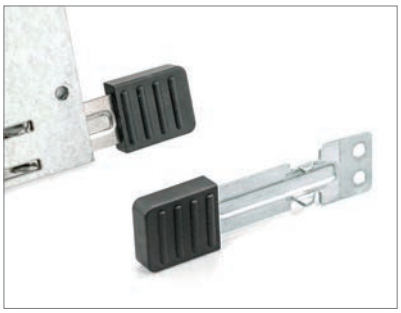

裝配件尺寸，僅供參考
Assembly parts are for reference only.

- Material: PC+ABS (UL)
- Flame Class: 94V-0
- Color: Black/Blue
- Unit: mm

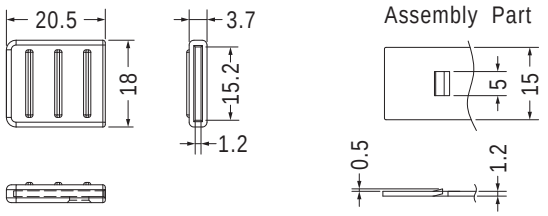


Part No.	Package
HANE-74	1000



裝配件尺寸，僅供參考
Assembly parts are for reference only.


- Material: PC+ABS (UL)
- Flame Class: 94V-0
- Color: Orange
- Unit: mm

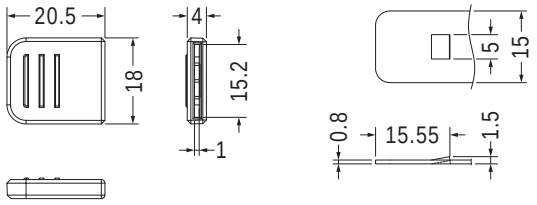

NEW

Part No.	Package
HANE-120	1000

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

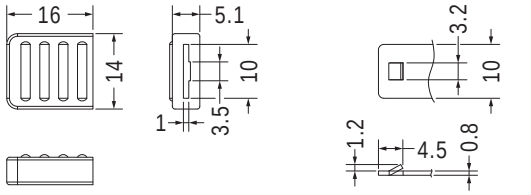


Part No.	Package
HANE-49	1000



裝配件尺寸，僅供參考
Assembly parts are for reference only.

- Material: Silicon Rubber (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm

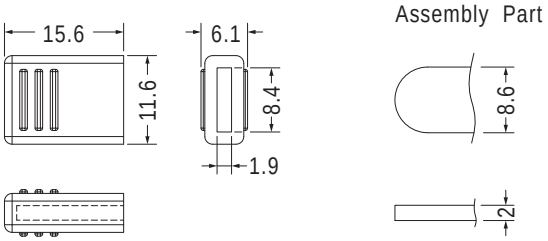


NEW

Part No.	Package
HANE-121	1000


拉柄蓋 LATCH CAP

用途：用於機殼之拉拔。

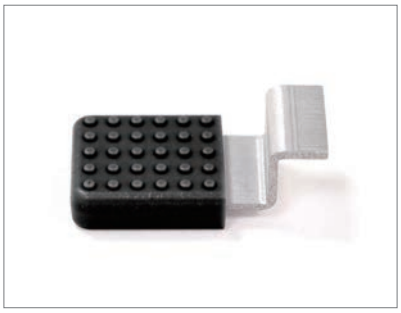


裝配件尺寸，僅供參考
Assembly parts are for reference only.

- Material: PC+ABS (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm

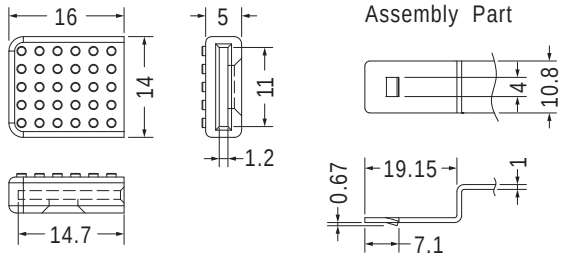


Part No.	Package
HANE-97	1000

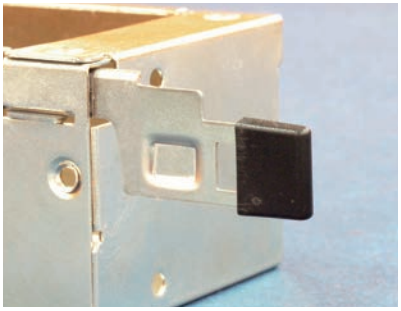


裝配件尺寸，僅供參考
Assembly parts are for reference only.

- Material: PC+ABS
- Color: Black
- Unit: mm

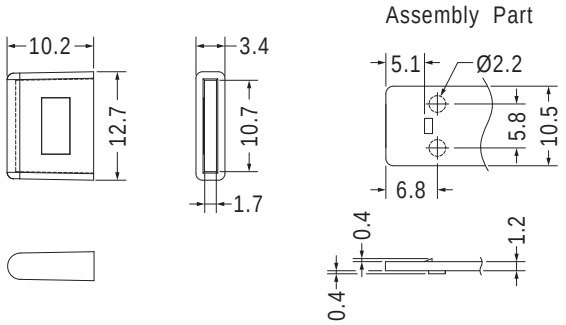


Part No.	Package
HANE-27	1000

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

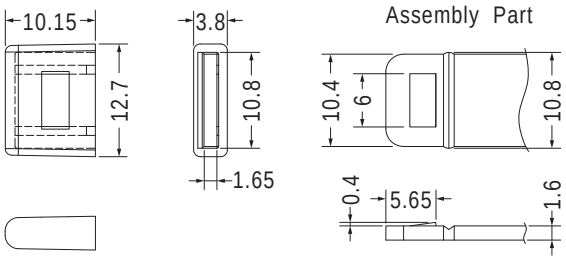


Part No.	Package
HANE-72	1000

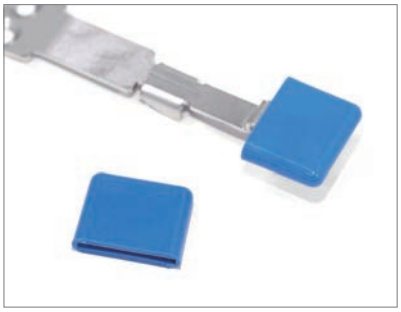

裝配件尺寸，僅供參考
Assembly parts are for reference only.

- Material: PP (UL)
- Flame Class: 94V-0
- Color: Blue
- Unit: mm

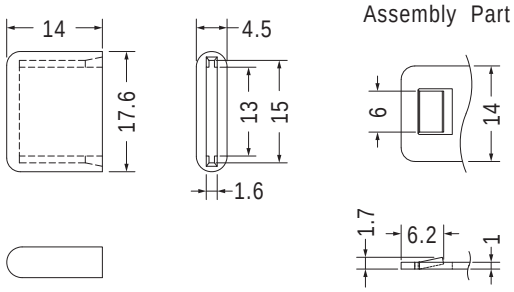


Part No.	Package
HANE-111	1000

拉柄蓋 LATCH CAP


用途：用於機殼之拉拔。



- Material: PC+ABS (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm



Assembly Part




Part No.	Package
HANE-98	1000


裝配件尺寸，僅供參考
Assembly parts are for reference only.



- Material: PC (UL)/ABS
- Flame Class: 94V-2/94V-0
- Color: Black/Orange
- Unit: mm



Assembly Part




THICKNESS: T

Part No.	A	C	D	E	F	T	Package
HANE-46	7.8	3.2	6.6	2.6	3.4	0.6	1000
HANE-76	5.0	4.0	7.0	3.0	3.5	0.7	
HANE-108	5.2	4.0	7.0	3.0	3.5	0.8	


裝配件尺寸，僅供參考
Assembly parts are for reference only.



- Material: TPV
- Color: Black
- Unit: mm




Assembly Part




Part No.	Package
HANE-22	250

裝配件尺寸，僅供參考
Assembly parts are for reference only.

- Material: PC+ABS (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm



Assembly Part



Part No.	Package
HANE-41	250


拉柄蓋 LATCH CAP

用途：用於機殼之拉拔。




裝配件尺寸，僅供參考
Assembly parts are for reference only.

- Material: PC+ABS (UL)
- Flame Class: 94V-2/94V-0
- Color: Black/Orange
- Unit: mm



Assembly Part




Part No.	Package
HANE-34	1000




裝配件尺寸，僅供參考
Assembly parts are for reference only.


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

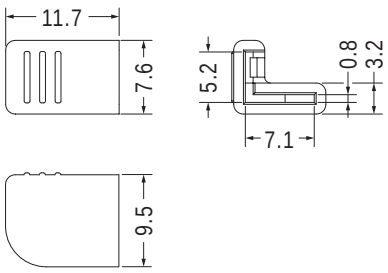

Assembly Part




Part No.	Package
HANE-30	1000

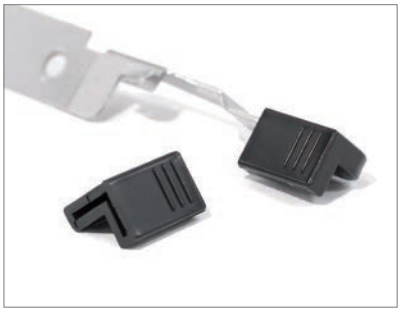


裝配件尺寸，僅供參考
Assembly parts are for reference only.

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

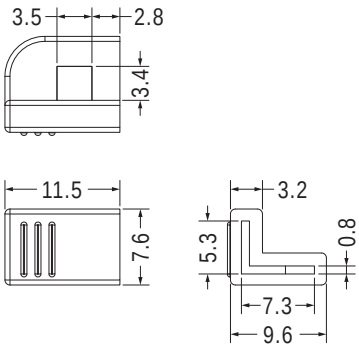

Assembly Part




Part No.	Package
HANE-103	1000




裝配件尺寸，僅供參考
Assembly parts are for reference only.

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm
- Patented (專利品)

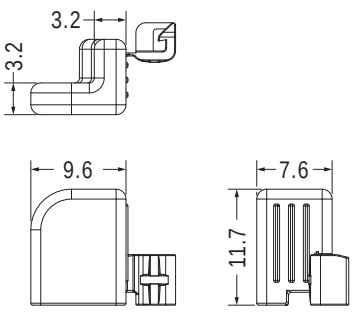


Assembly Part




Part No.	Package
HANE-86	1000

拉柄蓋 LATCH CAP


用途：用於機殼之拉拔。

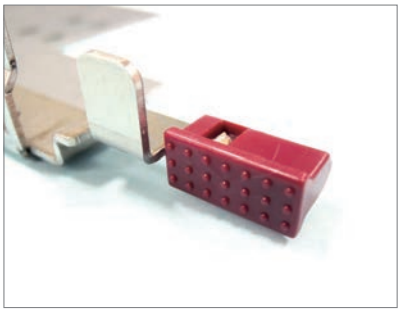

- Material: PC+ABS (UL)
- Flame Class: 94V-2/94V-0
- Color: Hot Plug Red
- Unit: mm




Assembly Part




裝配件尺寸，僅供參考
Assembly parts are for reference only.

Part No.	Package
HANE-53	1000

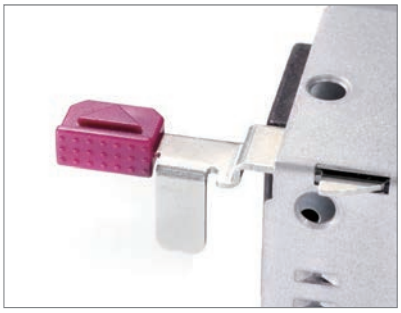

- Material: PC+ABS (UL)
- Flame Class: 94V-0
- Color: Red
- Unit: mm

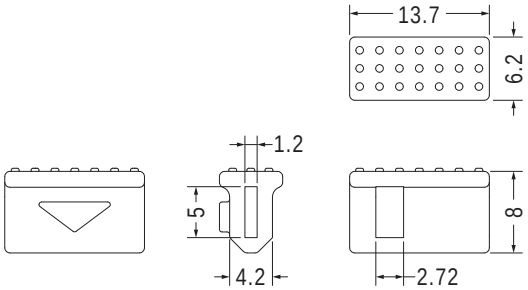


NEW


Part No.	Package
HANE-118	1000

拉柄 LATCH


用途：用於機殼之拉拔。

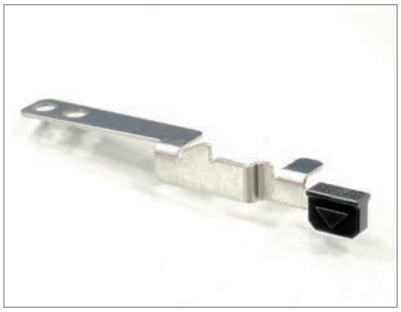


- Material: PC+ABS (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm

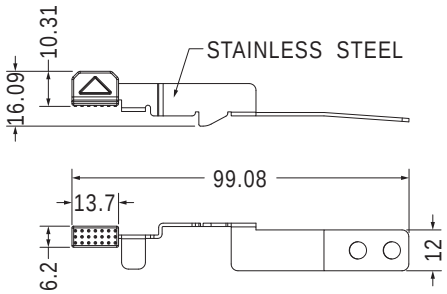

Part No.	Package
HANE-64	200

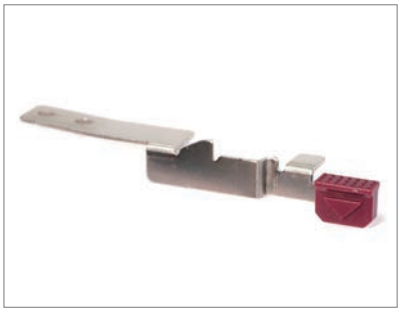

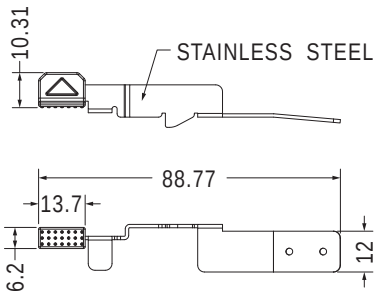


- Color: Red


Part No.	Package
HANE-104	200

拉柄 LATCH

用途：用於機殼之拉拔。

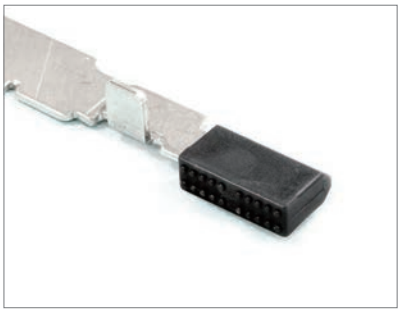

- Material: PC+ABS (UL)
- Flame Class: 94V-0
- Color: Black/Red
- Unit: mm

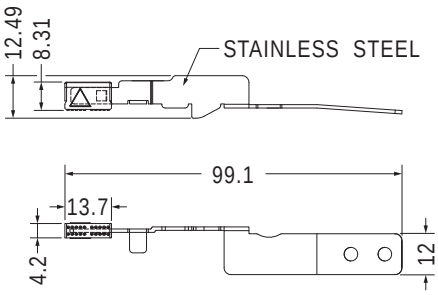


Part No.	Package
HANE-67	200

把手 HANDLE

用途：用於機殼之拉拔。




- Material: PC+ABS (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm



Part No.	A	B	C	D	Package
HAND-25	40.0	32.0	3.2	9.5	250
HAND-25-1	40.0	32.0	4.1	9.5	
HAND-38	38.0	30.0	3.2	9.5	
HAND-41	38.0	30.0	4.0	9.5	
HAND-41L	38.3	30.0	4.05	9.8	
HAND-47	40.0	32.0	4.2	9.5	





- Material: PC+ABS (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm

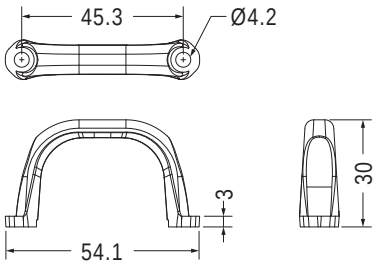

Part No.	Package
HAND-53	100



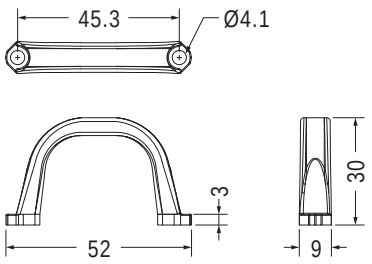



MOUNTING HOLE


Part No.	Package
HANU-92	250

把手 HANDLE

用途：用於機殼之拉拔。




- Material: PC+ABS (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm

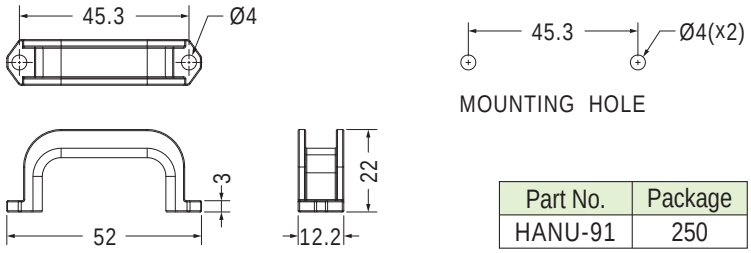

Part No.	Package
HANU-91	250




- Material: Nylon 66 (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm

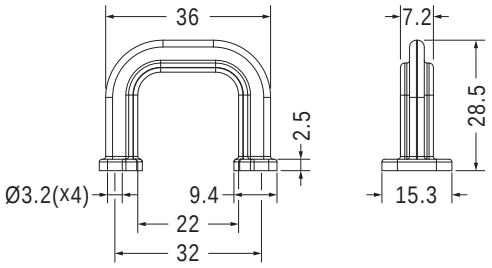

Part No.	Package
HANU-73	250




- Material: PC+ABS (UL)
- Flame Class: 94V-0
- Color: Gray
- Unit: mm

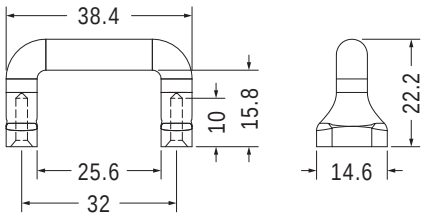

Part No.	Package
HANU-82	250



- Material: PC+ABS (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm

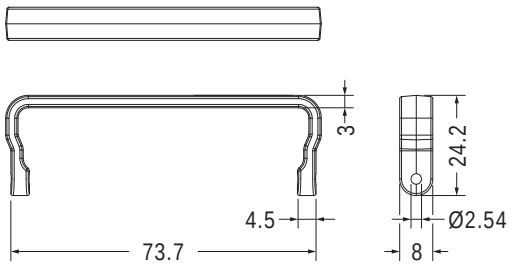


Part No.	Package
HAND-73	100

把手 HANDLE

用途：用於機殼之拉拔。



- Material: PC+ABS (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm

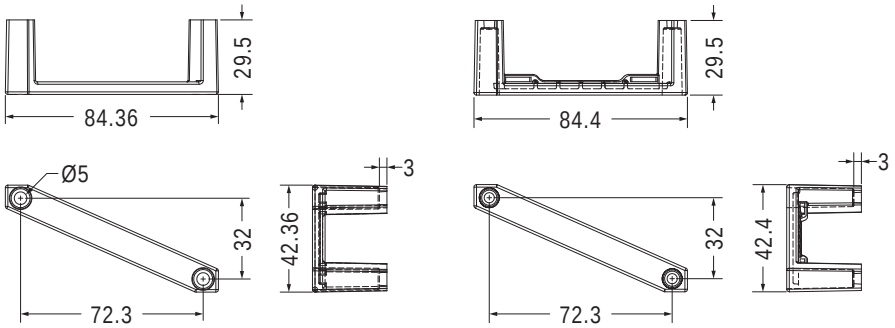


Part No.	Package
HAND-27	100

Part No.	Package
HAND-34	250




- Material: Nylon 66 (UL)
- Flame Class: 94HB
- Color: Black
- Unit: mm

用途：用於大型機殼之拉拔，耐負重。

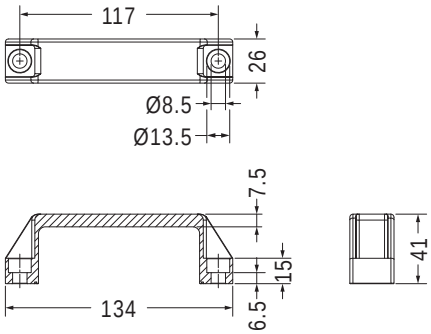


Part No.	Package
HAND-70	100

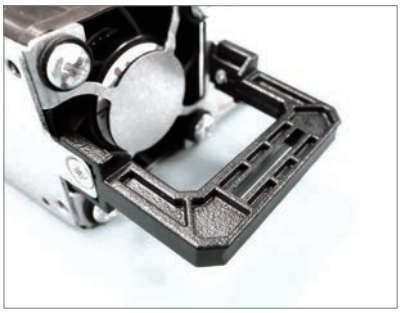


- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm


用途：用於機殼之拉拔。

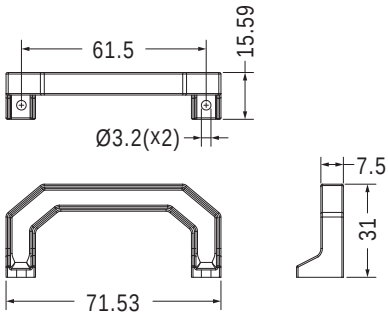

Part No.	Package
HAND-80-1	250

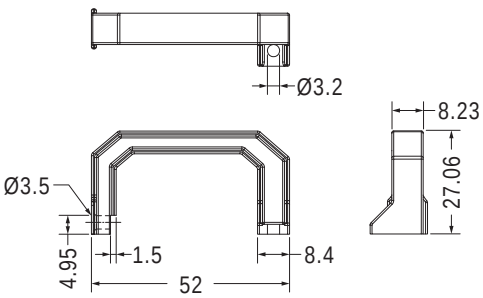


Part No.	Package
HAND-79	250

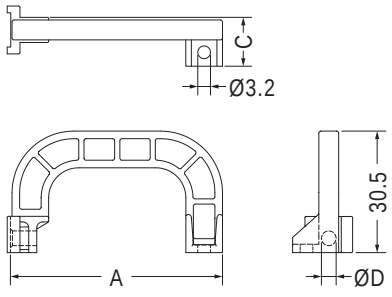


Part No.	A	C	D	Package
HAND-10	53.4	12.5	3.7	250
HAND-74	51.5	11.6	3.6	

把手 HANDLE


用途：用於機殼之拉拔。

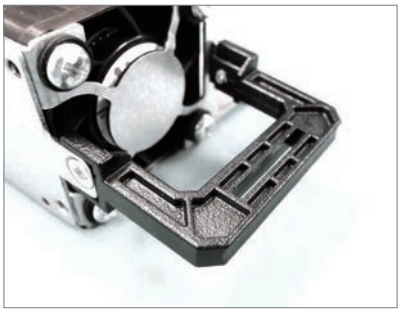

- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

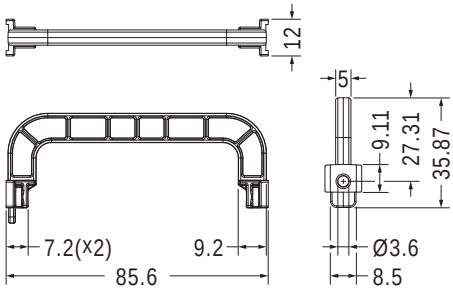


Part No.	Package
HAND-82	100

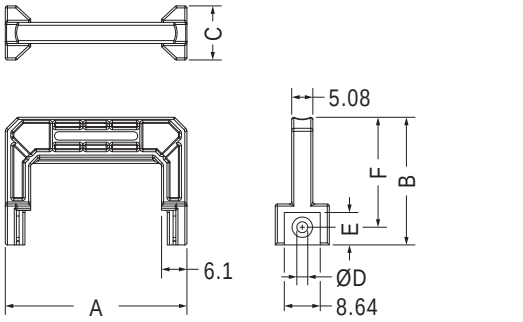


Part No.	A	B	C	D	E	F	Package
HAND-51	43.63	29.97	11.68	2.62	7.4	26.41	250
HAND-51L	43.63	30.67	13.0	2.62	7.8	26.41	
HAND-54	41.63	29.98	11.68	2.62	7.4	26.42	
HAND-55	34.59	29.98	11.68	2.6	7.1	26.42	

- Material: PC+ABS (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm

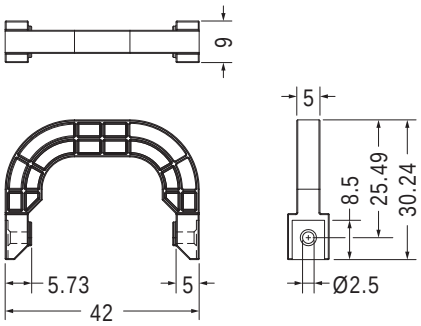

Part No.	Package
HAND-50	250


- Material: PC+ABS (UL)
- Flame Class: 94V-0
- Color: Juniper Blue/Juniper Orange
- Unit: mm

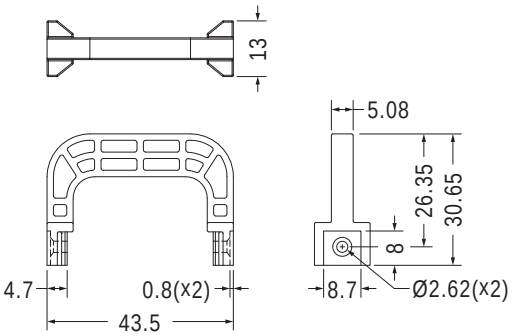

Part No.	Package
HAND-99	100



- Body Material: Silicon Rubber
- Metal Material: Zinc Plated SPCC
- Color: Black
- Unit: mm

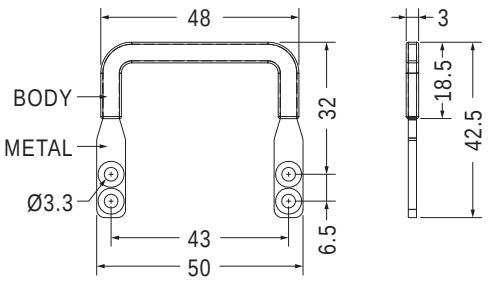


Part No.	Package
HAND-71	500

把手 HANDLE

用途：用於機殼之拉拔。




- Body Material: PC+ABS (UL)
- Metal Material: Zinc Plated SPCC
- Body Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm




Part No.	A	B	C	D	Package
HAND-30	71.5	61.5	22.0	8.0	250
HAND-31	51.6	41.6	21.0	9.0	



- Body Material: PC+ABS (UL)
- Metal Material: Zinc Plated SPCC
- Body Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

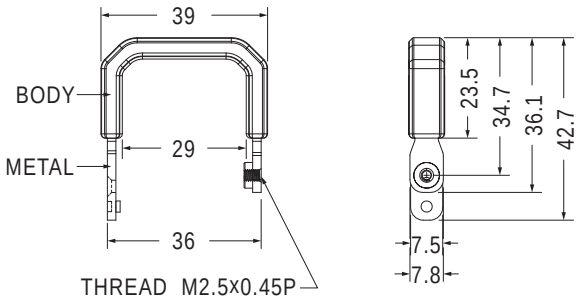


Part No.	Package
HAND-29	250

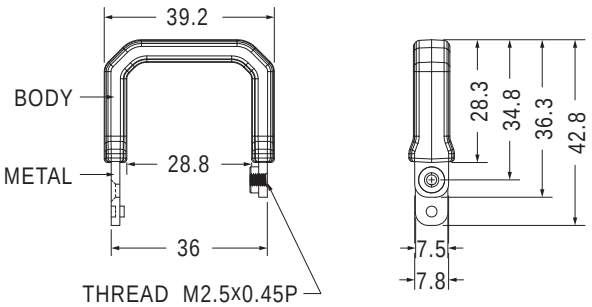

Part No.	Package
HAND-84	250



- Body Material: PC+ABS (UL)
- Metal Material: SGCC
- Body Flame Class: 94V-0
- Color: Black
- Unit: mm

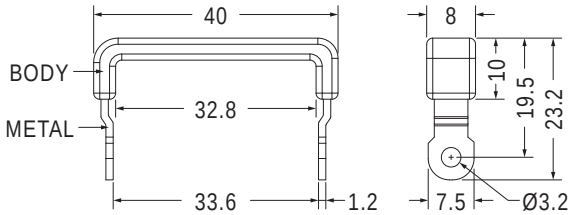


Part No.	Package
HANU-83	1000

把手 HANDLE

用途：用於機殼之拉拔。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

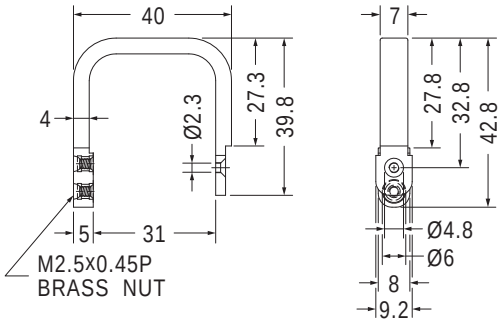

Part No.	Package
HANU-34	100




- Material: PC+ABS (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm

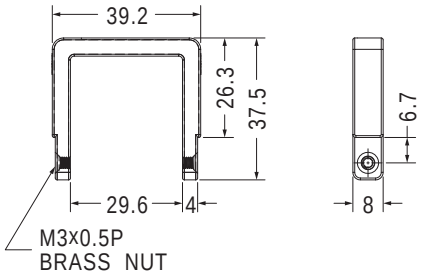


Part No.	Package
HANU-139	250



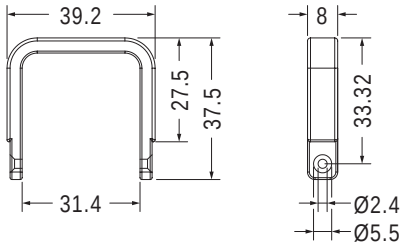


Part No.	Package
HANU-71	250

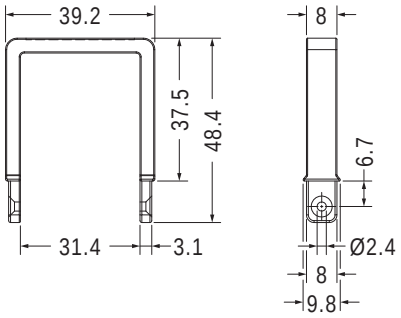

Part No.	Package
HANU-138	250



- Material: PC+ABS (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm

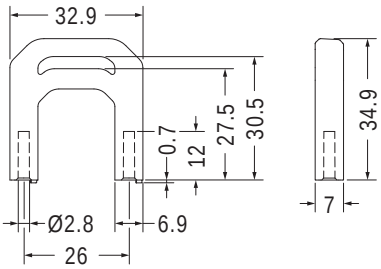


Part No.	Package
HANU-27U	250

把手 HANDLE

用途：用於機殼之拉拔。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black/Blue
- Unit: mm

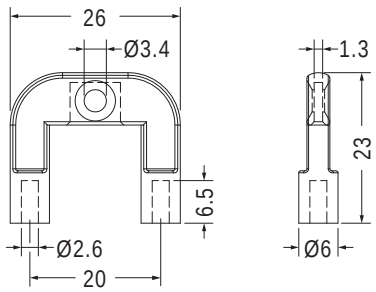

Part No.	Package
HAND-87	1000




- Material: PC+ABS (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm

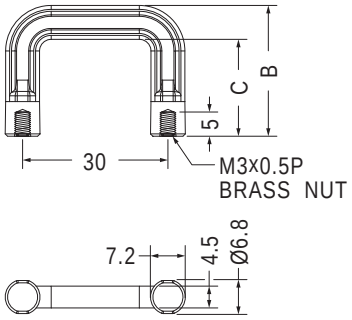

Part No.	B	C	Package
HANU-108	27.0	20.0	250
HANU-114	34.0	27.0	



- Material: Nylon 66 (UL)/PC+ABS (UL)/PC (UL)
- Flame Class: 94HB/94V-2/94V-0
- Color: Black
- Unit: mm

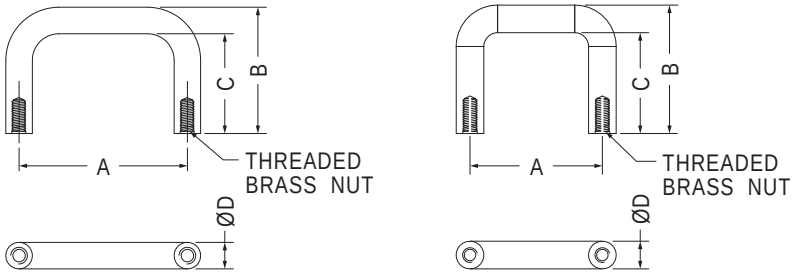

【 HANU-130, HANU-154, HANU-155 】

Part No.	A	B	C	D	Thread	Package
HANU-40	40.0	30.0	23.7	6.3	M3x0.5P	250
HANU-48	48.0	32.0	25.7	6.3		
HANU-51	51.0	32.0	25.7	6.3		
HANU-70-1	51.0	38.7	31.7	7.0		
HANU-70	51.0	38.7	31.7	7.0	6-32 UNC	200
HANU-72	51.5	45.0	38.0	7.3		250
HANU-76-632	32.0	22.5	15.5	7.0		
HANU-76	32.0	22.5	15.5	7.0	M3x0.5P	
HANU-77	32.0	29.3	23.0	6.3		
HANU-97	32.0	23.3	17.0	6.3		
HANU-107	32.0	40.0	33.0	7.0		


Part No.	A	B	C	D	Thread	Package
HANU-109	29.0	40.0	33.0	7.0	M3x0.5P	40
HANU-111	40.0	30.0	24.0	6.0		250
HANU-115	54.0	29.9	23.0	6.9		100
HANU-123	48.0	26.0	19.7	6.3		250
HANU-125	26.0	25.0	19.5	5.5		
HANU-126	45.3	22.5	17.0	5.5		
HANU-128	25.0	28.5	22.2	6.3		
HANU-130	30.2	29.3	23.0	6.3		
HANU-154	31.3	29.0	22.6	6.4		
HANU-155	29.9	49.0	42.0	7.0		

把手 HANDLE


用途：用於機殼之拉拔。



- Material: PC+ABS (UL)/PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm




Part No.	A	B	C	Package
HANU-30PN	30.0	25.0	19.5	250
HANU-32VB	32.0	28.4	22.9	



Part No.	Package
HANU-32PVB	250




- Material: PC+ABS (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm
- Patented (專利品)

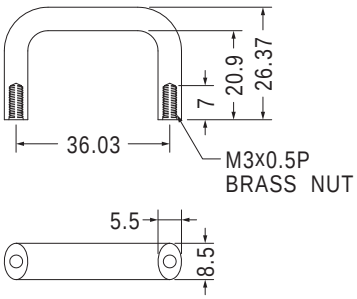

Part No.	Package
HANU-142	250



- Material: PC+ABS (UL)
- Flame Class: 94V-0
- Color: Gray
- Unit: mm

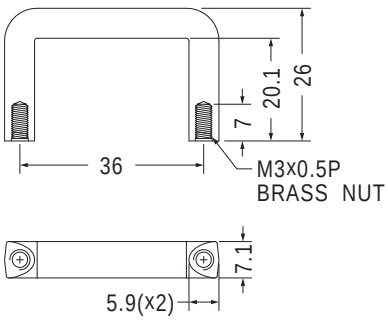


Part No.	Package
HANU-137	250

把手 HANDLE

用途：用於機殼之拉拔。




- Material: PC+ABS (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm

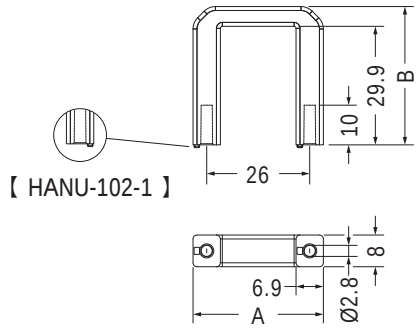

Part No.	A	B	Package
HANU-102	32.9	34.9	250
HANU-102-1	33.0	35.0	



- Material: PC+ABS (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm

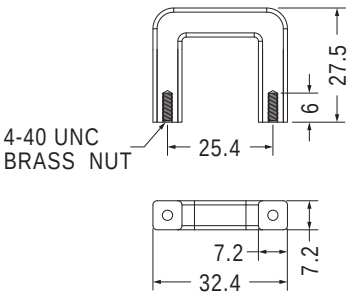


Part No.	Package
HANU-103	250




- Body Material: Nylon 66 (UL)+GF
- Flame Class: 94V-0
- Screw Material: Brass(Nickel Plated)
- Color: Black
- Unit: mm


用途：用於機殼之拉拔，不使用時可折疊，大量節省空間。

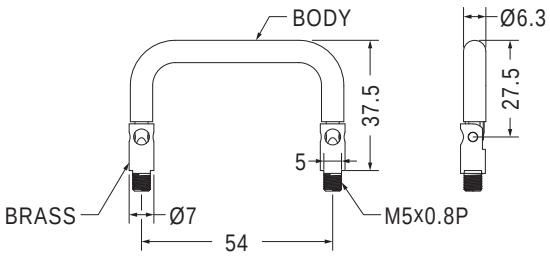

Part No.	Package
HANUL-2F	100

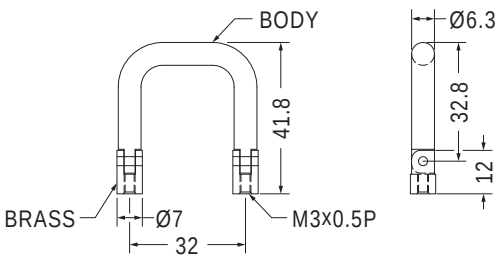


Part No.	Package
HANUL-3NF	100

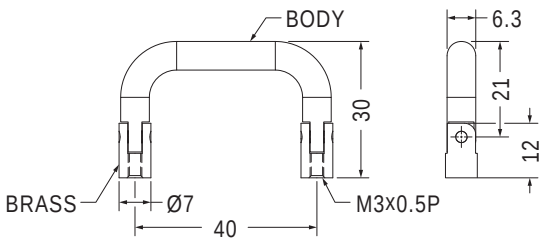


Part No.	Package
HANUL-16F	100

把手 HANDLE

用途：用於機殼之拉拔。

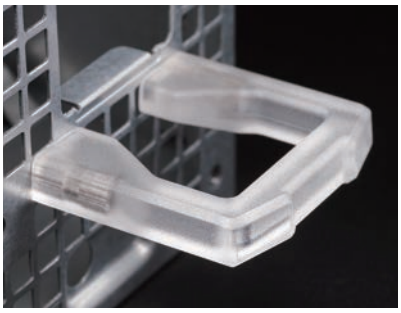


- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm

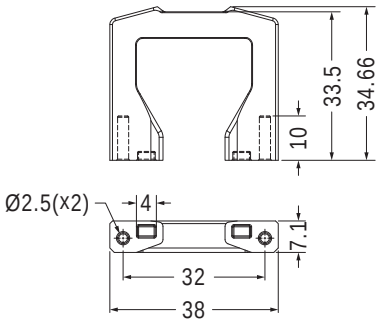

NEW


Part No.	Package
HANU-173	250

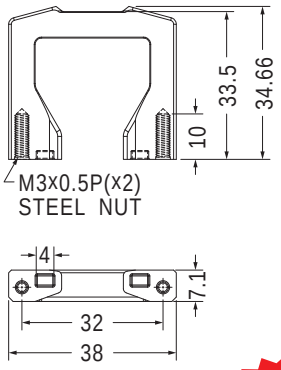

NEW

- Finish: NI Plated


Part No.	Package
HANU-173M3	250

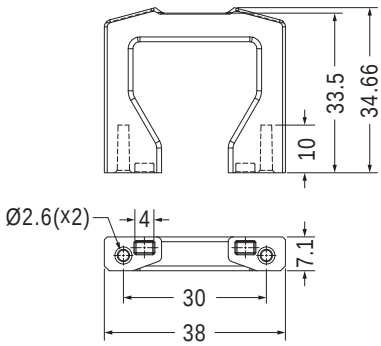


NEW


Part No.	Package
HANU-172	250





Part No.	Package
HANU-80	200

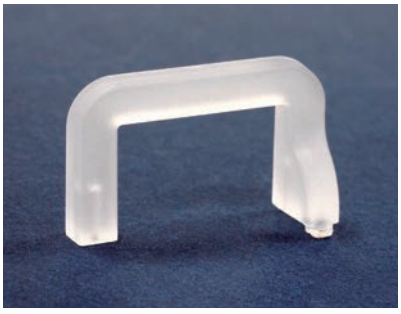




Part No.	Package
HANU-117	100

把手 HANDLE

用途：用於機殼之拉拔。




- Material: PC (UL)
- Flame Class: 94V-2
- Color: Black
- Unit: mm

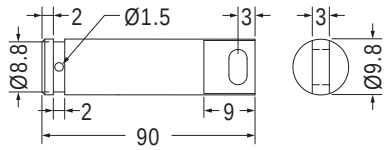

Part No.	Package
HANI-90	100


- Material: PC+ABS (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm

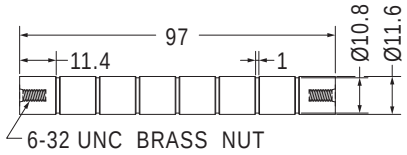


Part No.	Package
HANI-96	100



- Material: PC (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm

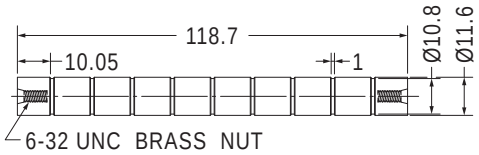



Part No.	Package
HANI-119	50

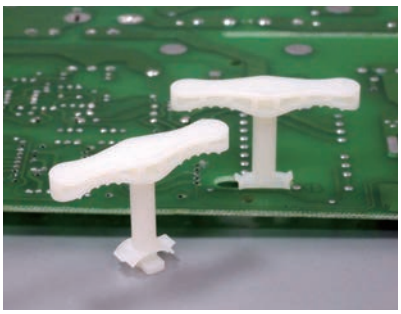


用途：用於PC板或機殼之拉拔。


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm
- Patented (專利品)





Part No.	Package
HANT-1	1000






Part No.	Package
HANT-2	1000

把手 HANDLE

用途：用於PC板或機殼之拉拔。



- Material: Nylon 66 (UL)
- Flame Class: 94V-0
- Color: Blue
- Unit: mm
- Patented（專利品）

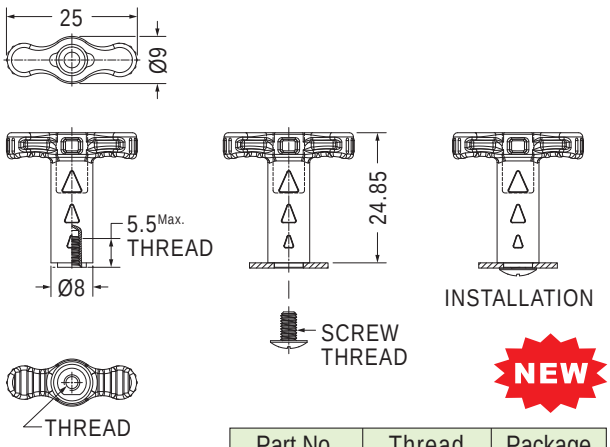


RECOMMEND MOUNTING HOLE
RECOMMEND THICKNESS

NEW

Part No.	Thread	Package
HANT-3	M3x0.5P	1000
HANT-3-1	M3.5x0.6P	
HANT-3-2	8-32 UNC	



- Material: PC+ABS (UL)
- Flame Class: 94V-0
- Color: Blue
- Unit: mm

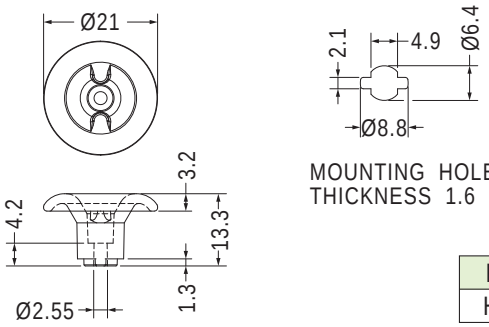


NEW


Part No.	Package
HANA-1	500

外箱把手 BOX HANDLE


用途：做為把手使用。

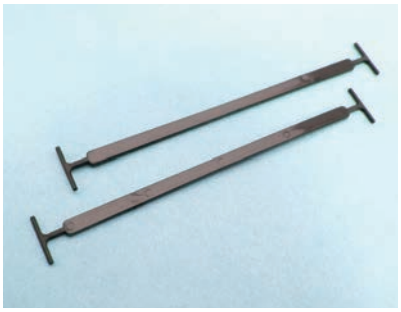

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

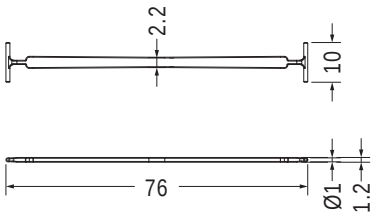


Part No.	Package
HAND-40	500

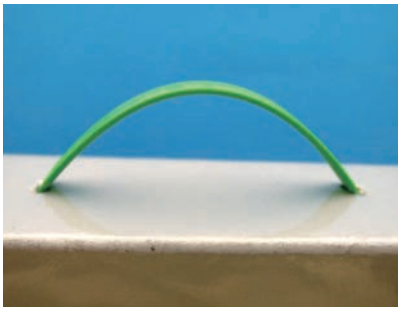


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black/Green
- Unit: mm

用途：用於PC板之拉拔。

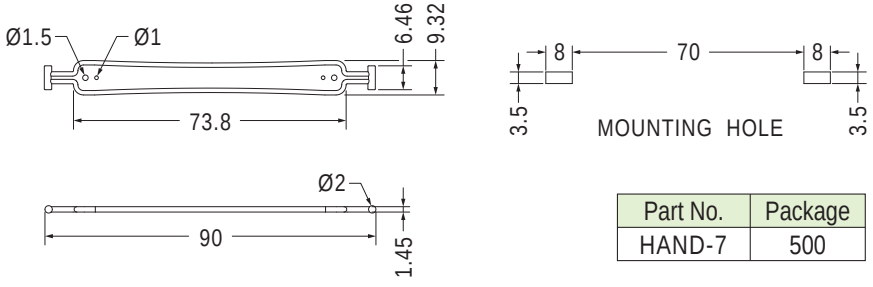



Part No.	Package
HAND-7	500

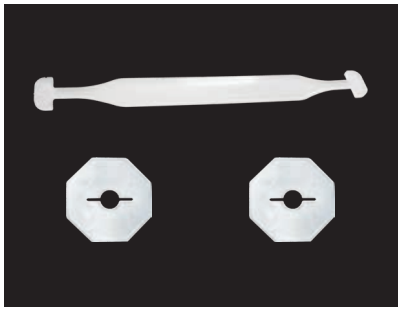

- Material: PE
- Color: Natural
- Unit: mm

用途：用於包裝盒上，HANDN26A配合HAND-26B使用，組裝方便。

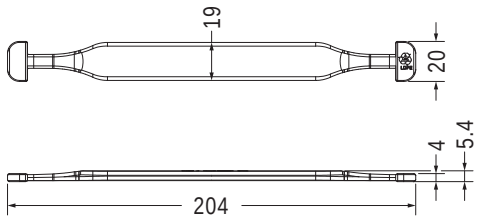




Part No.	Package
HANDN26A	100

Part No.	Package
HAND-26B	100





- Material: PE
- Color: Natural/Black
- Unit: mm

用途：用於包裝盒上，HAND-1配合HAND-2或HAND-65使用，組裝方便。

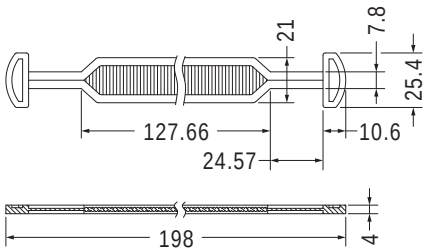

Part No.	Package
HAND-1	100

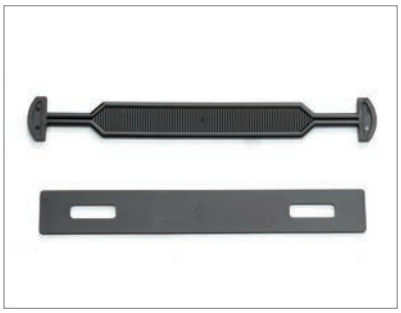

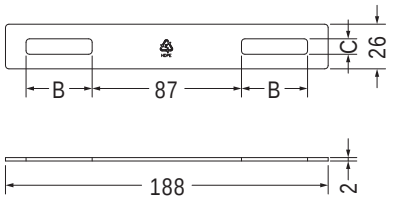



Part No.	B	C	Package
HAND-2	38.5	9.0	100
HAND-65	26.2	8.4	



- Material: PE
- Color: Black
- Unit: mm

用途：用於包裝盒上，HAND-12配合HAND-13使用，組裝方便。

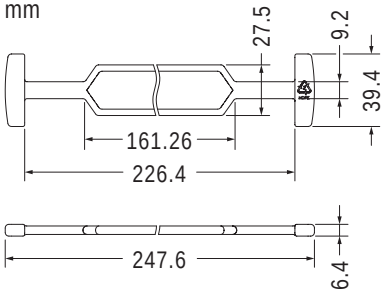

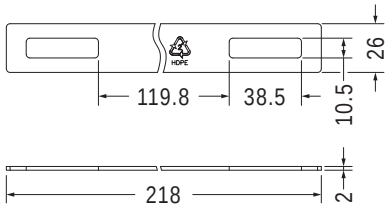

Part No.	Package
HAND-12	100


Part No.	Package
HAND-13	100

外箱把手 BOX HANDLE




- Material: PE
- Color: Black
- Unit: mm

用途：用於包裝盒上，HAND-120A配合HAND-120B使用，組裝方便。

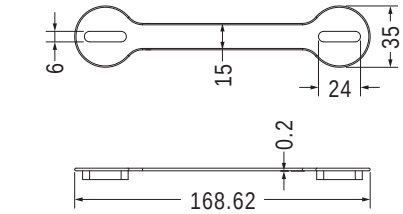


NEW

Part No.	Package
HAND-120A	100

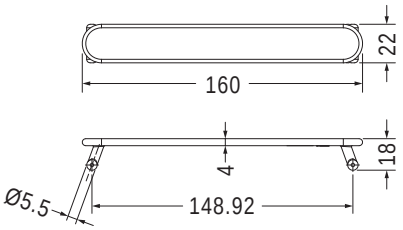


NEW

Part No.	Package
HAND-120B	100

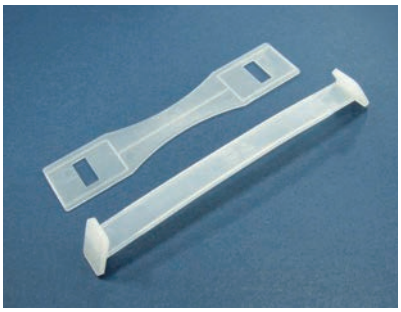


- Material: PE
- Color: Natura/Black
- Unit: mm

用途：用於包裝盒上，HAND-23A配合HAND-23B使用，組裝方便。

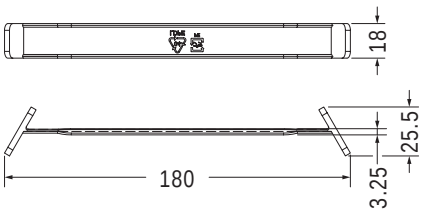

Part No.	Package
HAND-23A	100

- Material: PP
- Color: Natura/Black
- Unit: mm

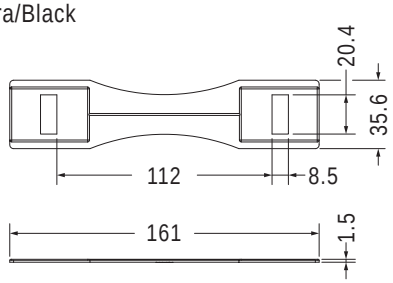


Part No.	Package
HAND-23B	100





- Material: PE
- Color: Natural
- Unit: mm

用途：用於包裝盒上，HAND-14A配合HAND-14B使用，組裝方便。

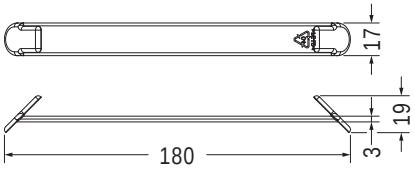

Part No.	Package
HAND-14A	100

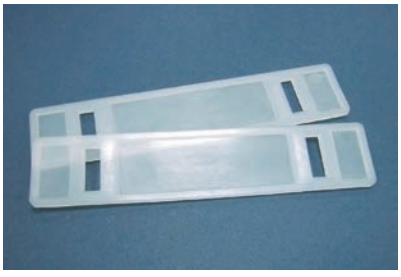


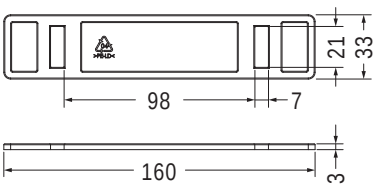


Part No.	Package
HAND-14B	100

外箱把手 BOX HANDLE

用途：用於包裝盒上，HAND-75A配合HAND-75B使用，組裝方便。

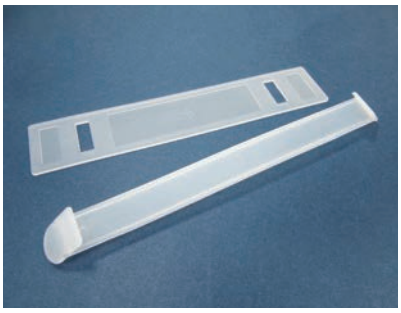


- Material: PE
- Color: Natural
- Unit: mm

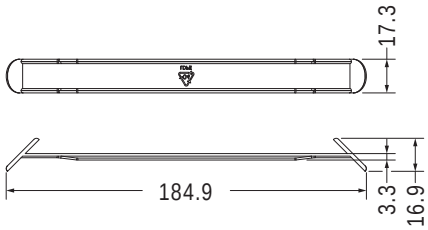

Part No.	Package
HAND-75A	100

- Material: PP
- Color: Natural
- Unit: mm

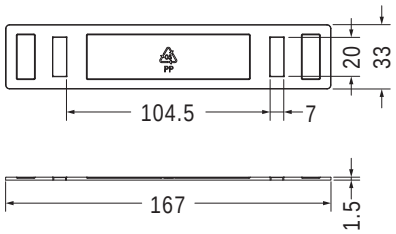


Part No.	Package
HAND-75B	100

外箱扣 BOX HANDLE


用途：用於包裝盒上，組裝方便。




- Material: PP
- Color: Natural/Black
- Unit: mm

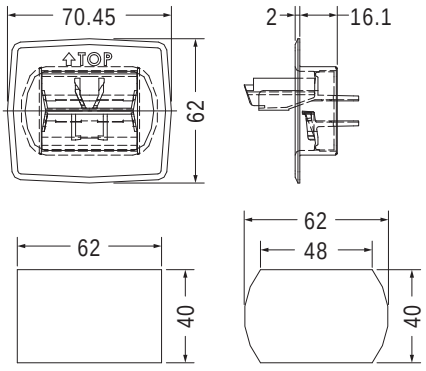


Part No.	Package
CABOX-1	50

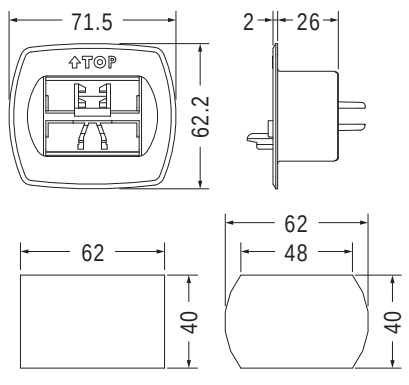

Part No.	Package
CABOX-3	50

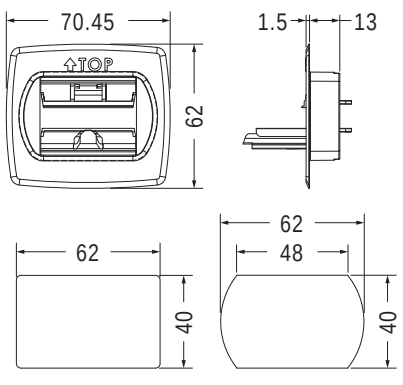

Part No.	Package
CABOX-5	50

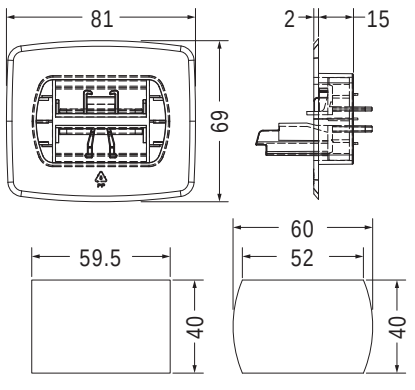


Part No.	Package
CABOX-6	40

外箱扣 BOX HANDLE


用途：用於包裝盒上，組裝方便。



- Material: PP
- Color: Natural/Black
- Unit: mm

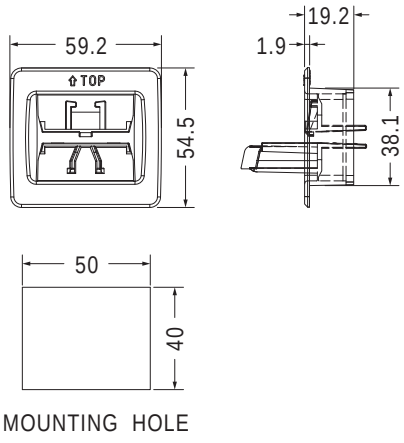

Part No.	Package
CABOX-7	50

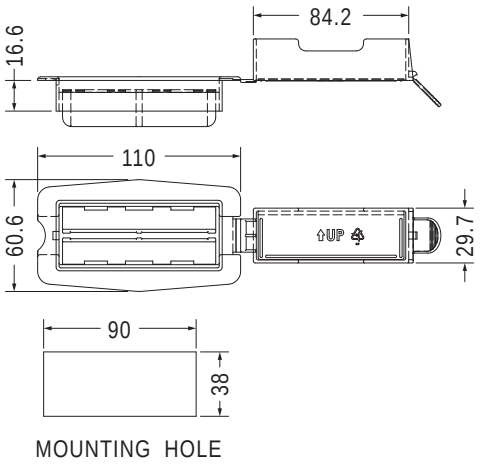


Part No.	Package
CABOX-2	25

打包扣 PACKING FASTENER

用途：用於打包繩束線用，整齊美觀方便拆卸。



- Material: PP
- Color: Natural
- Unit: mm




Part No.	Package
CTBX-1	250

外箱護腳墊 BOX EDGE PROTECTOR

用途：用於外箱打包機，避免外箱打凹變形。



- Material: PP
- Color: Black
- Unit: mm

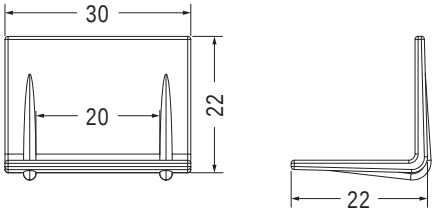

Part No.	Package
CTBXA-1	1000




4


- 電線/排線固定座
  Wire Saddles
- 隔離束線座
  Standoff Cable Clip
- 扭式固定座/環
  Twist Locks
- 束線帶固定座
  Cable Tie Mounts
- 固定扣
  Cable Clamps
- 線夾
  Clips
- 電源線/插座固定座
  Power Cord/
  Socket Fasteners
- 軌道式線扣組
  Cable Carriers
- 其它固定產品
  Other Mounts &
  Fasteners

排線固定板 FLAT CABLE CLAMP

用途：背膠式，用於電子、電腦內部排線固定，裝配容易，美觀不脫落。

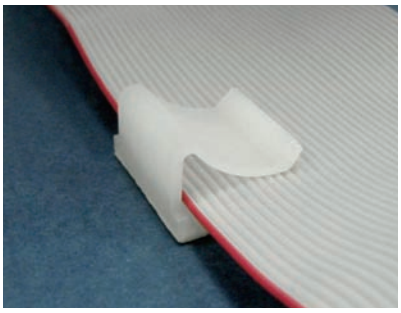


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



3M DOUBLE ADHESIVE TAPE


Part No.	A	Package
FCN-15	15.0	500
FCN-20	20.0	
FCN-25	25.4	



3M DOUBLE ADHESIVE TAPE


- Material: PVC
- Color: Gray

Part No.	A	Package
FCC-15	15.0	500
FCC-20	20.0	
FCC-25	25.0	250




3M DOUBLE ADHESIVE TAPE

Part No.	Package
FCN-16	500




3M DOUBLE ADHESIVE TAPE

Part No.	Package
FC-19	500



3M DOUBLE ADHESIVE TAPE

Part No.	Package
FC-19L	500




3M DOUBLE ADHESIVE TAPE


Part No.	Package
FCF-15	500

電線固定座 CABLE CLAMP

用途：背膠式，用於電子、電腦內部電線固定，裝配容易，美觀不脫落。

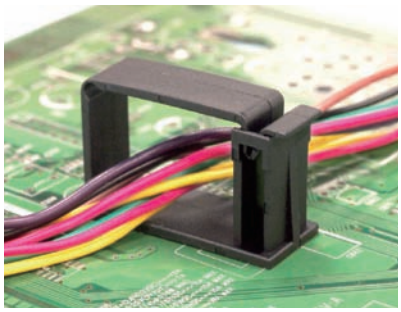


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



3M DOUBLE ADHESIVE TAPE

Part No.	B	C	D	Package
FCA-20	44.8	36.0	14.6	200
FCA-21	61.0	52.2	10.7	




3M DOUBLE ADHESIVE TAPE


Part No.	A	B	C	D	Package
FCA-1	19.7	77.6	64.0	9.95	50
FCA-2	19.0	53.5	40.0	8.9	100
FCA-3	19.0	45.8	32.0	8.44	200
FCA-24	16.0	50.0	37.6	15.2	

電線固定座 CABLE CLAMP

用途：背膠式，用於電子、電腦內部電線固定，裝配容易，美觀不脫落。

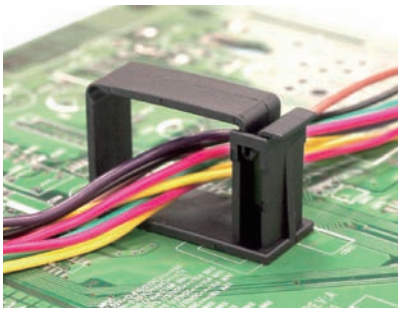


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




3M DOUBLE ADHESIVE TAPE


Part No.	A	B	C	D	Package
FCA-5	19.8	45.4	31.8	15.2	200
FCA-6	19.3	53.5	39.7	12.0	
FCA-7	19.3	53.5	39.7	11.7	
FCA-8	19.2	53.5	39.7	9.5	
FCA-19	18.7	55.2	41.3	7.0	



3M DOUBLE ADHESIVE TAPE

Part No.	A	B	C	D	Package
FCA-9	15.0	45.0	31.6	14.95	200
FCA-10	19.0	78.2	64.6	14.8	100
FCA-11	15.0	38.5	27.0	11.6	200
FCA-14	19.8	66.5	52.6	12.1	
FCA-17	14.8	38.0	26.9	24.1	
FCA-18	14.8	38.0	26.9	30.1	

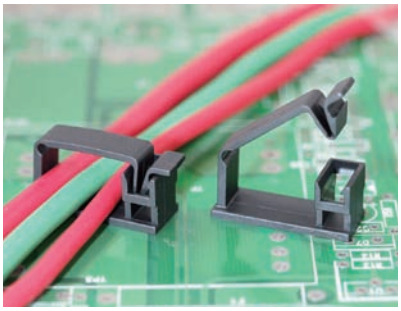




3M DOUBLE ADHESIVE TAPE


Part No.	Package
FCA-25	200






3M DOUBLE ADHESIVE TAPE


Part No.	Package
FCAC-1	1000

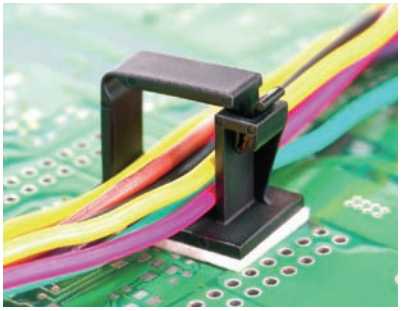



3M DOUBLE ADHESIVE TAPE

Part No.	Package
FCAB-1	500

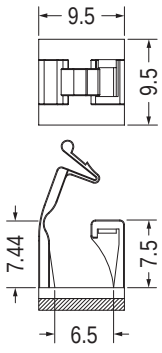


3M DOUBLE ADHESIVE TAPE


Part No.	Package
FCAB-7	1000

電線固定座 CABLE CLAMP

用途：背膠式，用於電子、電腦內部電線固定，裝配容易，美觀不脫落。

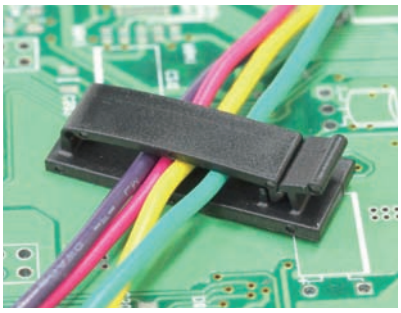


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




3M DOUBLE ADHESIVE TAPE

【 FCU-14 】




3M DOUBLE ADHESIVE TAPE



3M DOUBLE ADHESIVE TAPE


【 FCU-9 】




3M DOUBLE ADHESIVE TAPE

【 FCU-13 】


Part No.	A	B	C	D	Package
FCU-1	12.7	40.7	31.5	5.5	200
FCU-2	12.7	36.0	27.0	11.2	
FCU-3	15.0	36.0	27.0	13.9	
FCU-4	12.5	35.8	26.8	8.3	
FCU-5	12.7	26.2	17.0	4.55	
FCU-7	10.0	28.0	19.0	3.4	
FCU-8	12.9	72.3	63.1	6.7	100
FCU-9	18.8	30.7	20.9	16.0	
FCU-12	10.0	26.2	17.0	11.6	
FCU-13	12.7	59.0	50.0	8.4	
FCU-14	15.0	66.7	54.0	20.0	
FCU-15	12.7	41.0	32.0	12.4	200

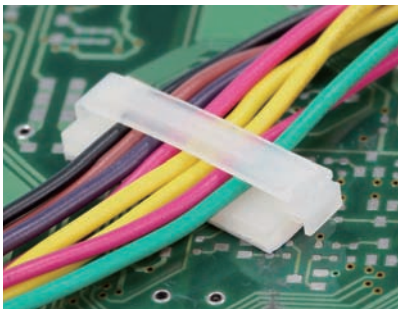




3M DOUBLE ADHESIVE TAPE


Part No.	Package
FCAB-2	500



3M DOUBLE ADHESIVE TAPE

Part No.	Package
FCAB-3	500

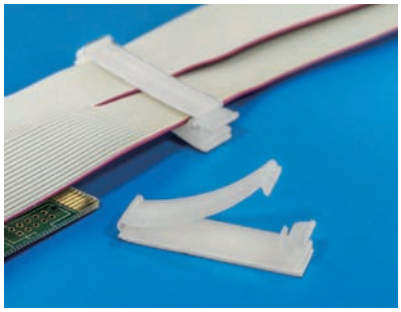




3M DOUBLE ADHESIVE TAPE


Part No.	Package
FCJ-40	100


電線固定座 CABLE CLAMP

用途：背膠式，用於電子、電腦內部電線固定，裝配容易，美觀不脫落。

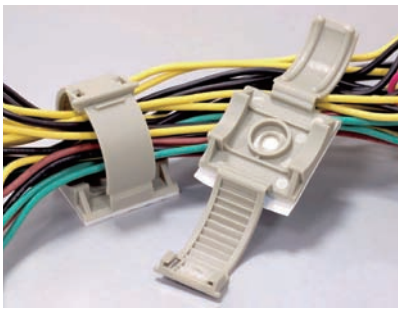

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black/Gray
- Unit: mm








3M DOUBLE ADHESIVE TAPE

Part No.	Package
CWK-1	200




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black/Gray
- Unit: mm




3M DOUBLE ADHESIVE TAPE


Part No.	Package
FCH-29	100

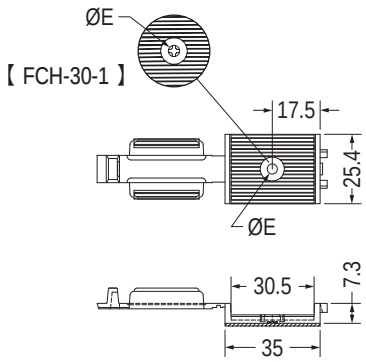

3M DOUBLE ADHESIVE TAPE

Part No.	E	Package
FCH-30	3.7	100
FCH-30-1	4.5	

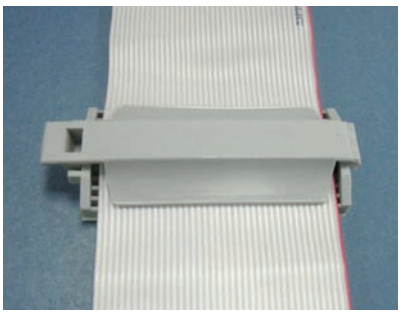


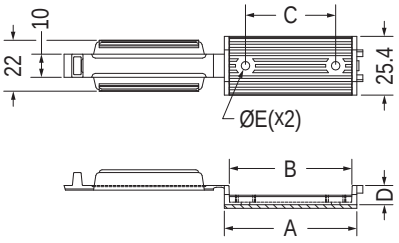

3M DOUBLE ADHESIVE TAPE

Part No.	A	B	C	D	E	Package
FCH-50	57.3	53.0	39.0	8.3	3.7	50
FCH-80	82.3	78.93	38.7	12.3	3.8	




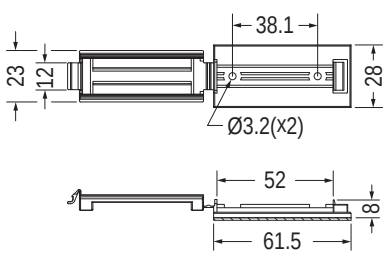


3M DOUBLE ADHESIVE TAPE

Part No.	Package
FCHA-1	50

用途：背膠式，用於電子、電腦內部電線固定，裝配容易，美觀不脫落。

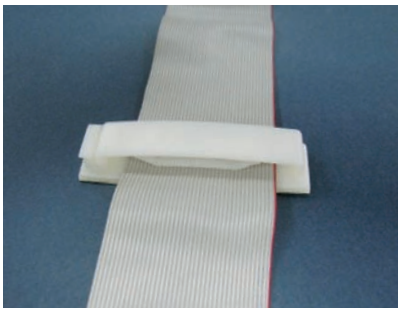



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



3M DOUBLE ADHESIVE TAPE
SUITABLE CABLE 50 PIN


Part No.	Package
FCB-1	100

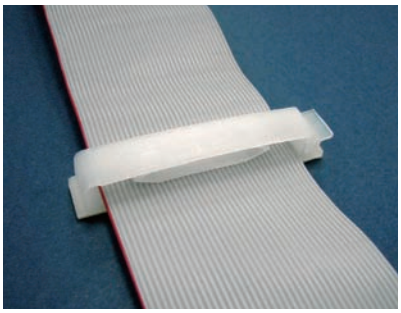



3M DOUBLE ADHESIVE TAPE
SUITABLE CABLE: P

Part No.	A	B	C	E	P	Package
FCB-40	10.2	65.0	53.8	8.23	40 PIN	200
FCB-50	10.0	77.0	64.5	9.2	50 PIN	100






【 FCB-40M 】
沒有檔板
No Stopper


3M DOUBLE ADHESIVE TAPE
SUITABLE CABLE 40 PIN

Part No.	Package
FCB-40M	100
FCB-40MT	




3M DOUBLE ADHESIVE TAPE


Part No.	Package
FCI-1	200



3M DOUBLE ADHESIVE TAPE


Part No.	Package
FCI-2	100

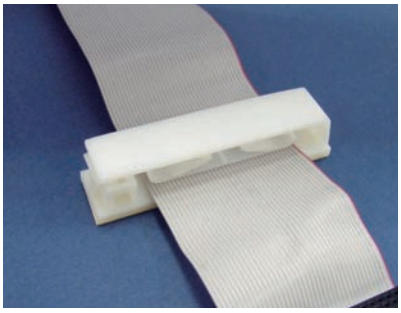



3M DOUBLE ADHESIVE TAPE


Part No.	Package
FCAM-1	100



3M DOUBLE ADHESIVE TAPE


Part No.	Package
FCK-50	100

電線固定座 CABLE CLAMP

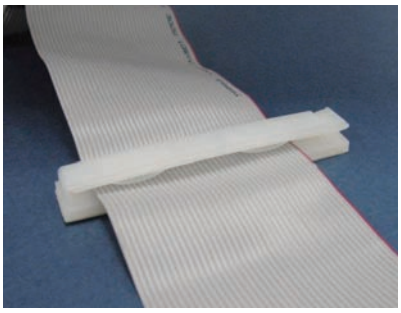

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

用途：背膠式，用於電子、電腦內部電線固定，裝配容易，美觀不脫落。

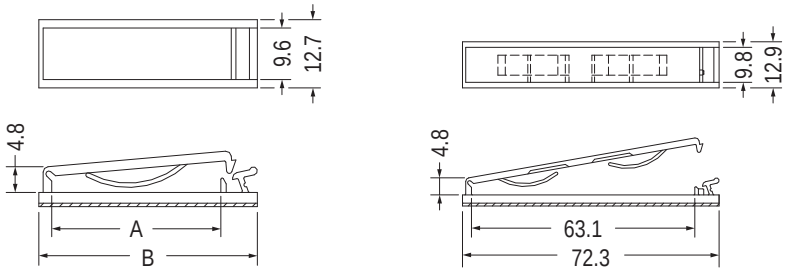


3M DOUBLE ADHESIVE TAPE

Part No.	A	B	Package
FCE-1	31.5	40.7	200
FCE-2	52.0	61.2	100


3M DOUBLE ADHESIVE TAPE

Part No.	Package
FCE-3	100

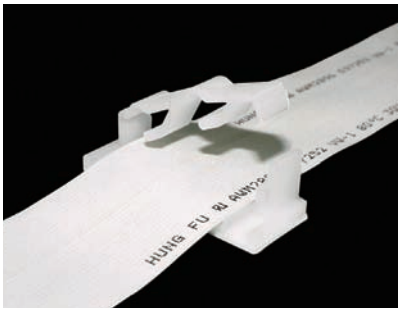


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

用途：可背膠或螺絲固定，用於電子、電腦內部電線固定，裝配容易，美觀不脫落。

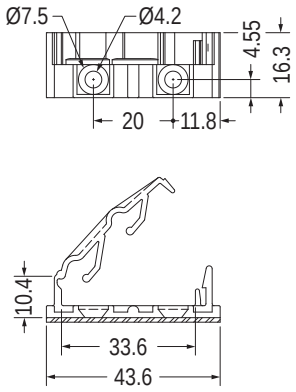


3M DOUBLE ADHESIVE TAPE

Part No.	Package
FCL-33	200

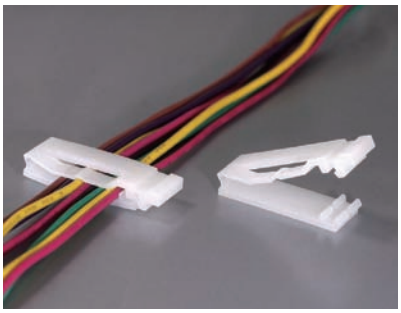

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

用途：背膠式，用於電子、電腦內部電線固定，裝配容易，美觀不脫落。

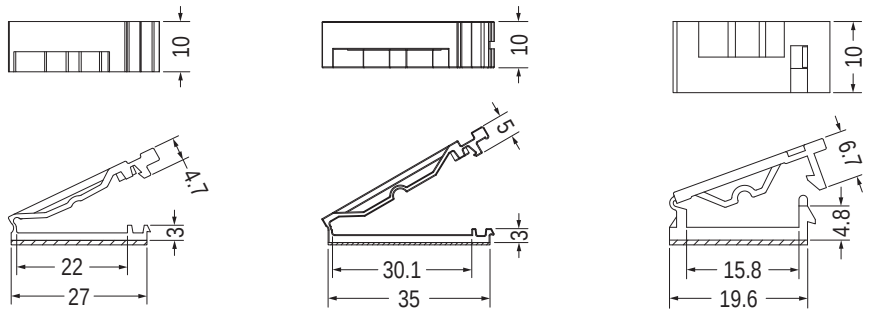

3M DOUBLE ADHESIVE TAPE

Part No.	Package
FCS-2	200

3M DOUBLE ADHESIVE TAPE


Part No.	Package
FCS-20	200

3M DOUBLE ADHESIVE TAPE


Part No.	Package
FCS-15	500

電線固定座 CABLE CLAMP

用途：背膠式，用於電子、電腦內部電線固定，裝配容易，美觀不脫落。

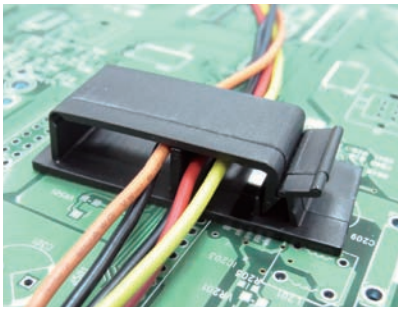


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



3M DOUBLE ADHESIVE TAPE

Part No.	Package
FCUB-1	200






3M DOUBLE ADHESIVE TAPE


Part No.	Package
FCUB-2	200

排線固定夾 FLAT CABLE CLAMP

用途：用於電子、電腦內部排線固定，裝配容易，美觀不脫落。

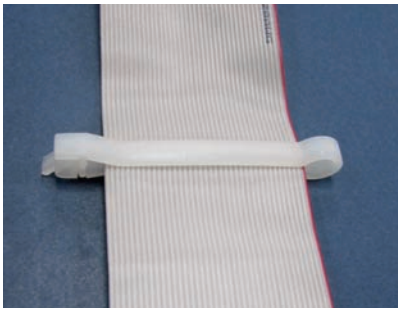



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



SUITABLE CABLE: P

Part No.	A	B	C	D	E	P	Package
FCE-30	62.3	13.0	8.9	12.0	6.4	30 PIN	100
FCE-40	70.2	12.2	8.7	12.8	6.2	40 PIN	

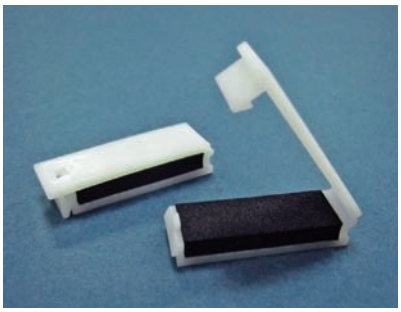

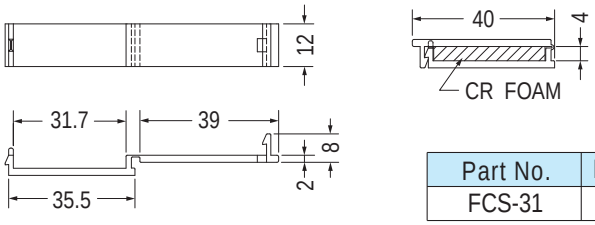


Part No.	Package
FCS-31	100


用途：配合螺絲，固定電線，美觀不脫落。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

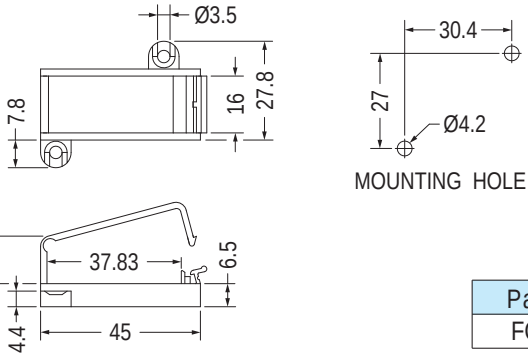


Part No.	Package
FCUA-1	200

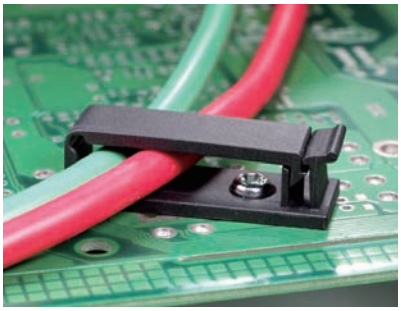

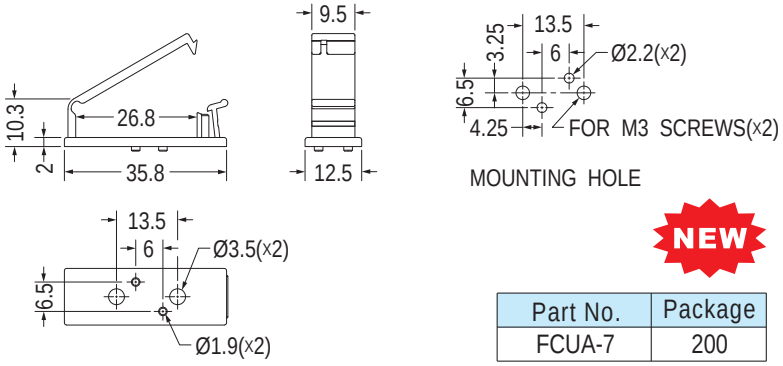


NEW

Part No.	Package
FCUA-7	200

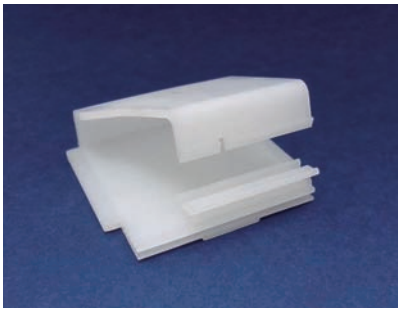


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

用途：用於電線之固定。

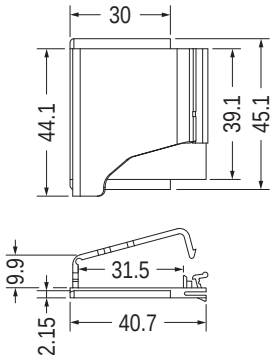

Part No.	Package
FCUA-2	200







Part No.	Package
FCUA-4	200


電線固定座 CABLE CLAMP

用途：用於電子、電腦內部電線固定，
裝配容易，美觀不脫落。

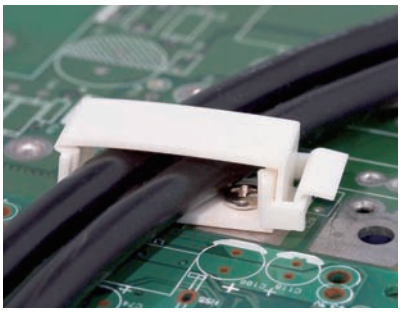



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm






Part No.	A	B	C	Package
FCSA-2	33.6	28.4	37.2	100
FCSA-3	47.8	42.6	51.4	

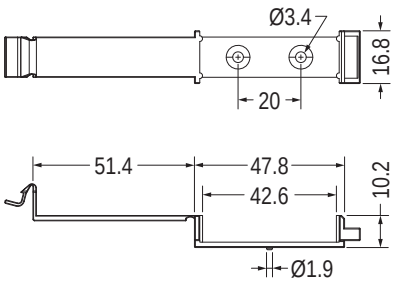




NEW


Part No.	Package
FCSA-17	100







Part No.	Package
FCSA-6	100




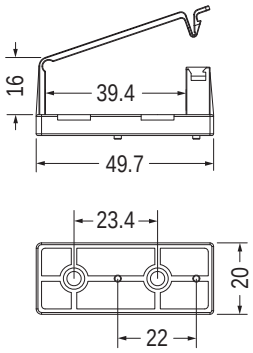




Part No.	Package
FCSA-7	100

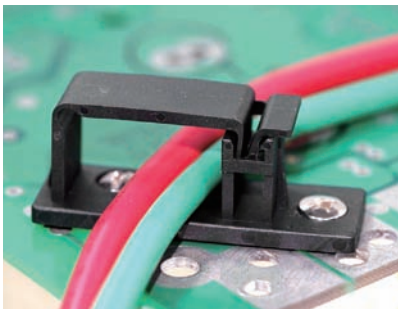


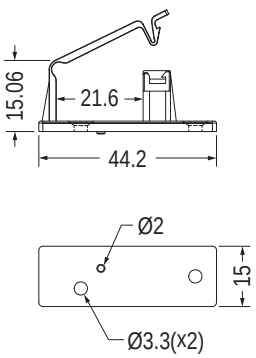





Part No.	Package
FCSA-10	250

用途：背膠式，用於電子、電腦內部電線固定，裝配容易，美觀不脫落。

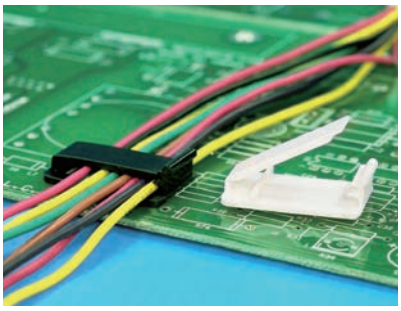


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm






MOUNTING HOLE





【 MIBB-7 】





DOUBLE ADHESIVE TAPE

Part No.	B	Package
MIBB-6	23.9	1000
MIBB-7	23.85	

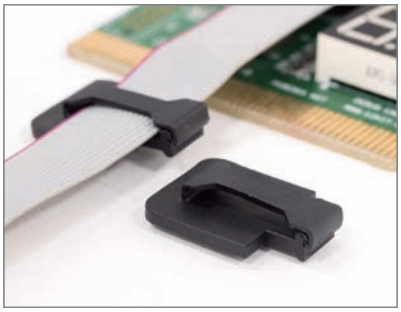

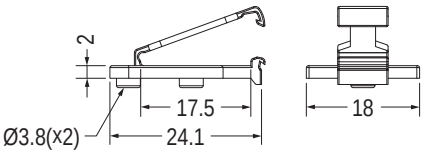







3M DOUBLE ADHESIVE TAPE
RELEASE TAB 易撕型背膠

Part No.	Package
MIBD-3	1000




3M DOUBLE ADHESIVE TAPE
RELEASE TAB 易撕型背膠


Part No.	Package
MIBB-9	1000

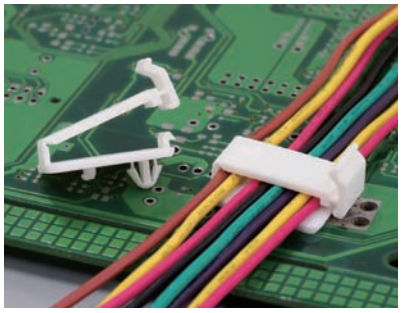


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

用途：用於電子、電腦內部電線固定，裝配容易，美觀不脫落。








MOUNTING HOLE
THICKNESS 0.6~0.8





Part No.	Package
MIB-32	1000

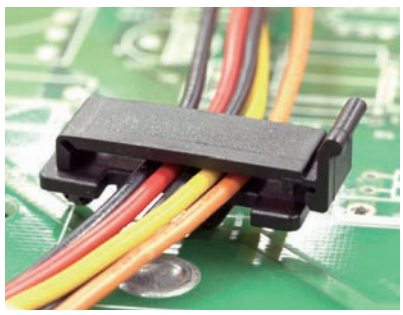











MOUNTING HOLE
THICKNESS 0.5~0.8






MOUNTING HOLE
THICKNESS 0.5~0.8

Part No.	Package
MIBB-1	1000


Part No.	Package
MIBB-2	1000


電線固定座 CABLE CLAMP

用途：用於電子、電腦內部電線固定，
裝配容易，美觀不脫落。

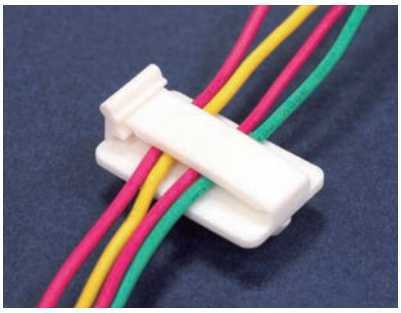


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

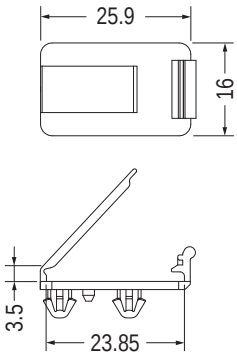




MOUNTING HOLE
THICKNESS 1.0

Part No.	F	Package
MIBB-3	12.0	1000
MIBB-5	13.0	

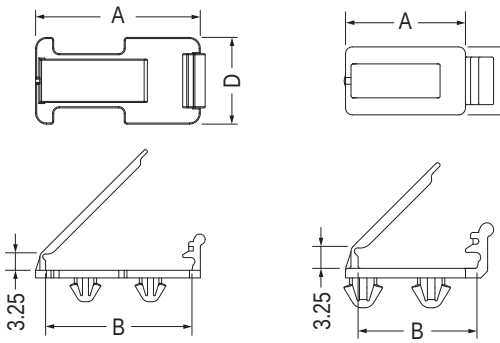



【 MIBB-13 】



MOUNTING HOLE
THICKNESS 0.5~0.8


Part No.	A	B	D	F	Package
MIBB-11	17.65	17.5	10.0	10.0	1000
MIBB-12	21.15	21.0	10.0	12.0	
MIBB-13	30.4	27.0	16.0	12.0	






MOUNTING HOLE
THICKNESS 1.5


Part No.	Package
MIBB-16	1000







MOUNTING HOLE
THICKNESS: T

Part No.	T	Package
MIBB-19	1.5	1000
MIBB-19S	1.0~1.2	

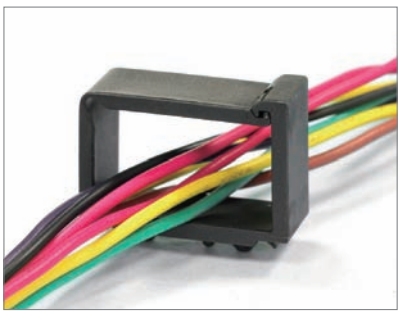

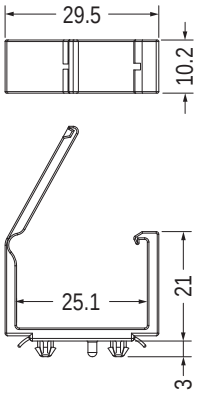




MOUNTING HOLE
THICKNESS 1.0

Part No.	Package
MIBA-4	500


電線固定座 CABLE CLAMP


用途：用於電子、電腦內部電線固定，
裝配容易，無背膠，美觀不脫落。

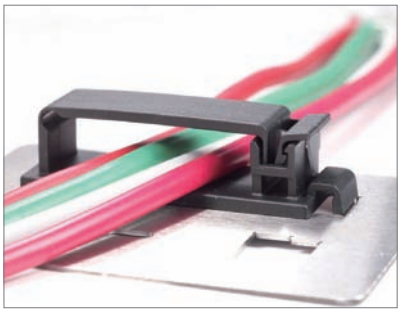

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


使用說明
Installation Guide






MOUNTING HOLE
THICKNESS 0.8


Part No.	C	E	F	I	J	M	N	Package
CHWC-1	14.75	15.0	14.1	4.0	4.7	6.6	4.0	500
★CHWC-11	10.42	10.52	13.2	4.9	5.5	9.0	6.4	200

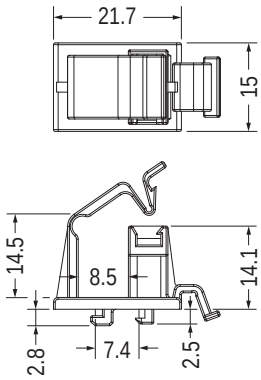




MOUNTING HOLE
THICKNESS 1.0


Part No.	Package
CHWC-2	500







MOUNTING HOLE
THICKNESS: T

Part No.	F	H	I	J	T	Package
CHWC-3	18.7	2.4	4.5	4.4	1.2	100
CHWC-9	19.6	2.0	4.6	6.4	0.8	200

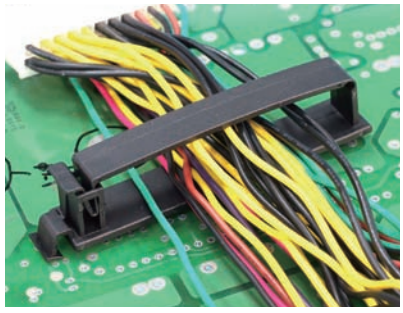







MOUNTING HOLE
THICKNESS 1.2

Part No.	Package
CHWC-6	500







MOUNTING HOLE
THICKNESS 1.0


Part No.	Package
CHWC-10	100


電線固定座 CABLE CLAMP

用途：用於電子、電腦內部電線固定，
裝配容易，美觀不脫落。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm








MOUNTING HOLE
THICKNESS 0.8




Part No.	A	B	C	D	E	F	H	I	J	K	L	Package
CHWB-1	20.7	10.3	7.0	10.2	9.51	9.9	2.2	4.5	4.0	2.0	5.2	500
CHWB-2	35.28	25.25	11.0	15.2	13.17	26.0	2.1	4.0	3.0	1.5	5.5	

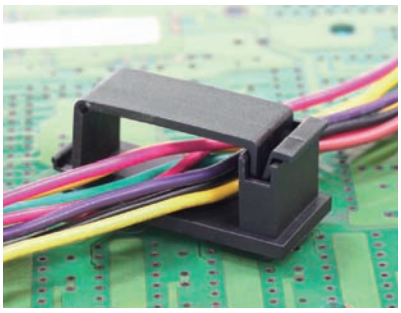







MOUNTING HOLE
THICKNESS 0.8



Part No.	Package
CHWB-4	500










MOUNTING HOLE
THICKNESS 0.8


NEW



Part No.	Package
FCTI-1	500

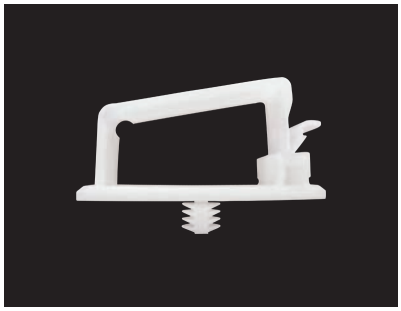





MOUNTING HOLE Ø6.5~Ø7.0
THICKNESS 0.8~3.0


Part No.	Package
FCUT-1	500

電線固定座 CABLE CLAMP

用途：用於電子、電腦內部電線固定，
裝配容易，美觀不脫落。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




MOUNTING HOLE Ø6.5
THICKNESS 0.8~1.6

Part No.	Package
FCJA-1	200




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm





MOUNTING HOLE Ø6.5
THICKNESS 0.5~2.2

Part No.	A	D	E	Package
FCJ-30	44.3	18.8	9.4	200
FCJ-30S	44.5	19.0	13.5	

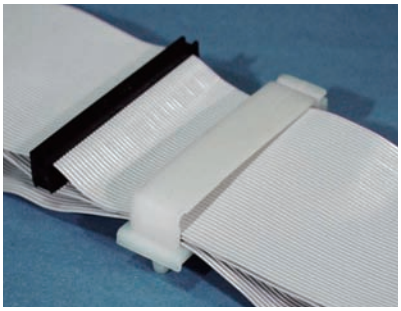

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm







MOUNTING HOLE
THICKNESS 0.8~2.2

Part No.	A	D	E	Package
FCT-1	77.4	19.6	9.9	100
FCT-1L	77.0	20.0	15.0	








MOUNTING HOLE
THICKNESS 0.8~3.2


Part No.	Package
FCT-5	100


電線固定座 CABLE CLAMP

用途：用於電子、電腦內部電線固定，
裝配容易，美觀不脫落。

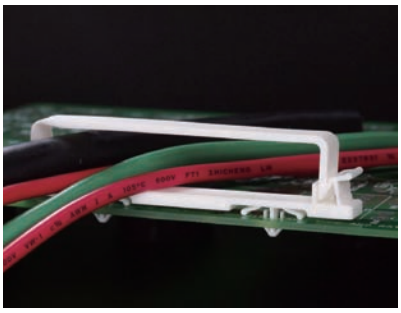


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm






MOUNTING HOLE
THICKNESS 0.8~2.2


Part No.	A	B	F	Package
FCT-2	53.8	40.0	30.0	100
FCT-3	45.8	32.0	25.0	






MOUNTING HOLE
THICKNESS: T


Part No.	T	Package
FCT-4	2.0	100
FCT-4S	0.8~1.0	
FCT-4M	0.8~2.0	






MOUNTING HOLE
THICKNESS 0.8~2.2

Part No.	Package
★FCT-15	200







MOUNTING HOLE
THICKNESS 0.8~2.2

Part No.	Package
★FCT-16	250




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm







MOUNTING HOLE
THICKNESS: T




Part No.	T	Package
FCTB-1	1.2~2.5	500
FCTB-2	1.2~3.25	100



【 FCT-6L, FCT-8L 】



MOUNTING HOLE
THICKNESS: T



MOUNTING HOLE
THICKNESS: T


【 FCT-12 】


Part No.	A	B	D	E	T	Package
FCT-6	36.0	24.2	8.0	9.9	0.8~1.2	100
FCT-6L	36.1	24.2	8.0	9.9	0.8~2.0	
FCT-8	40.0	28.3	7.9	11.4	0.8~1.2	
FCT-8L	40.0	28.3	7.9	11.4	1.2~2.5	
FCT-12	36.0	24.2	8.0	9.5	0.8~1.2	

用途：用於電子、電腦內部電線固定，
裝配容易，美觀不脫落。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm







MOUNTING HOLE
THICKNESS 0.8~1.0

Part No.	Package
FCT-14	200








MOUNTING HOLE
THICKNESS 1.0

Part No.	Package
FCTG-1	200







MOUNTING HOLE Ø4.8
THICKNESS 1.0


Part No.	Package
FCTE-1	100







【 FCT-11 】



MOUNTING HOLE
THICKNESS 0.8~2.2


Part No.	E	J	Package
FCT-7	14.9	5.5	100
FCT-9	14.9	2.4	
FCT-9M	26.5	4.5	
FCT-11	26.5	2.4	

電線固定座 CABLE CLAMP


用途：用於電子、電腦內部電線固定，
裝配容易，美觀不脫落。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




MOUNTING HOLE Ø4.8
THICKNESS 1.0





MOUNTING HOLE Ø4.8
THICKNESS 1.0

Part No.	Package
FCTF-1	50

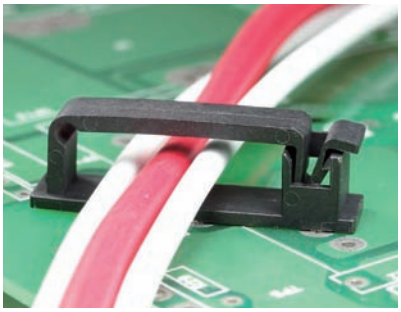


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm







MOUNTING HOLE
THICKNESS: T




Part No.	A	B	E	T	Package
FCTC-1	31.0	19.1	16.1	3.0	100
FCTC-4	28.0	16.6	15.2	1.0	







MOUNTING HOLE
THICKNESS 1.0




Part No.	E	Package
FCTC-5	7.7	100
★FCTC-6	9.8	







MOUNTING HOLE
THICKNESS 1.0





Part No.	Package
FCTC-2	200


用途：用於電子、電腦內部電線固定，
裝配容易，美觀不脫落。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm









MOUNTING HOLE
THICKNESS 0.8


Part No.	Package
FCTC-3	100



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm










MOUNTING HOLE
THICKNESS 0.8~1.2


Part No.	Package
WDT-20	500

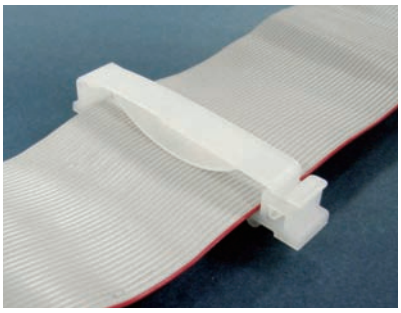

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm









MOUNTING HOLE
THICKNESS: T

Part No.	T	Package
FDT-2	0.8~1.2	1000
FDT-2-1.6	0.8~1.6	






MOUNTING HOLE
THICKNESS 0.8~2.0


Part No.	Package
FDT-3	500


電線固定座 CABLE CLAMP

用途：用於電子、電腦內部電線固定，
裝配容易，美觀不脫落。

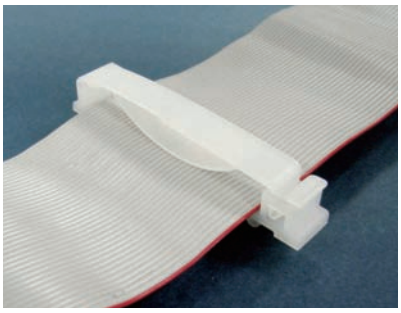


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm






MOUNTING HOLE
THICKNESS 0.8~2.0


Part No.	Package
FDT-4	100






MOUNTING HOLE
THICKNESS 2.0
SUITABLE CABLE 50 PIN


Part No.	Package
FCD-2	100







MOUNTING HOLE
THICKNESS 0.8~2.2
SUITABLE CABLE 50 PIN

Part No.	Package
FCD-1	100

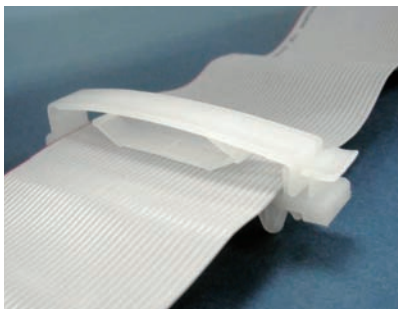







MOUNTING HOLE
THICKNESS: T
SUITABLE CABLE: P

Part No.	A	B	C	D	E	T	P	Package
FCD-35	55.0	39.6	35.0	12.5	9.0	0.8~1.8	35 PIN	100
FCD-40	65.0	53.8	40.0	10.2	8.0	0.8~2.2	40 PIN	
FCD-50	77.0	64.3	49.7	10.0	9.2	0.8~2.0	50 PIN	

用途：固定電線於機殼上，方便堅固。

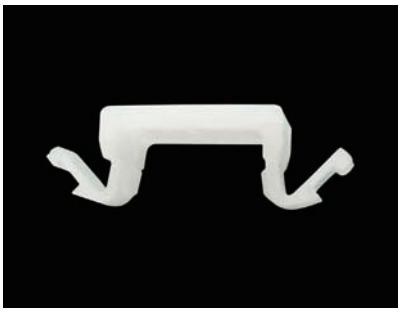



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

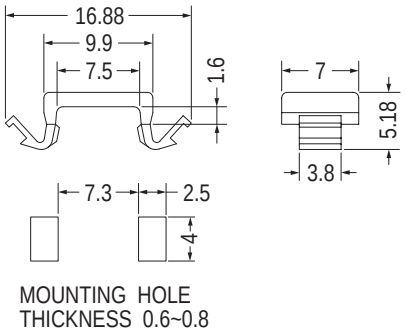

MOUNTING HOLE
THICKNESS 0.6~0.8

Part No.	Package
CCMH-7.5	1000

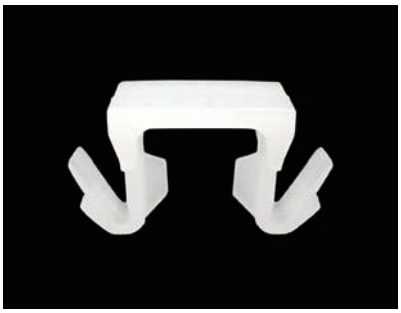


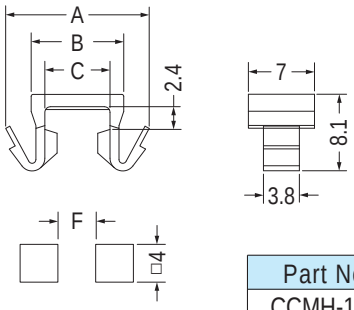

MOUNTING HOLE
THICKNESS 1.0~1.2

Part No.	A	B	C	F	Package
CCMH-12	15.2	9.8	6.8	4.0	1000
CCMH-15.1	18.1	12.9	10.0	7.1	




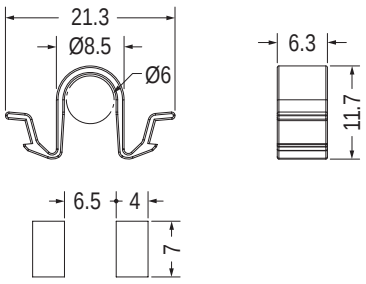

MOUNTING HOLE
THICKNESS 1.9

Part No.	Package
CCMHA-6	1000



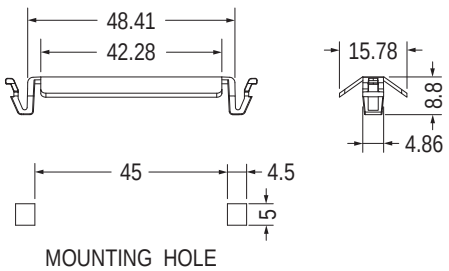


MOUNTING HOLE


Part No.	Package
CCMH-50	500

電線固定座 CABLE CLAMP


用途：用於電子、電腦LCD-TV內部排線固定，裝配容易，美觀不脫落。

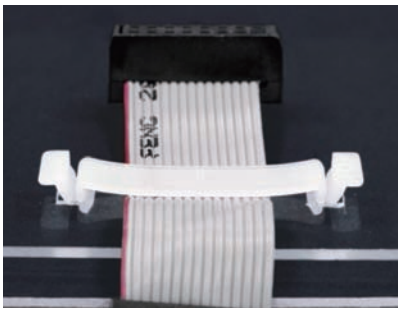

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
CCMB-10	1000




Part No.	A	C	F	Package
CCMB-15	27.0	15.35	15.0	1000
CCMB-30	42.0	30.18	30.0	



- Material: PPO
- Color: Black

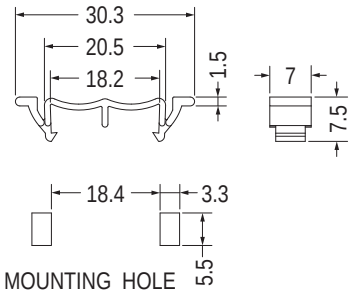

Part No.	Package
CCMB-31	1000




Part No.	A	B	C	F	Package
CCMA-30	43.8	32.2	30.0	30.0	1000
CCMA-40	53.8	42.2	40.0	40.0	





用途：可將電線固定於機殼上，電線不易磨損，配線整齊美觀。

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

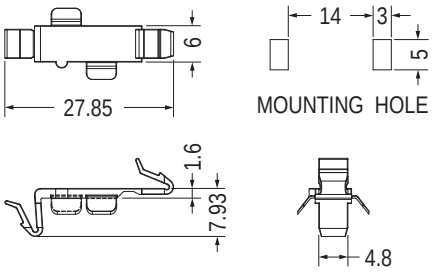


Part No.	Package
CCMD-1	1000

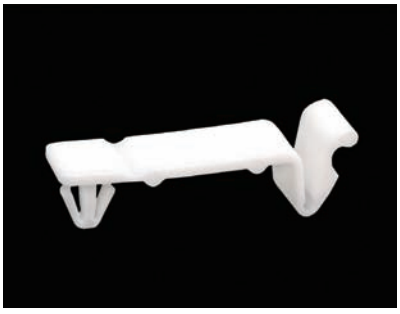

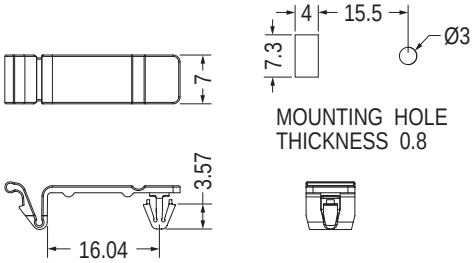


Part No.	Package
CCMC-1	1000

用途：背膠式，用於電子、電腦內部電線固定，裝配容易，美觀不脫落。

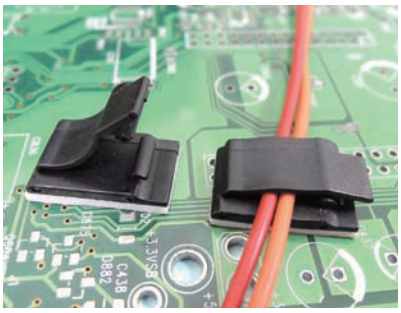


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

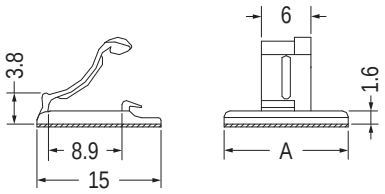

3M DOUBLE ADHESIVE TAPE


Part No.	A	Package
WDF-1	15.0	1000
WDF-3	6.0	

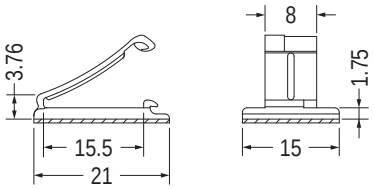

3M DOUBLE ADHESIVE TAPE


Part No.	Package
WDF-2	1000






3M DOUBLE ADHESIVE TAPE


Part No.	A	B	Package
WDF-6	15.9	9.8	1000
WDF-7	17.6	11.5	

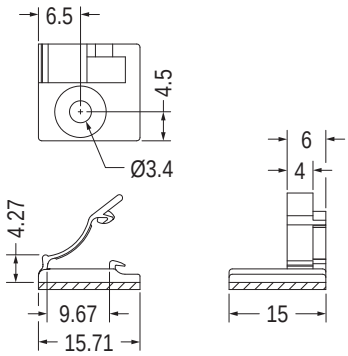

3M DOUBLE ADHESIVE TAPE


Part No.	Package
WDF-4	1000

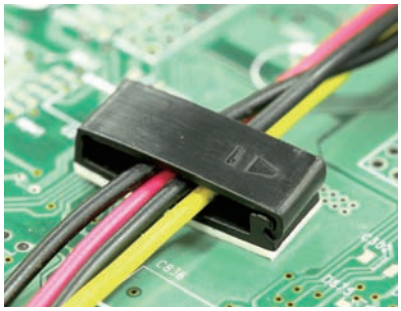

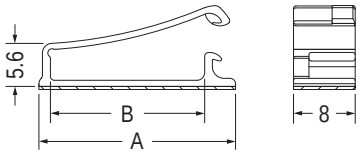


3M DOUBLE ADHESIVE TAPE

Part No.	A	B	Package
WDF-8	25.5	20.0	1000
WDF-9	35.5	30.0	

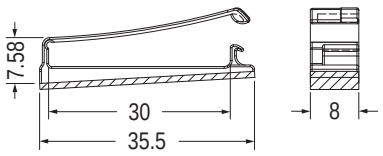


3M DOUBLE ADHESIVE TAPE

Part No.	Package
WDF-10	1000

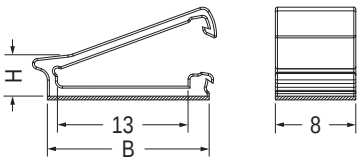


3M DOUBLE ADHESIVE TAPE

Part No.	B	H	Package
WCD-1	16.1	4.0	1000
WCD-4	17.0	8.0	

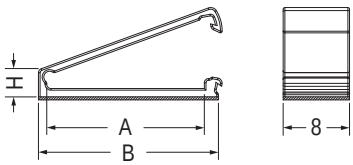

3M DOUBLE ADHESIVE TAPE

Part No.	A	B	H	Package
WCD-2	19.0	21.7	3.38	1000
WCD-3	18.5	21.85	4.87	

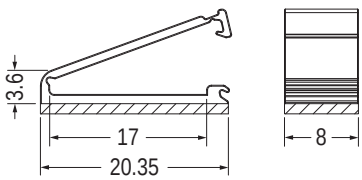

3M DOUBLE ADHESIVE TAPE


Part No.	Package
WCD-5	1000

電線固定座 CABLE CLAMP

用途：背膠式，可快速拆卸，固定電線維修方便，不佔空間。





- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



3M DOUBLE ADHESIVE TAPE

Part No.	Package
WCA-1	1000

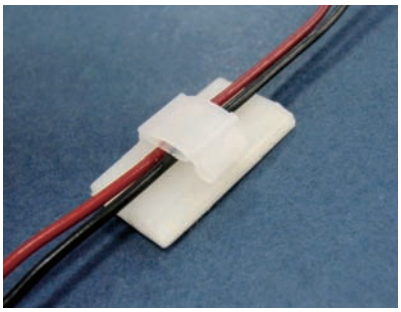


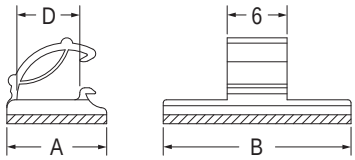

3M DOUBLE ADHESIVE TAPE


Part No.	A	B	D	Package
WCC-1	10.0	19.0	6.3	1000
WCC-1S	10.0	11.0	6.3	
WCC-2	14.0	19.0	10.5	500
WCC-8	10.0	19.5	6.0	1000




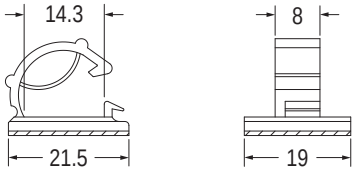

3M DOUBLE ADHESIVE TAPE

Part No.	Package
WCC-3	500

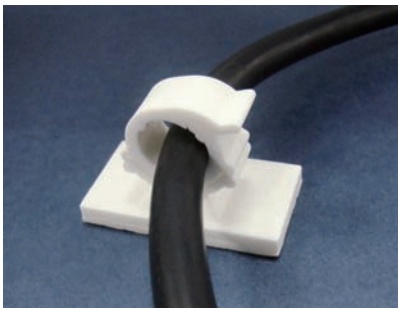


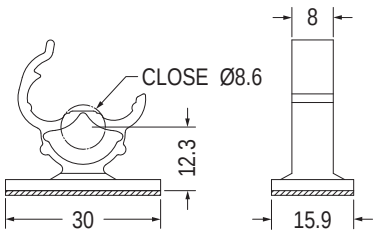

3M DOUBLE ADHESIVE TAPE

Part No.	Package
WSK-1	250







3M DOUBLE ADHESIVE TAPE

Part No.	A	C	Package
CHO-7.6	15.0	7.6	500
CHO-10	19.0	10.0	
CHO-12	20.0	12.0	

用途：小型化，背膠式，可快速捆紮及解開電線。

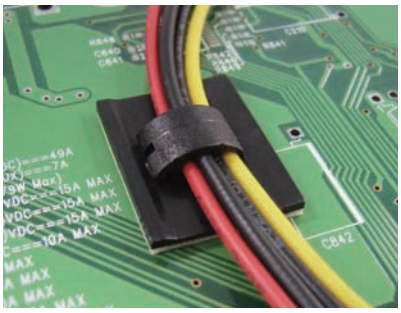


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




3M DOUBLE ADHESIVE TAPE


Part No.	Package
WCC-5	1000

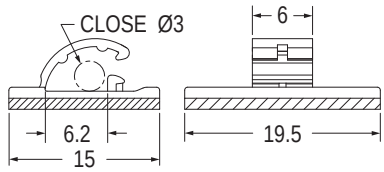

3M DOUBLE ADHESIVE TAPE


Part No.	Package
WCC-6	1000

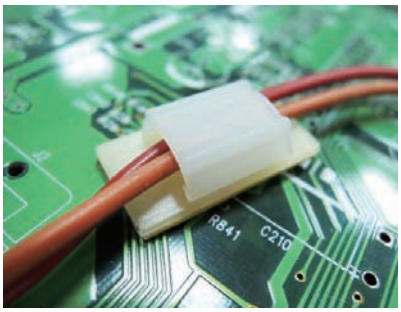

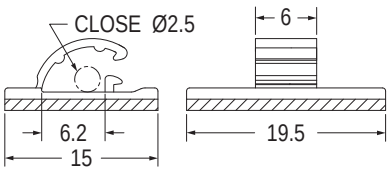

3M DOUBLE ADHESIVE TAPE

Part No.	Package
WCC-7	1000

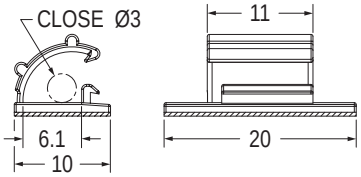


3M DOUBLE ADHESIVE TAPE

Part No.	Package
WCC-9	500




用途：固定電線於機板上，維修方便，不佔空間。


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	Package
MISD-1	500



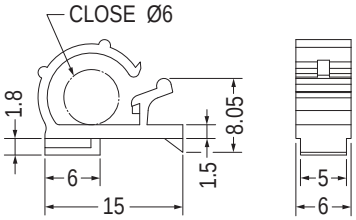




MOUNTING HOLE
THICKNESS 0.8


Part No.	Package
MISA-3	1000

電線固定座 CABLE CLAMP

用途：背膠式，可快速拆卸，固定電線維修方便，不佔空間。

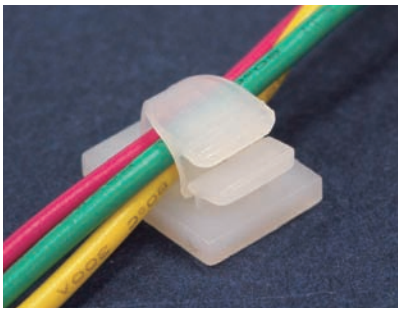



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



3M DOUBLE ADHESIVE TAPE


Part No.	A	B	C	D	Package
FWU-1	13.0	10.0	4.0	6.8	1000
FWU-2	15.0	13.0	6.0	9.0	
FWU-3	21.6	19.0	9.0	12.8	500
FWU-4	25.0	20.0	11.0	13.2	250
FWU-5	32.0	25.4	13.4	16.0	200
FWU-6	35.8	24.8	18.0	16.8	100
FWU-7	56.1	50.0	25.4	20.1	50
FWU-8	56.1	50.0	30.0	20.1	
FWU-9	37.6	31.5	18.0	17.0	100
FWU-10	31.0	19.0	9.0	12.8	200
FWU-11	13.0	10.0	5.0	6.8	1000

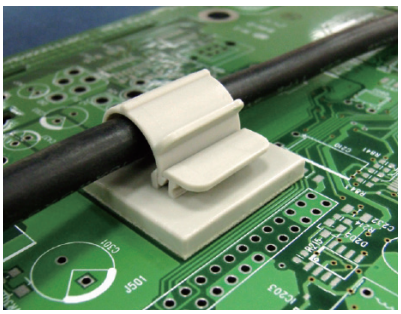




3M DOUBLE ADHESIVE TAPE

【 FWU-11 】




3M DOUBLE ADHESIVE TAPE

Part No.	A	B	C	D	Package
FWAS-1	16.4	19.3	5.0	9.7	500
FWAS-2	25.3	25.4	11.0	16.1	250
FWAS-3	37.0	29.3	19.6	16.9	100
FWAS-4	57.1	50.5	26.8	31.7	50
FWAS-5	22.1	25.4	6.35	16.0	250
FWAS-6	30.73	25.4	12.7	16.26	100




3M DOUBLE ADHESIVE TAPE

Part No.	A	B	C	D	Package
FWC-6	17.5	20.5	6.2	8.6	200
FWC-7	25.5	17.5	7.0	9.8	
FWC-10	30.3	23.9	10.3	12.0	
FWC-10S	30.0	21.0	10.0	12.0	
FWC-15	29.9	23.9	14.5	14.0	
FWC-19	35.7	25.2	18.5	15.9	



3M DOUBLE ADHESIVE TAPE

Part No.	A	B	C	D	Package
FWS-1	21.0	19.0	8.2	9.2	500
FWS-2	25.0	20.0	9.0	12.0	250
FWS-3	25.0	19.7	10.6	12.1	
FWS-4	29.0	20.0	12.6	14.0	
FWS-7	29.6	19.5	12.8	14.8	
FWS-8	21.6	17.0	10.4	12.0	
FWS-10	19.0	19.0	6.8	8.8	500



3M DOUBLE ADHESIVE TAPE


E217732
UL 1565

Part No.	A	B	C	D	Package	UL
AWC-1	24.8	18.8	7.9~10.3	10.2	250	UL
AWC-2	25.4	15.0	11.0~13.3	10.0		UL
AWC-2A	30.2	15.0	11.9~14.3	10.0		
AWC-3	34.4	18.8	14.7~19.1	12.7	100	UL
AWC-4	36.0	19.0	18.0~22.0	12.7		UL
AWC-5	39.8	19.8	22.0~26.5	13.0		UL
AWC-6	31.8	19.1	11.9~14.3	10.2	250	

用途：固定電線於PC板或機板上，維修方便，不佔空間。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

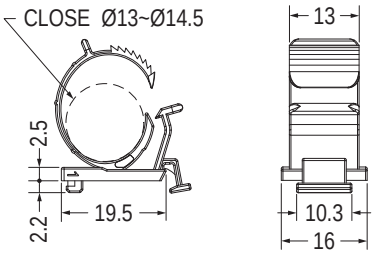

MOUNTING HOLE
THICKNESS 0.8~1.0


Part No.	Package
AWE-1	500



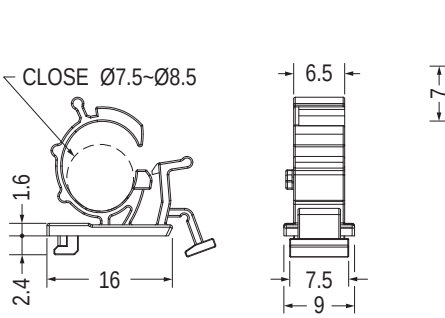


MOUNTING HOLE
THICKNESS 0.9~1.1

Part No.	Package
AWE-2	500

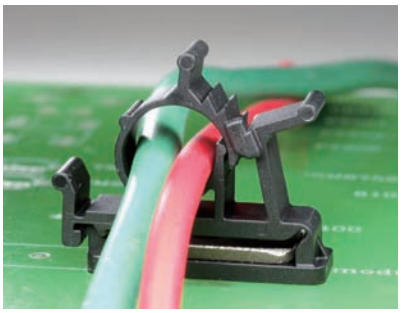


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

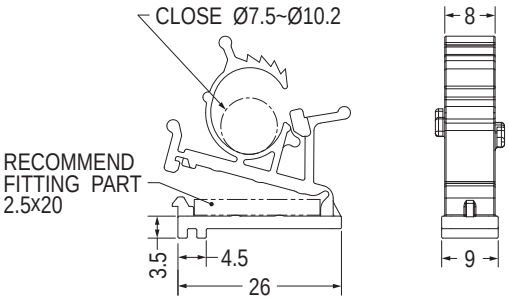


NEW


Part No.	Package
AWB-1	500

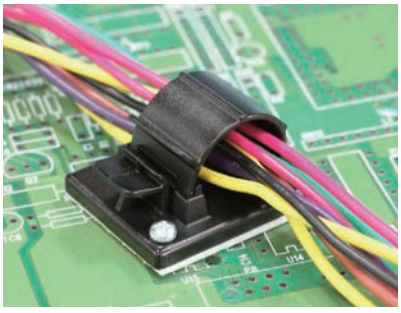

用途：背膠式，亦可配合螺絲，固定電線，美觀不脫落。

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm






3M DOUBLE ADHESIVE TAPE


Part No.	Package
FWD-1	1000

電線固定座 CABLE CLAMP

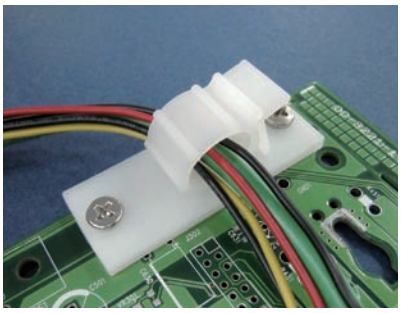


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

用途：配合螺絲，固定電線，美觀不脫落。




Part No.	Package
AWCA-1	1000

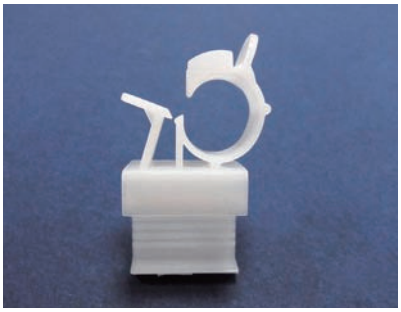


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

用途：用於機器上之電線固定。

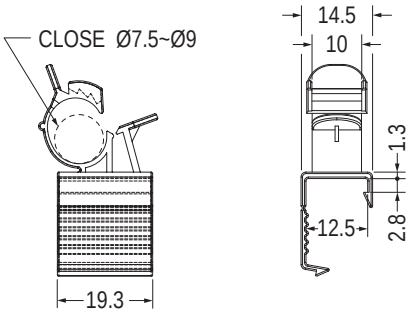


Part No.	Package
AWCB-1	500

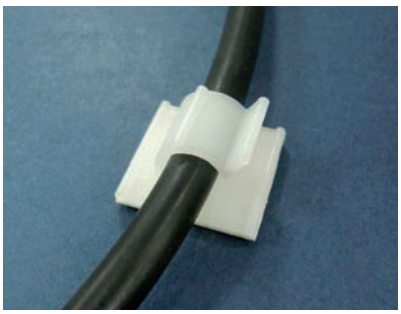


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


用途：背膠式，可快速拆卸，固定電線維修方便，不佔空間。

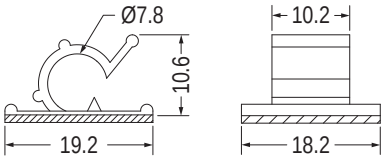

3M DOUBLE ADHESIVE TAPE


Part No.	Package
WC-1	500

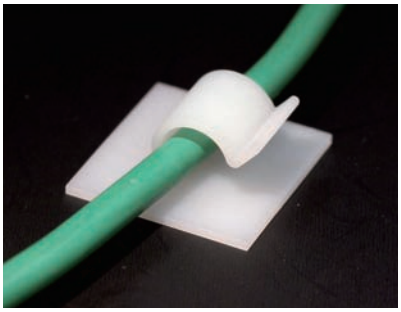




3M DOUBLE ADHESIVE TAPE

Part No.	Package
WRA-6	1000



3M DOUBLE ADHESIVE TAPE

Part No.	Package
WRA-18	500



3M DOUBLE ADHESIVE TAPE


Part No.	Package
WCL-30	500

電線固定座 WIRE CLIP

用途：背膠式，固定電線於機器中，整齊美觀。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




3M DOUBLE ADHESIVE TAPE

Part No.	A	B	D	Package
WC-6	10.0	4.3	5.1	1000
WC-7	12.0	6.25	5.5	




3M DOUBLE ADHESIVE TAPE

Part No.	Package
WC-12	1000




3M DOUBLE ADHESIVE TAPE

Part No.	Package
MWS-37	1000




3M DOUBLE ADHESIVE TAPE

Part No.	Package
WC-5	1000




3M DOUBLE ADHESIVE TAPE

Part No.	Package
WC-10	1000




3M DOUBLE ADHESIVE TAPE

Part No.	Package
WCL-11	1000




3M DOUBLE ADHESIVE TAPE

Part No.	Package
WCL-12	1000




3M DOUBLE ADHESIVE TAPE

Part No.	Package
WCL-1	500




3M DOUBLE ADHESIVE TAPE

Part No.	Package
WCL-13	1000

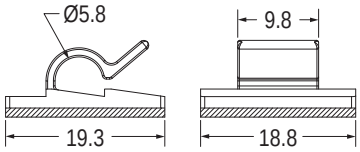


3M DOUBLE ADHESIVE TAPE

Part No.	Package
WCL-15	500




3M DOUBLE ADHESIVE TAPE

Part No.	Package
WCL-29	1000



3M DOUBLE ADHESIVE TAPE

Part No.	A	B	C	D	F	Package
WCT-4	15.9	4.0	15.9	5.7	9.7	500
WCT-5	19.0	5.2	19.0	8.0	10.2	
WCT-6	19.0	6.0	20.0	9.9	10.0	




3M DOUBLE ADHESIVE TAPE


Part No.	Package
WCL-23	500

電線固定座 WIRE CLIP

用途：背膠式，固定電線於機器中，整齊美觀。

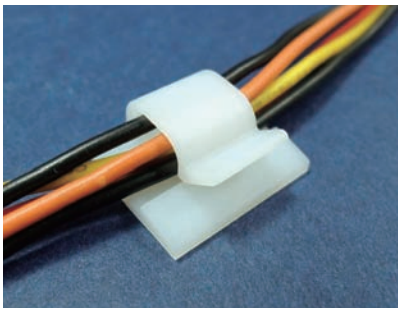


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

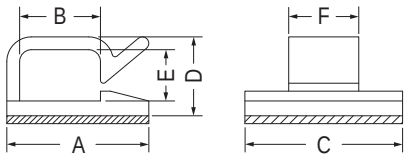


3M DOUBLE ADHESIVE TAPE

Part No.	A	B	C	D	E	F	Package
WCL-4	14.4	8.2	16.0	8.0	5.2	7.1	1000
WCL-5	16.8	10.2	16.0	9.5	6.7	7.0	500
WCL-7	20.8	13.6	19.0	11.3	8.2	9.0	
WCL-14	15.4	9.9	16.0	7.3	4.7	7.0	1000
WCL-27	20.1	15.8	16.0	9.3	6.5	9.0	500
WCL-28	22.7	18.0	20.0	8.7	6.0	10.0	

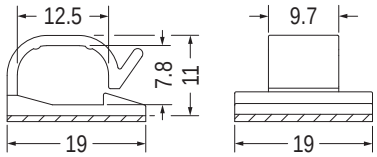


3M DOUBLE ADHESIVE TAPE

Part No.	Package
WCL-6	500

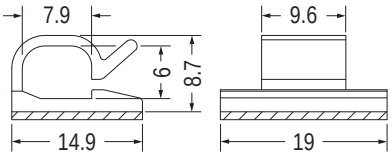


3M DOUBLE ADHESIVE TAPE


Part No.	Package
WCL-18	1000



3M DOUBLE ADHESIVE TAPE


Part No.	Package
WCL-31	500

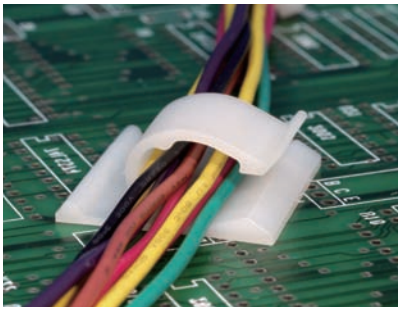

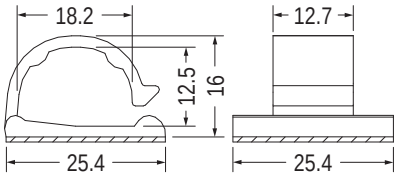


3M DOUBLE ADHESIVE TAPE

Part No.	Package
WCL-10	250




3M DOUBLE ADHESIVE TAPE


Part No.	Package
WCL-24	500

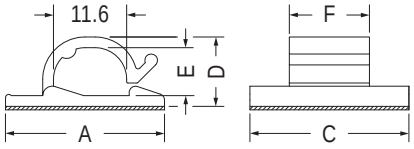

3M DOUBLE ADHESIVE TAPE

Part No.	A	C	D	E	F	Package
WCL-8	25.4	15.5	11.3	7.8	6.5	500
WCL-9	25.2	25.2	11.0	7.6	12.7	

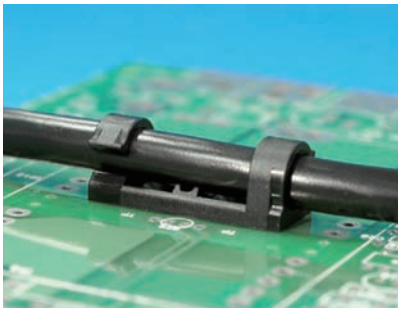

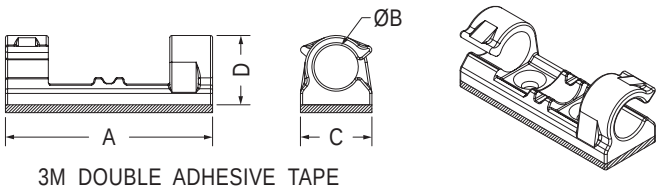


3M DOUBLE ADHESIVE TAPE


Part No.	A	B	C	D	Package
WCL-25	29.0	6.2	10.0	9.7	500
WCL-26	33.0	9.0	13.0	12.7	

電線固定座 WIRE SADDLE

用途：背膠式，可快速拆卸，固定電線
維修方便，整齊美觀，不佔空間。

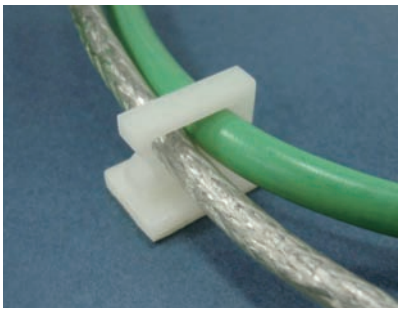


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

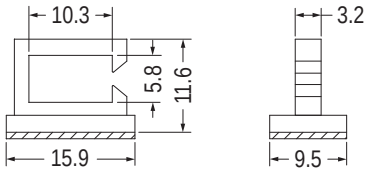


3M DOUBLE ADHESIVE TAPE

Part No.	Package
WSS-1	1000




3M DOUBLE ADHESIVE TAPE

Part No.	Package
MWS-30	1000




3M DOUBLE ADHESIVE TAPE


Part No.	Package
WCLA-1	1000



3M DOUBLE ADHESIVE TAPE


Part No.	Package
WC-4	1000

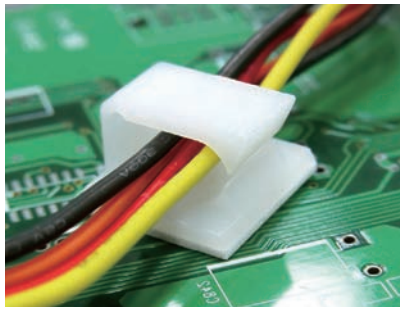

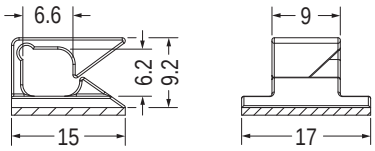


3M DOUBLE ADHESIVE TAPE

Part No.	Package
WSB-4	1000




3M DOUBLE ADHESIVE TAPE

Part No.	Package
WSB-6	1000



3M DOUBLE ADHESIVE TAPE


Part No.	A	B	C	D	E	F	Package
WSB-1	12.0	6.2	12.1	6.3	3.6	9.1	1000
WSB-2	16.0	11.7	16.0	9.1	6.0	9.0	
WSB-3	14.1	7.6	15.8	9.1	6.1	9.0	
WSB-5	14.0	10.5	12.1	6.25	3.5	10.0	



3M DOUBLE ADHESIVE TAPE



【 MWS-46L 】




3M DOUBLE ADHESIVE TAPE

Part No.	A	B	C	E	F	Package
MWS-2	13.0	8.5	9.2	3.0	6.3	1000
MWS-3	16.0	11.5	13.0	2.9	9.0	


Part No.	A	B	C	D	E	F	Package
MWS-2D	14.5	10.2	9.5	5.7	2.5	6.4	1000
MWS-27	12.5	8.4	9.5	5.2	2.8	6.5	
MWS-45	12.7	8.1	12.7	5.0	2.5	6.4	
MWS-46	9.8	6.65	9.5	3.85	1.4	6.4	
MWS-46L	9.7	6.45	9.5	4.5	1.4	6.4	

電線固定座 WIRE SADDLE

用途：背膠式，可快速拆卸，固定電線
維修方便，整齊美觀，不佔空間。

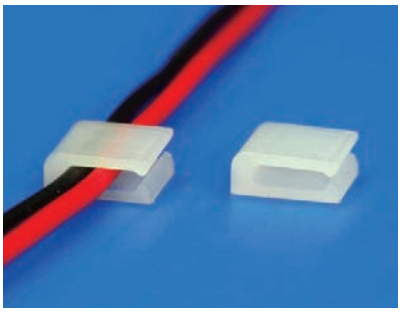


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

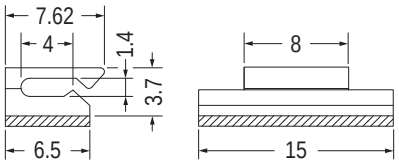


3M DOUBLE ADHESIVE TAPE

Part No.	Package
MWS-22	1000

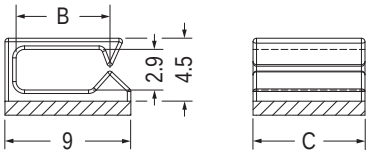


3M DOUBLE ADHESIVE TAPE

Part No.	B	C	Package
MWS-32	6.7	8.0	1000
MWS-42	6.73	4.0	




3M DOUBLE ADHESIVE TAPE
WITH RELEASE TAB 易撕型背膠


Part No.	Package
MWS-52	1000



3M DOUBLE ADHESIVE TAPE


Part No.	Package
MWS-43	1000

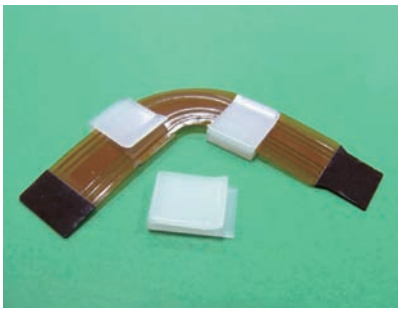




3M DOUBLE ADHESIVE TAPE


Part No.	Package
MWS-33	1000

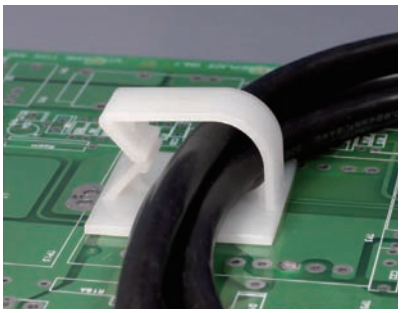

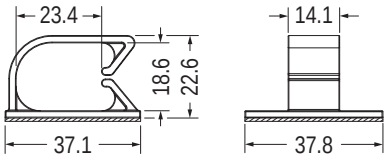

3M DOUBLE ADHESIVE TAPE


Part No.	Package
MWS-54	100



3M DOUBLE ADHESIVE TAPE

Part No.	Package
MWS-49	250




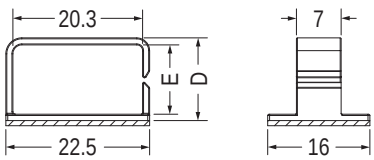

3M DOUBLE ADHESIVE TAPE


NEW


Part No.	D	E	Package
MWS-61	12.95	10.85	500
MWS-62	16.85	14.85	

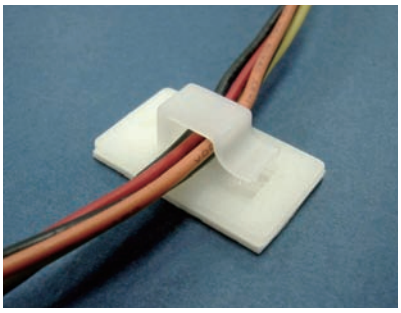

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


用途：可背膠或使用螺絲固定，可快速拆卸，固定電線維修方便，不佔空間。






3M DOUBLE ADHESIVE TAPE


Part No.	Package
WCS-1	500







3M DOUBLE ADHESIVE TAPE

Part No.	Package
WCS-2	500

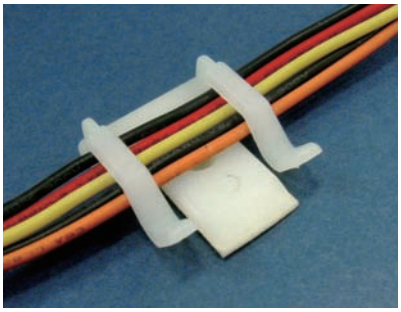


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm






3M DOUBLE ADHESIVE TAPE


Part No.	Package
FCP-25	500






3M DOUBLE ADHESIVE TAPE


Part No.	A	Package
FCP-22	25.2	500
FCP-22S	24.2	

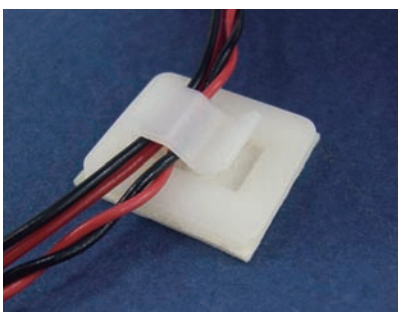

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


用途：背膠式，可快速拆卸，固定電線維修方便，不佔空間。






3M DOUBLE ADHESIVE TAPE

Part No.	Package
WCS-3	500






3M DOUBLE ADHESIVE TAPE


Part No.	Package
WCS-4	500


電線固定座 WIRE CLIP

用途：背膠式，可快速拆卸，固定電線維修方便，不佔空間。

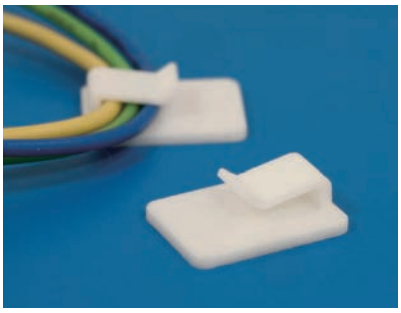


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm






DOUBLE ADHESIVE TAPE
RELEASE TAB 易撕型背膠


Part No.	A	B	C	D	Package
MIBB-10	16.0	9.0	4.5	1.2	500
MIBB-14	16.0	9.0	6.1	3.0	
MIBB-18	14.0	7.6	4.0	0.8	

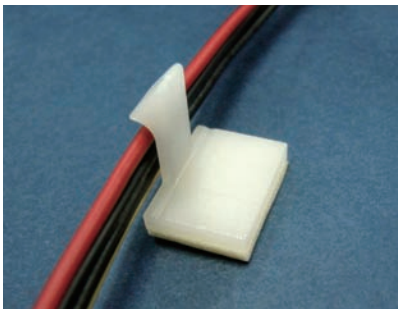

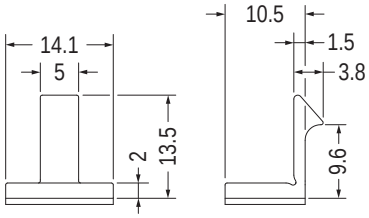


3M DOUBLE ADHESIVE TAPE

Part No.	Package
WCLL-1	500

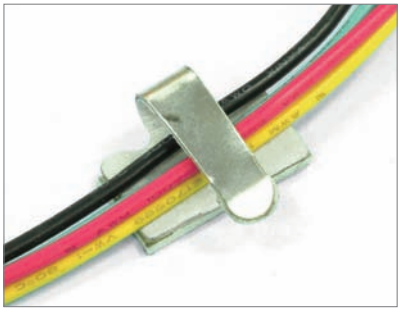


- Material: Steel
- Unit: mm

用途：背膠式，可快速捆紮電線安裝容易，經特殊處理，不刮手，不會刮傷電線。

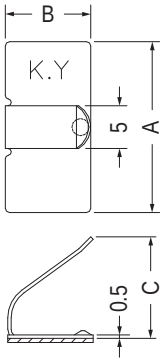

3M DOUBLE ADHESIVE TAPE


Part No.	A	B	C	Package
WCM-1	20.0	10.0	11.6	1000
WCM-2	25.0	15.0	17.1	500

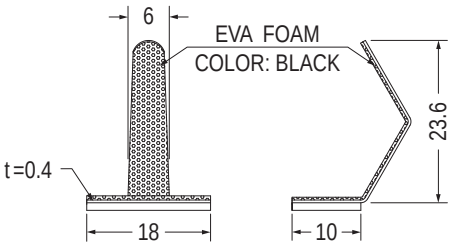

3M DOUBLE ADHESIVE TAPE

- Material: SPTE

Part No.	Package
WCM-5L	1000

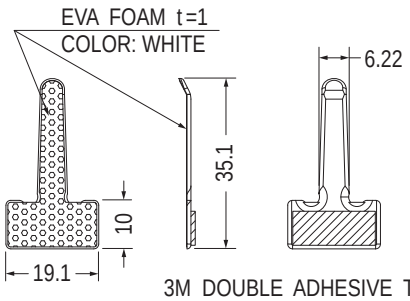


3M DOUBLE ADHESIVE TAPE

- Material: SPTE


Part No.	Package
WCM-9A	1000

電線固定板 WIRE CLIP

用途：背膠式，用於電線或零件之固定。

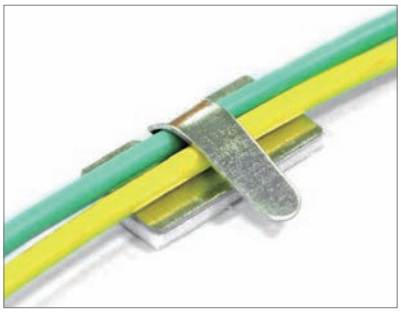


- Material: Aluminum
- Unit: mm

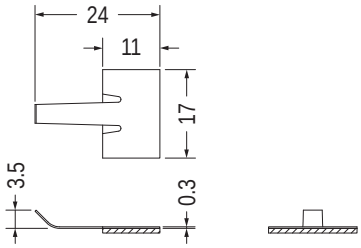


3M DOUBLE ADHESIVE TAPE

Part No.	Package
WCM-11	1000

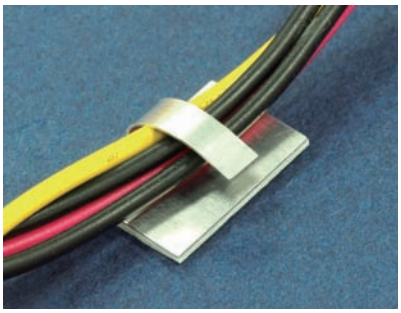



- Material: SPTE
- Unit: mm

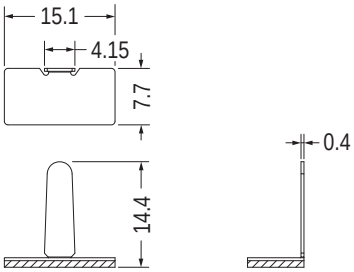

3M DOUBLE ADHESIVE TAPE

Part No.	Package
WCM-10	1000

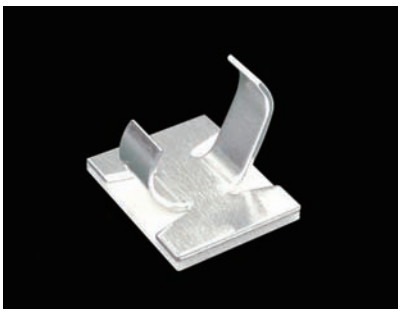




3M DOUBLE ADHESIVE TAPE


Part No.	A	B	C	D	Package
ALACO-01	16.0	10.6	9.4	0.45	500
ALACO-02	19.0	16.0	14.9	0.7	

電線固定座 WIRE SADDLE

用途：背膠式，可快速拆卸，固定電線維修方便，不佔空間。

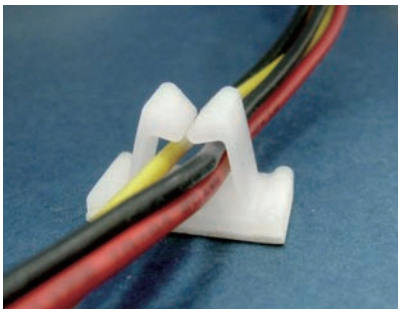

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




3M DOUBLE ADHESIVE TAPE


Part No.	A	B	D	E	Package
WT-2	10.7	6.3	17.8	8.9	1000
WT-2L	10.8	6.5	25.5	12.6	

電線固定座 WIRE SADDLE

用途：背膠式，可快速拆卸，固定電線維修方便，不佔空間。

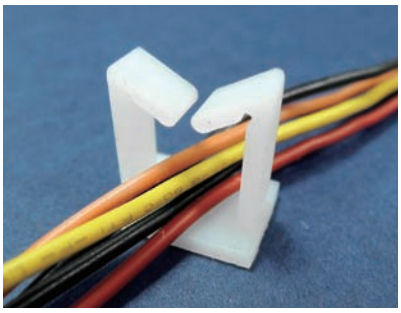


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




3M DOUBLE ADHESIVE TAPE

【 WT-5, WT-8, WT-12 】



3M DOUBLE ADHESIVE TAPE


【 WT-9 】



3M DOUBLE ADHESIVE TAPE


Part No.	A	B	C	D	E	F	Package
WT-1	17.2	12.2	11.5	21.0	19.0	5.3	500
WT-3	16.7	12.16	18.0	27.0	19.0	5.3	
WT-4	26.0	21.2	11.5	21.0	19.0	5.3	
WT-5	17.1	11.5	11.5	15.4	12.5	5.3	
WT-6	17.0	12.17	11.5	17.0	12.5	5.3	
WT-8	17.5	12.7	16.5	20.5	19.0	7.0	
WT-9	15.4	10.5	11.2	21.0	19.0	5.3	
★WT-12	26.0	22.0	11.5	15.5	19.0	5.3	






3M DOUBLE ADHESIVE TAPE

Part No.	A	B	C	D	F	Package
WT-7	28.5	25.1	5.8	9.0	8.0	500
WT-10	19.2	15.45	6.8	10.0	5.0	

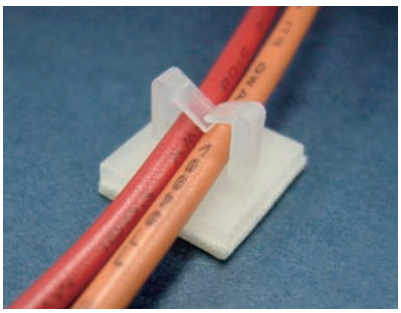


用途：超小型，背膠式，可快速固定及解開電線。

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




3M DOUBLE ADHESIVE TAPE

Part No.	Package
WLL-19	1000




3M DOUBLE ADHESIVE TAPE

Part No.	A	B	C	D	Package
WLL-1	6.5	3.8	4.5	9.6	1000
WLL-1S	6.2	4.23	4.3	9.6	
WLL-13	6.2	4.23	4.3	8.5	
WLL-16	6.5	4.3	4.5	9.5	




3M DOUBLE ADHESIVE TAPE

Part No.	Package
WLL-14	1000




3M DOUBLE ADHESIVE TAPE

Part No.	Package
WLL-20	1000




3M DOUBLE ADHESIVE TAPE

Part No.	Package
WLL-24	1000

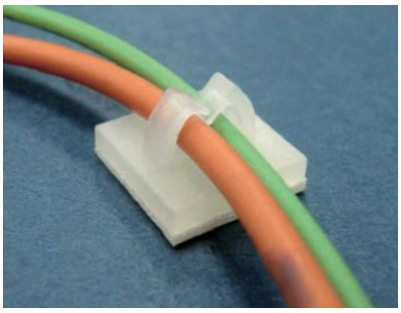


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

用途：超小型，背膠式，可快速固定及解開電線。




3M DOUBLE ADHESIVE TAPE

Part No.	Package
WLL-2	1000




3M DOUBLE ADHESIVE TAPE

Part No.	A	B	Package
WLL-6	7.6	3.94	1000
WLL-6L	9.3	5.64	

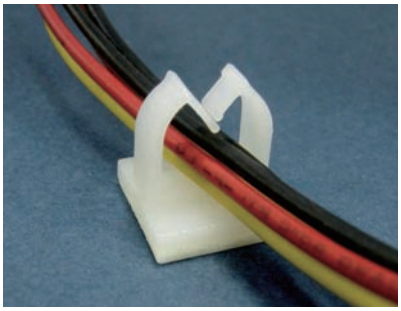


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


用途：背膠式，可快速拆卸，固定電線維修方便，不佔空間。



3M DOUBLE ADHESIVE TAPE


Part No.	A	B	C	H	Package
WLL-3	13.4	9.46	9.3	11.9	1000
WLL-21	9.3	5.5	6.6	9.0	
WLL-22	11.2	7.3	8.0	10.8	
WLL-23	15.0	11.1	9.2	12.0	

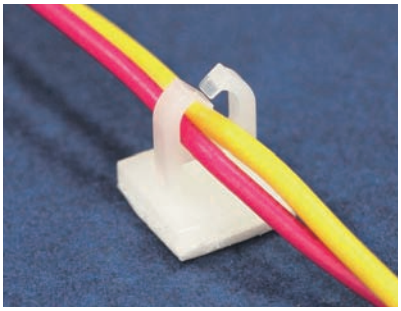




3M DOUBLE ADHESIVE TAPE

Part No.	Package
WLL-17	1000




3M DOUBLE ADHESIVE TAPE

Part No.	Package
★WLL-36	1000



3M DOUBLE ADHESIVE TAPE

Part No.	B	C	D	Package
WLL-9	11.31	7.0	9.0	1000
WLL-18	11.18	6.0	8.0	




3M DOUBLE ADHESIVE TAPE


Part No.	Package
WLL-10	500

電線固定座 WIRE SADDLE

用途：背膠式，可快速拆卸，固定電線維修方便，不佔空間。

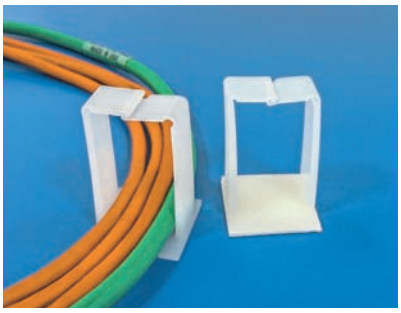


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




3M DOUBLE ADHESIVE TAPE

Part No.	Package
★WLU-6	500




3M DOUBLE ADHESIVE TAPE


Part No.	Package
WLU-4	200



3M DOUBLE ADHESIVE TAPE

Part No.	Package
WLU-1	200

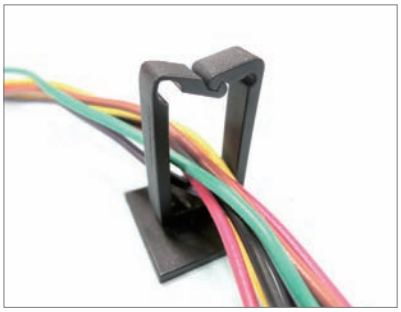




3M DOUBLE ADHESIVE TAPE

Part No.	B	D	F	Package
WLU-2	19.57	21.0	5.3	200
WLU-3	19.6	16.0	9.3	







3M DOUBLE ADHESIVE TAPE

Part No.	Package
WLG-1	250

用途：超小型，背膠式，可快速固定及解開電線。

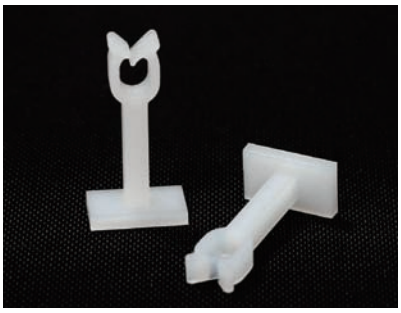


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



3M DOUBLE ADHESIVE TAPE
THICKNESS 0.9

Part No.	Package
WLLD-14	1000






3M DOUBLE ADHESIVE TAPE


Part No.	Package
WLL-27	1000






3M DOUBLE ADHESIVE TAPE

Part No.	Package
MWS-26	1000

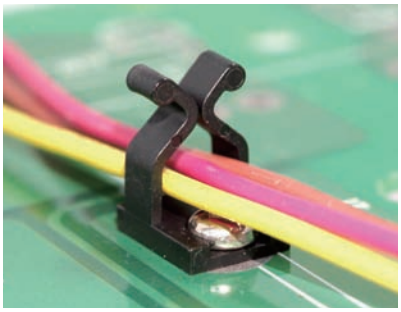

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

用途：背膠式，亦可鎖螺絲，可快速拆卸，固定電線，維修方便，不佔空間。

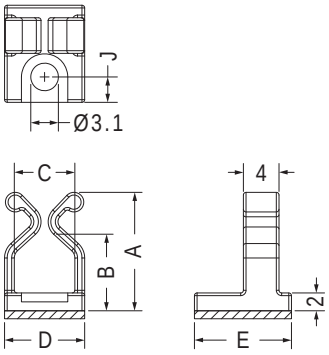


3M DOUBLE ADHESIVE TAPE


Part No.	A	B	C	D	E	J	Package
WLL-32	17.5	9.1	9.0	12.7	12.7	3.5	1000
WLL-33	13.3	6.6	6.8	9.0	10.9	2.85	

電線固定座 WIRE SADDLE

用途：背膠式，亦可鎖螺絲，可快速拆卸，固定電線，維修方便，不佔空間。

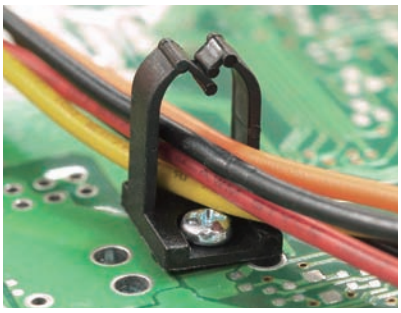


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



3M DOUBLE ADHESIVE TAPE


Part No.	A	B	E	I	J	Package
WLL-8	10.4	7.2	10.9	3.0	2.8	1000
WLL-11	14.0	10.8	10.9	2.7	2.85	
WLL-12	10.4	7.2	10.9	2.6	2.8	
WLL-26	14.0	9.8	11.0	2.7	2.9	
WLL-28	10.4	7.2	12.4	3.2	3.3	






3M DOUBLE ADHESIVE TAPE


Part No.	Package
WLL-29	1000



3M DOUBLE ADHESIVE TAPE


Part No.	Package
WLL-35	1000

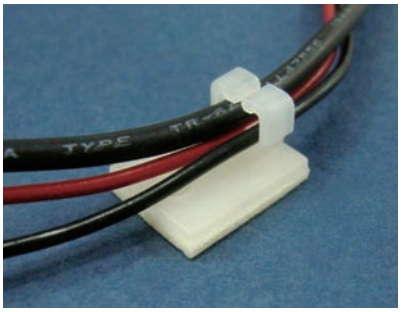




3M DOUBLE ADHESIVE TAPE

Part No.	Package
IMN-1	1000

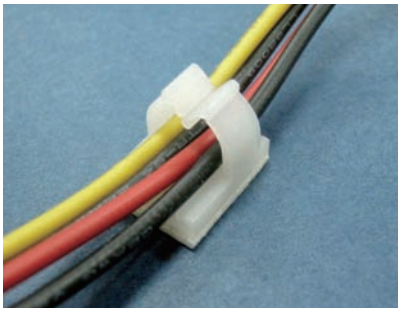




3M DOUBLE ADHESIVE TAPE


Part No.	I	Package
MWS-9	3.0	1000
MWS-9S	1.8	

電線固定座 WIRE SADDLE


用途：使用螺絲固定，可快速拆卸電線，維修方便，不易脫落。

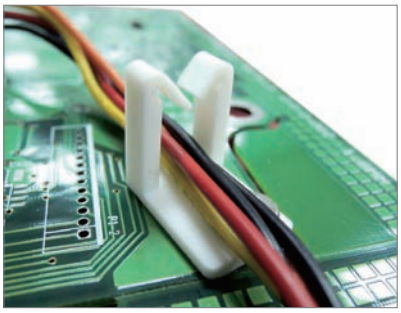


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

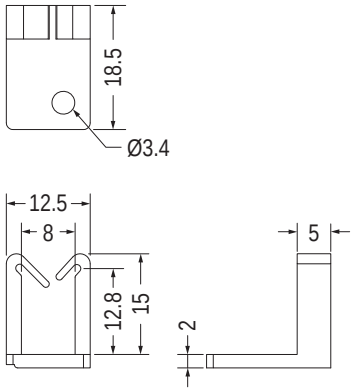



Part No.	Package
CHUB-1	1000

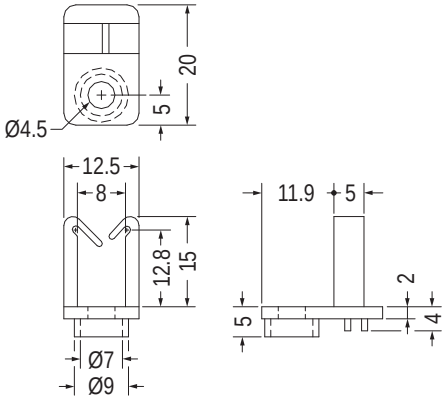


Part No.	Package
CHU-1	100

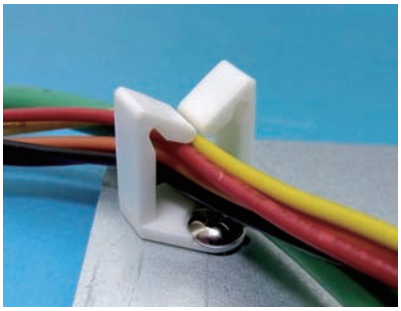









The dimension of mounting hole would depend on customer's screw spec.
孔大小照客戶螺絲增減




Part No.	Package
CHUF-1	1000

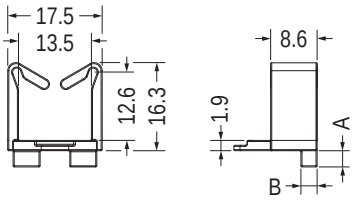



MOUNTING HOLE

【 CHUA-2】

Part No.	A	B	Package
CHUA-1			1000
CHUA-2	3.0	3.0	

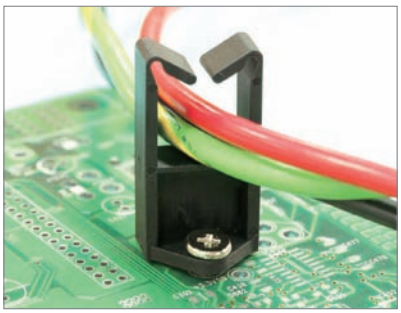






Part No.	Package
CHUC-1	1000

電線固定座 WIRE SADDLE


用途：使用螺絲固定，可快速拆卸電線，維修方便，不易脫落。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

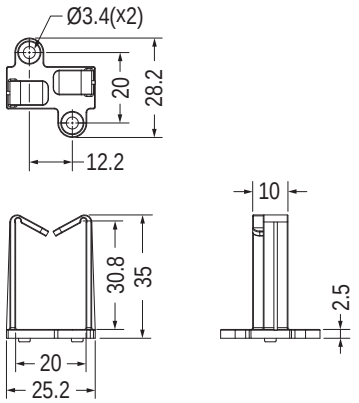



Part No.	Package
CHUL-1	500

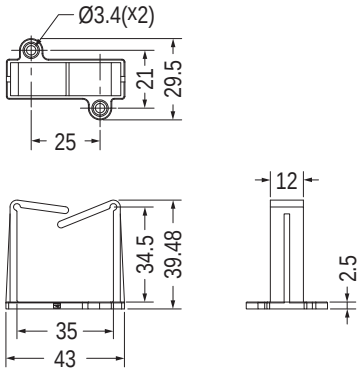

Part No.	Package
CHUL-2	100




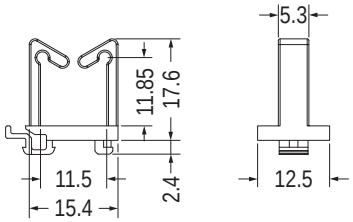




RECOMMEND MOUNTING HOLE THICKNESS 1.0

Part No.	Package
CHWG-1	1000

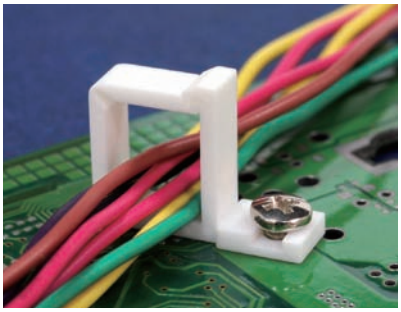


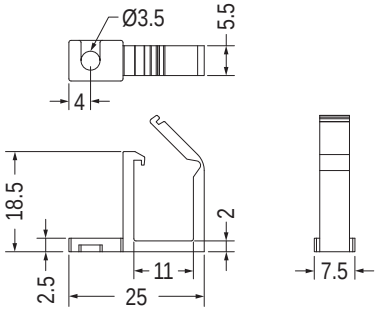


Part No.	Package
CHUE-1	1000


電線固定扣 CABLE CLAMP

用途：配合螺絲，固定電線，整齊美觀。

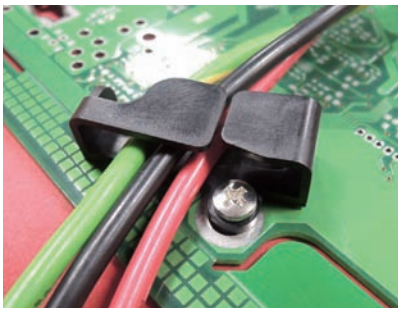



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




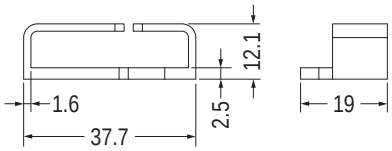

Part No.	Package
CCE-1	1000

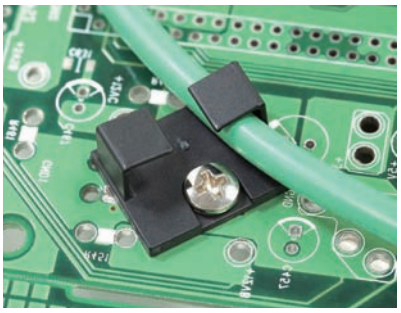



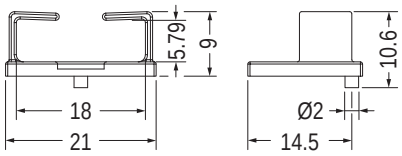


Part No.	Package
WT-11	1000

電線固定座 WIRE SADDLE

用途：背膠式，可快速拆卸，固定電線維修方便，不佔空間。





- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



3M DOUBLE ADHESIVE TAPE

Part No.	Package
WLLT-1	1000

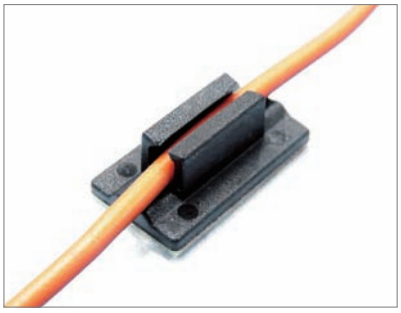

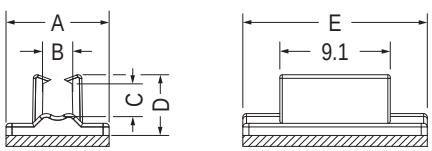

3M DOUBLE ADHESIVE TAPE


Part No.	A	B	C	D	E	Package
WTC-2	8.5	2.5	2.7	5.0	15.2	500
WTC-3	9.0	3.6	4.0	6.5	16.0	

電線固定座 WIRE MOUNT

用途：背膠式，可快速拆卸，固定電線維修方便，不佔空間。




- Material: ABS
- Color: Black
- Unit: mm

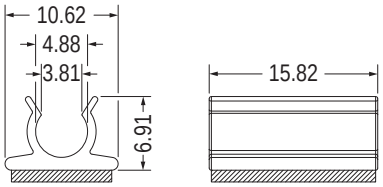


3M DOUBLE ADHESIVE TAPE

Part No.	Package
THVC-1	500

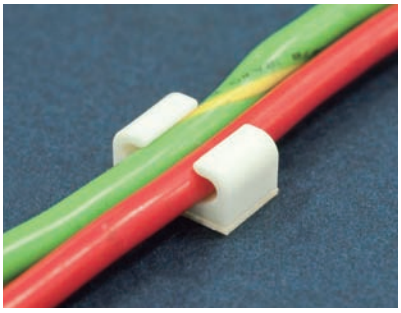



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

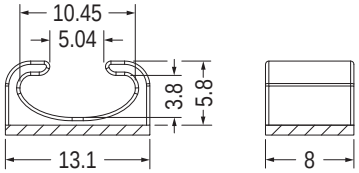

3M DOUBLE ADHESIVE TAPE


Part No.	Package
WLLT-3	1000

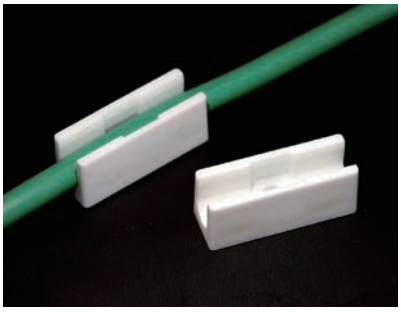

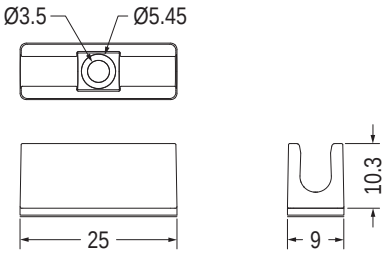


3M DOUBLE ADHESIVE TAPE

Part No.	Package
WLLT-6	1000

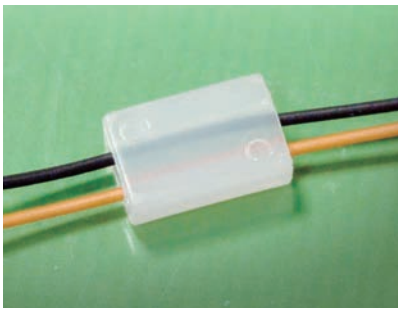

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

用途：背膠式，用於電子、電腦內部電線固定，裝配容易，美觀不脫落。



3M DOUBLE ADHESIVE TAPE


Part No.	Package
MWA-1	1000

電線固定座 CABLE CLAMP

用途：背膠式，可快速拆卸，固定電線維修方便，不佔空間。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

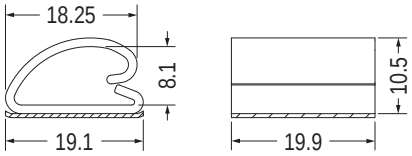


3M DOUBLE ADHESIVE TAPE

Part No.	Package
WUD-1	1000


用途：固定電線於機板上，維修方便，不佔空間。

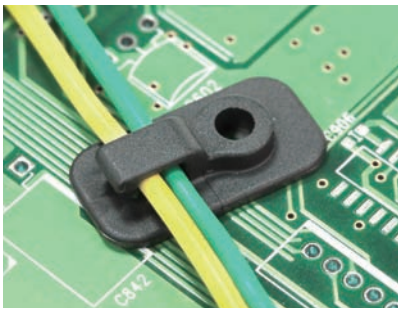

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
MIB-21	1000

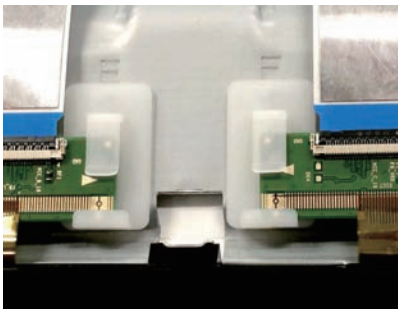


用途：背膠式，可快速拆卸，固定電線維修方便，不佔空間。

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




3M DOUBLE ADHESIVE TAPE

Part No.	A	B	Package
MIB-9	27.0	23.8	1000
MIB-17	31.9	28.7	




DOUBLE ADHESIVE TAPE

Part No.	Package
MIB-10	1000




3M DOUBLE ADHESIVE TAPE

Part No.	Package
MIB-11	1000



3M DOUBLE ADHESIVE TAPE


Part No.	Package
MIB-33	1000



3M DOUBLE ADHESIVE TAPE

Part No.	Package
MIB-34	1000






3M DOUBLE ADHESIVE TAPE


Part No.	Package
MIB-35	1000


電線固定座 MOUNT

用途：固定電線於機板上，維修方便，不佔空間。

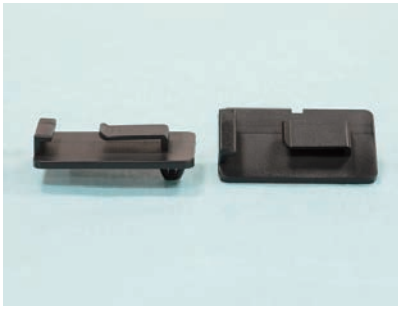


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm






MOUNTING HOLE
THICKNESS 0.5~0.8


Part No.	Package
MIB-15	1000






MOUNTING HOLE
THICKNESS 0.5~0.8


Part No.	Package
MIB-27	1000







MOUNTING HOLE
THICKNESS 0.5~0.8

Part No.	Package
MIB-16	1000
MIB-31	

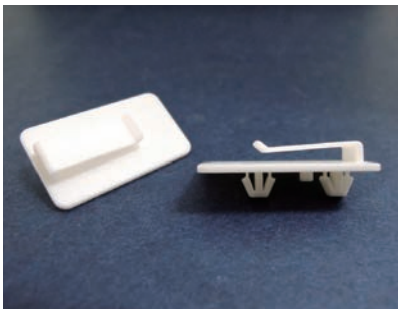







MOUNTING HOLE
THICKNESS 0.6~0.8

Part No.	H	Package
MIB-3	15.0	1000
MIB-14	8.0	








MOUNTING HOLE
THICKNESS: T


Part No.	A	B	C	E	F	G	T	Package
MIB-1	27.0	23.8	2.5	4.2	13.0	2.4	0.6~0.8	1000
MIB-4	31.9	28.7	2.5	9.1	13.0	2.1	0.5~0.8	
MIB-5	46.2	43.0	2.5	23.4	13.0	2.1	0.5~0.8	500
MIB-7	22.5	19.8	1.5	4.2	12.0	2.1	0.5	1000
MIB-8	28.5	25.25	2.55	4.2	13.0	2.4	0.5	
MIB-12	31.9	28.7	1.7	9.1	13.0	2.1	0.5~0.8	
MIB-13	31.9	28.7	1.4	9.1	13.0	2.1	0.5~0.8	
MIB-25	27.0	23.8	2.5	4.2	13.0	2.2	0.6~0.8	


電線固定座 MOUNT

用途：固定電線於機板上，維修方便，不佔空間。

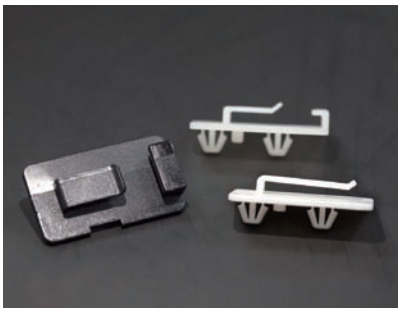


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm






MOUNTING HOLE
THICKNESS: T


Part No.	D	T	Package
MIB-6	3.5	0.6~0.8	1000
MIB-24	2.7	1.0	
MIB-26	3.5	0.6~0.8	






MOUNTING HOLE
THICKNESS 0.8


Part No.	Package
MIB-22	1000






MOUNTING HOLE
THICKNESS 1.0


Part No.	Package
MIB-23	1000






MOUNTING HOLE
THICKNESS 0.6~0.8

Part No.	Package
MIB-2	1000






MOUNTING HOLE
THICKNESS 0.6~0.8


Part No.	Package
MIB-28	1000

電線固定座 WIRE MOUNT

用途：背膠式，可快速拆卸，固定電線維修方便，不佔空間。

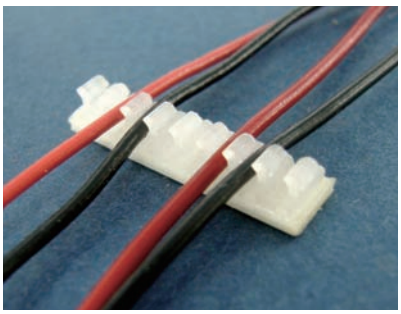


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

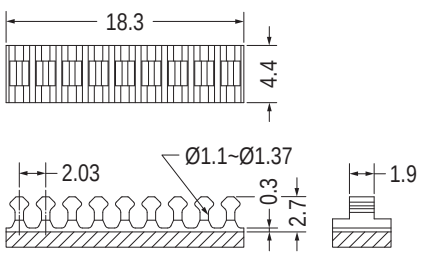

3M DOUBLE ADHESIVE TAPE


Part No.	Package
MU-01-8	500

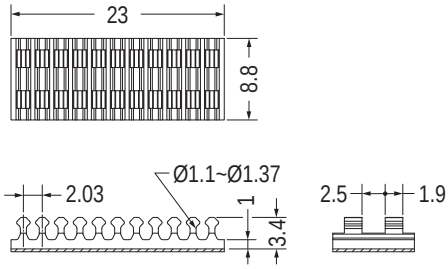


3M DOUBLE ADHESIVE TAPE

Part No.	Package
MU-02-10	200

用途：背膠式，可快速拆卸，固定電線維修方便，不佔空間。

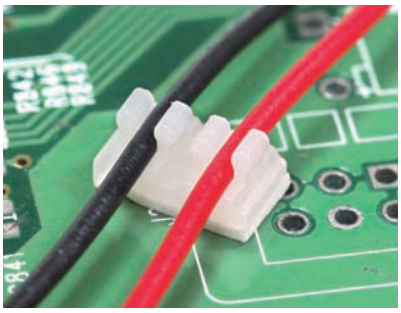


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



3M DOUBLE ADHESIVE TAPE


Part No.	Package
MU-03-3	500

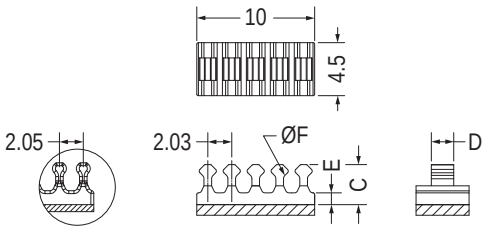

【 MU-03L-4 】


3M DOUBLE ADHESIVE TAPE

Part No.	C	D	E	F	Package
MU-03-4	3.4	1.9	1.0	1.1~1.37	500
MU-03L-4	3.6	2.0	1.2	1.4	

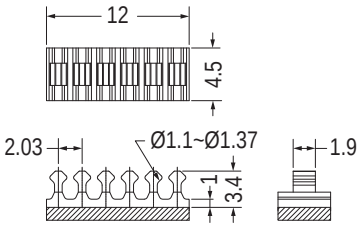


3M DOUBLE ADHESIVE TAPE

Part No.	Package
MU-03-5	500




3M DOUBLE ADHESIVE TAPE

Part No.	Package
MU-05-1	500




3M DOUBLE ADHESIVE TAPE

Part No.	Package
MU-05-2	500




3M DOUBLE ADHESIVE TAPE


Part No.	A	B	C	Package
MU-05-3	8.13	4.5	3.4	500
MU-08-3	8.1	4.4	3.6	



3M DOUBLE ADHESIVE TAPE


Part No.	Package
MU-05-4	500

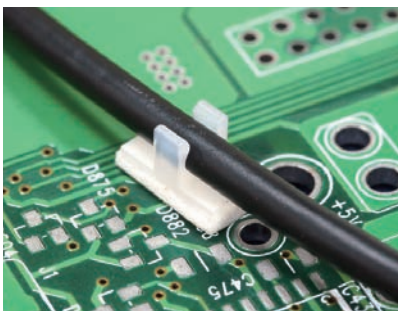




3M DOUBLE ADHESIVE TAPE


Part No.	Package
MU-07-2	1000



3M DOUBLE ADHESIVE TAPE

Part No.	Package
MUC-1	1000

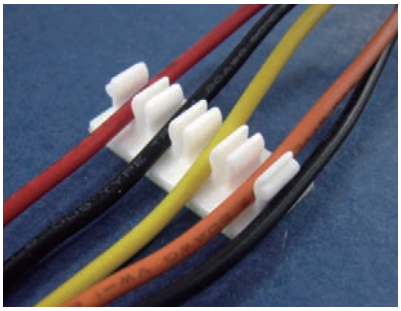

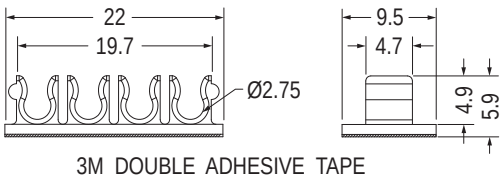

3M DOUBLE ADHESIVE TAPE


Part No.	Package
MUA-1	500


電線固定座 WIRE MOUNT


用途：固定電線於機板上，維修方便，不佔空間。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm






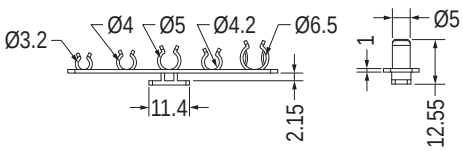




Part No.	Package
JETM-1	100


Part No.	Package
JETM-2	100

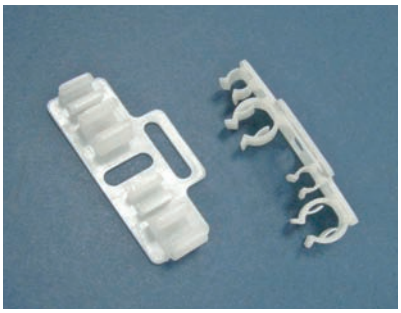


用途：快速拆卸，固定電線，維修方便，不佔空間。


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm










Part No.	Package
CMG-1	500

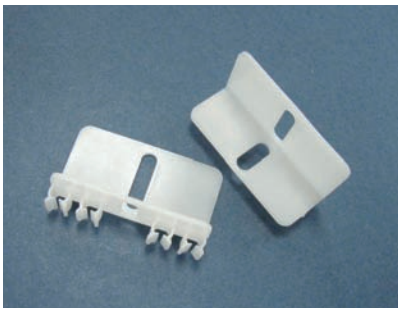









Part No.	Package
CMG-2	500


插頭固定座 MOUNT

用途：可快速拆卸，固定插頭。

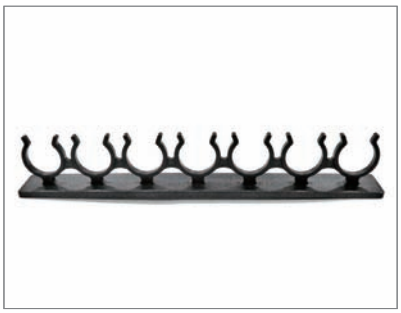

- Material: PP
- Color: Natural/Black
- Unit: mm







Part No.	Package
JETM-7	100

電線固定座 WIRE MOUNT


用途：固定電線於機殼上。

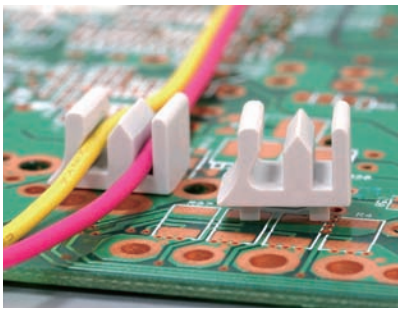

- Material: PC+ABS (UL)
- Flame Class: 94V-2/94V-0
- Color: Gray
- Unit: mm

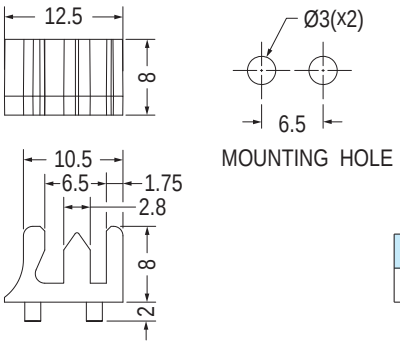


Part No.	Package
CFMG-1	1000

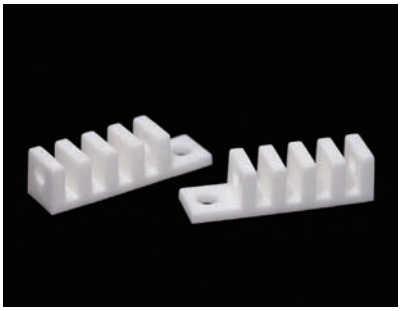


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

用途：固定電線，整齊美觀。




Part No.	Package
AIM25071	1000



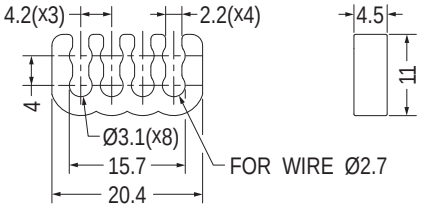


NEW

Part No.	Package
MUD-01-4	1000

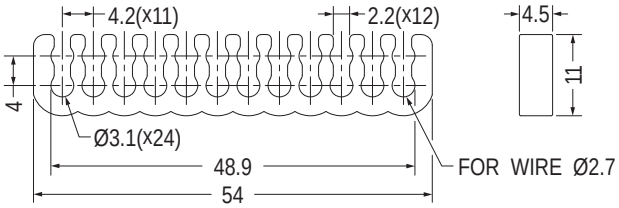

NEW

Part No.	Package
MUD-01-12	500

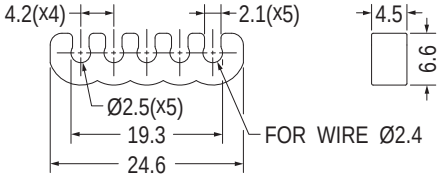


NEW


Part No.	Package
MUD-02-5	1000

電線固定座 WIRE MOUNT


用途：可將電線固定於機板上，電線不易磨損，配線整齊美觀。

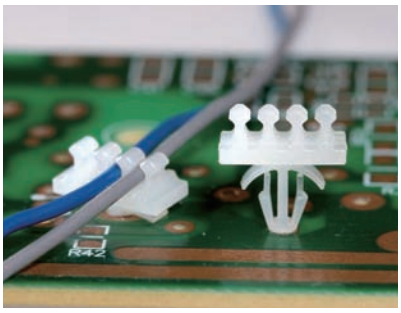


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

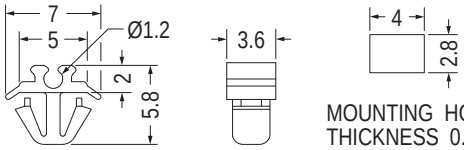


Part No.	Package
MUT-6	1000




Part No.	A	B	C	T	Package
MUT-5	6.3	3.6	1.4	1.0	1000
MUT-5L	6.3	3.6	1.4	1.6	
MUT-13	7.3	3.9	1.8	1.7	




Part No.	Package
MUT-11	1000





Part No.	Package
MUT-2	1000

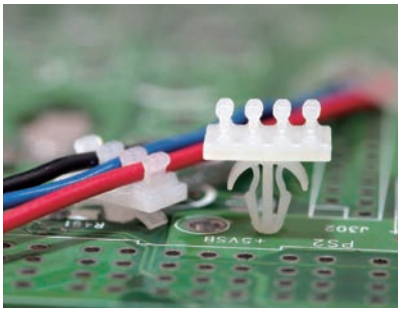

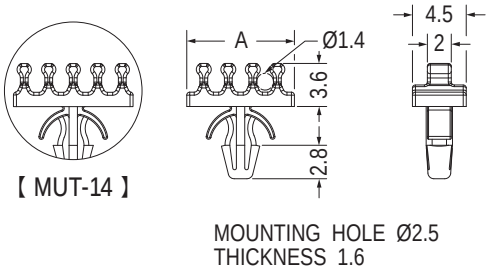

Part No.	A	Package
MUT-11-1	9.0	1000
MUT-14	10.0	

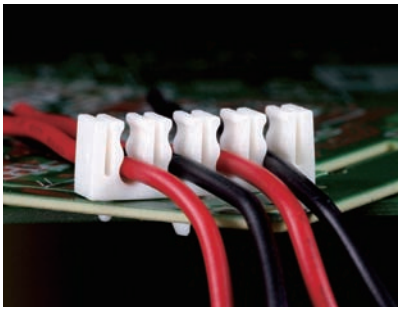


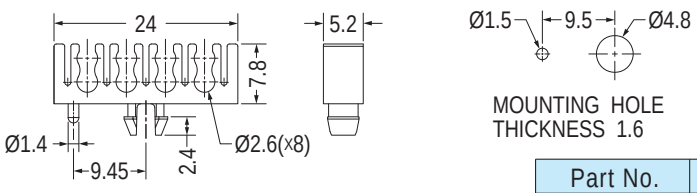


Part No.	Package
★MUT-15	1000


電線固定座 WIRE MOUNT

用途：可將電線固定於機板上，電線不易磨損，配線整齊美觀。

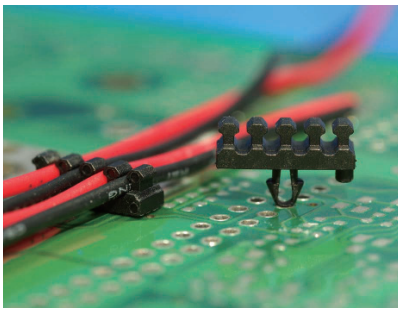

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm







MOUNTING HOLE
THICKNESS 1.2

Part No.	Package
MUT-10	1000




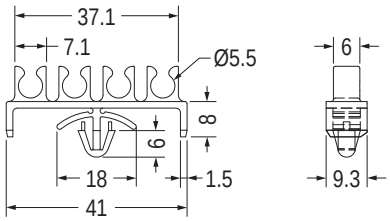




MOUNTING HOLE
THICKNESS 1.6~2.5


Part No.	Package
MUT-3	500

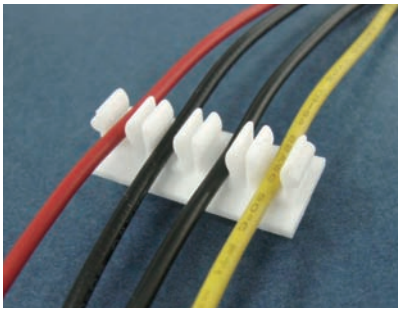


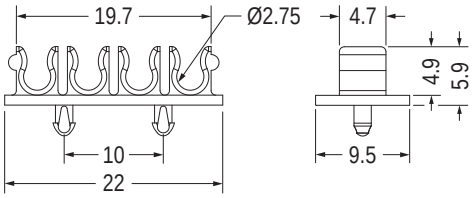


MOUNTING HOLE Ø1.75
THICKNESS 1.6

Part No.	Package
MUT-1	1000

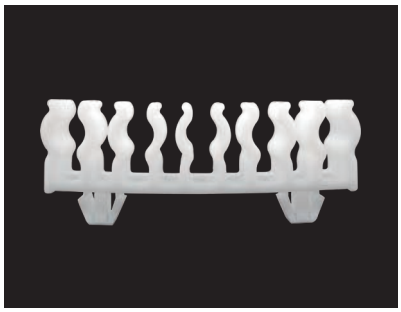


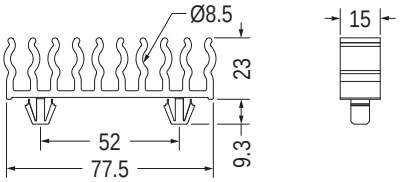





MOUNTING HOLE
THICKNESS 1.5~2.0

Part No.	Package
MUT-4	200

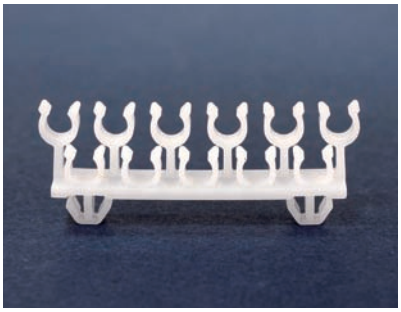

- Material: POM
- Color: Natural
- Unit: mm

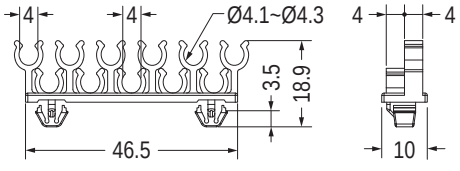




MOUNTING HOLE
THICKNESS 1.0~1.5


Part No.	Package
MUT-8	500

天線束線座 WIRE HOLDER

用途：將天線固定於機殼上，電線不易磨損，配線整齊美觀。

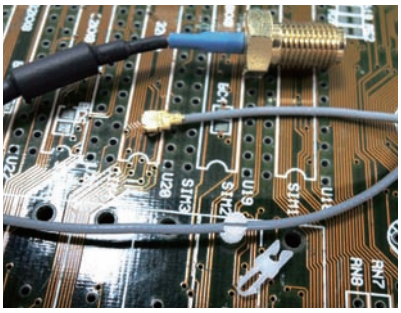


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




MOUNTING HOLE Ø2.0
THICKNESS 0.8

Part No.	Package
★CHB-1	2000




MOUNTING HOLE Ø2.0
THICKNESS 1.6

Part No.	Package
CHBB-1.1	2000




MOUNTING HOLE Ø2.0
THICKNESS: T

Part No.	T	Package
CHBB-2	1.6~2.0	2000
CHBB-2-1	1.0~1.2	
CHBB-2-0.8	0.8	




MOUNTING HOLE Ø2.0
THICKNESS 1.6~2.0

Part No.	Package
CHBB-3.5	2000




MOUNTING HOLE Ø2.0
THICKNESS: T

Part No.	T	Package
CHBB-5	1.6~2.0	2000
CHBB-5-1	1.0~1.2	
CHBB-5-0.8	0.8	




MOUNTING HOLE: ØG
THICKNESS: T


Part No.	A	B	C	D	G	T	Package
CHBB-1.6	2.8	1.7	1.4	0.9	1.8	1.2	2000
CHBB-1.7	2.6	1.8	1.37	1.0	2.0	1.6	



MOUNTING HOLE Ø2.0
THICKNESS: T

Part No.	C	T	Package
CHBB2-2	1.1	1.6~2.0	2000
CHBB2-2-0.8	1.1	0.8	
CHBB2-2-1.2	1.37	1.2	

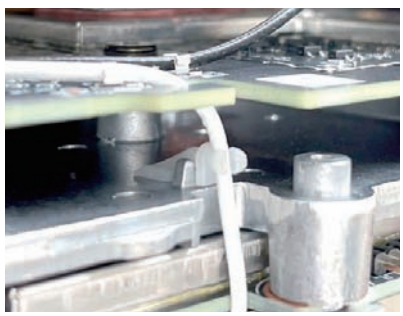




MOUNTING HOLE Ø2.0
THICKNESS 1.6


Part No.	Package
CHBE-1	1000

天線固定座 ANTENNA MOUNT


用途：將天線固定於機殼上，電線不易磨損，配線整齊美觀。

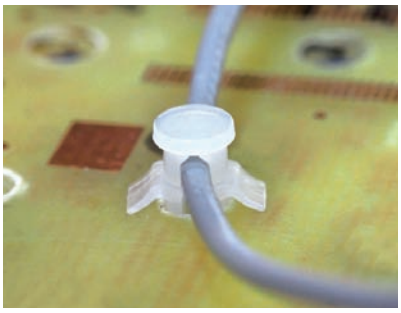

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm
- Patented（專利品）




Part No.	Package
CHBD-1	1000

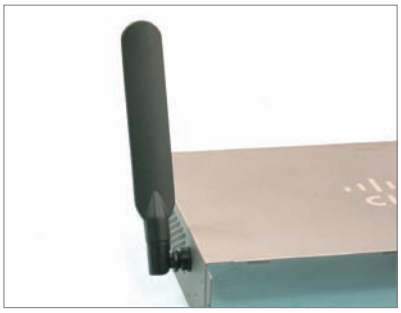


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

用途：用於機頂盒或路由器WI-FI天線之固定。

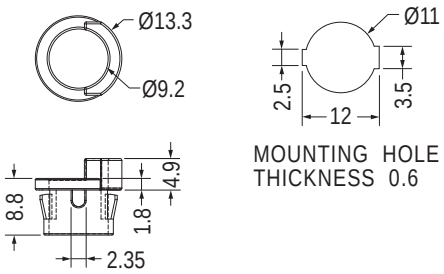


Part No.	Package
ANTCA-1	1000

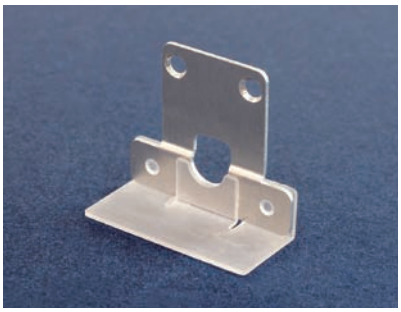

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


用途：用於天線之固定與保護。

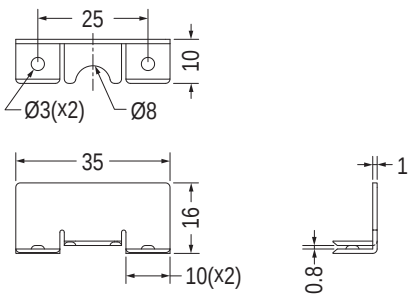


Part No.	Package
ANTCA-2	1000

WI-FI線固定座 WI-FI WIRE MOUNT


用途：用於WI-FI天線固定，避免脫落。

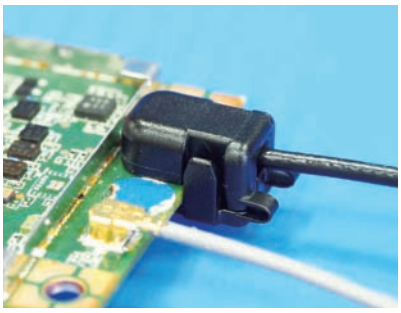


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm
- Patented（專利品）

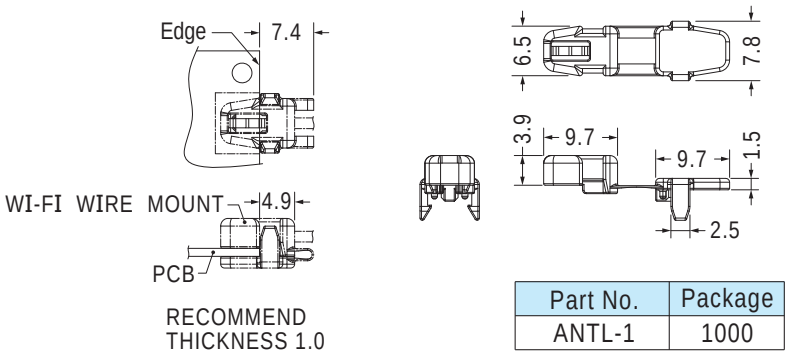


Part No.	Package
ANTL-1	1000

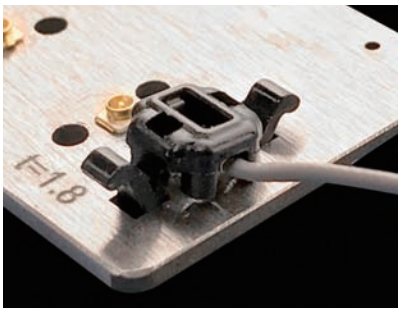

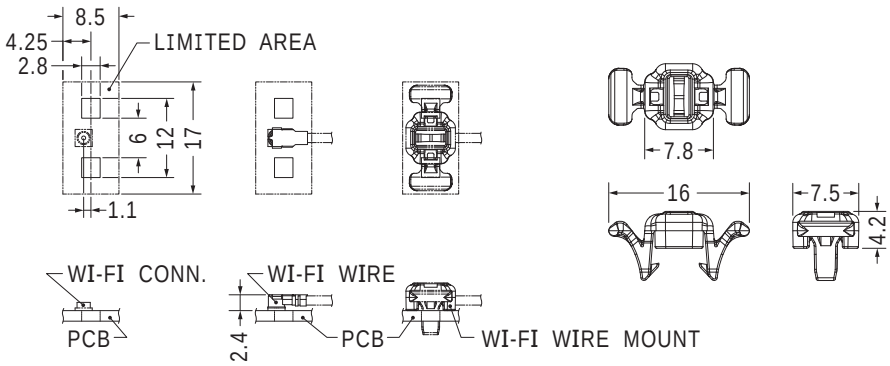

Part No.	Package
ANTL-2	1000




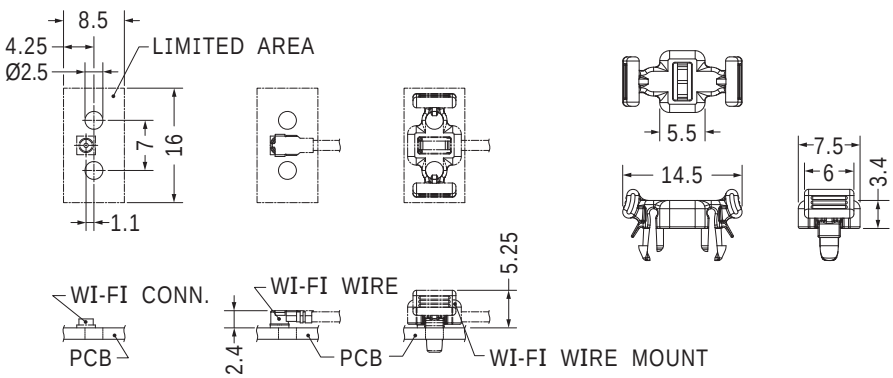


Part No.	Package
ANTL-3	1000


T8固定座 T8 MOUNT


用途：用於輕鋼架之固定網路天線。

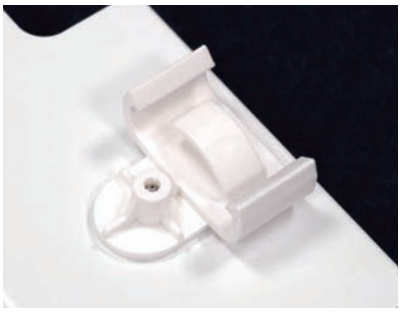


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm











Part No.	A	B	C	Package
EM-550	18.3	8.0	14.1	500
EM-551	28.5	15.0	15.5	
EM-552	42.85	15.0	15.5	250


電線固定座 WIRE CLIP

用途：可背膠或螺絲固定，可快速拆卸電線，維修方便，不佔空間。

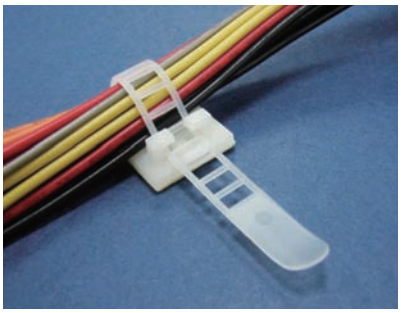



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm







INSTRUCTION DIAGRAM
使用示意圖





INSTRUCTION DIAGRAM
使用示意圖

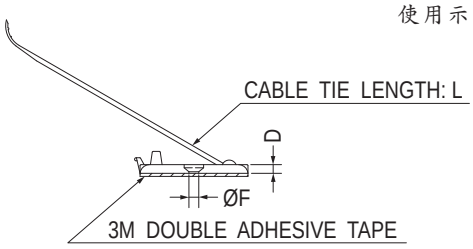


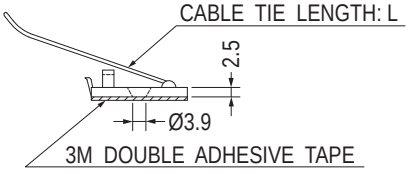

Part No.	C	L	Package
CL-1	14.0	64.2	200
CL-2	22.0	85.0	

Part No.	A	B	C	D	E	F	L	Package
CL-3	35.0	25.0	22.0	2.8	14.0	3.2	88.3	100
CL-4	35.0	25.0	35.0	2.8	14.0	3.2	127.0	
CL-5	30.2	21.0	22.0	2.5	12.0	3.5	91.0	
CL-6	30.5	21.0	32.0	2.5	12.0	3.7	117.0	
CL-7	20.0	15.0	12.0	2.5	5.0	3.4	55.0	200
CL-13	25.4	18.0	7.0	2.5	8.0	3.9	35.0	



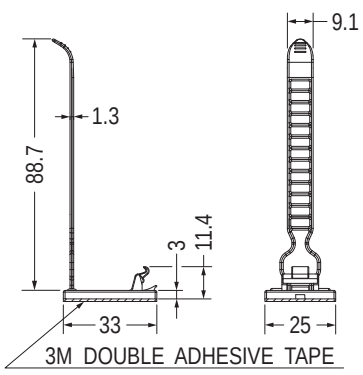


Part No.	Package
CLE-1	200




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

用途：背膠式，可快速拆卸，固定電線，維修方便，整齊美觀。

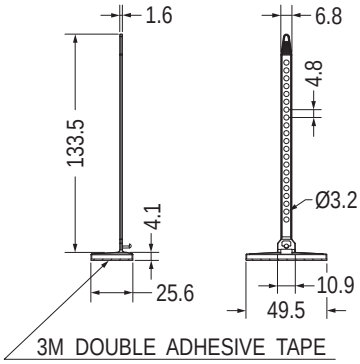


Part No.	Package
CLB-1	200

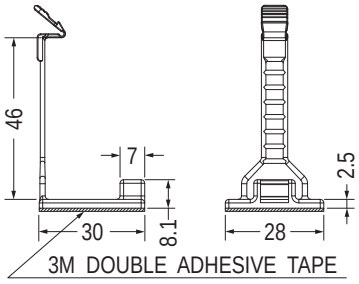


• Patented (專利品)

Part No.	Package
CLE-3	200

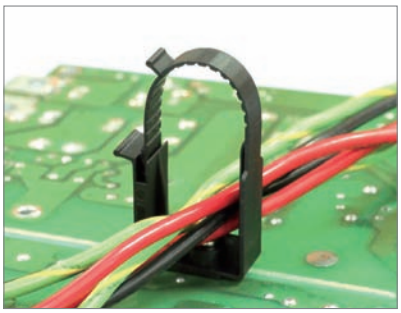


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


用途：固定電線於機板上，維修方便，不佔空間。

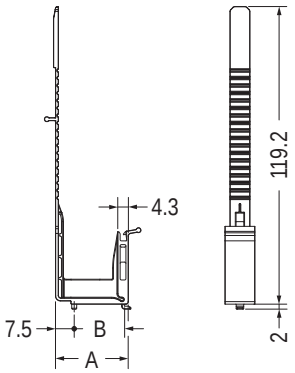

Part No.	A	B	C	Package
CLF-2	29.2	20.2	18.9	100
CLF-3	24.2	15.2	13.9	

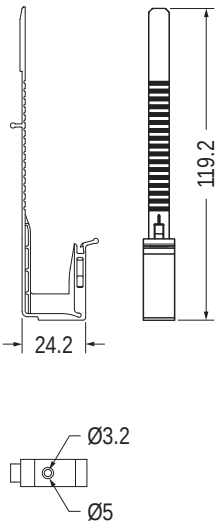



Part No.	Package
CLF-4	100

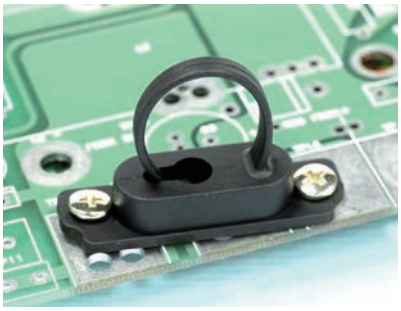


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

用途：配合螺絲，固定電線，整齊美觀。






【 CLG-2 】




Part No.	A	Package
CLG-1	34.0	200
CLG-2	36.0	

電線固定座 WIRE SADDLE

用途：卡槽式，可快速捆紮及解開電線。

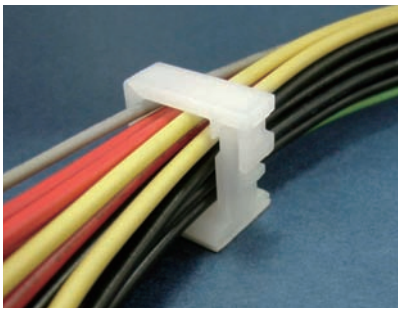


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

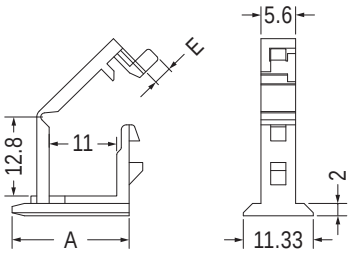

Part No.	A	E	Package
WLF-1	19.05		500
WLF-2	18.95	3.0	




【 WLF-5 】

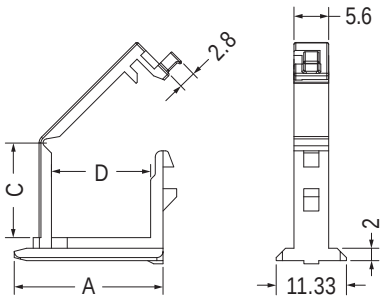


Part No.	A	C	D	Package
WLF-3	24.05	15.3	16.0	500
WLF-4	19.05	12.8	11.05	
WLF-5	19.05	12.8	11.05	

用途：背膠式，可快速捆紮及解開電線。

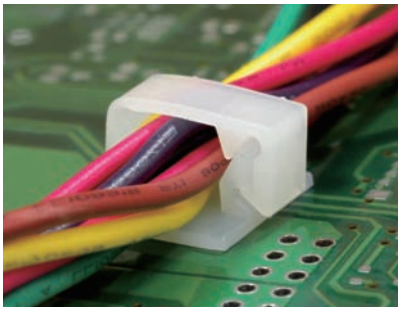



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



3M DOUBLE ADHESIVE TAPE


Part No.	A	B	C	D	Package
WLN-1S	16.0	14.0	5.5	11.1	500
WLN-6	13.0	12.0	6.0	8.1	

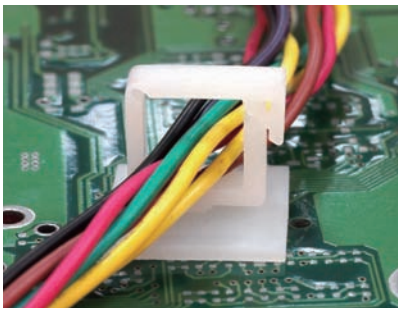




3M DOUBLE ADHESIVE TAPE

Part No.	Package
WLM-1	500



【 WLN-8 】




3M DOUBLE ADHESIVE TAPE


Part No.	A	B	C	D	Package
WLN-1	20.0	20.0	6.7	11.1	500
WLN-2	20.0	20.0	11.9	11.1	
WLN-3	20.0	20.0	15.7	15.7	250
WLN-5	15.0	14.0	8.7	10.75	500
WLN-7	16.0	12.0	8.7	10.75	
WLN-8	21.0	19.0	20.8	10.8	

電線固定座 WIRE SADDLE

用途：可用背膠式或螺絲固定，可快速捆紮及解開電線。

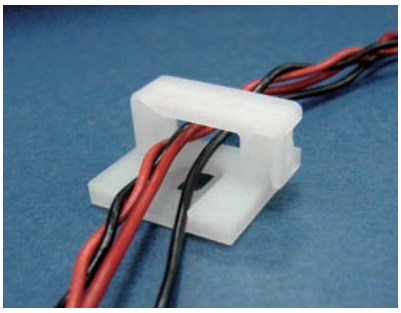



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



3M DOUBLE ADHESIVE TAPE

Part No.	A	C	D	Package
WLT-1	16.0	6.5	10.7	500
WLT-2	21.6	11.7	16.3	

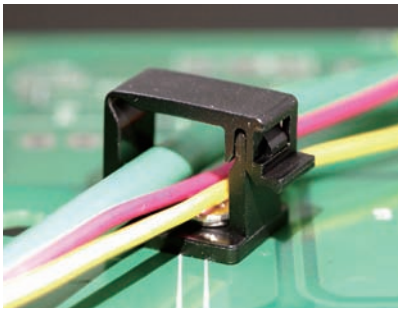




3M DOUBLE ADHESIVE TAPE




【 WLB-2 】

Part No.	Package
WLB-1	500
★WLB-2	

用途：背膠式，可快速捆紮及解開電線。

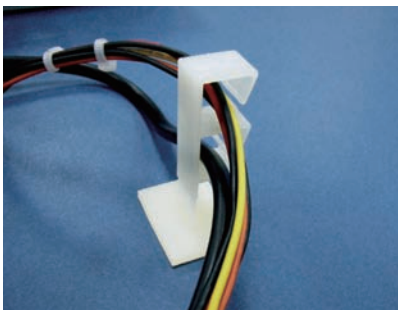

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




3M DOUBLE ADHESIVE TAPE


Part No.	Package
W2LK-1	50

電線固定座 WIRE SADDLE

用途：固定電線於PC板或機板上，維修方便，不佔空間。

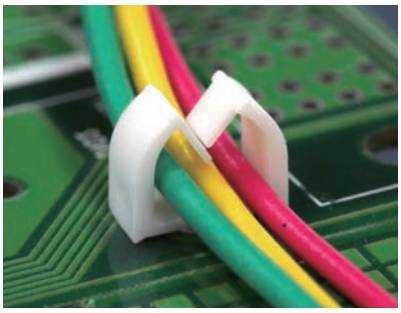


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




MOUNTING HOLE Ø3.0
THICKNESS 0.8~1.6

Part No.	Package
MWS-12	1000




MOUNTING HOLE Ø3.0
THICKNESS 1.6

Part No.	Package
MWS-10	1000




MOUNTING HOLE Ø3.0
THICKNESS 2.4

Part No.	Package
MWS-53	1000




MOUNTING HOLE Ø3.3
THICKNESS 1.0

Part No.	Package
MWS-31	1000




MOUNTING HOLE Ø3.5
THICKNESS 0.8~1.2

Part No.	Package
MWS-19	1000



MOUNTING HOLE: ØG
THICKNESS 1.0~1.6


E217732
UL 1565




MOUNTING HOLE: ØG
THICKNESS: T

Part No.	A	B	D	E	F	G	Package	UL
MWS-6	12.0	8.8	11.0	8.5	2.8	3.5	1000	UL
MWS-7	9.2	6.8	7.6	5.0	2.7	3.0	2000	UL
MWS-41	12.0	9.0	11.5	8.48	2.8	3.5	1000	


Part No.	A	B	D	E	F	G	T	Package
MWS-11	9.0	6.6	7.65	5.15	3.2	3.5	1.6	1000
MWS-11S	9.0	6.6	7.65	5.15	2.8	3.5	1.0	
MWS-15	10.7	8.3	9.6	7.0	3.4	3.0	1.6	
MWS-15S	10.7	8.3	9.6	7.0	2.4	3.0	1.6	

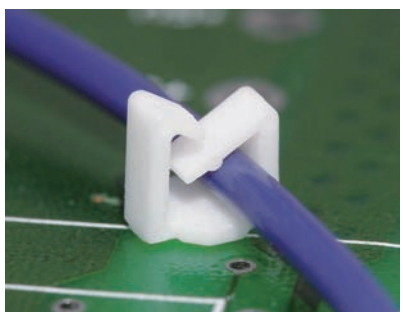



MOUNTING HOLE Ø3.0
THICKNESS 1.6

Part No.	Package
MWS-58	1000



MOUNTING HOLE Ø3.0
THICKNESS 1.6


Part No.	Package
MWS-38	1000

電線固定座 WIRE SADDLE

用途：固定電線於PC板或機板上，維修方便，不佔空間。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



MOUNTING HOLE Ø3.5
THICKNESS: T


Part No.	A	B	T	Package
MWS-13	6.5	4.3	1.0	1000
MWS-13L	7.8	5.6	1.5	
MWS-14	6.5	4.3	4.0	






MOUNTING HOLE Ø3.5
THICKNESS: T


Part No.	B	T	Package
MWS-20	4.5	4.0	1000
MWS-25	4.3	2.5	

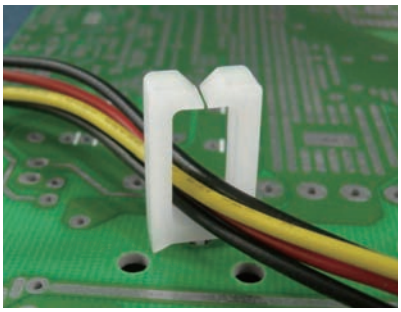




MOUNTING HOLE: ØG
THICKNESS: T

Part No.	F	G	T	Package
CHY-1	4.8	4.8	1.8	1000
CHY-1S	2.5	3.0	1.6	

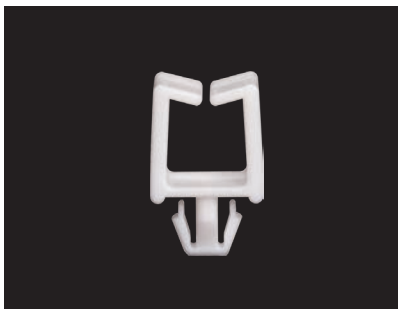




MOUNTING HOLE
THICKNESS 1.0~1.2

NEW


Part No.	Package
MWS-60	1000

電線固定座 WIRE SADDLE

用途：固定電線於PC板或機板上，維修方便，不佔空間。

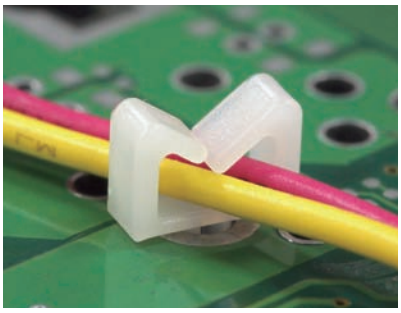


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




MOUNTING HOLE Ø1.75
THICKNESS 1.6

Part No.	Package
MWS-16	2000




MOUNTING HOLE Ø1.75
THICKNESS 2.2

Part No.	Package
MWS-55	2000




MOUNTING HOLE Ø2.0
THICKNESS: T

Part No.	T	Package
MWS-59	1.6	2000
MWS-59S	0.8	
MWS-59L	2.0	




MOUNTING HOLE Ø2.0
THICKNESS: T

Part No.	T	Package
MWS-8	1.6~1.8	2000
MWS-8S	1.2	




MOUNTING HOLE Ø2.8
THICKNESS 2.0


Part No.	Package
MWS-24	2000



MOUNTING HOLE Ø3.0
THICKNESS 1.2~1.6


Part No.	Package
MWS-1	2000

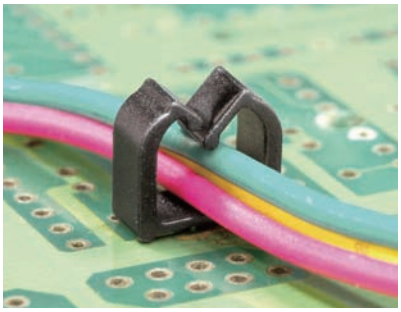



MOUNTING HOLE Ø1.75
THICKNESS 1.6

Part No.	A	B	D	E	Package
MWS-17	7.0	5.0	6.4	4.6	2000
MWS-44	8.5	6.5	7.0	5.2	



MOUNTING HOLE Ø3.0
THICKNESS 1.1


Part No.	Package
MWS-50	200

電線固定座 WIRE SADDLE

用途：固定電線於PC板或機板上，維修方便，不佔空間。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm







MOUNTING HOLE
THICKNESS 1.5

NEW


Part No.	Package
MWSD-2	1000

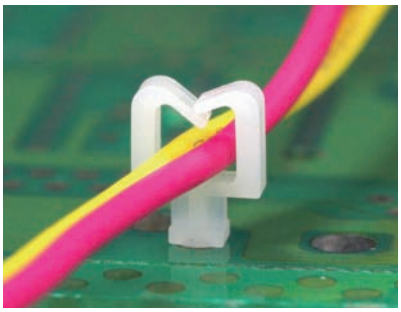




MOUNTING HOLE Ø2.0
THICKNESS 1.6


Part No.	Package
MWS-47	1000



MOUNTING HOLE Ø2.0
THICKNESS 1.6


Part No.	Package
★MWS-63	2000

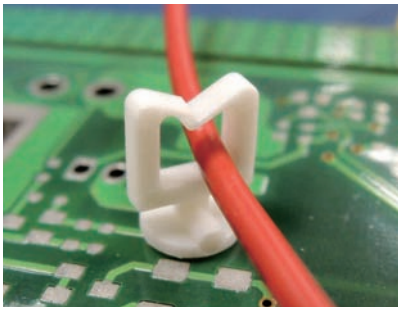




MOUNTING HOLE: ØG
THICKNESS: T

Part No.	D	E	G	H	T	Package
MWSD-3	6.4	4.26	1.8~1.9	3.73	2.4	1000
MWSD-4	7.3	5.1	1.78	6.4	1.57	

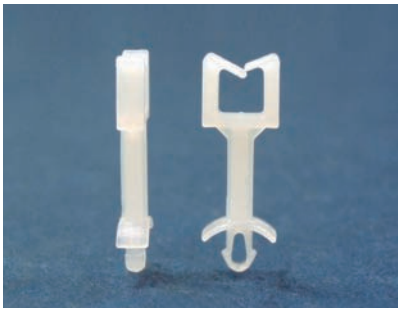



MOUNTING HOLE Ø2.0
THICKNESS 1.6~1.8


Part No.	H	Package
MWSE-1	9.0	1000
MWSE-2	7.0	
MWSE-4	15.0	

電線束線座 WIRE HOLDER

用途：固定電線於機板上，維修方便，不佔空間。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



MOUNTING HOLE Ø4.0
THICKNESS 2.5


Part No.	Package
THCC-1	500

電線固定座 WIRE SADDLE

用途：固定電線於PC板或機板上，維修方便，不佔空間。





- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



MOUNTING HOLE Ø4.0
THICKNESS 2.2


Part No.	Package
MWS-28	2000

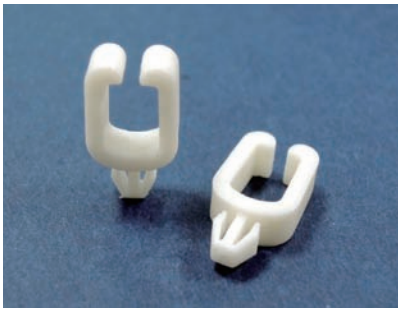




MOUNTING HOLE
THICKNESS 0.6~1.2

Part No.	Package
MWS-40	2000

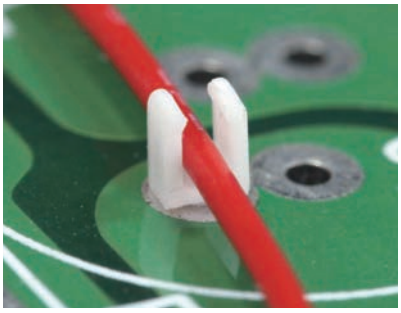




MOUNTING HOLE Ø1.0
THICKNESS 1.0


Part No.	Package
MWSC-7	1000

電線固定座 WIRE SADDLE

用途：固定電線於PC板或機板上，維修方便，不佔空間。

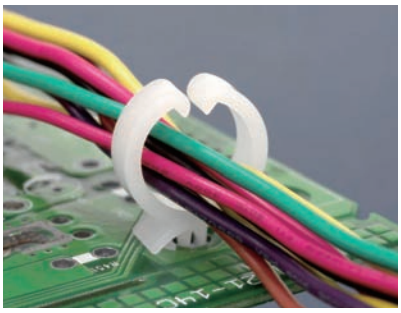



- Material: Nylon 6 (UL)
- Flame Class: 94V-2
- Color: Natural
- Unit: mm



MOUNTING HOLE: ØG
THICKNESS 0.8~2.2


Part No.	G	Package
CHBA-1	3.5	1000
CHBA-2	3.2	

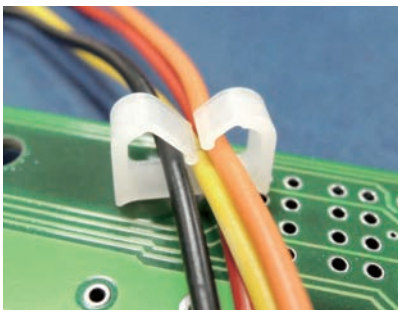




MOUNTING HOLE Ø3.0
THICKNESS: T


Part No.	T	Package
MWSC-2	1.5	1000
MWSC-2L	2.0	

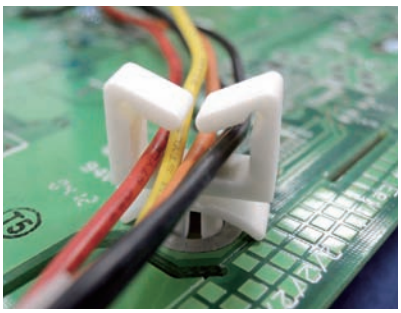



MOUNTING HOLE: ØG
THICKNESS 0.8~1.6


Part No.	G	Package
CHAE-1	4.8	1000
CHAE-1S	4.4	



MOUNTING HOLE Ø4.4
THICKNESS 2.0~3.0


Part No.	Package
CHAV-1	1000

電線固定座 WIRE SADDLE

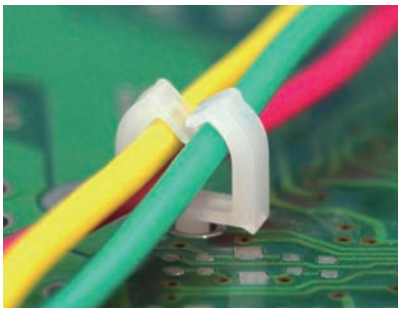


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

用途：固定電線於PC板或機板上，維修方便，不佔空間。




MOUNTING HOLE Ø3.0
THICKNESS 1.2~1.6

Part No.	Package
MWSC-1	1000




MOUNTING HOLE Ø1.7
THICKNESS: T

Part No.	D	E	T	Package
MWSC-3	6.3	4.46	2.4	1000
MWSC-4	4.0	2.2	2.4	
MWSC-5	4.0	2.2	1.6	
MWSC-6	6.0	4.2	1.6	

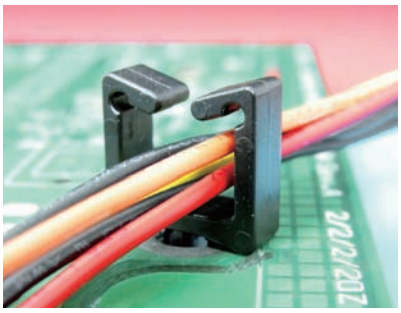


- Material: PC+ABS (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

用途：固定電線於PC板或機板上，維修方便，不佔空間。




MOUNTING HOLE Ø4.8
THICKNESS 1.1

Part No.	Package
CHAW-1	1000

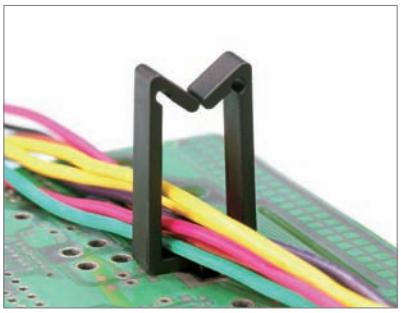


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

用途：可快速固定電線，安裝容易。




MOUNTING HOLE
THICKNESS 1.6

Part No.	Package
CHAB-5	1000



MOUNTING HOLE
THICKNESS 1.0

Part No.	D	E	Package
CHAB-1	12.0	7.2	1000
CHAB-2	17.0	12.2	500
CHAB-3	26.0	21.2	

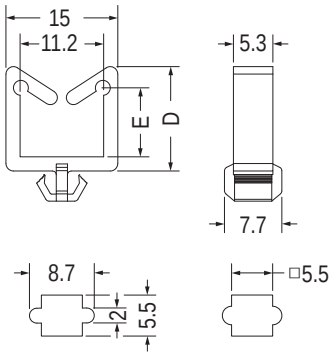


MOUNTING HOLE
THICKNESS 0.5~0.8
【 CHAB-4 】

MOUNTING HOLE
THICKNESS 0.8~1.0
【 CHAB-1L 】


Part No.	D	E	Package
CHAB-1L	12.0	7.2	1000
CHAB-4	14.0	9.3	


電線固定座 WIRE SADDLE

用途：固定電線於PC板或機板上，維修方便，不佔空間。

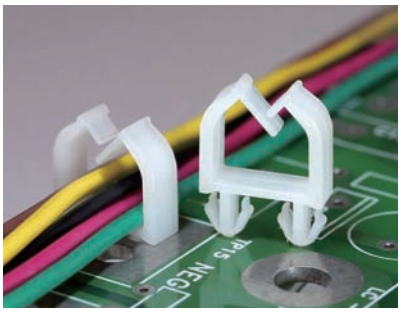


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm






MOUNTING HOLE
THICKNESS 1.6


Part No.	Package
MWSG-1	1000

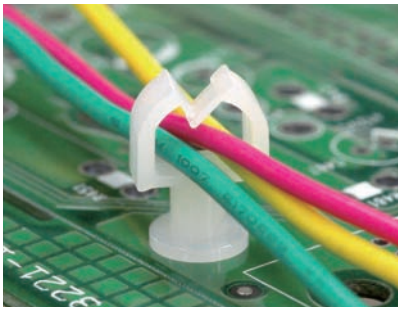




MOUNTING HOLE Ø3.8
THICKNESS 1.6

Part No.	Package
MWSA-2	1000




MOUNTING HOLE Ø3.8
THICKNESS 1.7

Part No.	Package
MWSA-17.2	1000




MOUNTING HOLE Ø3.0
THICKNESS 1.0~1.6

Part No.	Package
MWSL-6	1000

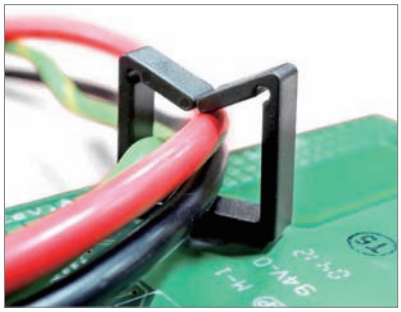


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

用途：固定電線於木板或機殼上，維修方便，不佔空間。



MOUNTING HOLE Ø7.9
THICKNESS 6.4




MOUNTING HOLE Ø5.3
THICKNESS 6.4

Part No.	A	C	D	E	F	Package
WSBH-7	15.1	11.0	13.0	6.7	8.5	1000
WSBH-12	15.5	11.1	18.3	12.3	8.5	
WSBH-19	15.2	11.1	27.2	21.0	8.7	
WSBH-29	15.1	11.0	35.0	28.7	8.5	


Part No.	Package
WSBH-13	1000

電線固定座 WIRE SADDLE

用途：固定電線於PC板或機板上，維修方便，不佔空間。

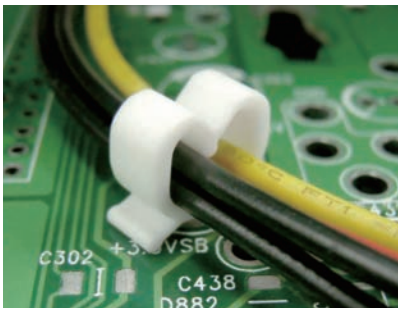


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




MOUNTING HOLE Ø3.0
THICKNESS 0.6~1.6

Part No.	A	B	F	H	Package
MWC-2	9.7	7.2	2.2	4.5	2000
★MWC-2S	10.0	7.0	2.2	4.5	
MWC-6	9.7	7.2	2.8	5.1	

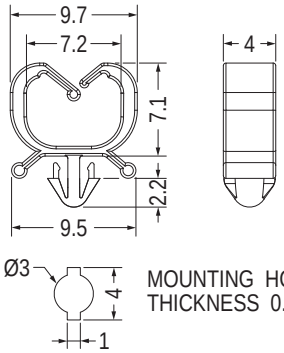


MOUNTING HOLE
THICKNESS 0.6~0.8


Part No.	Package
★MWC-4	2000



MOUNTING HOLE: ØG
THICKNESS 0.6~1.6


Part No.	F	G	H	Package
MWC-3	2.2	3.0	4.5	2000
MWC-10	3.0	3.5	5.3	

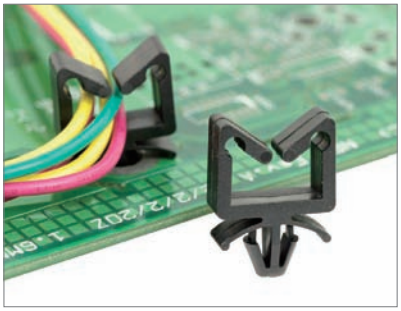




【 CHA-3L 】 【 CHA-5 】 【 CHA-6 】 【 CHA-9 】

E217732
UL 1565




MOUNTING HOLE: ØG
THICKNESS: T

Part No.	A	B	C	D	E	G	T	Package	UL
CHA-1	15.0	11.2	5.3	12.0	7.2	4.8~5.0	0.8~2.0	1000	UL
CHA-1L	15.0	11.2	5.3	12.0	7.2	4.8~5.0	2.2		
CHA-2	15.0	11.2	5.3	17.0	12.2	4.8~5.0	0.8~2.0	500	UL
CHA-3	15.0	11.2	5.3	26.0	21.2	4.8~5.0	0.8~2.0		UL
CHA-3L	15.0	11.2	5.3	26.0	21.2	4.8~5.0	3.0		
CHA-4	15.0	11.2	5.3	34.0	29.2	4.8~5.0	0.8~2.0		UL
CHA-5	15.1	11.1	5.6	17.8	11.65	4.75	1.6~3.2		
CHA-6	15.0	11.2	5.3	17.0	12.2	4.8	0.8~2.2		
CHA-6L	15.0	11.2	5.3	17.0	12.2	4.8	0.8~2.5		
CHA-9	15.0	10.6	5.2	20.0	15.3	4.8	0.8~2.2		
CHA-11	15.0	11.2	5.3	12.0	7.2	5.4	0.8~2.0	1000	




MOUNTING HOLE Ø3.0
THICKNESS 1.6~2.3


Part No.	Package
CHA-8	500



MOUNTING HOLE Ø4.75
THICKNESS 1.6

Part No.	Package
CHA-13	1000







MOUNTING HOLE
THICKNESS 1.6

Part No.	Package
CHA-15	500

用途：固定電線於PC板或機板上，維修方便，不佔空間。

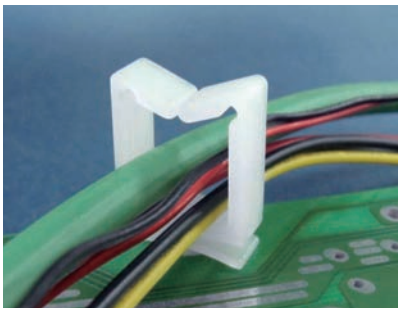



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



MOUNTING HOLE: ØG
THICKNESS: T


Part No.	A	B	C	D	E	F	G	T	Package
CHP-1	19.7	15.7	5.4	18.2	14.0	5.7	4.8~5.0	1.2~2.1	500
CHP-2	15.0	11.0	5.5	17.0	12.6	5.7	4.8~5.0	1.2~2.1	
CHP-3	18.5	14.6	5.5	17.0	12.55	6.1	5.0	1.2~2.0	

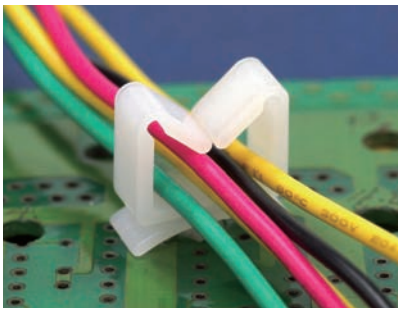




MOUNTING HOLE Ø3.4~Ø3.5
THICKNESS 2.5

Part No.	Package
CHPB-1	1000

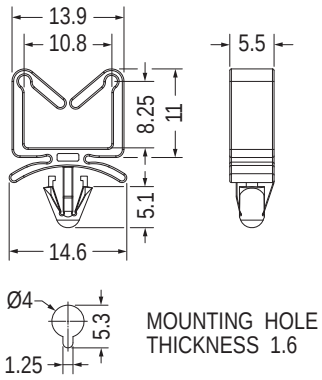


MOUNTING HOLE
THICKNESS 1.6

Part No.	Package
CHA-10	1000




MOUNTING HOLE Ø4.0
THICKNESS 0.8~2.0

Part No.	Package
MWS-34	500




MOUNTING HOLE Ø4.7~Ø4.9
THICKNESS 0.8~2.0

Part No.	Package
CHA-14	500




MOUNTING HOLE Ø4.8
THICKNESS 0.8~1.6

Part No.	Package
CHAD-1	1000




MOUNTING HOLE Ø4.8
THICKNESS 1.0~2.5

Part No.	Package
CHR-11	500



MOUNTING HOLE Ø5.0
THICKNESS 0.8~1.6

Part No.	Package
CHX-1	1000




MOUNTING HOLE Ø5.0
THICKNESS 2.4~3.0


Part No.	Package
CHPA-1	1000

電線固定座 WIRE SADDLE

用途：固定電線於PC板或機板上，維修方便，不佔空間。

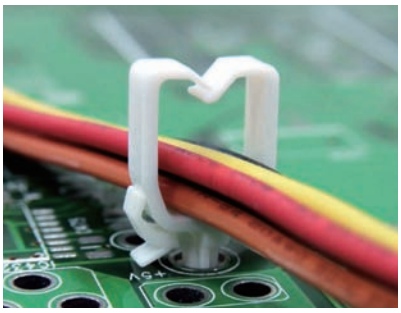


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



MOUNTING HOLE Ø3.5
THICKNESS 0.6~1.6


Part No.	Package
MWSB-1	2000






MOUNTING HOLE Ø6.3~Ø7.0
THICKNESS 0.6~3.0


Part No.	Package
MWCA-1	1000

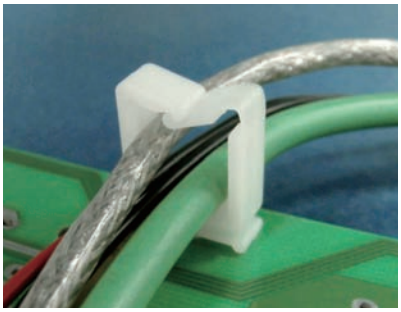



MOUNTING HOLE Ø4.8~Ø5.0
THICKNESS 0.5~2.0

Part No.	D	E	Package
CH-10	15.9	11.2	500
CH-19	25.2	20.5	




MOUNTING HOLE Ø4.8
THICKNESS 0.8~1.6


Part No.	D	E	Package
CH-11	15.9	11.1	500
CH-13	20.6	15.8	

電線固定座 WIRE SADDLE

用途：固定電線於PC板或機板上，維修方便，不佔空間。

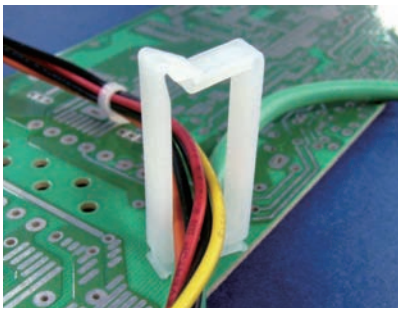


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




MOUNTING HOLE Ø4.8
THICKNESS 0.8~1.8


Part No.	Package
CH-14	500



MOUNTING HOLE Ø4.8
THICKNESS: T


Part No.	T	Package
CH-15	0.5~2.3	500
CH-15L	1.5~3.0	

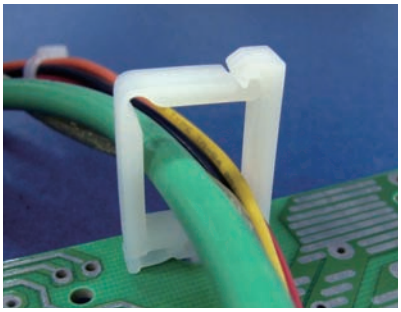





MOUNTING HOLE Ø4.8
THICKNESS 0.5~2.0

Part No.	A	B	C	D	E	Package
CHF-1	16.4	12.0	4.6	21.5	17.4	500
CHF-2	14.4	10.4	4.6	16.5	12.4	
CHF-3	18.4	14.0	5.0	24.0	20.0	

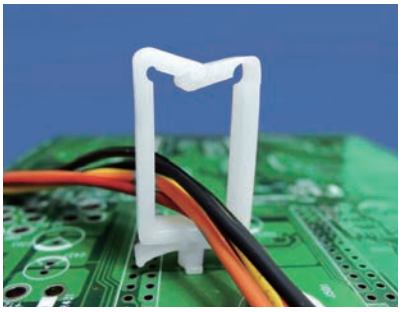






MOUNTING HOLE
THICKNESS 0.8~1.6


Part No.	E	P	Package
CHZC-1	4.8	13.0	500
CHZC-2	9.8	18.8	
CHZC-3	19.0	27.2	
CHZC-4	26.8	35.1	

電線固定座 WIRE SADDLE

用途：固定電線於PC板或機板上，維修方便，不佔空間。

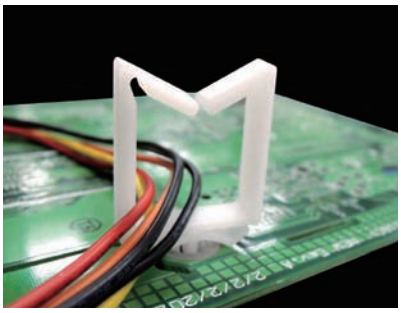



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




MOUNTING HOLE Ø4.75
THICKNESS 1.2

Part No.	D	E	Package
CHAH-1	18.2	12.7	500
CHAH-2	27.1	21.6	

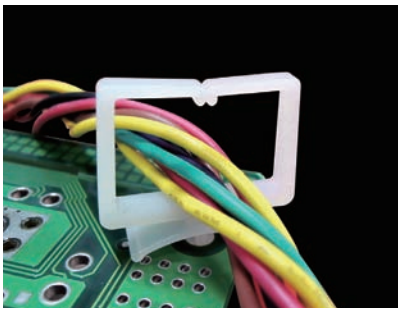

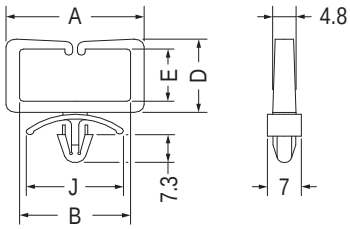


MOUNTING HOLE Ø4.8~Ø5.0
THICKNESS: T




MOUNTING HOLE Ø4.8~Ø5.0
THICKNESS 0.8~2.5


Part No.	A	B	D	E	J	T	Package
CHE-1	28.5	22.9	19.2	13.6	20.2	1.1~3.5	500
CHE-2	42.0	36.0	66.0	60.3	20.1	0.8~4.0	

Part No.	Package
CHE-3	500

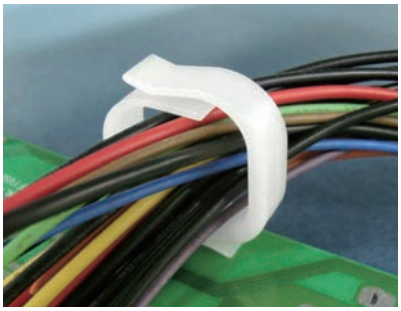




MOUNTING HOLE Ø4.8~Ø5.5
THICKNESS 0.8~2.0




MOUNTING HOLE Ø4.8~Ø5.5
THICKNESS 0.8~2.0


Part No.	Package
CHD-18	250

Part No.	Package
CHD15-34	250

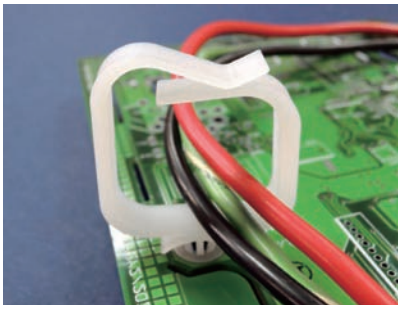

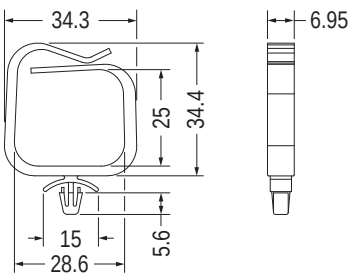

MOUNTING HOLE Ø4.8
THICKNESS 0.8~2.0




MOUNTING HOLE Ø4.8
THICKNESS 0.8~2.0

Part No.	Package
CHD-20	250


Part No.	Package
CHD35-40	200


電線固定座 WIRE SADDLE

用途：固定電線於PC板或機板上，維修方便，不佔空間。

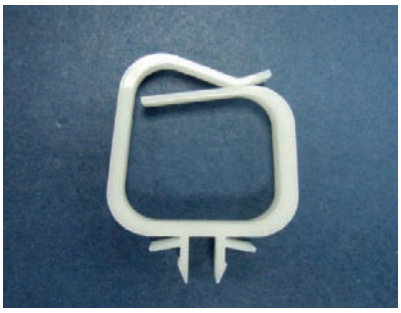

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

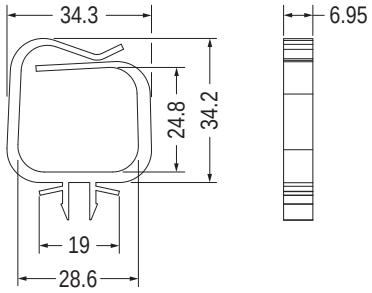




MOUNTING HOLE
THICKNESS 0.8~2.0

Part No.	Package
CHD-19	250









MOUNTING HOLE
THICKNESS 0.8~2.0

Part No.	Package
WUCD-36	1000

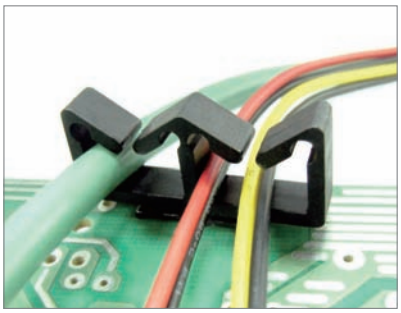

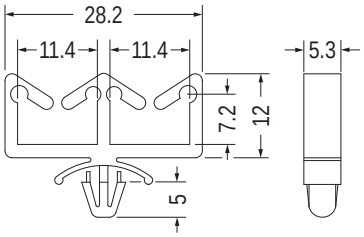




【 CHAA-3 】

MOUNTING HOLE: ØG
THICKNESS 1.2~2.1

Part No.	G	Package
CHAA-1	4.8~5.0	1000
CHAA-3	4.8	



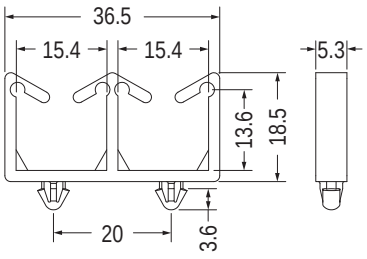


MOUNTING HOLE Ø4.0
THICKNESS 1.0


Part No.	Package
CHAA-4	500

電線固定座 WIRE SADDLE

用途：固定電線於PC板或機板上，維修方便，不佔空間。

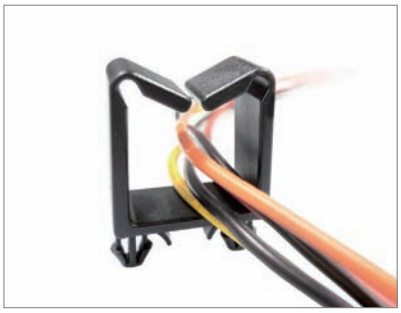



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




MOUNTING HOLE Ø4.0
THICKNESS 0.8~2.5

Part No.	Package
CHAF-3	1000

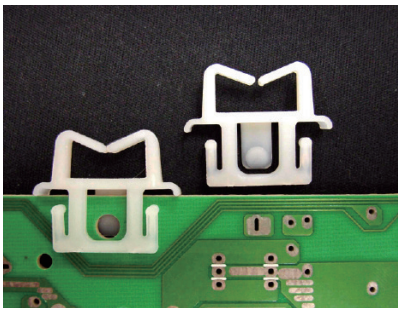


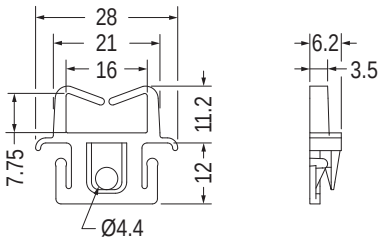



MOUNTING DETAIL



Part No.	Package
EDGE-1	500

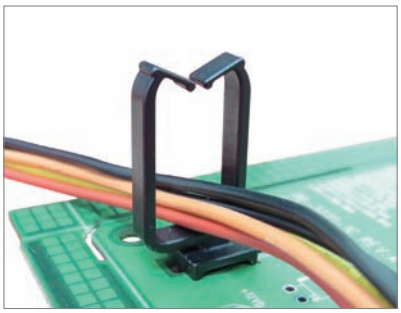






MOUNTING HOLE
THICKNESS 0.8~2.0


Part No.	Package
WSSA-1	500

電線固定座 WIRE SADDLE

用途：用於固定電線。

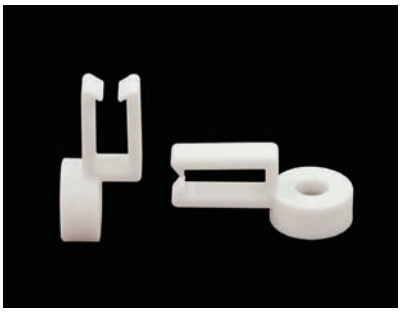

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

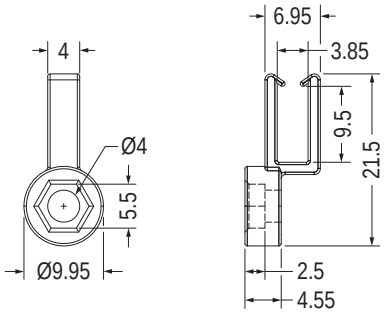



Part No.	Package
THP-1	500



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

用途：將電線固定於LCD-TV上，電線不易磨損，配線整齊美觀。

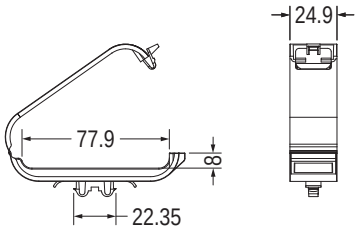





MOUNTING HOLE
THICKNESS 1.0~2.5

Part No.	Package
CMKB-1	50



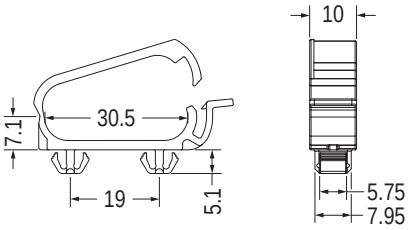



MOUNTING HOLE
THICKNESS 0.8~1.2


Part No.	Package
CMKB-2	250

電線固定座 WIRE MOUNT

用途：將電線固定於LCD-TV上，電線不易磨損，配線整齊美觀。




- Material: PP (UL)
- Flame Class: 94HB
- Color: Computer/Black
- Unit: mm

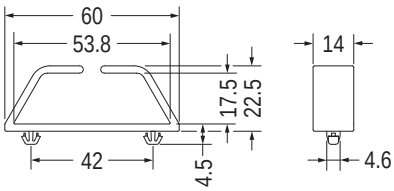

MOUNTING HOLE Ø4.8
THICKNESS 1.5


Part No.	Package
CHT-42	100



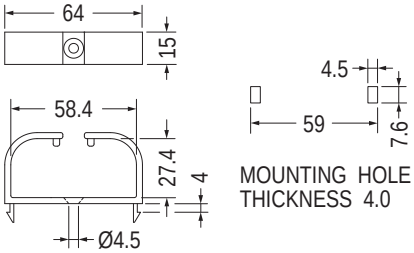

MOUNTING HOLE
THICKNESS 4.0


Part No.	Package
CHV-59	100



Part No.	Package
CHV-59K	100




- Material: PP (UL)
- Flame Class: 94HB
- Color: Natural
- Unit: mm

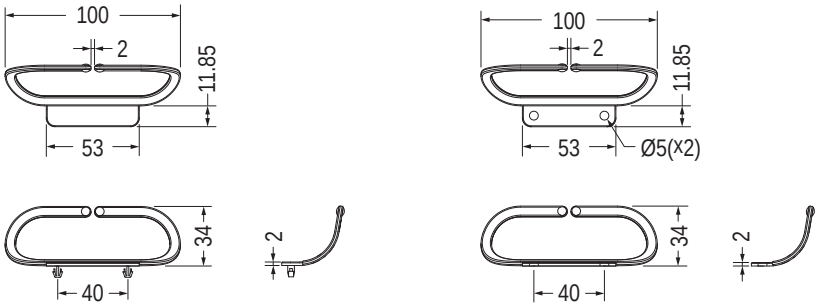

MOUNTING HOLE Ø4.0
THICKNESS 2.8


Part No.	Package
WUCD-100	100

Part No.	Package
WUCDF-100	100

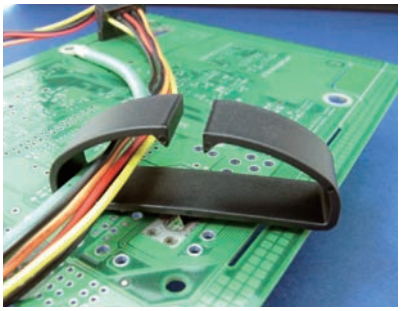

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


用途：固定電線於PC板或機板上，維修方便，不佔空間。

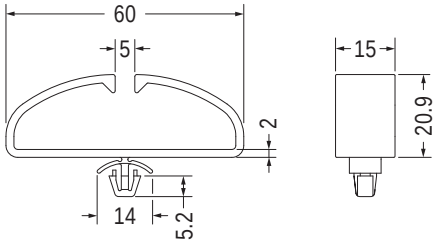


MOUNTING HOLE Ø6.0
THICKNESS 0.8~2.5

Part No.	Package
CHAU-1	500

用途：固定電線於PC板或機板上，維修方便，不佔空間。

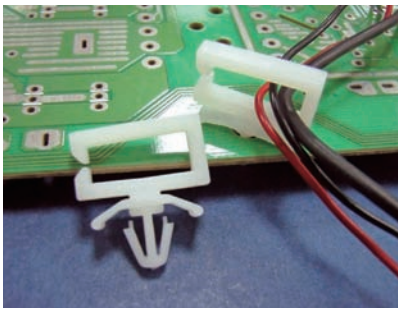


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

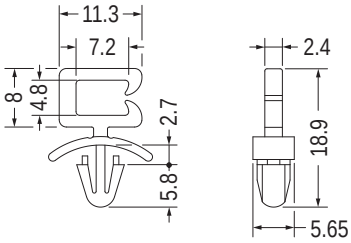


MOUNTING HOLE Ø4.8
THICKNESS 0.8~2.0


Part No.	Package
WAS-1	1000

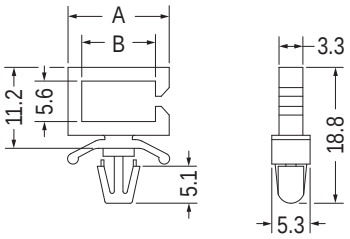

MOUNTING HOLE Ø4.8
THICKNESS 0.8~2.0


Part No.	A	B	Package
WSS-2	14.0	10.2	1000
WSS-2L	17.0	13.2	

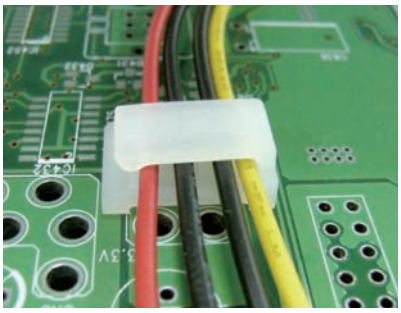

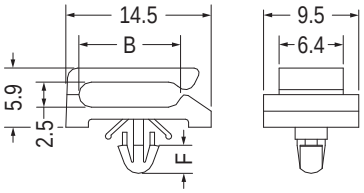


MOUNTING HOLE: ØG
THICKNESS: T


Part No.	B	F	G	T	Package
MIS-2	10.2	2.8	3.0	0.6~1.8	1000
MIS-9	10.15	3.15	4.0	1.6	

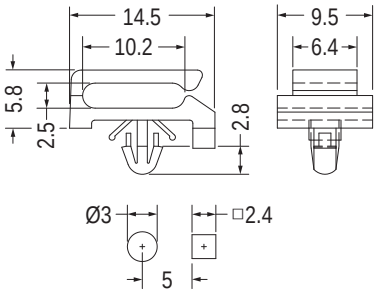

MOUNTING HOLE Ø3.0
THICKNESS: T


Part No.	T	Package
MIS-11	0.6~1.8	2000
MIS-11L	1.0~2.2	

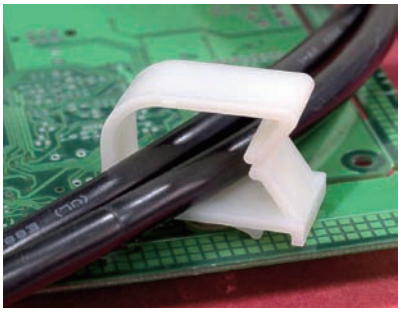

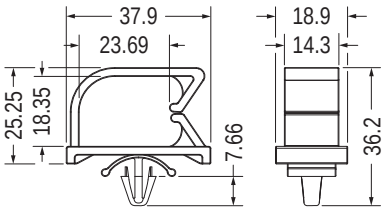


MOUNTING HOLE Ø6.4
THICKNESS 1.9


Part No.	Package
MIS-20	250

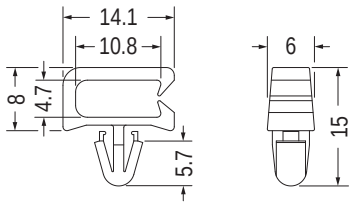

MOUNTING HOLE Ø4.8
THICKNESS 0.8~1.6

Part No.	Package
MIS-3	2000

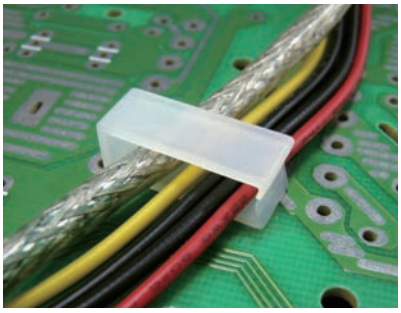

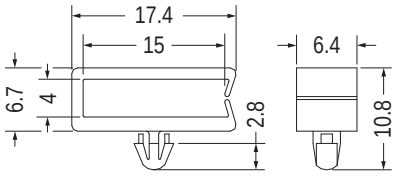

MOUNTING HOLE Ø3.0
THICKNESS 1.0


Part No.	Package
MIS-5	2000


電線固定座 WIRE SADDLE

用途：固定電線於PC板或機板上，維修方便，不佔空間。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

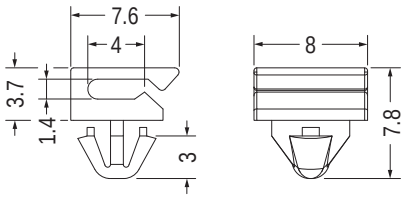





MOUNTING HOLE
THICKNESS 0.8

Part No.	Package
MIS-14	2000




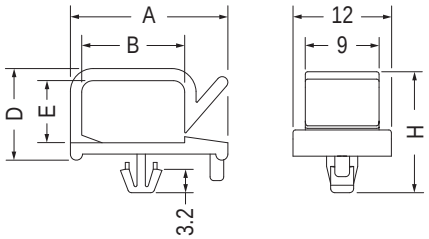





MOUNTING HOLE
THICKNESS: T

Part No.	A	B	D	E	H	L	T	Package
MIS-7	20.8	13.6	12.5	8.2	16.9	10.0	0.6~0.8	500
MIS-7M	20.8	13.6	12.5	8.2	17.0	10.0	0.8~1.2	
MIS-8	16.8	10.5	10.3	6.5	14.3	7.0	0.8~1.0	
MIS-8M	16.8	10.5	10.3	6.5	14.8	7.0	1.2	
MIS-8L	16.8	10.5	10.3	6.5	15.2	7.0	1.6	

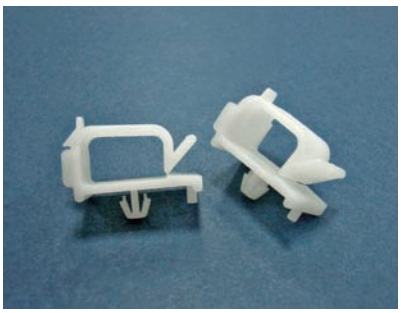


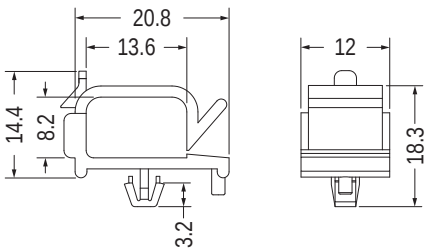





MOUNTING HOLE
THICKNESS 0.6~1.0

Part No.	Package
MIS-10	1000

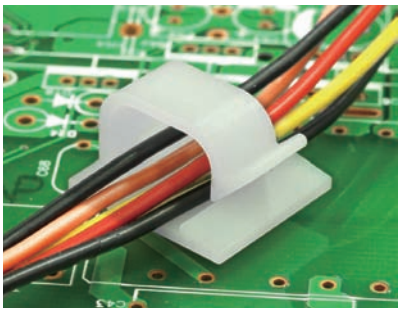


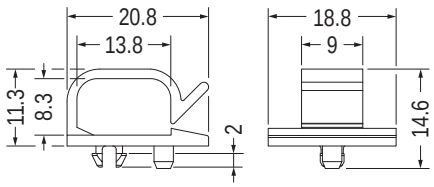





MOUNTING HOLE
THICKNESS 1.0

Part No.	Package
MIS-17	1000










MOUNTING HOLE
THICKNESS 1.0

Part No.	Package
MIS-21	1000







MOUNTING HOLE
THICKNESS 1.0


Part No.	Package
MIS-29	500


電線固定座 WIRE SADDLE

用途：固定電線於PC板或機板上，維修方便，不佔空間。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

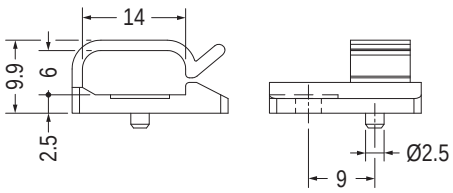





MOUNTING HOLE

Part No.	Package
WCLB-1	1000

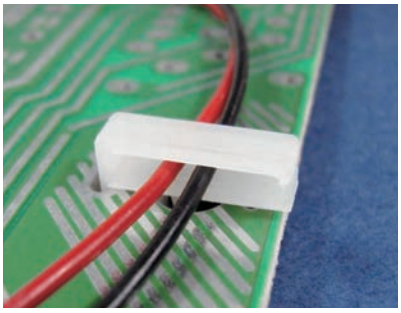


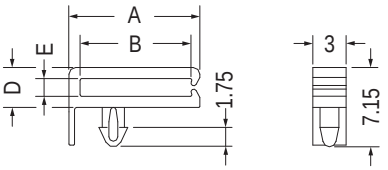





MOUNTING HOLE
THICKNESS 1.6

Part No.	A	B	D	E	Package
MIS-4	11.8	10.0	3.6	1.6	1000
MIS-23	14.8	12.48	4.3	2.3	

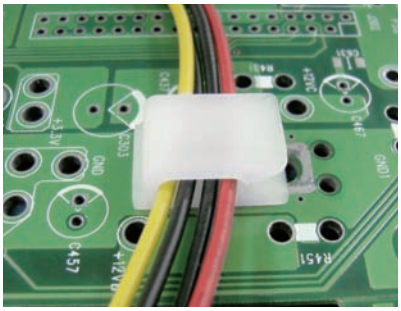


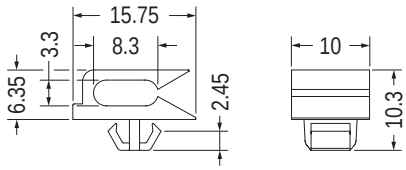




MOUNTING HOLE
THICKNESS 1.0


Part No.	Package
MIS-6	1000

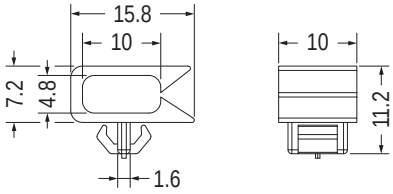




MOUNTING HOLE
THICKNESS 0.6~0.8

Part No.	Package
MIS-28	1000

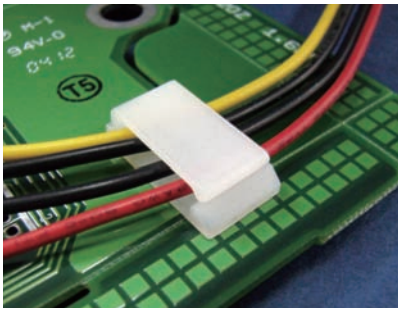

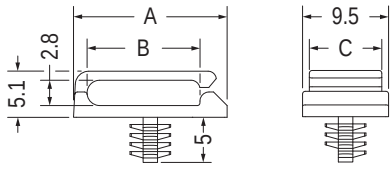




MOUNTING HOLE
THICKNESS 4.0


Part No.	A	B	C	Package
MISB-1	17.0	12.5	8.0	1000
MISB-2	12.7	8.3	6.4	


電線固定座 WIRE SADDLE

用途：快速拆卸，固定電線維修方便，不佔空間。

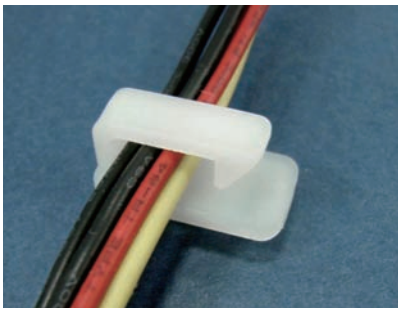


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

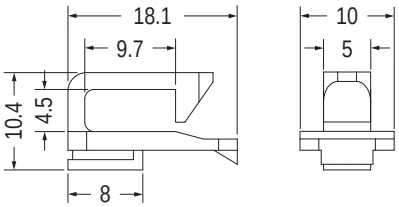





MOUNTING HOLE
THICKNESS 0.8

Part No.	Package
MISA-1	1000

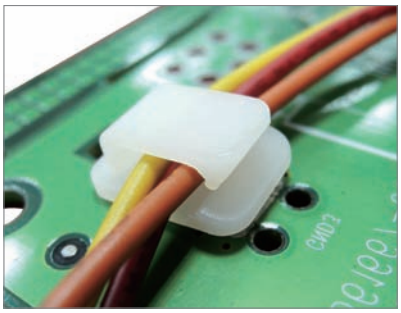


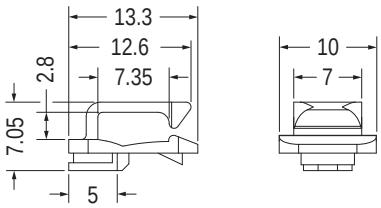





MOUNTING HOLE
THICKNESS 0.9

Part No.	Package
MISA-2	1000

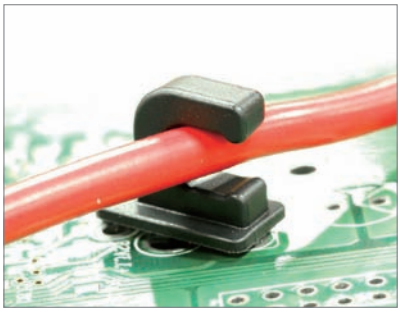

- Material: ABS (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm

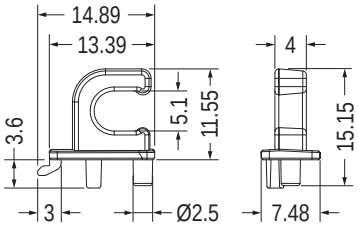




MOUNTING HOLE
THICKNESS 0.6


Part No.	Package
MISE-1	1000

電線固定座 CABLE CLAMP

用途：快速固定電線，安裝容易。

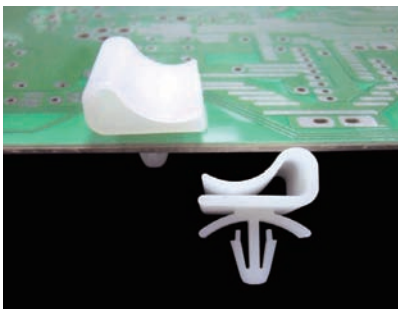


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

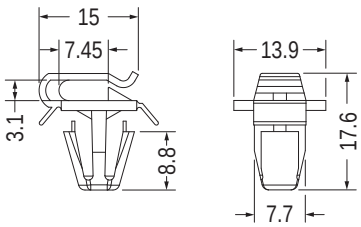

MOUNTING HOLE Ø8.0
THICKNESS 1.0~2.8


Part No.	Package
FCCA-1	1000

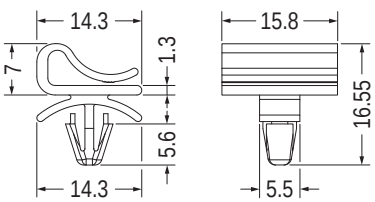


MOUNTING HOLE Ø4.8
THICKNESS 0.6~2.0

Part No.	Package
FCCB-1	1000

用途：快速固定電線，安裝容易。

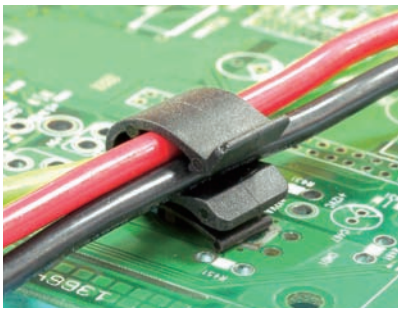



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



MOUNTING HOLE Ø6.3~Ø6.5
THICKNESS 1.0~3.0


Part No.	Package
FCCD-1	1000

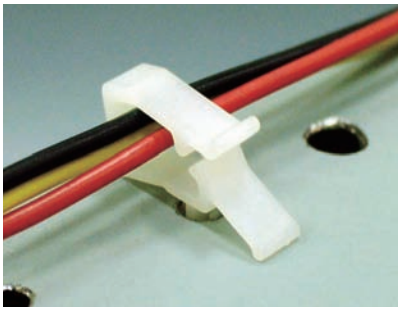

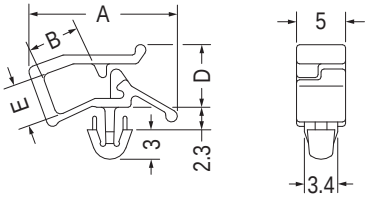


MOUNTING HOLE Ø3.5
THICKNESS 0.5~1.6


Part No.	A	B	D	E	Package
WPEM-1	20.3	7.2	8.5	6.2	1000
WPEM-1S	15.2	5.3	6.4	4.3	
WPEM-2	13.5	4.1	5.0	2.6	

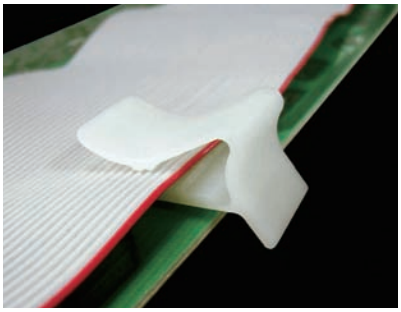

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


用途：用於電子、電腦內部排線固定，裝配容易，美觀不脫落，固定力強。







MOUNTING HOLE
THICKNESS 0.8~2.5

Part No.	Package
FCCT-12	500

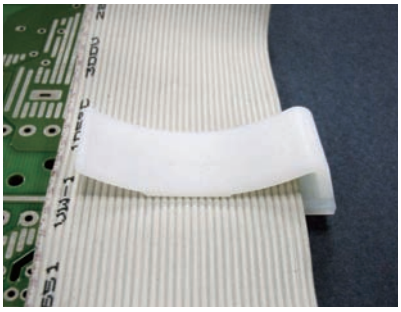

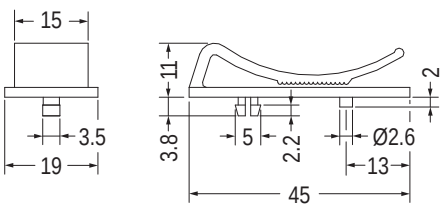




MOUNTING HOLE
THICKNESS 1.2


Part No.	Package
FCG-15	1000

電線固定座 CABLE CLAMP

用途：固定電線於PC板或機板上，維修方便，不佔空間。

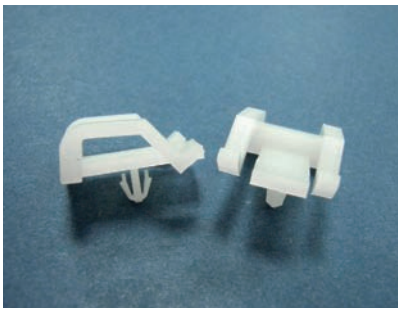

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

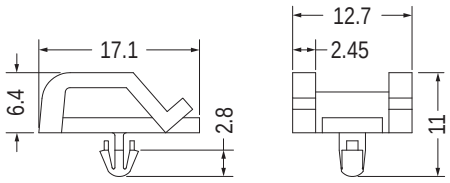


MOUNTING HOLE Ø3.0
THICKNESS 1.6


Part No.	Package
FCPT-1	1000

電線固定座 WIRE SADDLE

用途：固定電線於PC板或機板上，維修方便，不佔空間。

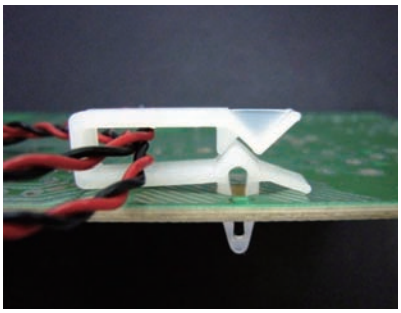



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

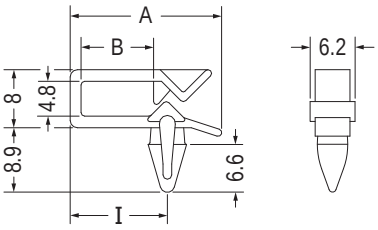

MOUNTING HOLE Ø4.8
THICKNESS 2.0


Part No.	A	B	I	Package
WPEG-1	20.9	10.0	13.4	1000
WPEG-2	24.2	13.2	16.8	
WPEG-3	17.5	6.6	10.8	

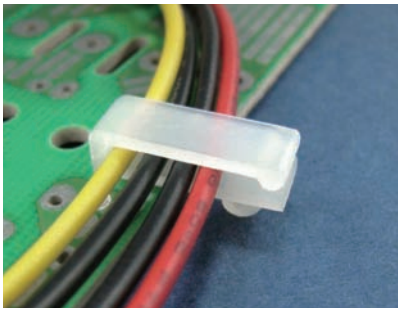


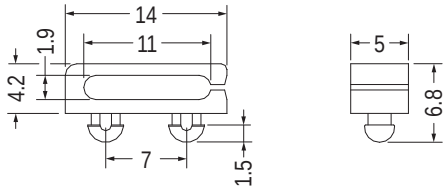

MOUNTING HOLE Ø3.0
THICKNESS 0.8~1.0

Part No.	Package
MWS-4	2000

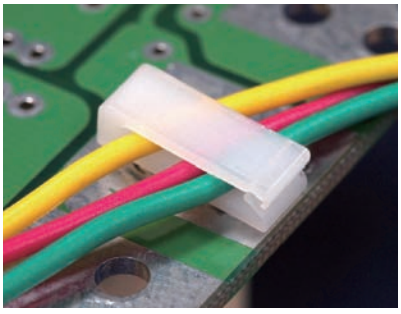

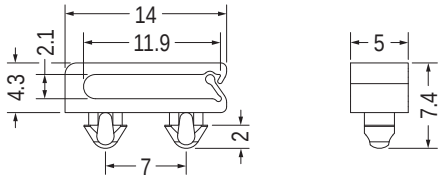


MOUNTING HOLE Ø3.0
THICKNESS 0.8~1.0


Part No.	Package
MIS-18	1000

電線固定座 WIRE SADDLE

用途：固定電線於PC板或機板上，維修方便，不佔空間。

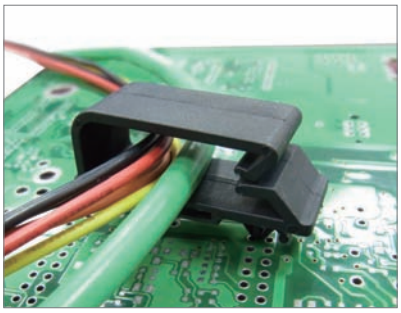


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

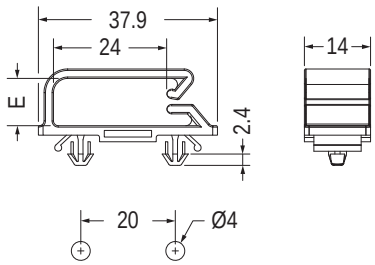

MOUNTING HOLE
THICKNESS 0.8~2.0

Part No.	E	Package
MIBA-1	18.7	200
MIBA-2	10.0	500

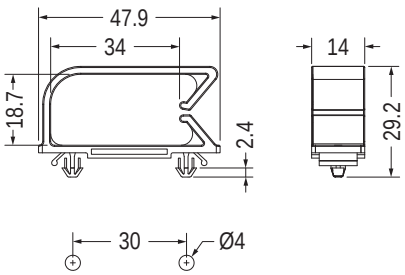


MOUNTING HOLE
THICKNESS 0.8~2.0


Part No.	Package
MIBA-3	500

電線固定扣 CABLE CLAMP


用途：可快速固定電線，安裝容易。

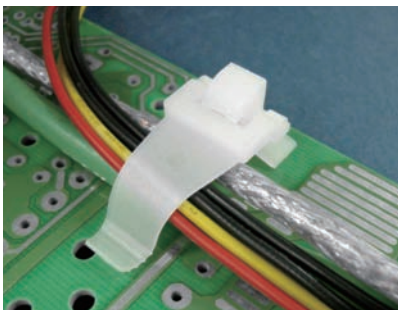

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm





MOUNTING HOLE Ø4.8
THICKNESS 1.2~2.0



Part No.	Package
HFCC-12	1000







MOUNTING HOLE
THICKNESS 2.1


Part No.	Package
HFCD-29	1000

電線固定座 CABLE CLAMP

用途：固定電線於木板或機殼上，維修方便，不佔空間。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




MOUNTING HOLE Ø3.0

Part No.	Package
WSBC-1	1000



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


用途：固定電線於機板上，維修方便，不佔空間。

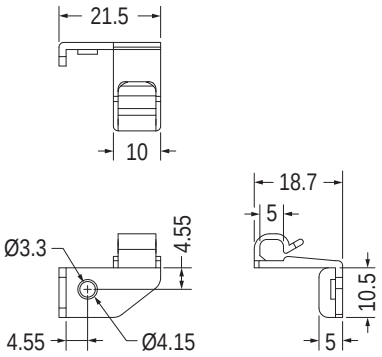


Part No.	Package
MISA-4	1000

風扇束線座 FAN CABLE TIE MOUNT

用途：風扇電線之固定，整齊美觀。

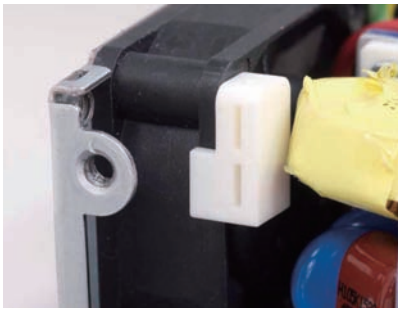



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



MOUNTING HOLE Ø3.5


Part No.	Package
WKM-2	1000

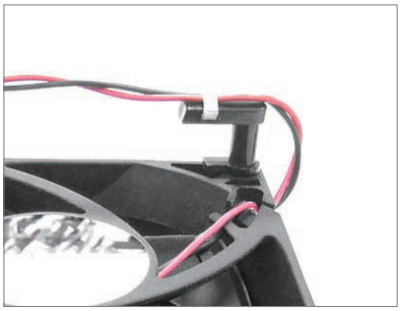




MOUNTING HOLE Ø4.4

Part No.	Package
WKM-10	500

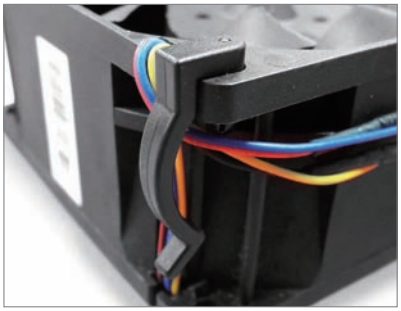




MOUNTING HOLE Ø4.3
THICKNESS 4.0


Part No.	Package
WKA-1	1000

電線固定座 CABLE CLAMP


用途：固定電線於PC板或機板上，維修方便，不佔空間。

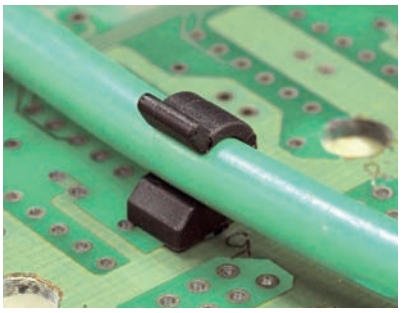


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

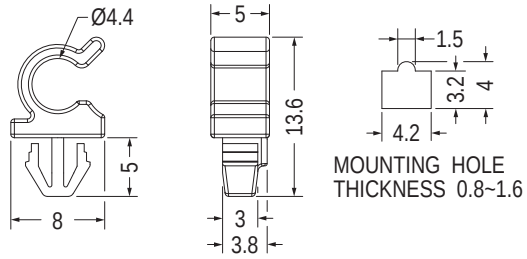


Part No.	Package
CHQ-4.5	1000

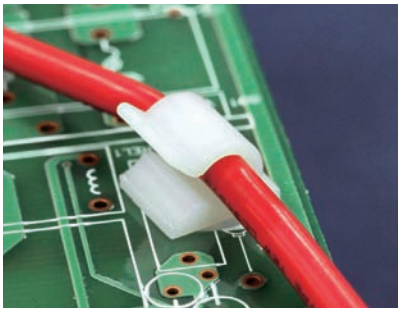


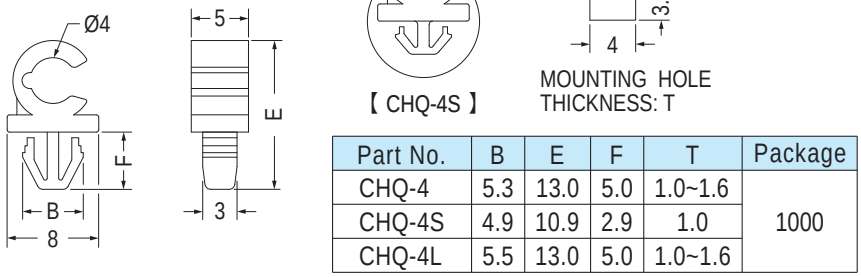


Part No.	B	E	F	T	Package
CHQ-4	5.3	13.0	5.0	1.0~1.6	1000
CHQ-4S	4.9	10.9	2.9	1.0	
CHQ-4L	5.5	13.0	5.0	1.0~1.6	

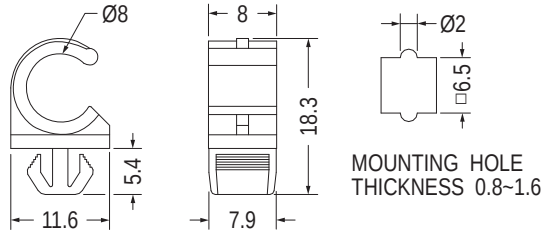


Part No.	Package
CH-9	1000

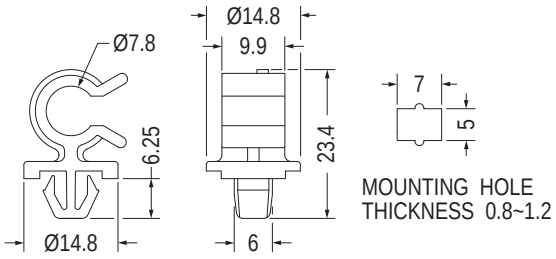

Part No.	Package
CH-12	1000

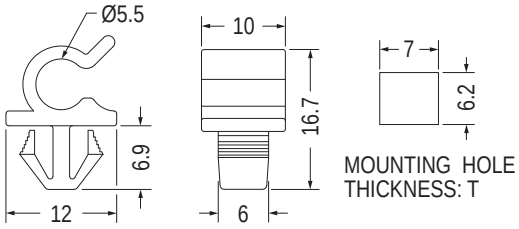


Part No.	T	Package
CHQC-1	2.0	1000
CHQC-1L	0.7~2.0	

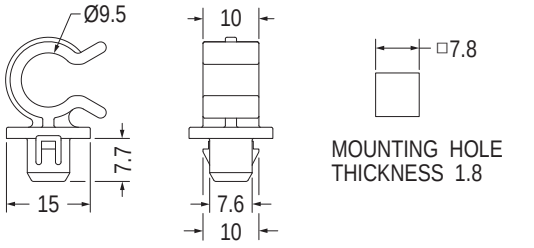


Part No.	Package
CHQF-1	1000

電線固定座 WIRE HOLDER

用途：固定電線於機板上，維修方便，不佔空間。

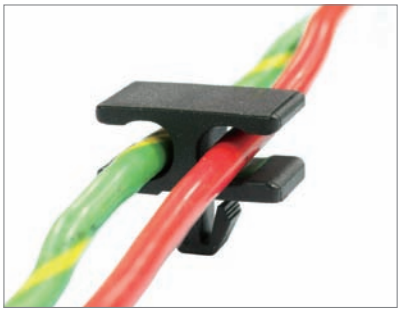


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

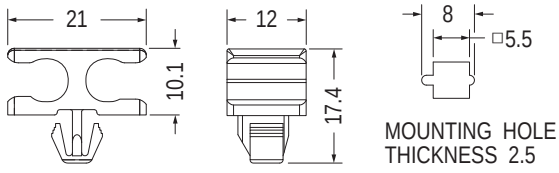


Part No.	Package
CHQE-1	1000

電線固定座 WIRE HOLDER

用途：可快速固定及解開電線。

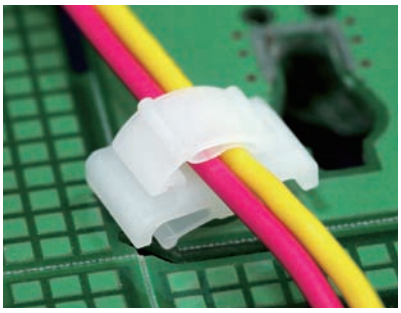


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

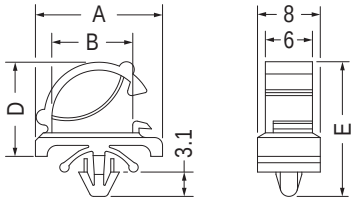

MOUNTING HOLE Ø3.5
THICKNESS: T

Part No.	A	B	D	E	T	Package
WLO-1	13.5	6.2	8.2	14.0	0.8~2.0	1000
WLO-1-2.5	13.5	6.2	8.6	14.6	0.8~2.5	
WLO-2	16.2	10.3	12.0	17.6	0.8~2.0	
WLO-2-2.5	16.2	10.3	12.0	18.0	0.8~2.5	

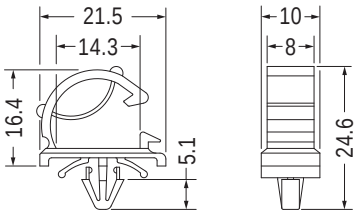

MOUNTING HOLE Ø4.8
THICKNESS 0.8~2.5


Part No.	Package
WLO-3	500

電線固定座 CABLE CLAMP


用途：固定電線於PC板或機板上，維修方便，不佔空間。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
EMF-6	500

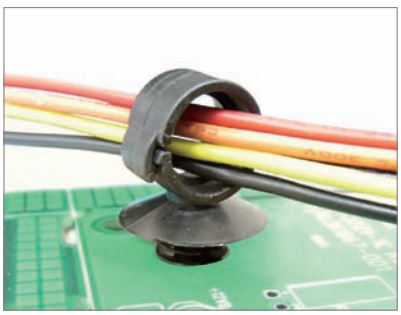


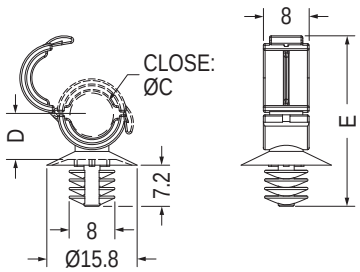

MOUNTING HOLE Ø6.5~Ø7.0
THICKNESS 0.8~9.0

Part No.	C	D	E	Package
CCMK-1	5.5	6.3	24.4	1000
CCMK-2	8.0	7.7	29.8	

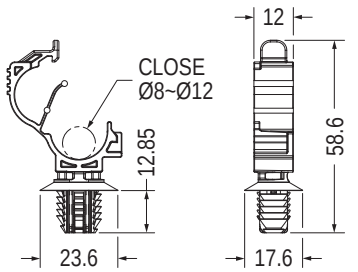




MOUNTING HOLE
THICKNESS 0.6~6.75

(RECOMMEND FOR REFERENCE ONLY)

Part No.	Package
CCML-1	1000




MOUNTING HOLE Ø6.2~Ø6.7
THICKNESS 0.5~2.0


Part No.	Package
CCMI-1	1000

電線固定座 CABLE CLAMP

用途：固定電線於PC板或機板上，維修方便，不佔空間。

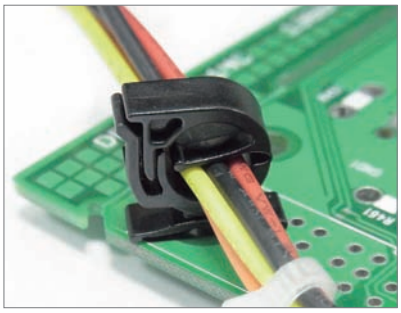



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



MOUNTING HOLE Ø4.0
THICKNESS 0.8~1.6


Part No.	C	E	Package
CHN-7.6	7.6	26.7	500
CHN-10	10.0	31.0	
CHN-12	12.0	34.4	

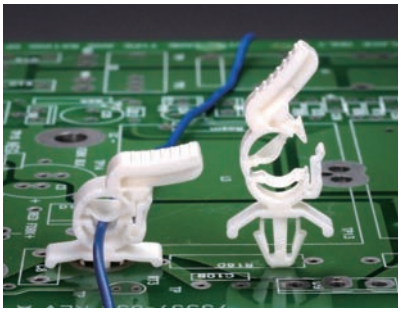




MOUNTING HOLE Ø4.8
THICKNESS 0.5~2.0
(RECOMMEND FOR REFERENCE ONLY)


Part No.	Package
CHNA-1	1000

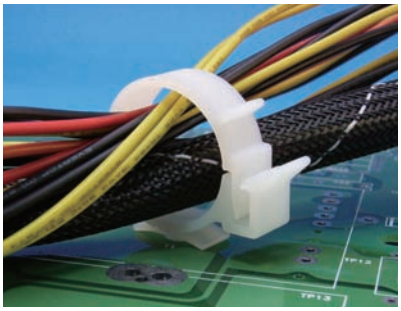




MOUNTING HOLE Ø6.5
THICKNESS: T


Part No.	C	E	T	Package
FWT-25	25.0	52.8	0.8~1.6	100
FWT-30	30.0	59.7	0.8~2.0	

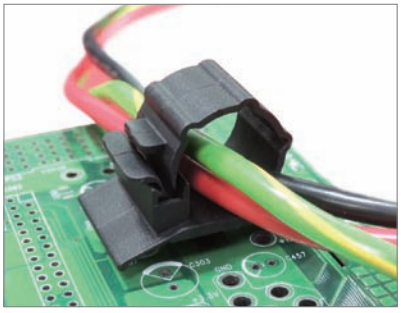




MOUNTING HOLE Ø6.4
THICKNESS: T

Part No.	B	C	F	T	Package
CKS-7	15.0	7.0	4.9	0.8~2.3	200
CKS-10	17.2	10.3	4.9	0.8~2.3	
CKS-13-L	19.2	13.0	4.9	0.5~2.3	
CKS-14	19.3	14.8	4.9	0.8~2.3	
CKS-16-L	21.3	16.0	4.9	0.5~2.3	
CKS-20-L	23.2	20.0	4.9	0.5~2.3	
CKS-20-H	23.2	20.0	4.9	2.3~4.1	
CKS-26-L	31.4	28.0	5.0	0.5~2.3	100

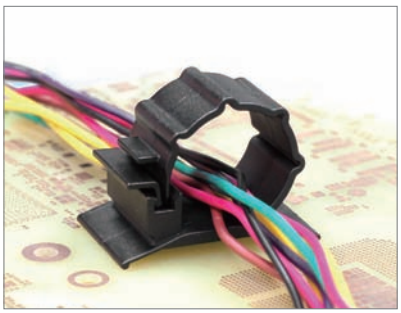

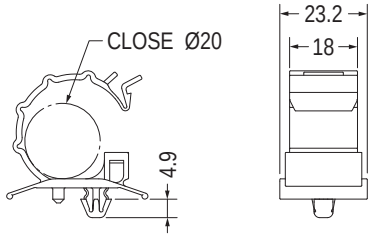

MOUNTING HOLE
THICKNESS 0.8~1.5


Part No.	Package
CKSA-20-L	200

T8燈管固定座 T8 LAMP MOUNT

用途：可固定T8 LED燈管或電線使用。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



MOUNTING HOLE Ø5.5
THICKNESS 1.0~1.2


Part No.	D	Package
AWD-1	26.0	50
AWD-2	9.0	100
AWD-3	26.0	50

電線固定座 CABLE CLAMP

用途：可固定電源線，避免不小心脫落，造成電腦停機。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

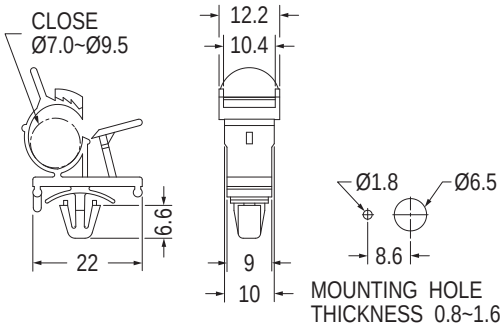

MOUNTING HOLE
THICKNESS 0.8~1.6


Part No.	Package
AWK-10	2000



MOUNTING HOLE Ø6.5
THICKNESS 0.8~2.5


Part No.	Package
AWK-16	1000




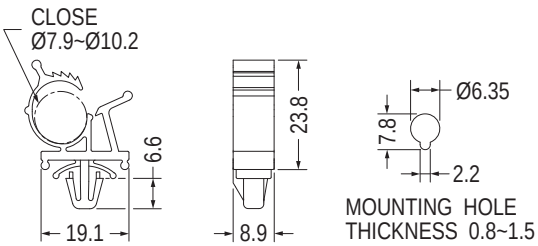

MOUNTING HOLE
THICKNESS 0.8~1.5

Part No.	Package
AWKA-2	500

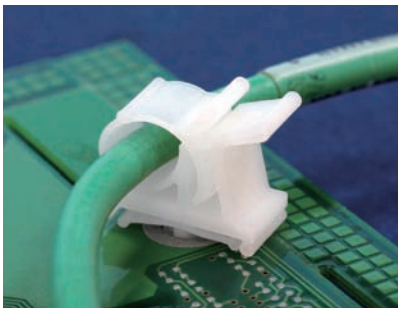



MOUNTING HOLE Ø6.35
THICKNESS 0.8~1.5


Part No.	Package
AWKA-1	500

電線固定座 CABLE CLAMP

用途：固定電線於PC板或機板上，維修方便，不佔空間。





- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black/Gray
- Unit: mm



MOUNTING HOLE Ø5.0~Ø6.0
THICKNESS 0.6~2.7


Part No.	Package
FWK-5	1000

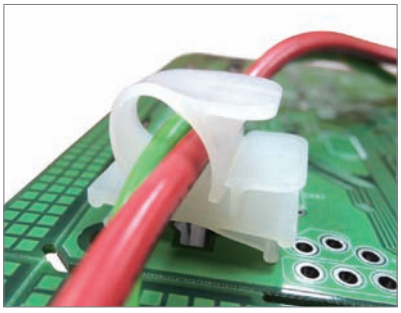




MOUNTING HOLE Ø6.5~Ø7.0
THICKNESS 0.6~2.7


Part No.	Package
FWKA-1	250

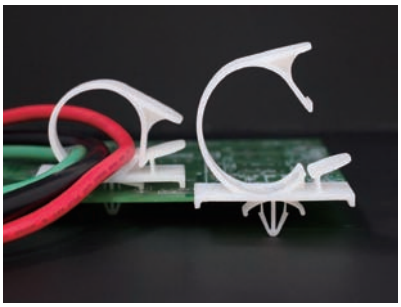


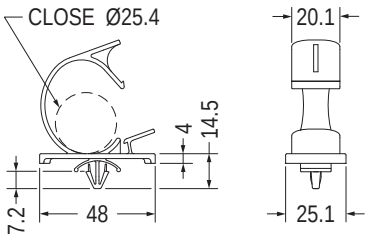


MOUNTING HOLE Ø5.0~Ø6.0
THICKNESS 0.6~2.7

Part No.	Package
FWK-9	1000

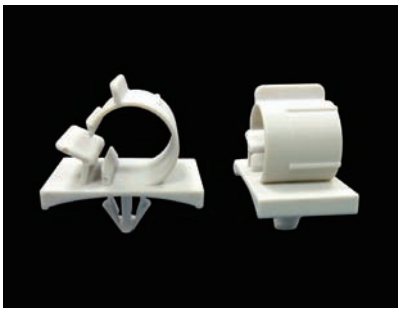



MOUNTING HOLE Ø6.35
THICKNESS: T




MOUNTING HOLE Ø6.5
THICKNESS: T
【 WL-1 】

Part No.	A	B	C	T	Package
WL-1	25.7	16.8	10.5	0.8~1.6	500
WL-2	35.05	22.35	19.05	0.5~2.0	100
WL-3	25.4	14.73	6.35	2.3~3.8	500
WL-4	25.4	16.51	9.52	2.3~3.8	


電源線固定座 POWER CORD RETENER

用途：可固定電源線，避免不小心脫落，造成電腦停機。

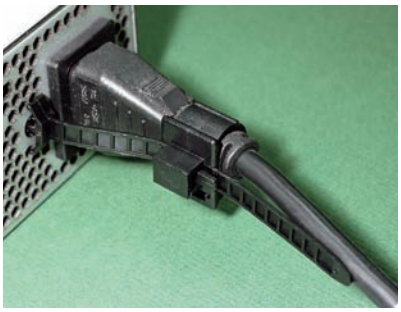

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

MOUNTING HOLE: ØG
THICKNESS: T

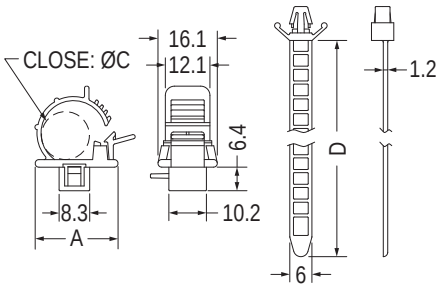




【 SWPL-57 】



【 SWPL-48 】


Part No.	A	C	D	G	T	Package
SWPL-1	22.5	11.0~13.0	86.75	4.8	0.8~2.0	100
SWPL-4	22.5	12.0~15.0	86.75	4.8	0.8~2.0	
SWPL-6	22.5	11.0~13.0	86.75	3.5	0.8~2.0	
SWPL-8	29.5	19.0~22.0	86.75	4.8	0.8~2.0	
SWPL-48	22.5	11.0~13.0	86.75	4.0	0.8~2.0	
SWPL-57	22.5	12.0~15.0	86.75	4.8	0.6~1.8	
SWPL-74	22.5	11.0~13.0	112.5	4.8	0.8~2.0	

MOUNTING HOLE Ø4.8
THICKNESS 0.8~1.6

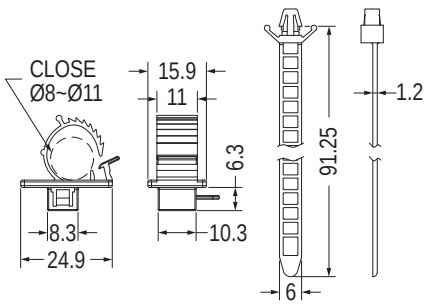


Part No.	Package
SWPL-14	100

MOUNTING HOLE Ø4.8
THICKNESS 0.8~2.0

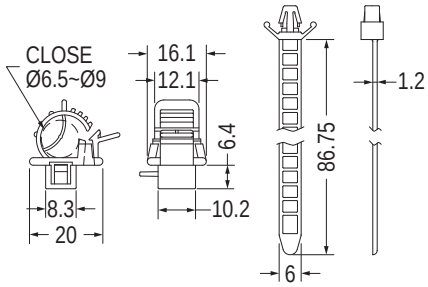


Part No.	Package
SWPL-3	100

MOUNTING HOLE Ø3.5
THICKNESS 0.8~2.0

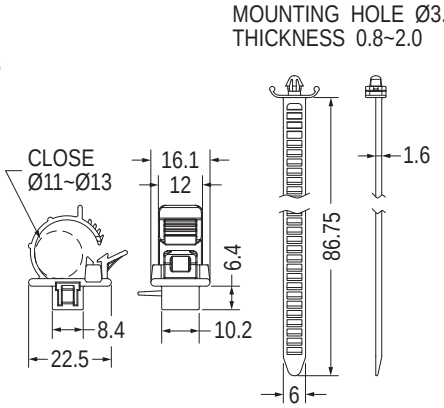


Part No.	Package
SWPL-53	100

MOUNTING HOLE Ø3.5
THICKNESS 0.8~2.0

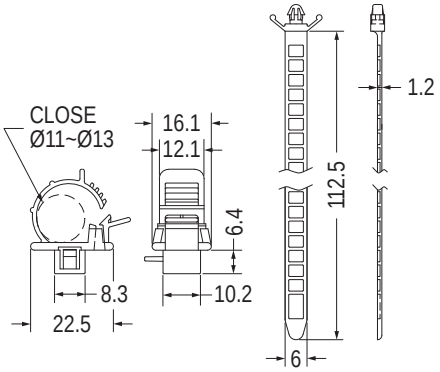


Part No.	Package
SWPL-22	100

MOUNTING HOLE Ø4.8
THICKNESS 0.8~2.0

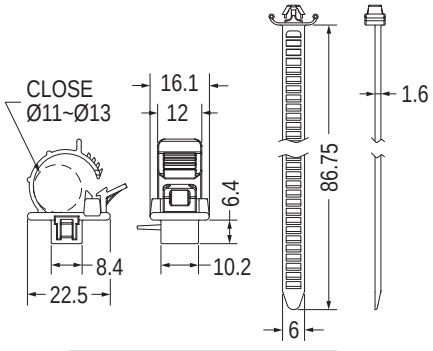


Part No.	Package
SWPL-25	100

MOUNTING HOLE Ø4.8~Ø5.0
THICKNESS 0.8~2.0

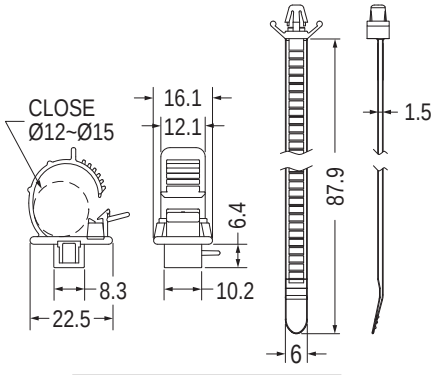

Part No.	Package
SWPL-58	100


MOUNTING HOLE Ø3.5
THICKNESS 0.8~2.0

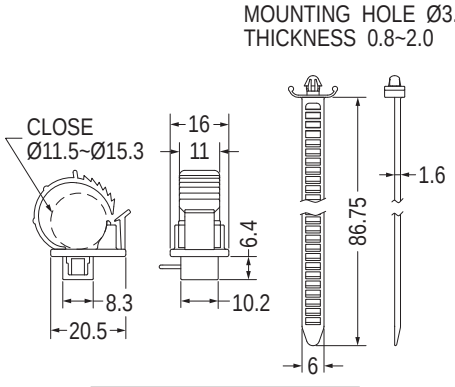

Part No.	Package
SWPL-67	100


電源線固定座 POWER CORD RETENER

用途：可固定電源線，避免不小心脫落，造成電腦停機。

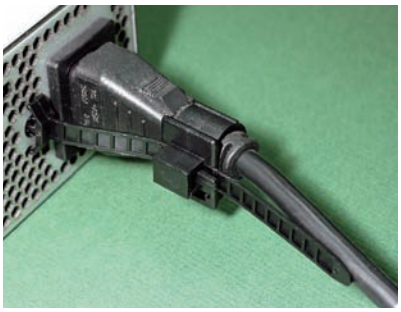


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

MOUNTING HOLE Ø5.0
THICKNESS 0.5~2.0

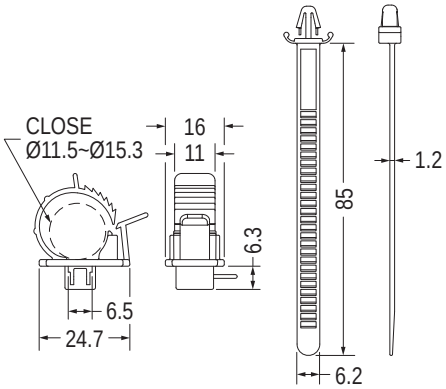


Part No.	Package
SWPL-65	100

MOUNTING HOLE
THICKNESS 0.8~2.0

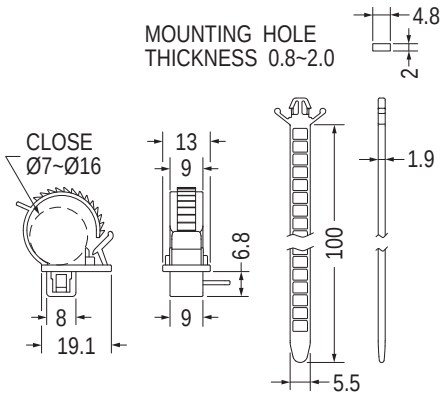


Part No.	Package
SWPL-100	100

MOUNTING HOLE
THICKNESS 0.8~1.4

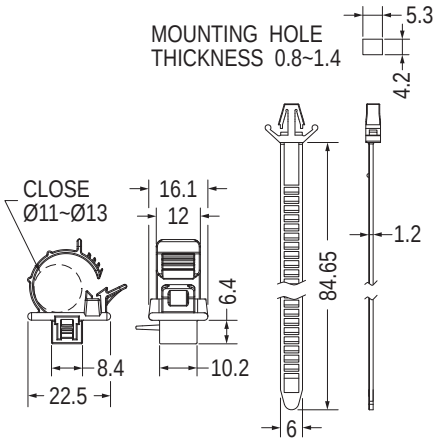


Part No.	Package
SWPL-73	100

MOUNTING HOLE
THICKNESS 0.8

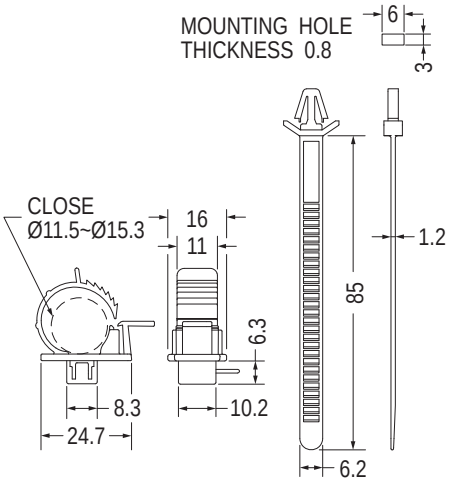


Part No.	Package
SWPL-96	100

MOUNTING HOLE: ØG
THICKNESS: T

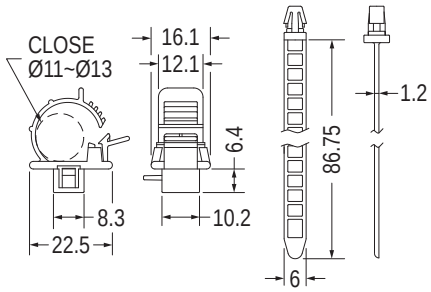


Part No.	G	T	Package
SWPL-2	4.8	2.0~3.0	100
SWPL-11	4.0	0.6~0.8	
SWPL-27	4.8	0.6~1.2	

MOUNTING HOLE Ø3.5
THICKNESS 0.8

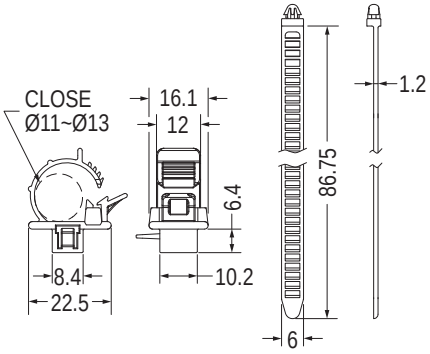


Part No.	Package
SWPL-66	100

MOUNTING HOLE Ø4.0
THICKNESS 0.6~1.0

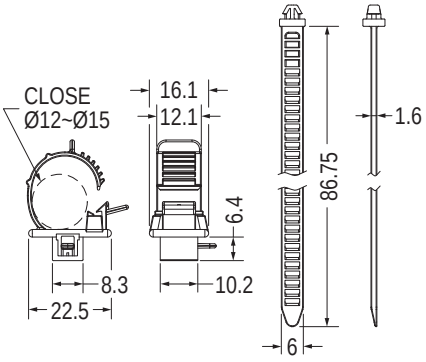

Part No.	Package
SWPL-88	100


MOUNTING HOLE Ø4.0
THICKNESS 0.6~0.8

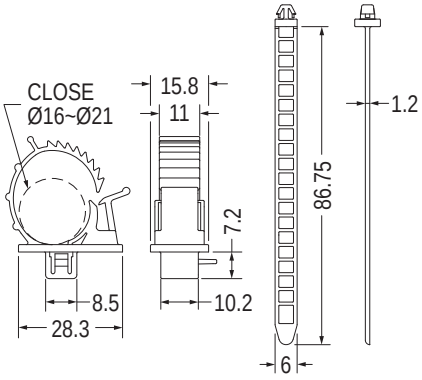

Part No.	Package
SWPL-103	100


電源線固定座 POWER CORD RETENER

用途：可固定電源線，避免不小心脫落，造成電腦停機。

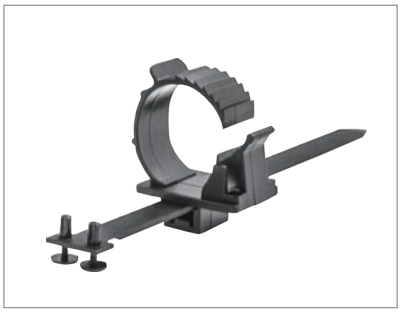


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

MOUNTING HOLE: ØG
THICKNESS 1.8

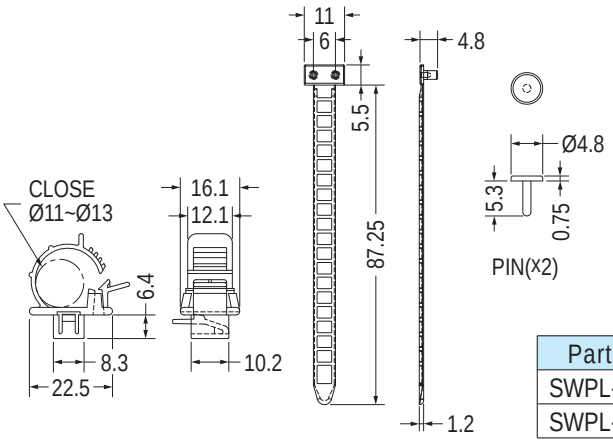


Part No.	G	Package
SWPL-37-1	2.5	100
SWPL-37S-1	2.3	

MOUNTING HOLE Ø3.5
THICKNESS 2.0~2.8

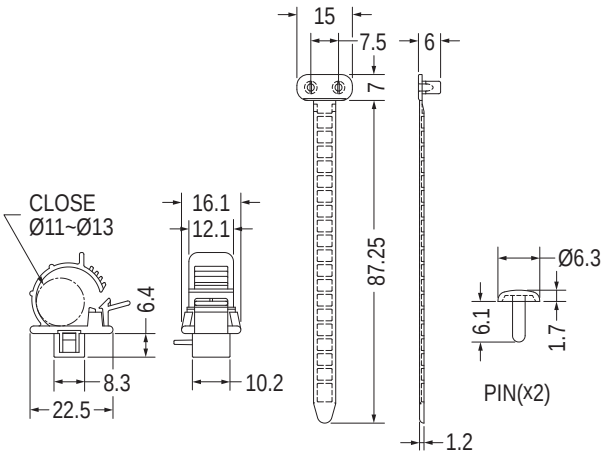

Part No.	Package
SWPL-76	100


MOUNTING HOLE Ø2.3
THICKNESS 1.8

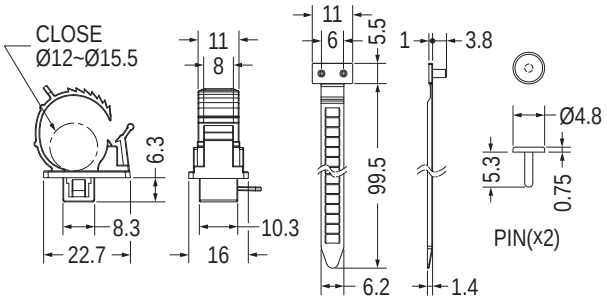

Part No.	Package
SWPL-94	100




MOUNTING HOLE Ø2.2
THICKNESS 0.8~1.0

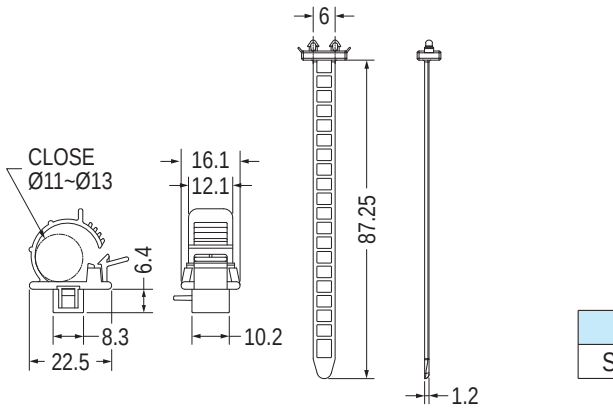


Part No.	Package
SWPL-15S	100

電源線固定座 POWER CORD RETENER


用途：可固定電源線，避免不小心脫落，造成電腦停機。

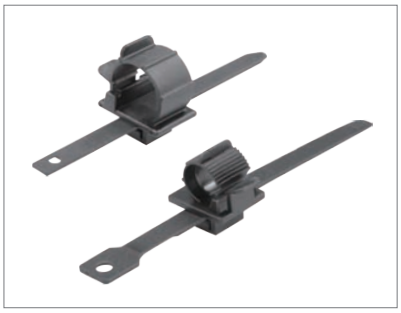


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

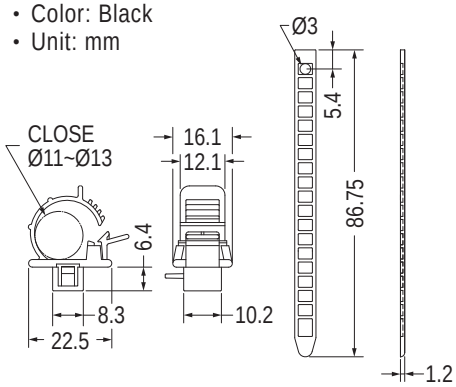



Part No.	Package
SWPL-19	100

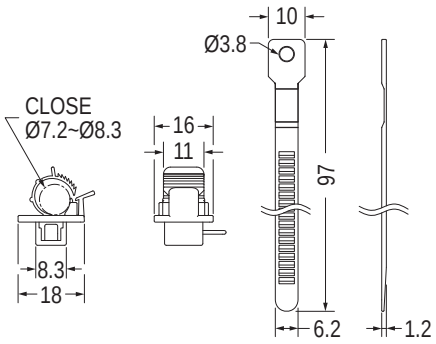

Part No.	Package
SWPL-72	100

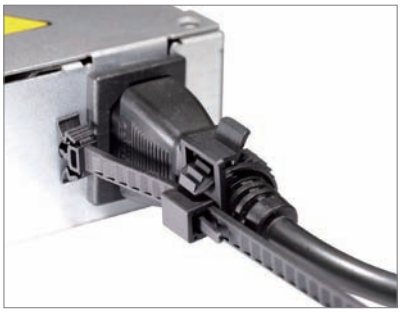

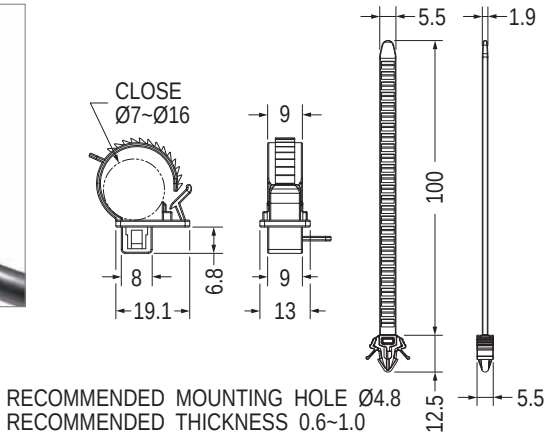


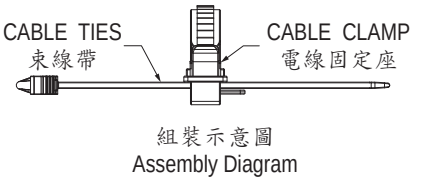



組裝示意圖
Assembly Diagram

- Patented (專利品)

Part No.	Package
SWPL-106	100

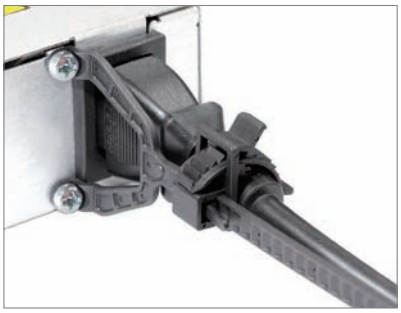

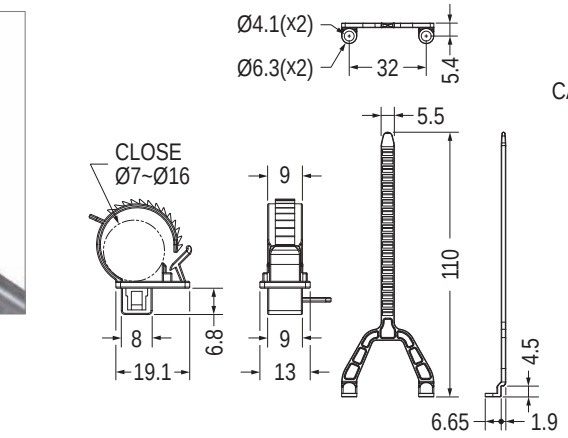



組裝示意圖
Assembly Diagram


Part No.	Package
SWPL-105	100


C13 AC電源扣件 C13 AC POWER RETAINER

用途：可固定電源線，避免不小心脫落，造成電腦停機。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Gary
- Unit: mm

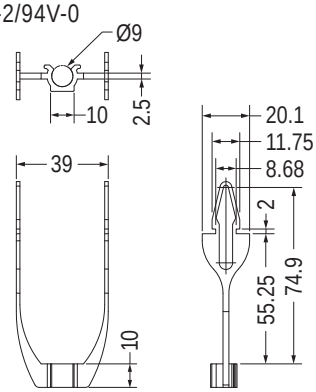




MOUNTING HOLE

Part No.	Package
EMD-512	250

電源線固定座 POWER CORD RETENER


用途：可固定電源線，避免不小心脫落，造成電腦停機。

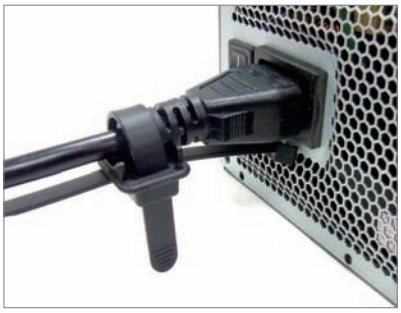

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

MOUNTING HOLE Ø4.8
THICKNESS 0.8~2.0


CABLE Ø18.0
(DATA ONLY FOR REF.)

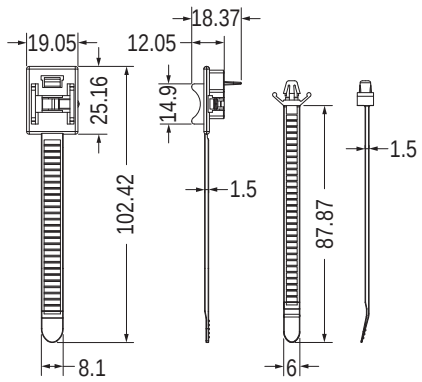

Part No.	Package
SWPL-16	500


MOUNTING HOLE Ø4.8
THICKNESS 0.8~2.0

CABLE Ø16.0
(DATA ONLY FOR REF.)

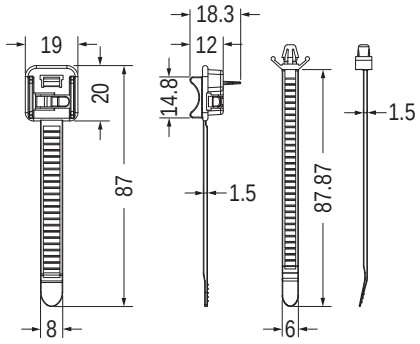


Part No.	Package
SWPL-21	500

MOUNTING HOLE Ø4.8
THICKNESS 0.8~2.0

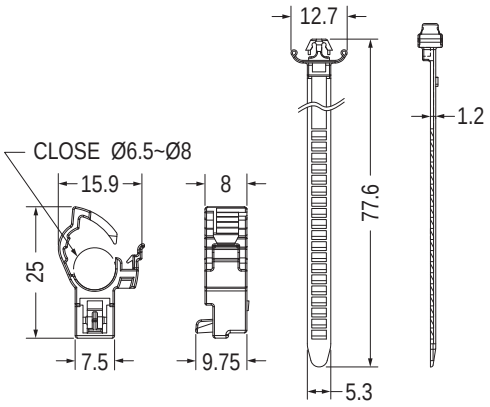

Part No.	Package
SWPL-18	100


MOUNTING HOLE Ø4.8
THICKNESS 0.8~2.0

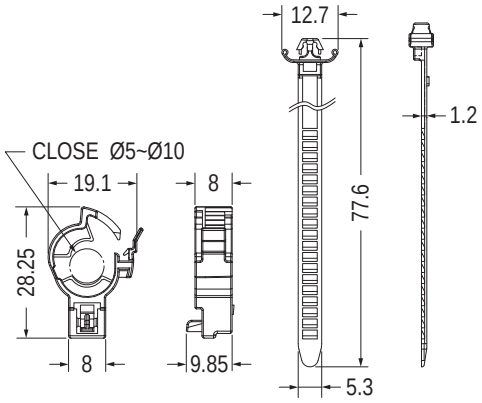

• Patented (專利品)


Part No.	Package
SWPL-20	100

MOUNTING HOLE
THICKNESS 1.8~2.8

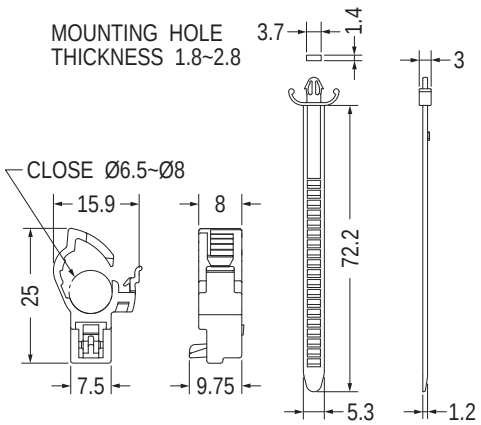

Part No.	Package
SWPL-69	100

MOUNTING HOLE Ø4.8
THICKNESS 0.8~2.0

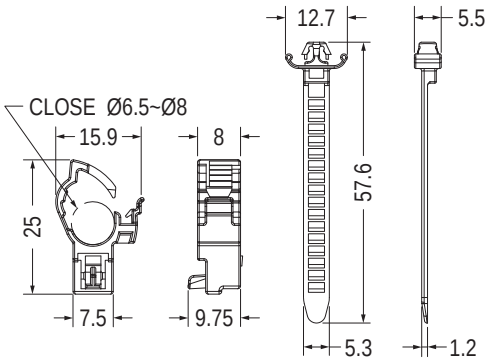


Part No.	Package
SWPL-82	500

用途：可固定電源線，避免不小心脫落，造成電腦停機。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

MOUNTING HOLE
THICKNESS 0.8

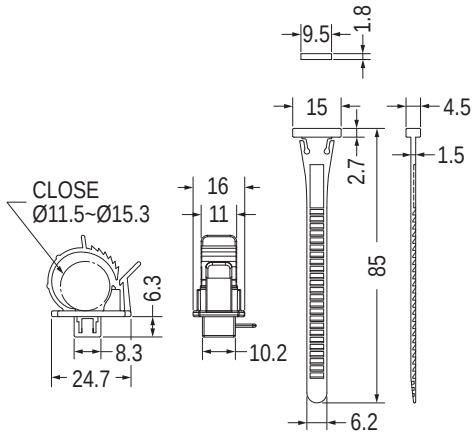


Part No.	Package
SWPL-23	100

MOUNTING HOLE
THICKNESS 0.8

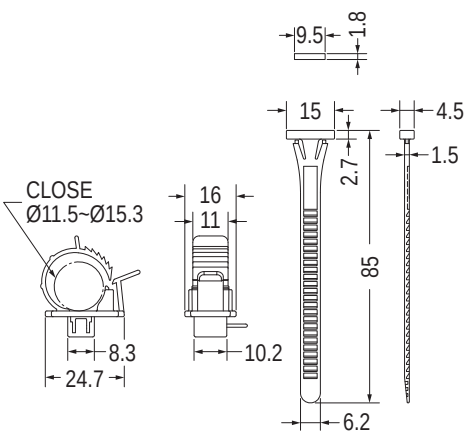


Part No.	Package
SWPL-64	100


MOUNTING HOLE
THICKNESS 0.8

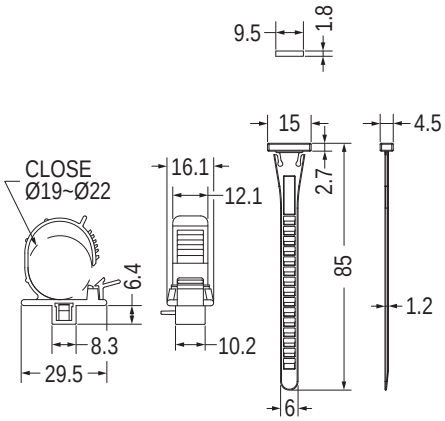

Part No.	Package
SWPL-101	100

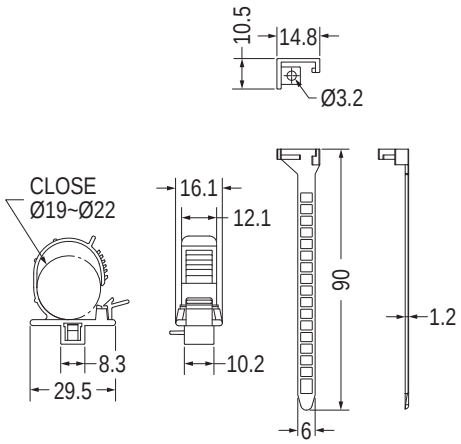


Part No.	Package
SWPL-43	100

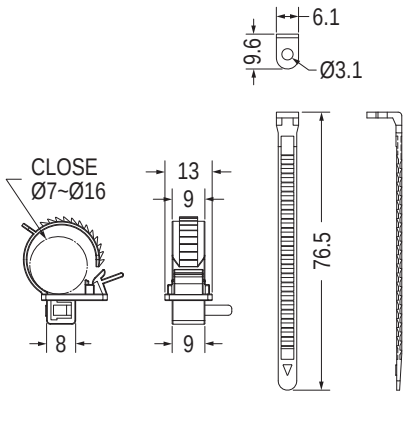

Part No.	Package
SWPL-78	100



MOUNTING HOLE Ø4.0
THICKNESS 1.0

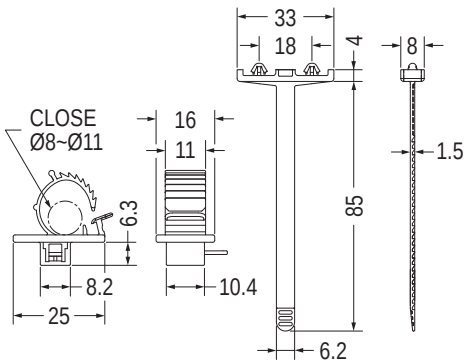


Part No.	Package
SWPL-46	100

電源線固定座 POWER CORD RETENER

用途：可固定電源線，避免不小心脫落，造成電腦停機。





- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

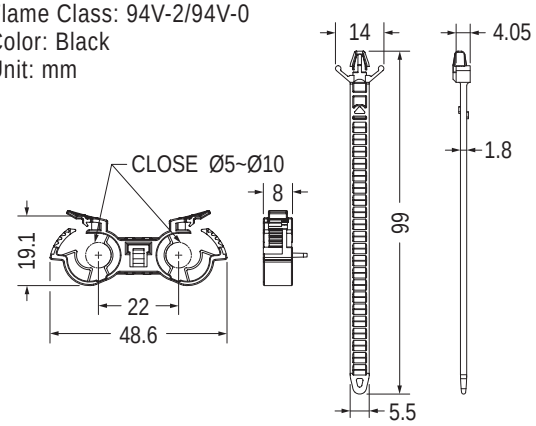


MOUNTING HOLE Ø4.0
THICKNESS 0.8~2.0

Part No.	Package
SWPL-87	100

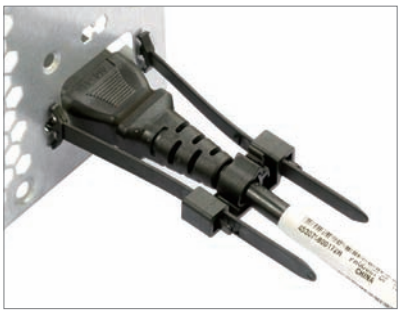

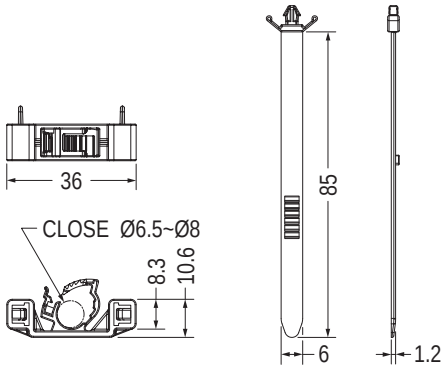




MOUNTING HOLE
THICKNESS 0.8~2.0


- Patented (專利品)

Part No.	Package
SWPL-50	100

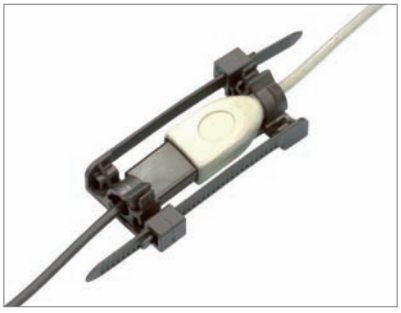


用途：固定電源線、USB...等，中間對接延長，避免脫落。


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm
- Patented (專利品)

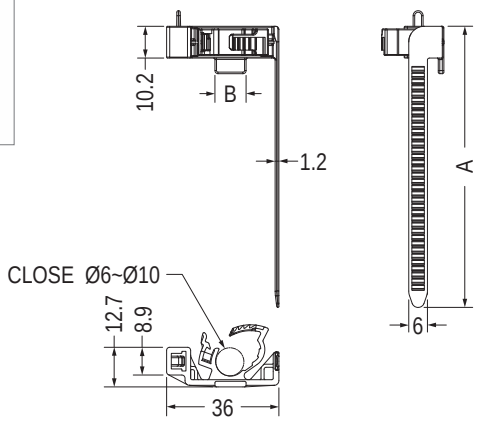

Part No.	A	B	Package
SWPL-52	90.2	10.0	100
SWPL-55	90.2		
SWPL-59	115.2	10.0	



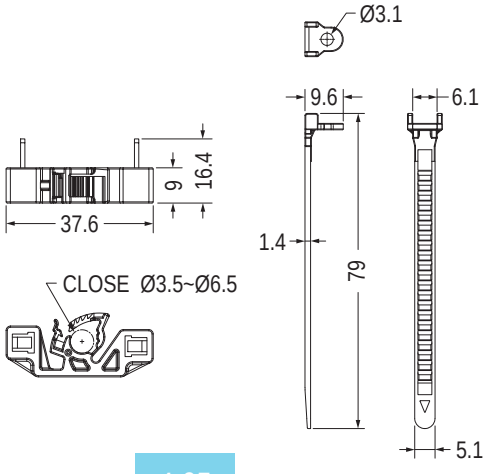




RECOMMEND MOUNTING LAYOUT


Part No.	Package
SWPL-98	100

電線插座固定座 POWE CORD RETENER


用途：避免電源插座脫落。

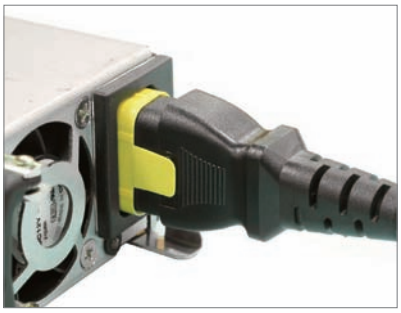

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black/Red/ Blue/Yellow/Green
- Unit: mm




Part No.	Package
SWKL-1	1000




Part No.	Package
SWKL-2	1000


HDMI固定座 HDMI MOUNT


用途：配合螺絲、束線帶，使用於USB、HDMI等線材端子，固定於機殼上，避免勾到脫落。

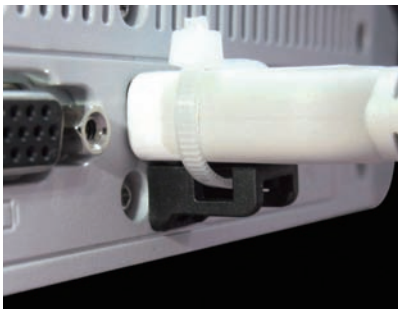

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm





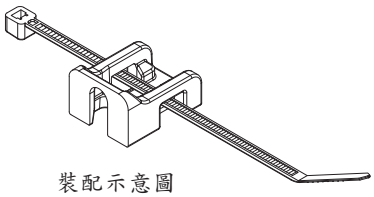


裝配示意圖
Assembly Diagram


Part No.	Package
SWCM-1	1000


束線帶固定座 CABLE TIE MOUNT


用途：固定於機板上，配合束線帶使用，固定電線。

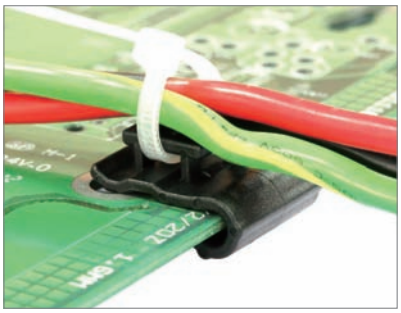

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black/Gray
- Unit: mm










裝配示意圖
Assembly Diagram


Part No.	Package
SWPC-1	500

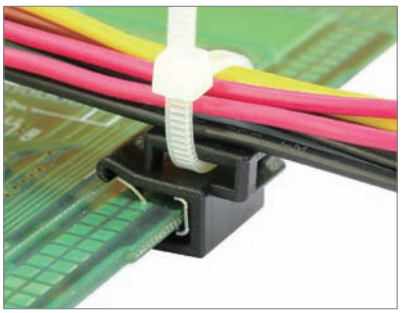





RECOMMEND SUITABLE THICKNESS 1.5~2.0

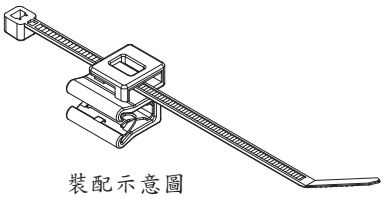


裝配示意圖
Assembly Diagram


Part No.	Package
SWPC-2	1000

電線固定座 U-CLAMP

用途：配合螺絲，固定電線，整齊美觀。

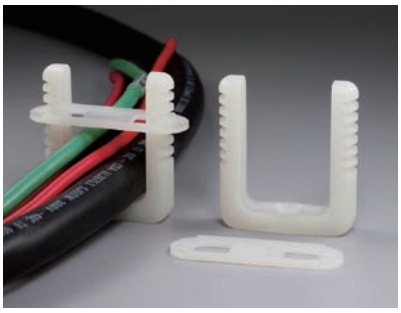


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm
- Patented（專利品）

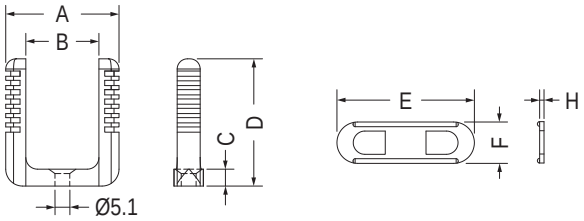


Part No.	A	B	C	D	E	F	H	Package
DC-1	38.9	25.1	5.8	43.7	47.2	14.2	1.5	100
DC-1.5	55.2	37.0	7.9	56.6	62.7	17.8	1.2	

電線固定座 WIRE SADDLE

用途：固定電線於機板上，維修方便，不佔空間。

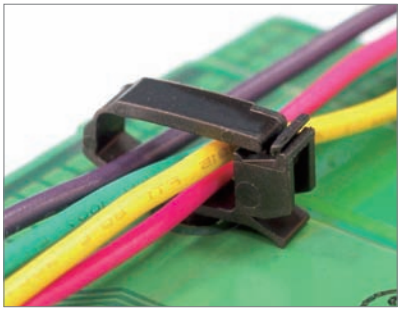



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



MOUNTING HOLE Ø3.5
THICKNESS: T


Part No.	A	B	E	T	Package
CHI-3	11.5	6.2	2.4	0.8~2.2	1000
CHI-6	16.5	11.0	4.5	0.5~1.8	

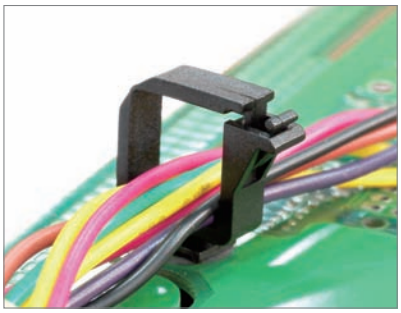




MOUNTING HOLE Ø4.8
THICKNESS 1.6


Part No.	Package
CHK-13	500



MOUNTING HOLE Ø4.8
THICKNESS 0.8~3.5

Part No.	D	E	Package
CHK-6	7.0	5.2	1000
CHK-8	8.8	7.0	
CHK-12	14.2	12.4	500

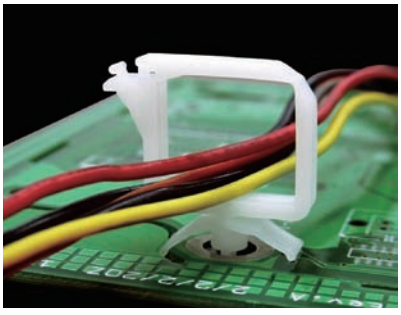





MOUNTING HOLE Ø4.8
THICKNESS 2.0~3.0


Part No.	A	B	D	E	Package
CHK-14	24.2	16.0	15.5	13.7	500
CHK-15	26.7	18.5	24.1	22.3	

用途：固定電線於機板上，維修方便，不佔空間。

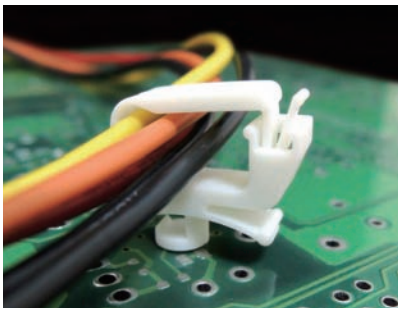


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm







MOUNTING HOLE
THICKNESS 0.5~1.6

Part No.	Package
CHWA-2	500

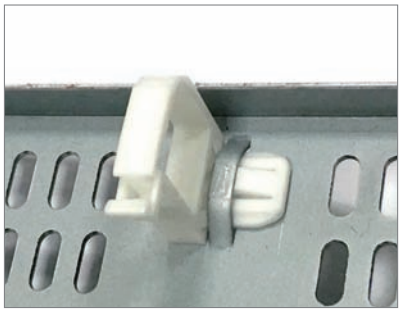


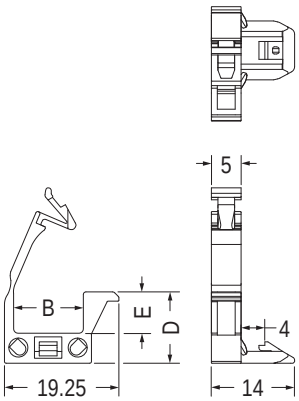





MOUNTING HOLE

Part No.	B	D	E	Package
CHCK-1	11.62	12.0	6.95	500
CHCK-2	11.7	17.7	12.65	

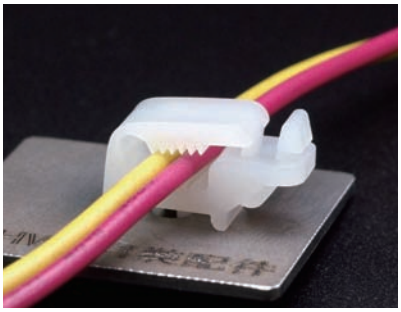







MOUNTING HOLE
THICKNESS 1.0

Part No.	Package
CHWF-1	1000

用途：固定電線於PC板或機板上，維修方便，不佔空間。

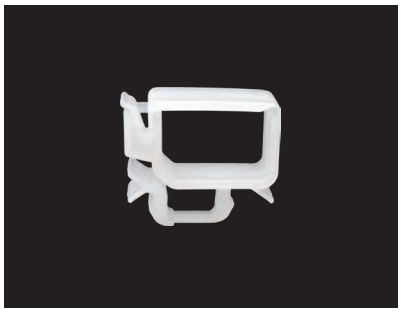


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



MOUNTING HOLE
THICKNESS 0.8

Part No.	Package
CHWK-1	500






MOUNTING HOLE
THICKNESS 1.0~1.6

Part No.	Package
CHKE-1	1000






MOUNTING HOLE Ø4.8
THICKNESS 0.8~2.3

Part No.	A	B	D	E	I	Package
CHWS-6	15.4	10.0	6.8	5.6	20.31	1000
CHWS-8.5	16.4	11.0	9.3	8.1	21.31	
CHWS-12	18.3	12.0	13.3	11.6	20.31	500
CHWS-14	21.4	16.0	14.8	13.6	23.31	
CHWS-20	25.4	20.0	20.8	19.6	27.31	
CHWS-30	31.4	25.6	30.8	29.4	33.31	250



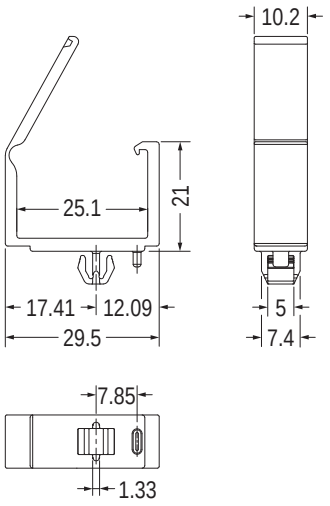


MOUNTING HOLE
THICKNESS 1.2


NEW

Part No.	Package
CHAJ-2	500


用途：固定電線於PC板或機板上，維修方便，不佔空間。

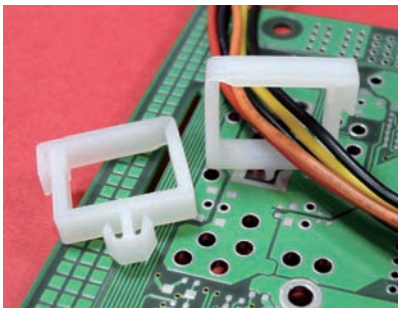


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

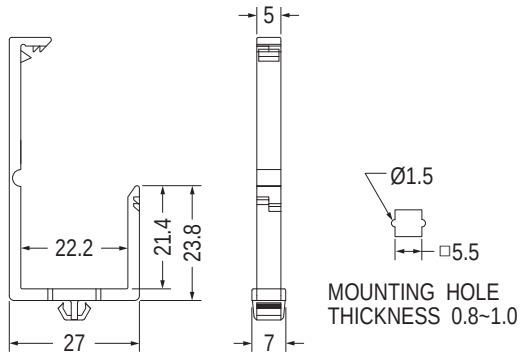


Part No.	Package
CHAC-4	500

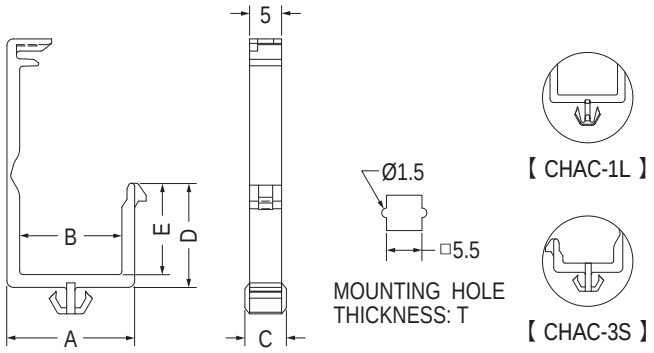


Part No.	A	B	C	D	E	T	Package
CHAC-1	20.0	16.0	6.8	16.3	14.3	1.0	1000
CHAC-1L	20.0	16.0	6.7	16.3	14.3	2.0	
CHAC-2	15.1	11.1	6.8	12.5	10.5	1.0	
CHAC-3	15.1	11.1	6.8	7.3	5.3	1.0	
CHAC-3S	15.1	11.1	6.5	7.3	5.3	1.0	

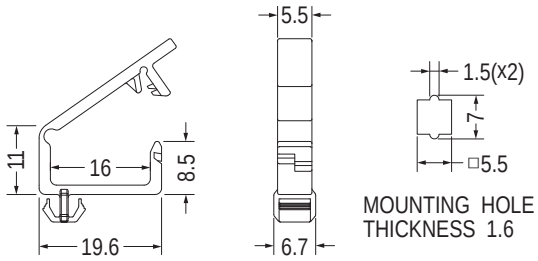


Part No.	Package
CHAC-8	1000

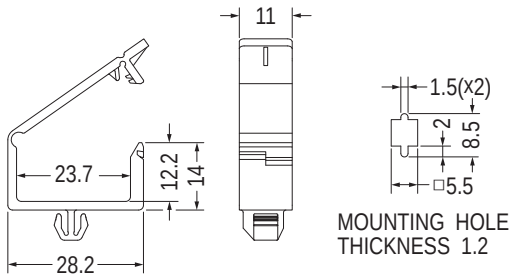

Part No.	Package
CHAC-7	1000

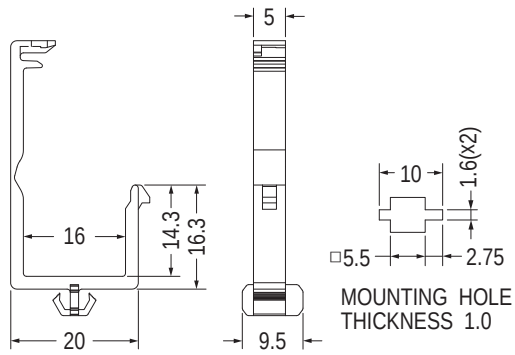


Part No.	Package
CHAC-5-1	1000

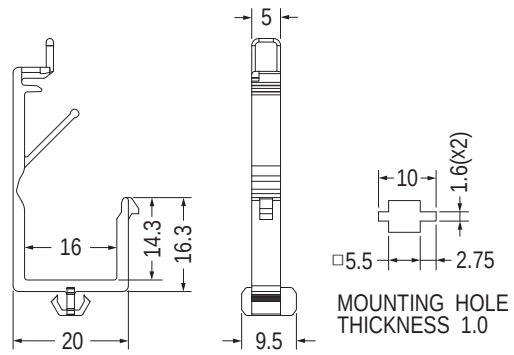


Part No.	Package
CHACA-1	1000

電線固定座 WIRE SADDLE

用途：固定電線於PC板或機板上，維修方便，不佔空間。

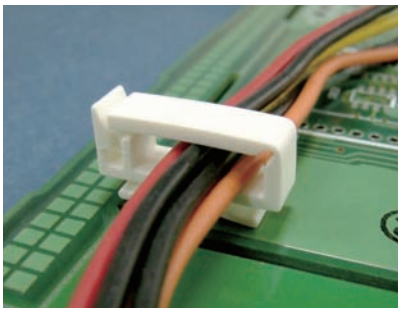


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




MOUNTING HOLE Ø3.0
THICKNESS 1.2~1.7

Part No.	Package
CHL-3	1000




MOUNTING HOLE Ø3.5
THICKNESS 0.8~2.0

Part No.	Package
CHJ-3	1000




MOUNTING HOLE Ø4.8
THICKNESS 0.8~2.0


Part No.	Package
CH-1	500




MOUNTING HOLE: ØG
THICKNESS: T

Part No.	A	B	D	E	F	G	T	Package
CHWT-3.4S	17.5	13.5	5.1	3.1	3.0	3.5	1.8	1000
CHWT-3.4	17.5	13.5	5.1	3.1	5.6	4.8	2.0	
CHWT-4.8	14.7	10.7	6.5	4.5	5.6	4.8	2.0	
CHWT-8.8	14.7	10.7	10.5	8.5	5.6	4.8	2.0	500
CHWT-10	20.3	16.3	11.7	9.7	5.6	4.8	2.0	
CHWT-14.1	20.3	16.3	15.8	13.8	5.6	4.8	2.0	
CHWT-21.7	22.0	18.0	23.4	21.4	5.6	4.8	2.0	

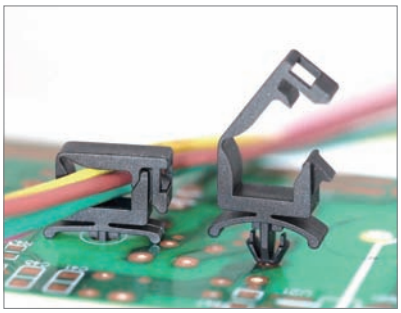





MOUNTING HOLE Ø3.5
THICKNESS 0.8~2.5



扣合示意圖
Close Diagram

Part No.	Package
CHWH-4.4	500

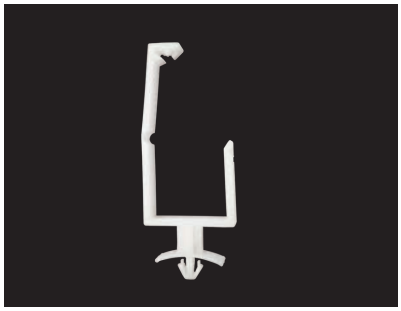

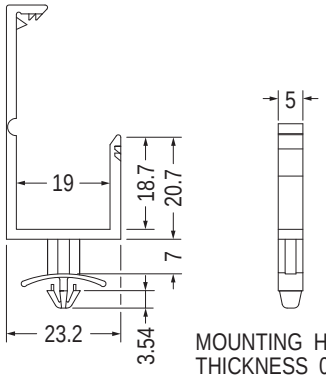


MOUNTING HOLE Ø4.8
THICKNESS 0.8~1.6


Part No.	Package
CHH-3	500

電線固定座 WIRE SADDLE

用途：固定電線於PC板或機板上，維修方便，不佔空間。

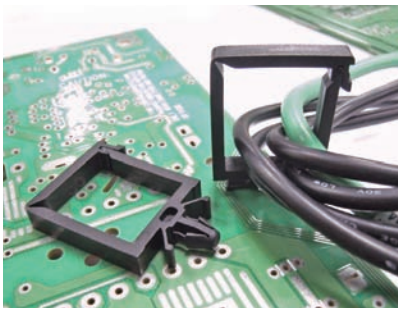


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

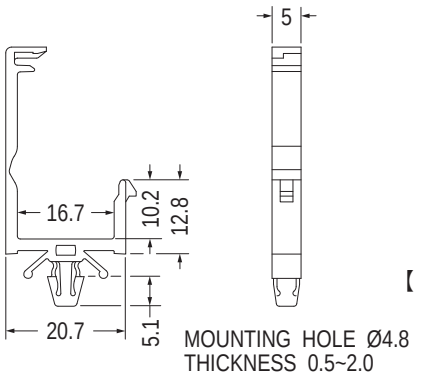

MOUNTING HOLE Ø4.8
THICKNESS 0.5~2.0


Part No.	Package
CHM-10	1000


【 CHM-20S 】

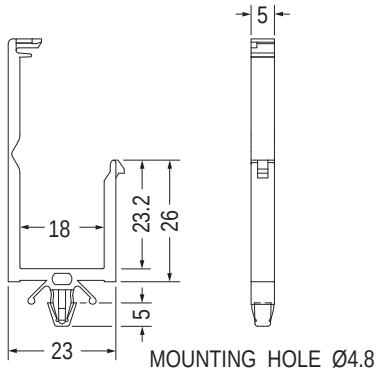

MOUNTING HOLE Ø4.8
THICKNESS: T

Part No.	T	Package
CHM-20	0.5~2.0	500
CHM-20S	0.8~2.0	

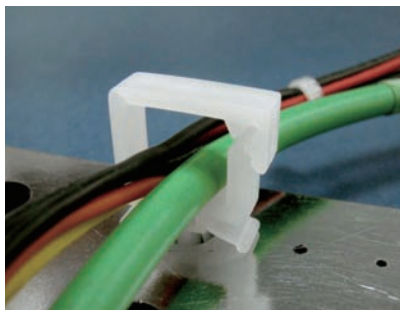


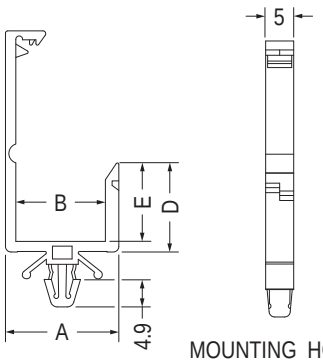


MOUNTING HOLE: ØG
THICKNESS: T

E217732
UL 1565


Part No.	A	B	D	E	G	T	Package	UL
CHC-1	20.25	16.0	15.9	14.0	4.8~5.0	1.2~2.4	500	UL
CHC-2	15.35	11.1	11.8	9.9	4.8~5.0	1.2~2.4		UL
CHC-3	15.35	11.1	6.8	4.9	4.8~5.0	1.2~2.4		UL
CHC-5	27.0	22.8	14.85	12.85	4.8	0.5~1.0		

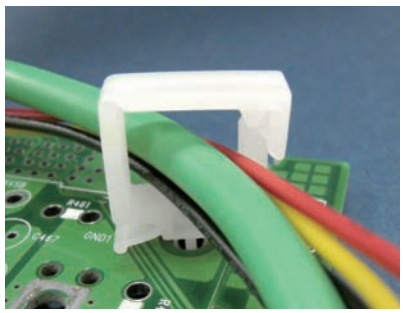



MOUNTING HOLE Ø3.0
THICKNESS 0.8~2.5

Part No.	Package
CHCS-1	500




MOUNTING HOLE Ø3.5
THICKNESS 0.8~2.5


Part No.	D	E	Package
CHH-1	6.8	4.9	500
CHH-2	11.8	9.9	

電線固定座 WIRE SADDLE

用途：固定電線於PC板或機板上，維修方便，不佔空間。

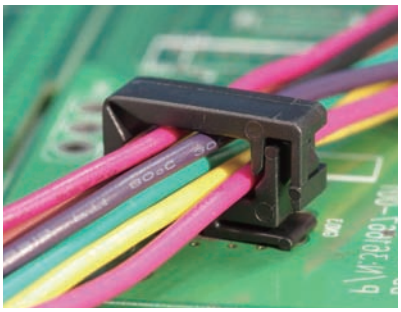


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




MOUNTING HOLE Ø4.8
THICKNESS 1.0

Part No.	Package
CHC-4	500




MOUNTING HOLE Ø4.8~Ø5.0
THICKNESS 1.2~2.4


Part No.	Package
CHC-6	1000



MOUNTING HOLE Ø4.0
THICKNESS 0.8~2.5


Part No.	Package
CHZB-1	500






MOUNTING HOLE
THICKNESS 0.8~1.6


Part No.	A	B	D	E	Package
CHZ-1	16.5	10.7	11.95	9.95	500
CHZ-2	22.1	16.3	12.85	10.85	
CHZ-3	22.1	16.3	16.95	14.95	
CHZ-4	23.8	18.0	24.55	22.55	






MOUNTING HOLE
THICKNESS 0.8~2.0

Part No.	Package
CHKA-1	1000





MOUNTING HOLE
THICKNESS 0.8~1.6



【 CHZA-XS 】




【 CHZA-X 】


Part No.	A	B	D	E	Package
CHZA-1	14.8	10.7	6.8	4.8	1000
CHZA-1S	14.8	10.7	6.8	4.8	
CHZA-2	14.8	10.7	11.0	9.0	
CHZA-2S	14.8	10.7	11.0	9.0	
CHZA-3	20.4	16.3	11.9	9.9	500
CHZA-3S	20.4	16.3	11.9	9.9	
CHZA-4	20.4	16.3	16.0	14.0	
CHZA-4S	20.4	16.3	16.0	14.0	
CHZA-5	22.1	18.0	23.6	21.6	
CHZA-5S	22.1	18.0	23.6	21.6	

電線固定座 WIRE SADDLE

用途：固定電線於PC板或機板上，維修方便，不佔空間。

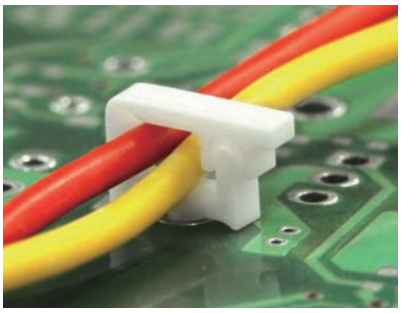



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




MOUNTING HOLE Ø1.7
THICKNESS 2.4

Part No.	Package
CHLB-1	1000

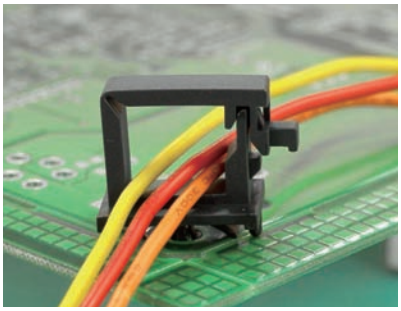


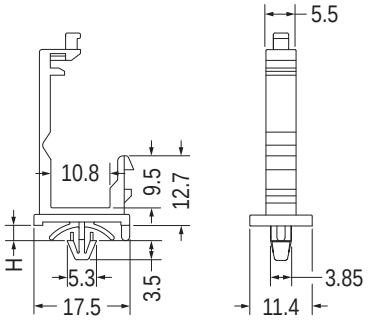




MOUNTING HOLE
THICKNESS: T


Part No.	H	T	Package
CHWE-1	2.79	1.6~2.0	1000
CHWE-1S	1.7	0.8~1.0	
CHWE-1M	2.0	0.8~1.0	

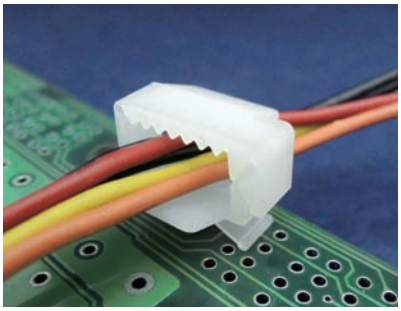


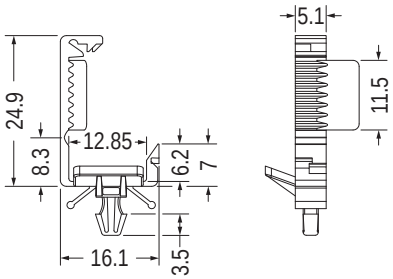

MOUNTING HOLE Ø3.5
THICKNESS 1.0~2.5

Part No.	Package
CHCA-1	500

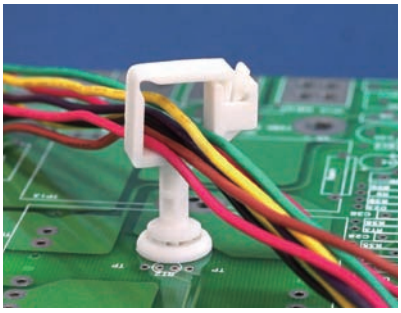



MOUNTING HOLE Ø4.6
THICKNESS 3.5

- Patented (專利品)


Part No.	Package
CHKC-1	1000

電線固定座 WIRE SADDLE

用途：固定電線於PC板或機板上，維修方便，不佔空間。





- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

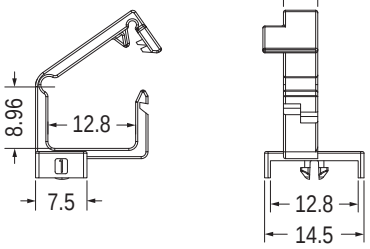

MOUNTING HOLE Ø3.0
THICKNESS 0.8

Part No.	Package
MIS-27	1000

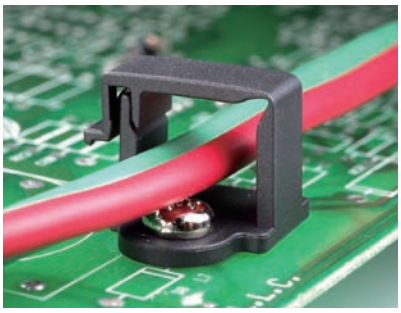


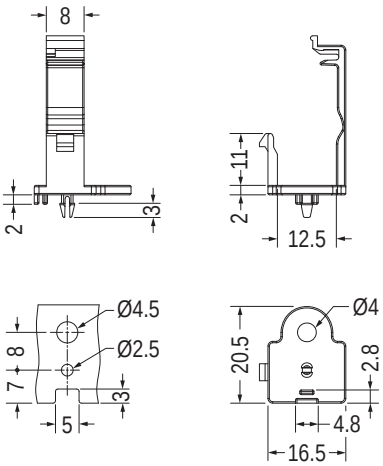



MOUNTING HOLE
THICKNESS 1.6

NEW

Part No.	Package
CHMK-5	1000

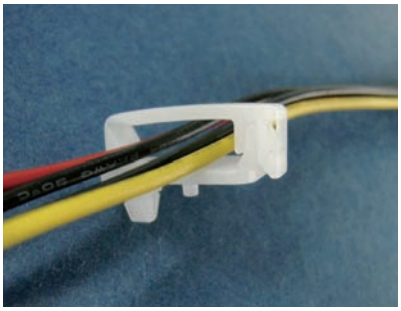


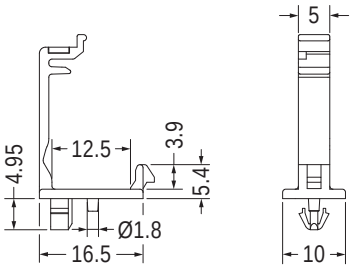





MOUNTING HOLE
THICKNESS 2.0

Part No.	Package
CHMK-1	1000

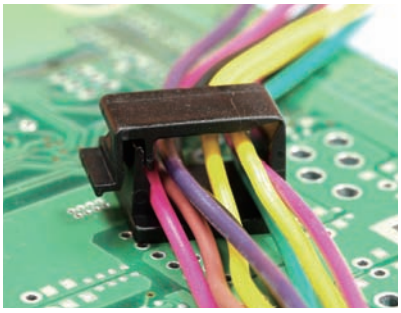

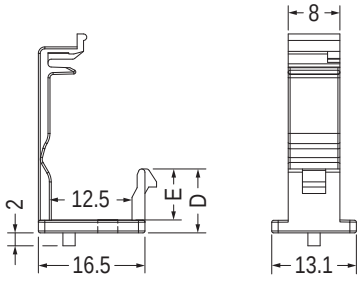




MOUNTING HOLE


Part No.	D	E	Package
CHMK-2	9.9	7.9	1000
CHMK-3	13.0	11.0	


電線固定座 WIRE SADDLE

用途：固定電線於PC板或機板上，維修方便，不佔空間。

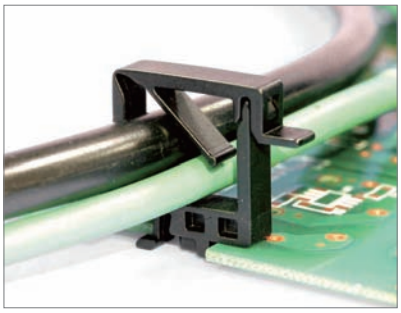


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm







MOUNTING HOLE
THICKNESS 0.6~0.8

Part No.	Package
CHACB-1	1000

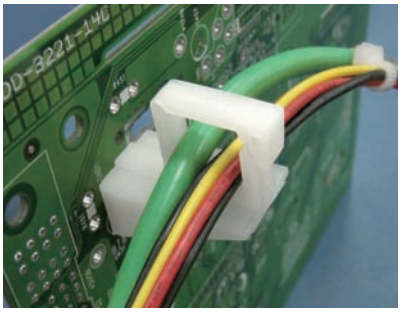







MOUNTING HOLE


Part No.	Package
CHW-1	250





MOUNTING HOLE


Part No.	Package
CHW-2	250




Part No.	Package
CHW-1T	250

電線固定座 WIRE HOLDER

用途：背膠式，固定電線，維修方便。

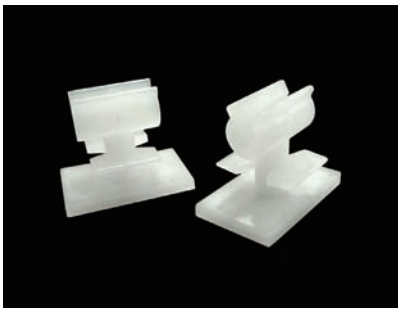


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




3M DOUBLE ADHESIVE TAPE

Part No.	Package
THVA-1	500







MOUNTING HOLE
THICKNESS 1.2


Part No.	Package
THVB-1	500

電線固定座 WIRE MOUNT

用途：固定電線於PC板或機板上，維修方便，不佔空間。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



MOUNTING HOLE Ø5.5
THICKNESS 0.8~2.3


Part No.	Package
OCSH-14	500






MOUNTING HOLE Ø6.5
THICKNESS 1.2

Part No.	Package
OCC-4	500



MOUNTING HOLE Ø6.0
THICKNESS 2.0


Part No.	Package
OCC-5	1000




MOUNTING HOLE Ø6.5
THICKNESS 2.0


Part No.	Package
OCC6.5-5	1000

用途：固定電線於PC板或機板上，維修方便，不佔空間。

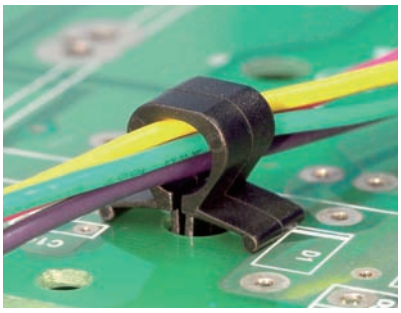


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm






【 OCCB-6.5 】


Part No.	A	B	C	D	E	G	T	Package
OCC-6	9.2	6.9	5.0	6.2	16.0	6.0	2.0	1000
OCCB-6.5	10.15	7.8	6.3	6.82	18.9	6.5	2.5~4.0	
OCC-8	11.2	6.9	7.0	8.2	17.6	6.0	2.0	500
OCC-10	13.2	6.9	9.0	10.2	20.1	6.0	2.0	

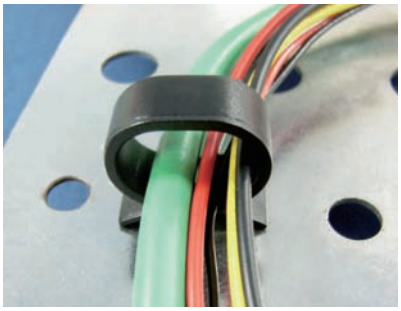





Part No.	Package
OCCB-15	500





Part No.	Package
OCCB-20	500

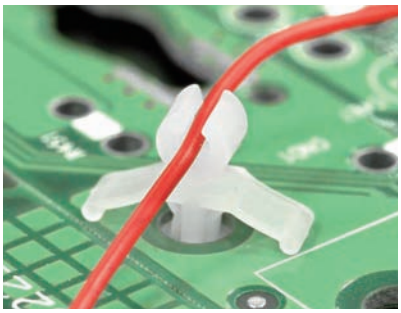





Part No.	Package
THV-11	1000

電線固定座 WIRE MOUNT

用途：固定電線於PC板或機板上，維修方便，不佔空間。

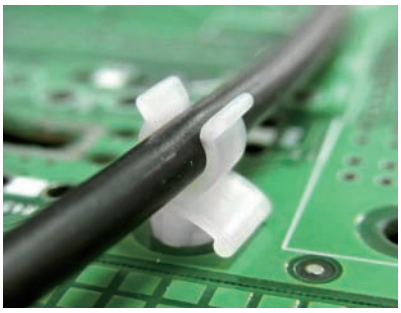


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




MOUNTING HOLE Ø4.0
THICKNESS 0.8~2.5

Part No.	D	E	Package
THV-1	4.5	17.1	500
THV-7	12.5	25.1	




MOUNTING HOLE Ø4.0
THICKNESS 0.8~2.5

Part No.	D	E	Package
THV-3	4.6	16.8	500
THV-4	8.5	20.7	




MOUNTING HOLE
THICKNESS 0.8~1.2

Part No.	Package
THV-6	1000




MOUNTING HOLE
THICKNESS 0.6

Part No.	Package
THV-5	500




MOUNTING HOLE
THICKNESS 3.0


Part No.	Package
THV-9	1000

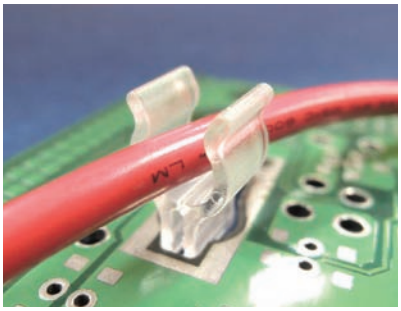


- Material: PC (UL)
- Flame Class: 94V-2
- Color: Transparent
- Unit: mm



Part No.	Package
THVD-1	500

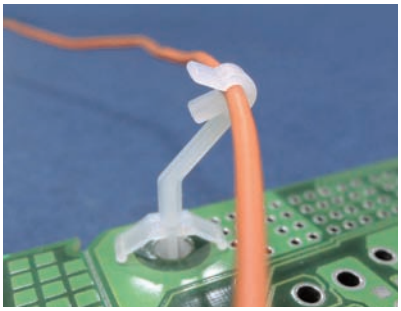

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




MOUNTING HOLE Ø4.0
THICKNESS 0.8~2.5


Part No.	Package
THV-8	1000

電線固定座 WIRE MOUNT

用途：固定電線於PC板或機板上，維修方便，不佔空間。

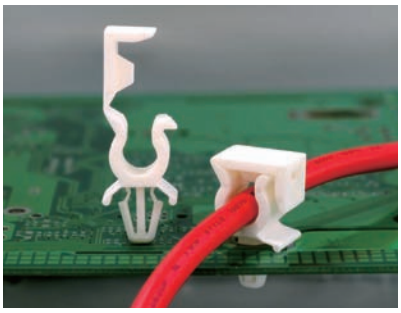


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

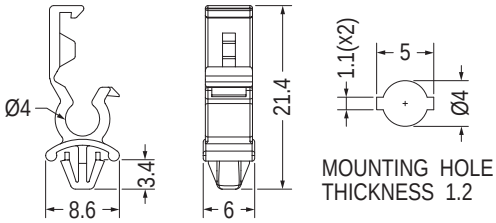


MOUNTING HOLE
THICKNESS 1.2

Part No.	Package
THV-14	1000



MOUNTING HOLE Ø6.0
THICKNESS 1.2

Part No.	Package
THV-17	1000




MOUNTING HOLE: ØG
THICKNESS 1.2


Part No.	A	B	D	G	K	L	Package
THV-15	13.6	9.63	7.6	6.0	7.0	39.8	1000
THV-16	11.5	3.6	5.0	4.0	1.9	21.23	

電線固定座 CABLE CLIP

用途：固定電線於PC板或機板上，維修方便，不佔空間。

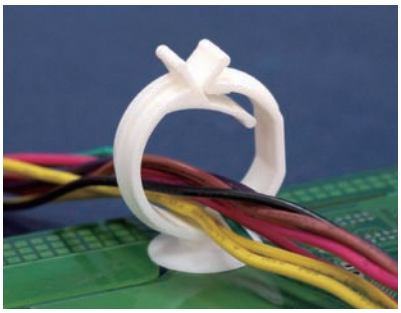


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




MOUNTING HOLE Ø6.5~Ø7.0
THICKNESS 0.6~2.0

Part No.	Package
THW-2	500




MOUNTING HOLE Ø6.35
THICKNESS 0.8~1.6

Part No.	Package
THW-1	500



MOUNTING HOLE Ø4.8
THICKNESS 1.0~3.2

Part No.	Package
SLC-17	500



MOUNTING HOLE Ø4.0
THICKNESS 0.6~2.0


Part No.	Package
SLCB-8	1000

電線固定座 CABLE CLIP

用途：固定冷陰極管或電線於PC板或機板上，維修方便，不佔空間。





- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




MOUNTING HOLE Ø4.0
THICKNESS 0.8~2.0

Part No.	E	Package
SLCPA-1	20.8	500
SLCPA-2	25.85	

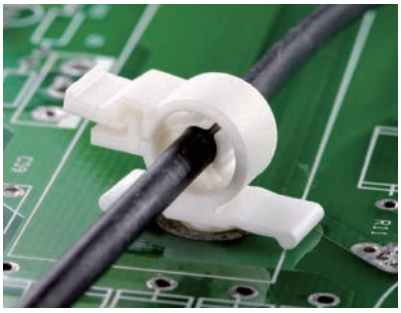



MOUNTING HOLE Ø4.8
THICKNESS 0.5~2.0



裝配示意圖
Assembly Diagram

NEW


Part No.	Package
SLCPA-3	500

隔離束線座 STANDOFF CABLE CLIP

用途：固定電線於PC板或機板上，強韌牢固，維修方便，不佔空間。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




MOUNTING HOLE Ø4.8
THICKNESS 0.8~2.0

Part No.	Package
SLC-19	500



MOUNTING HOLE Ø4.8
THICKNESS 0.8~2.0


Part No.	D	E	Package
SLCC-12.7	12.7	41.2	500
SLCC-15.9	15.9	44.4	
SLCC-19.1	19.1	47.6	
SLCC-22.2	22.2	50.7	
SLCC-25.4	25.4	53.9	

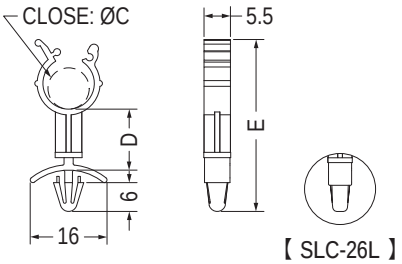

【 SLC-26L 】


MOUNTING HOLE Ø4.8
THICKNESS 0.8~2.0

Part No.	C	D	E	Package
SLC-21	8.6	12.7	35.8	1000
SLC-22	12.2	12.7	39.4	500
SLC-24	8.6	6.4	29.5	
SLC-25	8.6	19.1	42.1	
SLC-26	6.7	19.1	39.3	
SLC-26L	6.7	19.1	39.3	



MOUNTING HOLE Ø4.8~Ø5.0
THICKNESS 0.7~2.0


Part No.	Package
SLCE-13	500




MOUNTING HOLE Ø4.8
THICKNESS 1.6

Part No.	Package
SLCD-9.5	500

用途：固定電線於PC板或機板上，強韌牢固，維修方便，不佔空間。

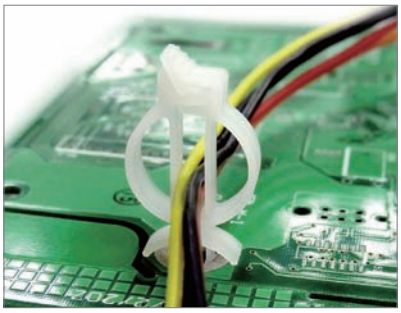



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

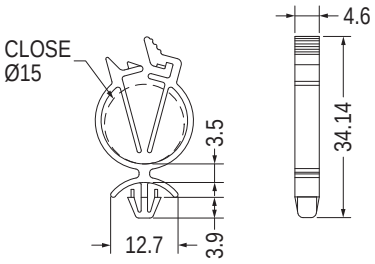

MOUNTING HOLE Ø4.8
THICKNESS 0.8~2.0


Part No.	Package
SLCA-15	500

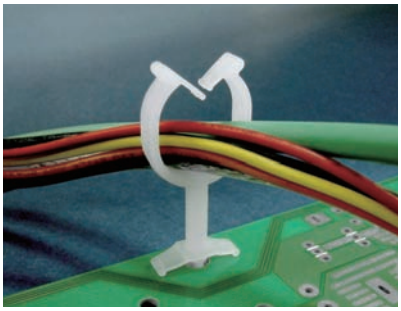




MOUNTING HOLE Ø3.5
THICKNESS 0.6~1.6

Part No.	Package
THE-11	500




MOUNTING HOLE Ø3.5
THICKNESS 1.2~2.0

Part No.	Package
THE-39	500




MOUNTING HOLE Ø4.8~Ø5.0
THICKNESS 0.5~2.0

Part No.	Package
THE-38	500



MOUNTING HOLE Ø4.8~Ø5.0
THICKNESS 0.5~2.3


Part No.	Package
THE-9	500




MOUNTING HOLE Ø4.8~Ø5.0
THICKNESS 0.5~2.3

E217732
UL 1565

Part No.	D	E	Package
THE-12	12.7	38.5	500
THE-17	16.8	42.6	
THE-25	25.0	50.8	
THE-37	36.8	62.6	

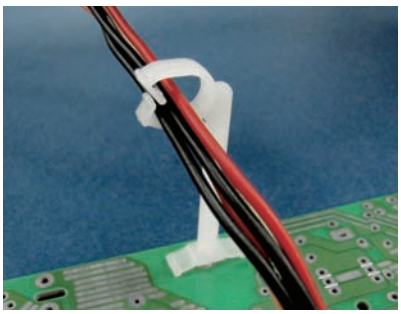




MOUNTING HOLE Ø4.8~Ø5.0
THICKNESS 0.5~2.1

Part No.	Package
THEL-41	500


扭式固定座 TWIST LOCK

用途：可快速綑紮及解開電線，安裝容易。

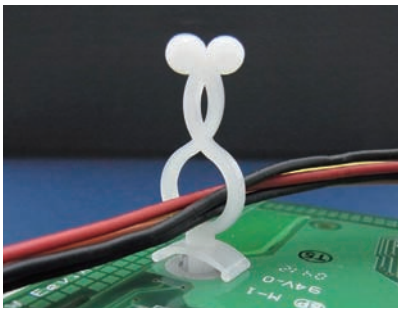


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

E217732
UL 1565

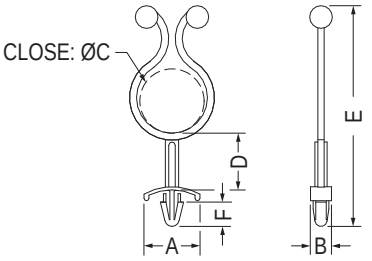


MOUNTING HOLE: ØG
THICKNESS: T

Part No.	A	B	C	D	E	F	G	T	Package	UL
THA-1	16.1	6.0	6.1	3.1	33.8	7.3	4.8~5.0	0.8~3.0	1000	UL
THA-2	16.0	5.9	6.1	20.0	51.0	7.3	4.8~5.0	0.8~3.0	500	UL
THA-3	16.0	5.9	6.1	35.3	66.0	7.3	4.8~5.0	0.8~3.0		UL
THA-4	16.0	6.0	9.8	2.8	39.6	7.3	4.8~5.0	0.8~3.0	1000	UL
THA-5	16.0	6.0	9.8	20.0	56.8	7.3	4.8~5.0	0.8~3.0	500	UL
THA-6	16.2	5.9	9.8	35.2	71.5	7.3	4.8~5.0	0.8~3.0		UL
THA-7	16.0	5.9	13.8	3.0	42.0	7.3	4.8~5.0	0.8~3.0	1000	UL
THA-8	16.1	6.0	13.8	20.4	59.3	7.3	4.8~5.0	0.8~3.0	500	UL
THA-9	16.0	5.9	13.8	35.8	74.7	7.3	4.8~5.0	0.8~3.0		UL
THA-10	16.0	6.0	18.4	16.2	63.5	7.3	4.8~5.0	0.8~3.0		UL
THA-11	16.0	5.4	22.3	3.0	56.8	7.3	4.8~5.0	0.8~2.5		UL
THA-12	16.0	6.0	9.7	15.8	53.1	7.3	4.8~5.0	0.8~3.0		UL
THA-14	16.0	6.0	18.7	8.0	55.3	7.3	4.8~5.0	0.8~3.0		UL
THA-15	16.4	6.0	6.8	10.5	43.8	7.3	4.8~5.0	0.8~3.0		
THA-16	10.5	6.0	7.0	5.6	34.7	7.3	4.8~5.0	0.8~2.0		
THA-19	13.8	6.0	9.8	4.4	40.9	7.2	4.8~5.0	0.8~2.5		
THA-21	12.9	4.8	7.7	8.0	37.7	3.7	3.0	0.8~2.4	1000	
THA-22	15.5	4.9	18.5	8.1	58.2	5.8	3.5	1.0~2.0	500	

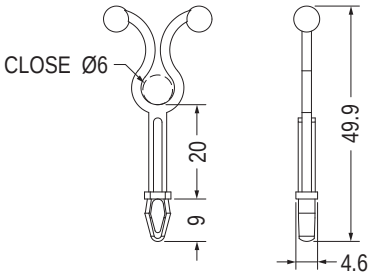


MOUNTING HOLE Ø4.6
THICKNESS 2.5


Part No.	Package
THN-1	500

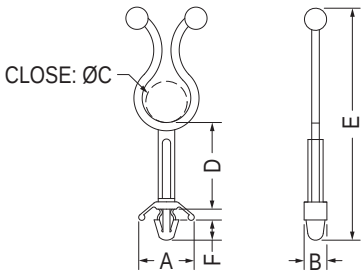

MOUNTING HOLE: ØG
THICKNESS 0.8~2.2

Part No.	A	B	C	D	E	F	G	Package
THC-1	13.8	5.5	10.4	21.0	56.5	5.0	4.8	500
THC-1S	9.2	4.9	7.2	3.0	26.7	3.1	4.0	1000
THC-2	13.8	5.6	5.0	34.0	59.8	5.0	4.8	500
THC-3	14.0	5.6	10.4	4.5	37.7	5.0	4.8	1000
THC-4	13.5	5.7	10.0	43.5	78.1	4.9	4.8	250

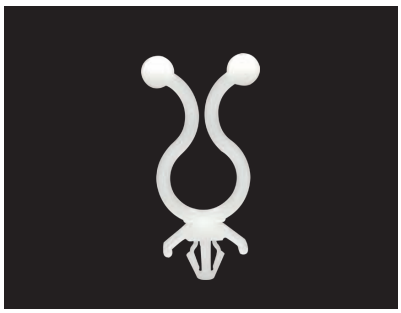

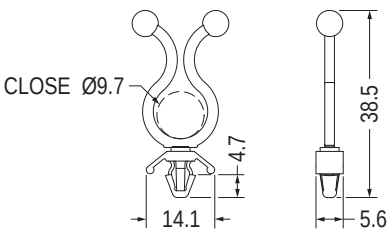


MOUNTING HOLE Ø4.8
THICKNESS 0.8~2.5


Part No.	Package
THC-6	1000

扭式固定座 TWIST LOCK

用途：可快速綑紮及解開電線，安裝容易。

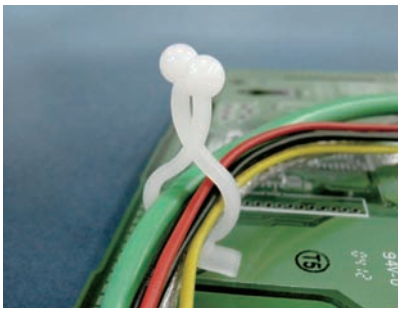


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




MOUNTING HOLE Ø4.0
THICKNESS 0.8~2.0

Part No.	Package
THC-5	1000




MOUNTING HOLE Ø4.0
THICKNESS 0.8~2.0


Part No.	Package
THI-4	500

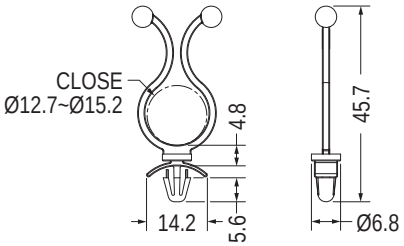

MOUNTING HOLE Ø4.75~Ø4.8
THICKNESS 0.8~2.0


Part No.	Package
★THD-5	500

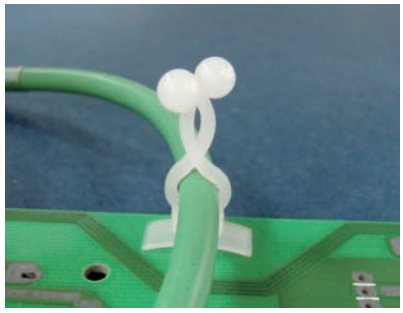




MOUNTING HOLE Ø4.8
THICKNESS 0.8~2.0


Part No.	Package
THL-4.8	1000

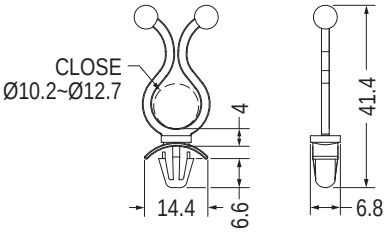

MOUNTING HOLE Ø6.0
THICKNESS 0.78~2.0

Part No.	Package
THD-3	500

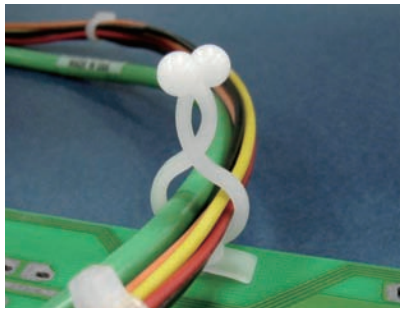




MOUNTING HOLE Ø4.8~Ø5.0
THICKNESS 0.8~2.0


Part No.	C	D	E	F	Package
THD-1	9.8	4.9	40.2	5.2	500
THD-2	17.1	4.9	49.4	5.2	
THD-4	17.5	4.85	47.6	3.6	

扭式固定座 TWIST LOCK


用途：可快速綑紮及解開電線，安裝容易。

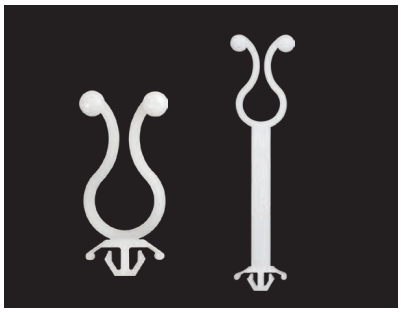


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
THG-12	500

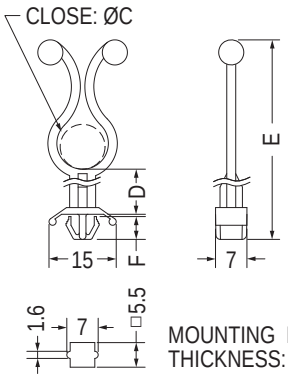



Part No.	C	D	E	F	T	Package
THG-13	10.0	47.0	81.45	5.1	0.8~1.6	500
THG-14	18.0	6.0	52.2	5.9	1.0~2.0	

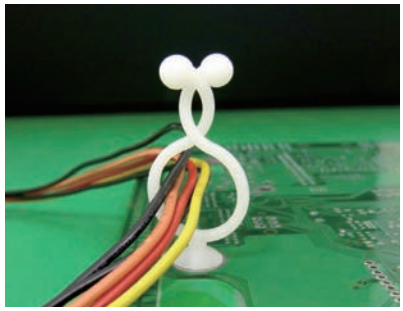





Part No.	Package
THCA-1	500

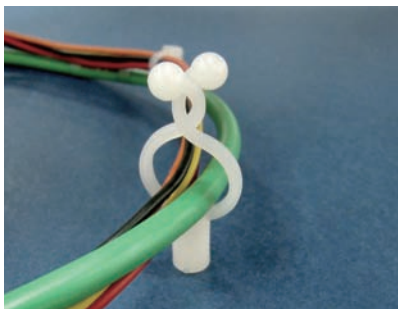







Part No.	Package
THJ-15	500

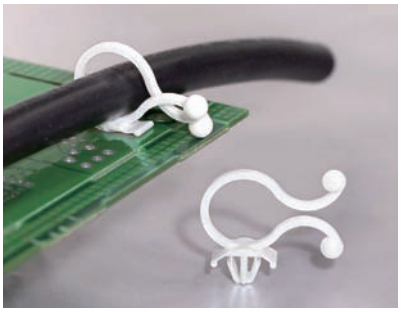




Part No.	F	G	T	Package
THH-8	5.0	4.0	1.6~4.0	500
THH-9	3.5	3.0	0.8~2.0	

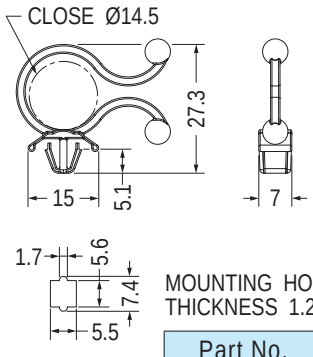


Part No.	Package
THH-13	500

扭式固定座 TWIST LOCK


用途：固定電線於PC板或機板上，維修方便，不佔空間。

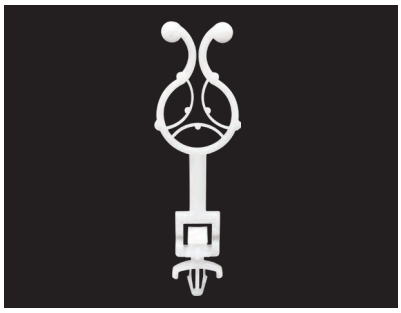

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm





CABLE BUNDLE
RANGE 3.5~12.0



MOUNTING HOLE
THICKNESS 0.8~2.0

Part No.	Package
THFA-1	500

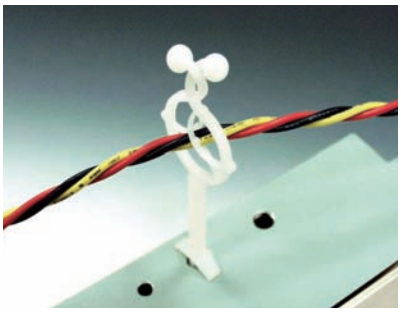




MOUNTING HOLE Ø4.8~Ø5.0
THICKNESS 0.5~2.3


E217732
UL 1565

Part No.	Package
THF-1	500

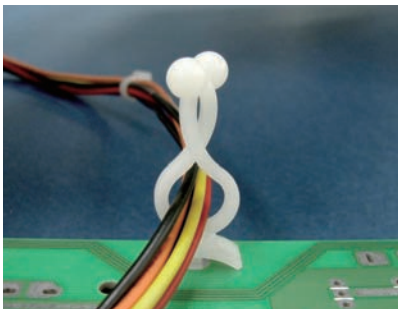


用途：可快速捆紮及解開電線，裝配容易，可用於木板上。

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




MOUNTING HOLE: ØG

Part No.	B	G	Package
WKL-10	5.5	5.0	500
WKL-10A	5.0	4.5	



MOUNTING HOLE Ø7.9
PANEL THICKNESS 6.4

Part No.	C	D	Package
WTL-11	10.0	28.6	500
WTL-19	18.0	37.5	




MOUNTING HOLE Ø7.9
PANEL THICKNESS 6.4


Part No.	C	D	E	Package
WTL-764	7.6~10.2	25.4	6.4	500
WTL-795	7.6~10.2	25.4	9.5	
WTL-7127	7.6~10.2	25.4	12.7	
WTL-7159	7.6~10.2	25.4	15.9	
WTL-1064	10.2~12.7	28.6	6.4	
WTL-1095	10.2~12.7	28.6	9.5	
WTL-10127	10.2~12.7	28.6	12.7	
WTL-10159	10.2~12.7	28.6	15.9	
WTL-1764	17.8~20.3	38.1	6.4	
WTL-1795	17.8~20.3	38.1	9.5	
WTL-17127	17.8~20.3	38.1	12.7	
WTL-17159	17.8~20.3	38.1	15.9	

扭式固定座 TWIST LOCK


用途：背膠式，可快速拆卸，固定電線，維修方便，整齊美觀。

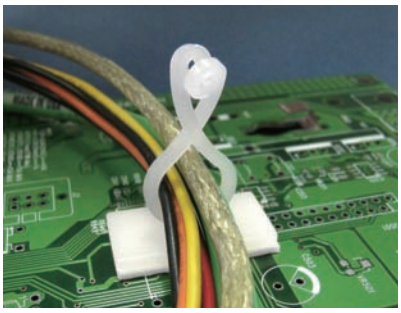

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

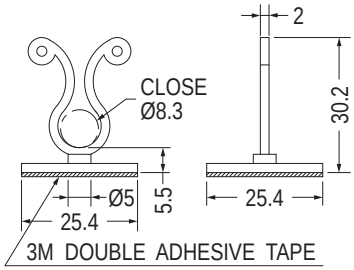


Part No.	Package
KLS-1	250

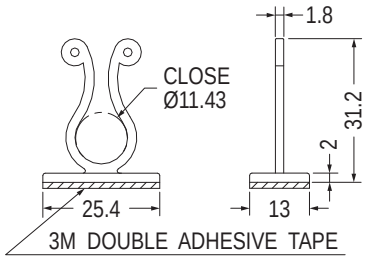


Part No.	Package
KLF-11	500







Part No.	Package
KL-26	250

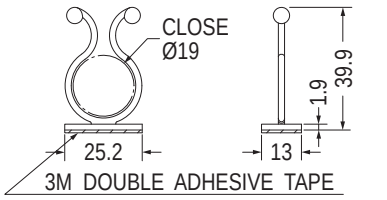


Part No.	Package
KLR-1	500

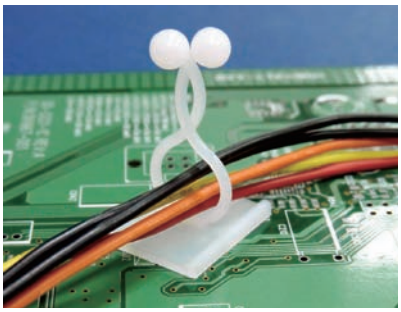




E217732
UL 1565

Part No.	A	B	C	D	Package	UL
KL-1	20.0	20.0	13.8	31.9	250	UL
KL-2	20.0	14.0	8.5	26.2	500	UL
KL-2L	25.0	13.0	8.2	27.9		UL
KL-3	21.0	19.0	10.0	28.2		UL
KL-4	18.5	21.0	10.0	27.3		
KL-5	38.0	20.0	34.0	56.2	100	UL
KL-6	10.0	19.8	5.8	27.6	500	
KL-7	20.0	13.0	7.2	21.9		UL
KL-11	21.0	19.0	10.0	30.0		
KL-14	22.1	13.0	12.5	34.8	250	
KL-16	25.0	13.0	17.0	37.0		UL
KL-19	25.0	13.0	20.0	39.0		UL
KL-22	28.0	15.0	23.0	41.0		UL
KL-23	25.0	20.0	13.2	34.7		
KL-25	24.9	17.9	18.0	38.0		




Part No.	Package
KLB-1	500




Part No.	Package
KLC-1	250


扭式固定環 TWIST LOCK

用途：用於配線中，有快速捆紮及解開之優點，可重覆使用。

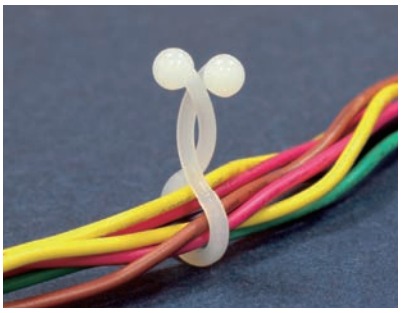

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm





【 TL-34, TL-36, TL-37 】

E217732
UL 1565

Part No.	B	C	D	Package	UL
TL-1	5.1	4.0	17.8	1000	UL
TL-2	8.3	7.3	23.8		UL
TL-3A	11.5	10.0	27.5		UL
TL-4	15.4	13.8	30.4		UL
TL-5	18.8	17.2	35.0		UL
TL-6	25.8	24.2	41.4	500	UL
TL-7	22.0	19.5	42.0		UL
TL-8	5.6	5.0	16.5		
TL-9	11.0	9.7	30.0		
TL-10	19.2	16.3	38.5		
TL-11	5.2	4.2	22.0		
TL-12	8.6	8.0	26.0		


Part No.	B	C	D	Package	UL
TL-13	13.2	11.5	32.5	500	
TL-14	15.0	14.5	35.1		
TL-27	27.5	27.0	46.0		
TL-28	29.0	26.8	55.5		
TL-29	18.0	17.0	40.0		
TL-30	19.2	16.5	38.5		
TL-31	18.6	17.0	40.0		
TL-32	14.8	13.5	35.0		
TL-34	5.1	4.0	17.8		
TL-35	34.0	32.0	56.0		
TL-36	22.0	20.0	42.0		
TL-37	24.9	23.0	44.3		
TL-38	40.0	38.0	63.0		


扭式固定座 TWIST LOCK

用途：可快速細紮及解開電線，安裝容易。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

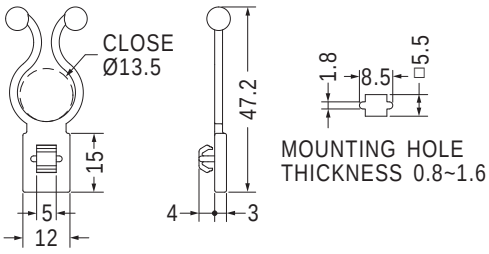




Part No.	Package
THJA-1	500

Part No.	Package
THM-1	1000

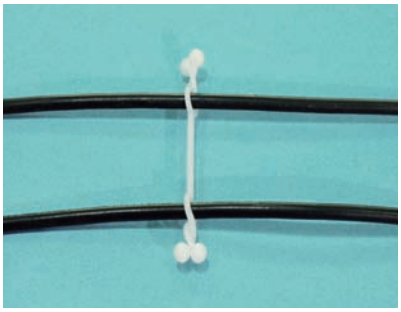


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

用途：用於電子內部電線固定，安裝容易，美觀不脫落。



【 2L-10 】




E217732
UL 1565


Part No.	A	B	C	D	Package	UL
2L-7	75.0	1.8	6.3	33.2	500	UL
2L-8	56.0	1.6	8.5	13.2		UL
2L-10	82.2	2.0	8.6	30.0		

防落下固定帶 ANIT-TIP STRAPS


用途：預防LCD-TV於地震時落下，固定物件用。

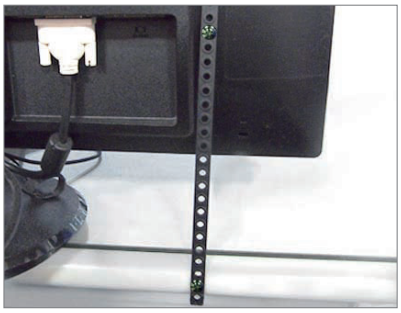


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
CCHD-220	500



Part No.	A	Poles	Package
CCHD-172	172.75	19.0	500
CCHD-210	210.0	22.0	



Part No.	Package
CCHD-175	500

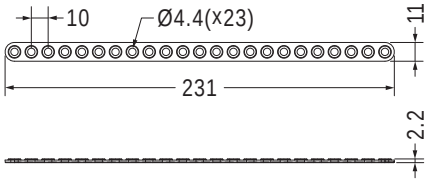


- Material: PP
- Color: Black


Part No.	Package
CCHD-231	500

束線帶固定座 CABLE TIE MOUNT

用途：配合束線帶使用，固定電線，背膠式亦可配合螺絲，使機器內部走線美麗、整齊。

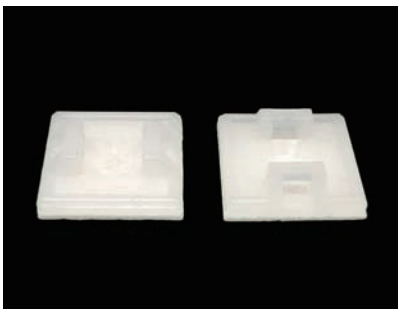



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



3M DOUBLE ADHESIVE TAPE


Part No.	Package
CM-18	1000

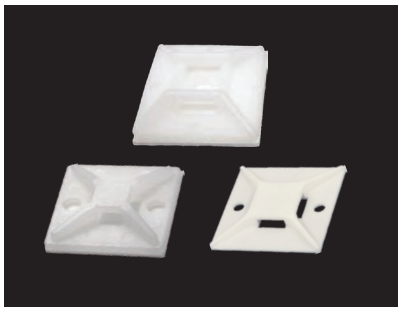




3M DOUBLE ADHESIVE TAPE

Part No.	Package
CM-1	500



3M DOUBLE ADHESIVE TAPE

Part No.	Package
CM-28S	250




3M DOUBLE ADHESIVE TAPE

Part No.	Package
CM-38	250

用途：配合束線帶使用，固定電線，背膠式亦可配合螺絲，使機器內部走線美麗、整齊。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



3M DOUBLE ADHESIVE TAPE


Part No.	Package
CM-25	500



3M DOUBLE ADHESIVE TAPE


E217732
UL 1565


Part No.	A	C	D	E	Package	UL
CM-13	13.0	3.2	3.2	1.3	1000	UL
CM-16	16.0	4.0	3.8	1.5		
CM-19	19.1	4.0	4.0	1.6	500	UL
CM-19L	19.5	4.8	5.0	1.7		
CM-20	20.0	4.3	4.8	1.6		UL



3M DOUBLE ADHESIVE TAPE


Part No.	A	C	D	E	F	Package
CM-19S	19.0	5.0	4.0	1.9	3.0	500
CM-19SL	19.0	5.0	4.0	2.0	4.2	
CM-28	27.8	5.5	6.0	2.0	5.0	250

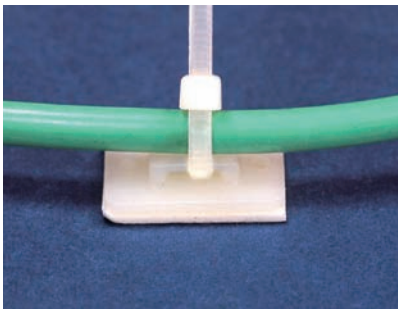




3M DOUBLE ADHESIVE TAPE

Part No.	Package
CM-29	1000

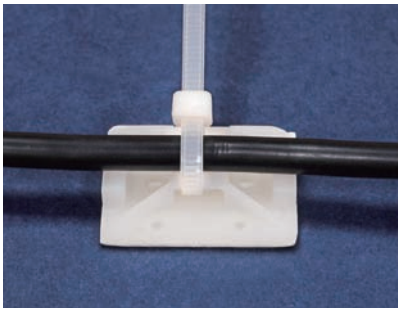




3M DOUBLE ADHESIVE TAPE


Part No.	Package
CM-30	250

束線帶固定座 CABLE TIE MOUNT


用途：用螺絲固定於機板上，配合束線帶固定電線。

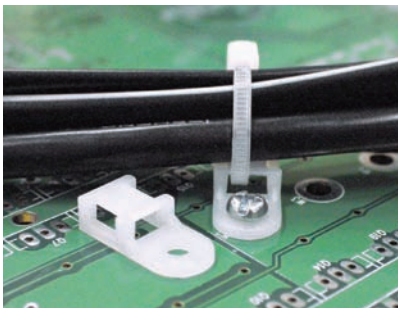


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
TH-1	1000




Part No.	F	Package
TH-3	3.6	1000
TH-3L	4.7	




Part No.	F	Package
TH-4	4.3	1000
TH-7	6.5	




Part No.	Package
TH-6	1000




Part No.	Package
TH-5	1000



Part No.	Package
TH-5-1	1000




Part No.	Package
TH-8	1000




Part No.	Package
TH-9	1000

束線帶固定座 CABLE TIE MOUNT

用途：用螺絲固定於機板上，配合束線帶固定電線。

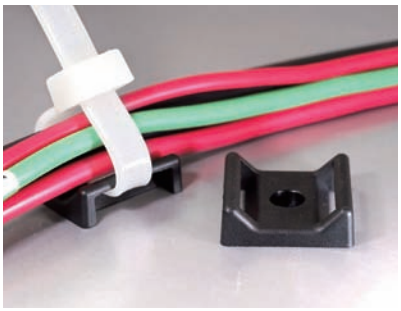


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




- Material: Nylon 66 (UL)+GF
- Flame Class: 94HB/94V-0

Part No.	Package
TM-4	500




Part No.	A	B	C	D	E	F	H	Package
TH-2	15.2	9.7	6.6	6.9	2.0	3.5	5.2	1000
TH-2S	13.3	8.2	5.85	5.9	1.75	3.2	3.6	



Part No.	A	B	C	D	E	F	H	Package
TM-2S6	14.9	9.6	7.2	7.8	1.5	3.7	5.6	1000
TM-2S8	14.9	9.6	7.2	7.8	1.5	4.5	5.6	
TM-3S8	22.0	16.0	9.6	8.0	2.3	4.5	9.2	500
TM-3S10	22.0	16.0	9.6	9.6	2.3	4.8	9.2	
TM-3S25	22.0	16.0	9.6	12.7	2.3	6.4	9.2	






Part No.	Package
THMA-1	1000




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

用途：使用背膠固定於機板上，配合束線帶固定電線。



3M DOUBLE ADHESIVE TAPE

Part No.	Package
THU-1	1000




3M DOUBLE ADHESIVE TAPE


Part No.	Package
THU-2	1000

束線帶固定座 CABLE TIE MOUNT

用途：配合束線帶固定電線於機殼上，方便安裝，強韌牢固。

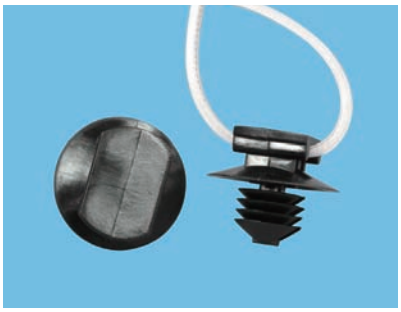


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




MOUNTING HOLE Ø6.0~Ø6.4
THICKNESS 0.8~9.0

Part No.	Package
CCMF-2	1000




MOUNTING HOLE Ø4.5~Ø5.0
THICKNESS 0.8~7.0

Part No.	Package
CCMF-3	1000



MOUNTING HOLE Ø6.5~Ø7.0
THICKNESS 0.8~3.0


Part No.	Package
CCMF-5	1000



MOUNTING HOLE Ø6.4~Ø7.1
THICKNESS 0.8~6.0


Part No.	Package
CCMF-7	1000






MOUNTING HOLE Ø7.9
THICKNESS 6.4

Part No.	Package
CCMF-1	1000

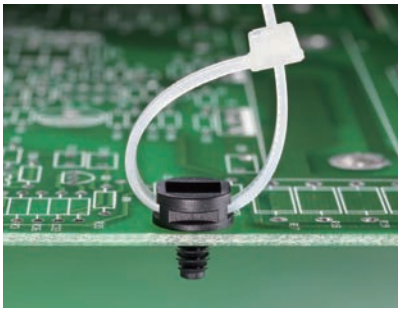




MOUNTING HOLE Ø3.3~Ø4.0 (M4)
THICKNESS 1.0~3.0

NEW


・料號尾碼加-C，做為車規識別

Part No.	Package
CCMF-9-C	1000

用途：配合束線帶固定電線於機殼上，方便安裝，強韌牢固。

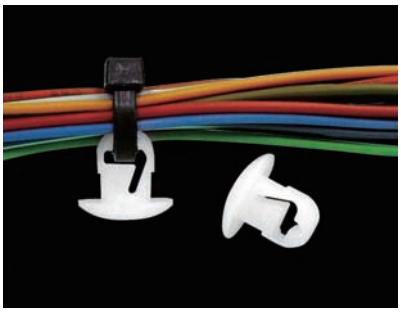


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

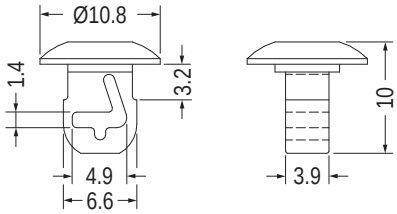

MOUNTING HOLE Ø6.4


Part No.	Package
CCM-1	1000




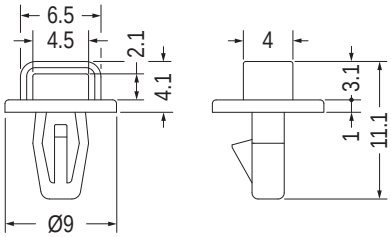

MOUNTING HOLE Ø4.0
THICKNESS 1.6~2.0

Part No.	Package
CCMT-2	1000

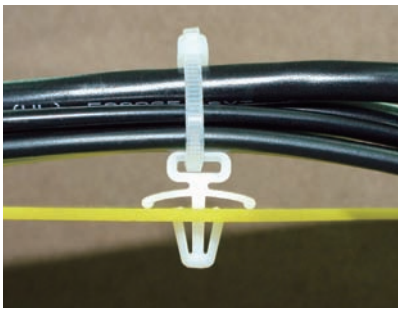




MOUNTING HOLE Ø4.8
THICKNESS 0.8~2.0


• Patented (專利品)

Part No.	Package
CCME-1	1000




MOUNTING HOLE Ø6.2~Ø6.3
THICKNESS 0.8~3.6

Part No.	Package
CCMW-3	1000




MOUNTING HOLE Ø6.4
THICKNESS 3.17

Part No.	Package
CCMV-1	1000



MOUNTING HOLE Ø6.4
THICKNESS 1.2~2.8

Part No.	Package
CCMW-1	1000



MOUNTING HOLE Ø6.2
THICKNESS 0.8~3.2


Part No.	Package
CCMW-2	1000

電線固定座 WIRE SADDLE

用途：固定電源於PC板或機板上，維修方便，不佔空間。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

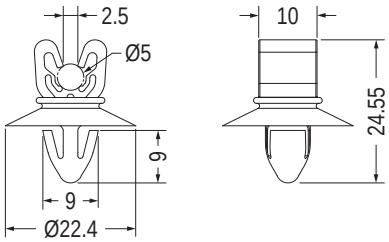


MOUNTING HOLE Ø8.0
THICKNESS 1.2


Part No.	Package
CHUK-1	500


插頭固定扣 SOCKET MOUNT

用途：配合束線帶固定電線於機殼上，方便安裝，強韌牢固。

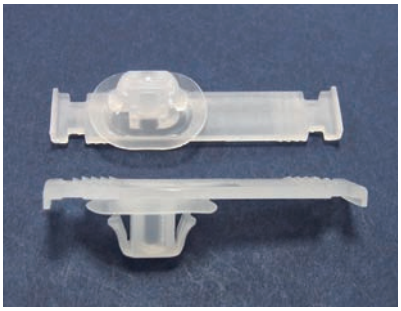

- Material: PP (UL)
- Flame Class: 94HB
- Color: Natural/Black
- Unit: mm







RECOMMENDED MOUNTING HOLE
RECOMMENDED THICKNESS 2.0

Part No.	Package
YJECL-1	500







RECOMMENDED MOUNTING HOLE
RECOMMENDED THICKNESS 2.0


Part No.	Package
YJECL-2	500

電線固定扣 CABLE CLAMP

用途：用於電線之固定。



- Material: PC (UL)
- Flame Class: 94V-2
- Color: Natural/Transparent
- Unit: mm



MOUNTING HOLE Ø3.0
THICKNESS 2.4


Part No.	Package
LPZ-5	1000

電線固定扣 WIRE BUTTON

用途：固定電線於機器上，維修方便，不佔空間。




- Material: Nylon 6 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

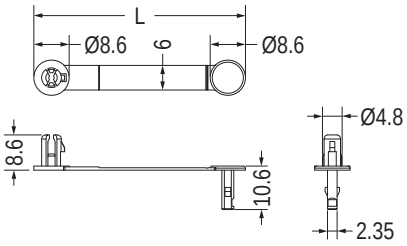

MOUNTING HOLE Ø4.8
THICKNESS: T

Part No.	L	T	Package
CCU-2	51.6	0.8~3.2	500
CCU-3	71.6	0.6~3.0	
CCU-4	99.0	0.6~3.0	

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black

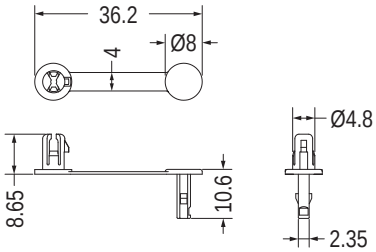


MOUNTING HOLE Ø4.8
THICKNESS 3.5

Part No.	Package
CCU-1	500

接地線夾 GROUNDING CABLE CLAMP


用途：用於夾持隔離電線再用螺絲固定，接地效果佳，防干擾。




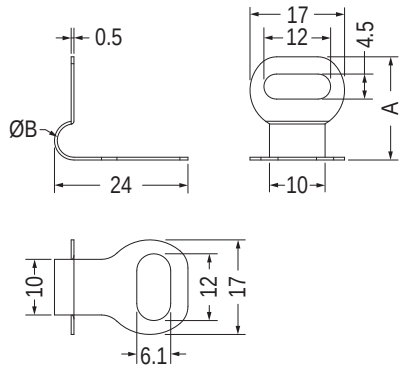

- Material: SPTE


Part No.	A	B	Package
KMCC-1	18.55	6.0	500
KMCC-2	19.6	8.0	

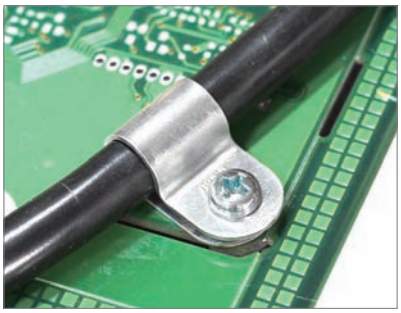

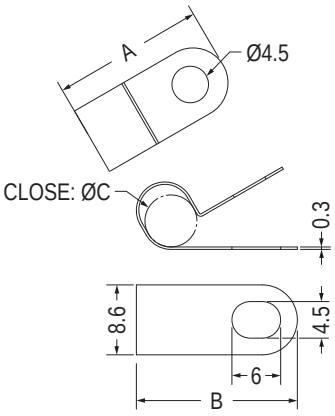


- Material: SUS

Part No.	A	B	C	Package
KTCC-3	17.2	17.6	3.0	1000
KTCC-4	17.2	17.6	4.0	
KTCC-5	17.9	18.7	4.8	
KTCC-6	18.7	19.8	6.4	
KTCC-9	18.65	20.62	9.0	

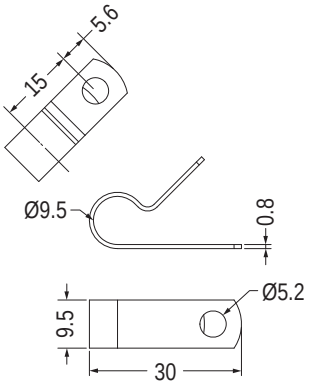


- Material: Aluminum

Part No.	Package
KTCC-22	1000




- Material: Aluminum

Part No.	Package
KTCC-23	1000



- Material: Aluminum

Part No.	Package
KTCC-12	1000




- Material: Steel
- Finish: Zinc Plated


Part No.	Package
KTCC-16	1000

電線固定扣 CABLE CLAMP


用途：配合螺絲，固定電線，整齊美觀。

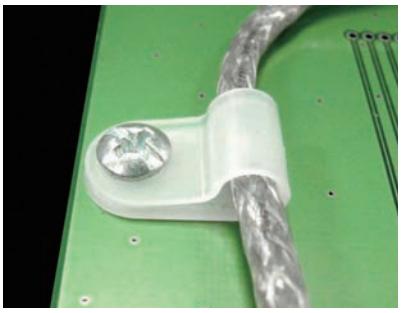


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




【 CC-10, CC-35, CC-50 】




Part No.	A	B	C	D	Package
CC-1SS	6.5	3.8	3.2	6.8	1000
CC-1S	9.2	5.4	3.2	8.2	
CC-1	13.2	5.4	3.0	8.9	
CC-2	10.0	5.4	4.5	10.2	
CC-3	9.3	5.0	6.2	10.2	
CC-4	9.5	5.0	7.6	10.5	
CC-4L	9.2	5.4	8.0	10.7	
CC-5	9.5	4.9	9.0	12.4	
CC-5L	12.3	5.4	9.0	13.2	500
CC-6	12.7	4.8	11.5	14.7	
CC-7	12.9	5.4	12.8	16.0	
CC-7S	12.5	4.8	15.5	16.7	
CC-8	12.9	5.4	17.0	19.6	200
CC-9	12.9	5.4	20.0	21.2	250
CC-10	12.9	5.4	24.0~27.0	23.5	200
CC-12	9.9	4.4	3.0	8.5	1000
CC-13	9.5	3.2	8.3	12.0	
CC-14	6.3	3.7	3.5	6.4	
CC-15	9.6	4.4	5.6	12.1	
CC-16	11.6	6.4	5.6	12.1	
CC-17	10.0	4.2	5.0	9.5	
CC-18	10.0	4.2	11.0	13.0	
CC-19	9.9	4.4	4.5	7.75	
CC-20	10.0	4.3	6.0	9.9	
CC-31	10.0	4.2	11.5	14.0	
CC-32	10.0	4.2	5.0	9.5	
CC-35	6.5	3.3	3.0	9.5	
CC-37	10.9	5.0	7.5	10.5	
CC-38	12.9	6.6	7.5	10.5	
CC-44	10.0	3.5	4.5	10.2	
CC-50	4.0	2.5	3.1	6.0	
CC-51	12.7	5.2	9.5	12.3	
CC-59	12.7	5.2	31.75	26.9	250




Part No.	Package
CC-28	1000




Part No.	Package
CC-55	1000



Part No.	A	C	D	E	F	Package
CC-25	9.5	3.2	9.86	17.0	4.4	500
CC-26	9.5	4.8	11.10	19.0	4.4	
★CC-63	12.7	4.8	9.9	19.3	5.2	




Part No.	F	Package
CC-24	5.4	500
CC-45	4.4	




Part No.	Package
CC-21	500


用途：配合螺絲，固定電線，整齊美觀。

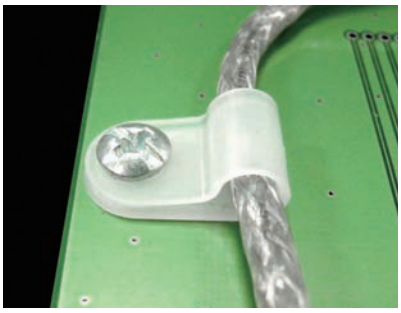


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
CC-53	1000




Part No.	Package
CC-29	1000




Part No.	Package
CC-42	1000




Part No.	Package
CC-54	1000




Part No.	Package
CC-56	1000




Part No.	Package
CC-23	500




Part No.	Package
CC-57	1000




Part No.	Package
CC-46	1000




Part No.	Package
CC-49	500




Part No.	Package
CC-58	1000






SUITABLE CABLE

Part No.	Package
CCP-2	1000




Part No.	Package
★CCP-5	1000




Part No.	Package
CCF-1	1000

電線固定扣 CABLE CLAMP


用途：配合螺絲，固定電線，整齊美觀。

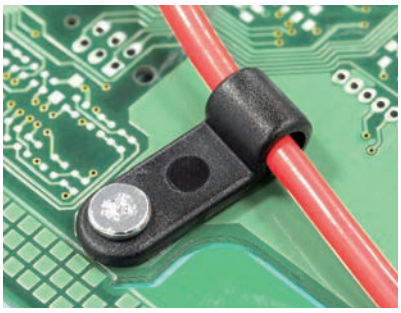


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	A	B	D	H	I	Package
CCO-4	21.75	9.5	11.75	7.5	10.5	500
CCO-5	28.2	10.0	19.0	5.4	8.4	




Part No.	C	Package
CCO-1	3.5	500
CCO-2	4.7	




Part No.	Package
CCO-6	500

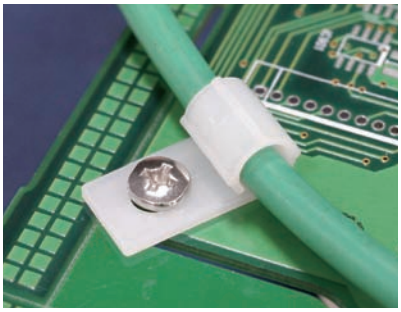





Part No.	Package
CD-5	500




Part No.	Package
CD-3.4	500



Part No.	A	B	C	D	E	F	H	Package
CD-6	21.2	10.3	5.2	16.7	1.5	6.3	6.0	500
CD-6S	21.2	10.3	3.2	16.7	1.5	6.3	6.0	
CD-9.2	20.6	10.2	5.2	14.0	1.3	4.4	9.2	
CD-9.2S	20.0	10.2	3.2	13.45	1.3	4.5	9.2	




Part No.	C	Package
CDKW-6	4.5	1000
CDKW-6-3	3.0	




Part No.	Package
CDKW-9.2	1000


用途：配合螺絲，固定電線，整齊美觀。

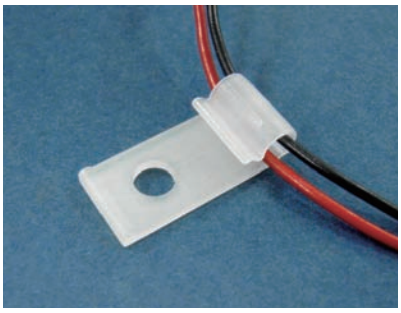


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
CDV-2.3	1000




Part No.	Package
CDV-3.2	1000

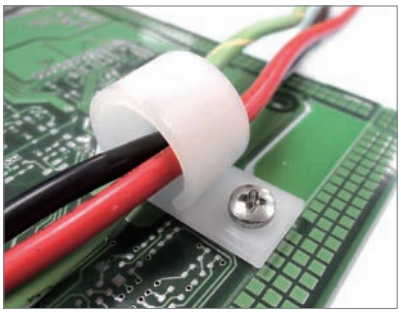


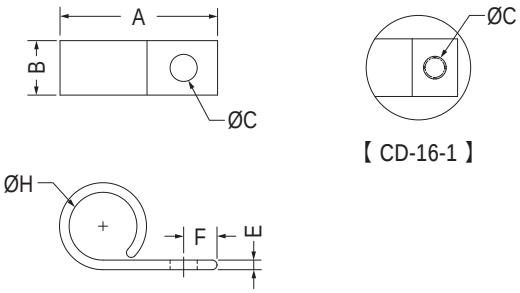

Part No.	A	B	C	E	F	H	Package
CD-12.7	29.5	10.2	5.08	1.8	6.35	12.7	500
CD-12.7-3.2	29.5	10.2	3.2	1.8	6.35	12.7	
CD-16	30.0	12.7	5.0	2.0	5.0	16.0	
CD-16-1	30.0	12.7	5.0	2.0	5.0	16.0	
CD-19	32.54	12.7	5.18	2.03	4.82	19.05	
CD-19-6.3	32.54	12.7	6.3	2.03	4.82	19.1	
CD-26	39.85	12.6	5.15	2.2	5.18	26.0	250
CD-40	53.5	12.6	5.0	2.5	4.8	36.9	100




Part No.	E	J	Package
CCA-1	1.8	1.4	500
CCA-2	1.4	1.3	




Part No.	A	B	C	E	F	K	Package
CCB-1	29.2	10.0	4.0	1.8	4.3	12.7	500
CCB-1S	29.2	10.0	3.1	1.8	4.3	12.7	
CCB-2	21.0	10.0	4.0	1.2	6.0	5.5	1000
CCB-2S	21.0	10.0	3.1	1.2	6.0	5.5	
CCB-3	39.6	12.7	4.0	2.0	4.2	17.8	200
CCB-4	50.0	12.7	4.0	2.2	4.3	25.0	
★CCB-6	21.0	10.0	4.0	1.2	4.0	7.0	1000

電線固定扣 CABLE CLAMP


用途：使用螺絲將電線固定於機器中，固定電線不易鬆動。

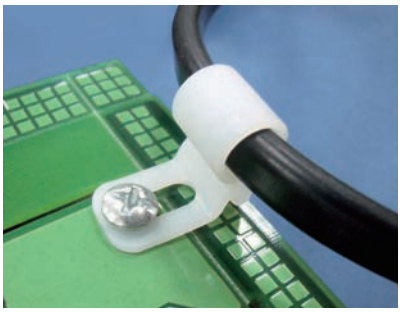


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
CCMG-1	1000

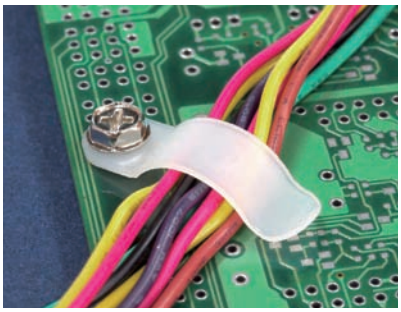




Part No.	Package
CDK-1	1000







Part No.	Package
CDK-3	1000




Part No.	Package
CDK-3-1	1000

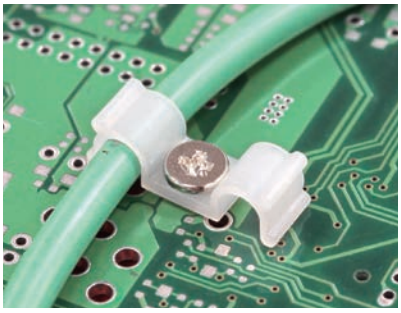




Part No.	Package
CLIA-3	1000




Part No.	Package
CDK-5	1000





Part No.	Package
CDK-7	1000




Part No.	Package
CDK-8	1000



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

用途：背膠式，可快速拆卸，固定電線，維修方便，不佔空間。




3M DOUBLE ADHESIVE TAPE

Part No.	A	C	E	Package
CDK-2	13.2	2.4	3.2	1000
CDK-6	12.3	1.5	2.4	




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

用途：使用螺絲將電線固定於機器中，固定電線不易鬆動。

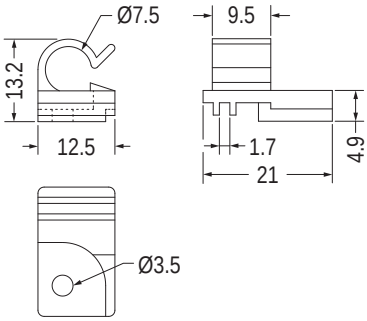


Part No.	Package
WCL-3	500

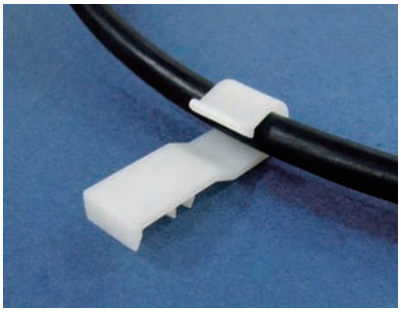



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


用途：固定電線於機器中，整齊美觀。



Part No.	Package
WCL-2	500

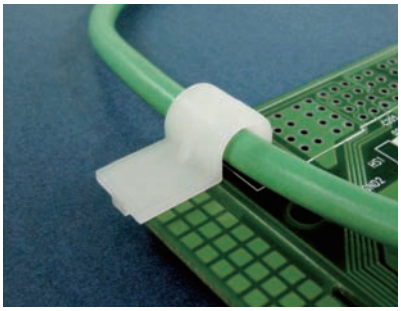

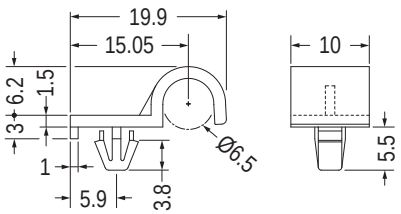





MOUNTING HOLE

Part No.	Package
CLH-6	500

用途：固定電線於機器中，整齊美觀。

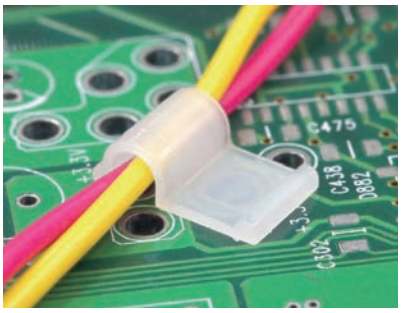


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



MOUNTING HOLE Ø3.2
THICKNESS 1.6


Part No.	Package
CLI-4	500






MOUNTING HOLE Ø3.2
THICKNESS 1.6

Part No.	A	B	C	E	Package
CLI-5	14.1	6.1	4.9	4.8	2000
CLI-6	15.8	7.0	6.5	6.1	

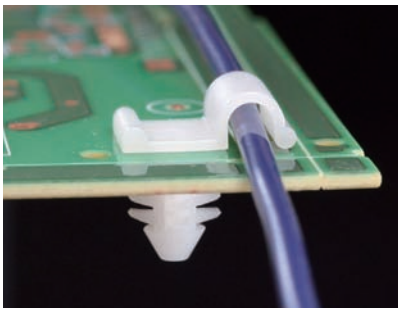





MOUNTING HOLE Ø6.35
THICKNESS 6.35

NEW


Part No.	Package
CLK-2	500

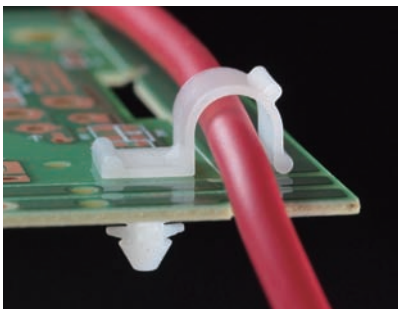



MOUNTING HOLE Ø6.35
THICKNESS 6.35

Part No.	Package
★CLK-3	500



MOUNTING HOLE Ø6.35
THICKNESS 6.35


Part No.	Package
★CLK-4	500


電線固定座 CABLE CLAMP

用途：適用螺絲M4、長12，可快速拆卸，固定電線，維修方便，不佔空間。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

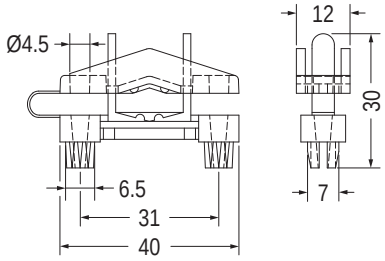



MOUNTING HOLE
THICKNESS 2.0


Part No.	Package
CLU-1	250


LCD理線座 CABLE CLIP

用途：固定LCD-TV背部電線，美觀整齊。



- Material: HIPS (UL)
- Flame Class: 94HB
- Color: Gray
- Unit: mm






Part No.	Package
LCDCM-1	100


電線固定扣 CABLE CLAMP


用途：固定電線於機板上，維修方便，不佔空間。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm









Part No.	Package
CCMJ-1	1000

電線固定扣 CABLE CLAMP

用途：固定電線於機器中，整齊美觀。

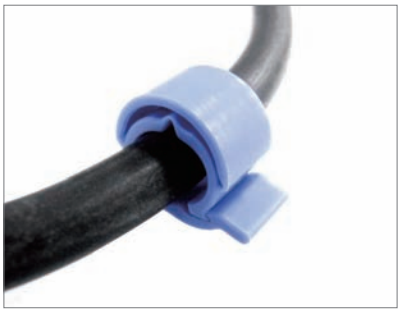



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black/Blue
- Unit: mm



Part No.	Package
WAK-1	1000








扣合示意圖
Folded


Part No.	A	B	C	D	E	F	Package
WAL-1	14.65	6.0	7.6	0.8	8.15	3.9	1000
WAL-2	18.34	5.3	11.6	1.0	10.20	5.3~5.5	



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

用途：固定電線於機器中，防止電線斷路。








扣合後
Folded



扣合前





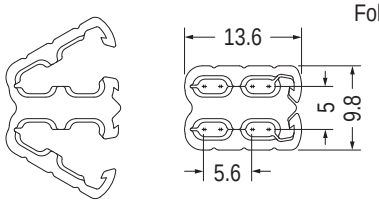


UNIT FOLDED VIEW

Part No.	Package
2WCA-2	1000










UNIT FOLDED VIEW

Part No.	Package
3WC-2	1000

用途：固定電線於機器中，防止電線斷路。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

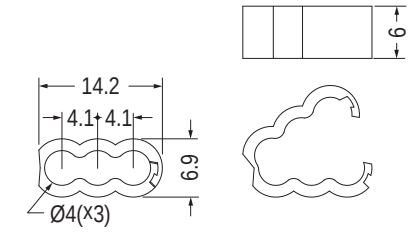

UNIT FOLDED VIEW


Part No.	Package
3WC-4	1000




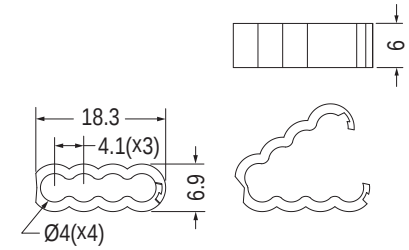

UNIT FOLDED VIEW

Part No.	Package
4WC-4	1000

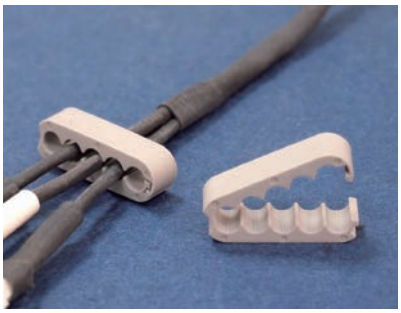


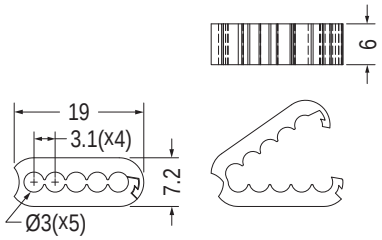

UNIT FOLDED VIEW

- Color: Gray

Part No.	Package
5WC-3	1000

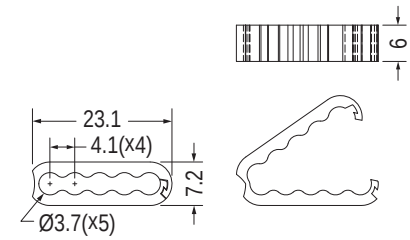

UNIT FOLDED VIEW


- Color: Gray

Part No.	Package
5WC-3.5	1000




用途：固定電線於機器中，整齊美觀。

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

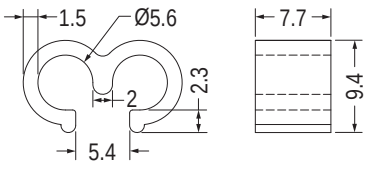


Part No.	Package
MUB-1	1000

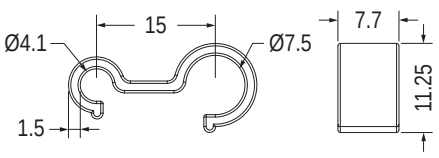


Part No.	Package
MUB-2	1000

電線固定扣 CABLE CLAMP

用途：使用螺絲將電線固定於機器中，固定電線不易鬆動。

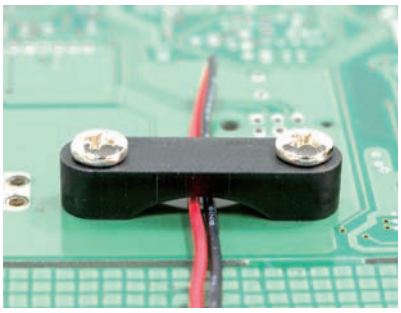


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




- Flame Class: 94HB

Part No.	Package
CLT-4	1000




- Material: Nylon 6 (UL)
- Flame Class: 94V-2
- Color: Natural

Part No.	Package
CLT-19	1000




Part No.	Package
CLT-2	500




- Material: Nylon 66 (UL)/ABS (UL)/ PC+ABS (UL)
- Flame Class: 94HB/94V-2/94V-0

Part No.	Package
CLT-1	500




- Flame Class: 94HB

Part No.	Package
CLT-5	1000




- Material: ABS (UL)
- Flame Class: 94HB

Part No.	Package
CLT-8	1000




- Flame Class: 94HB

Part No.	Package
CLT-6	1000




- Material: PBT (UL)
- Flame Class: 94V-0
- Color: Natural


Part No.	Package
CLT-18	500



Part No.	Package
CLT-14	1000



Part No.	Package
CLT-20	1000




Part No.	Package
CLT-10	1000

用途：使用螺絲將電線固定於機器中，固定電線不易鬆動。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black/Gray
- Unit: mm





Part No.	Package
CLT-7	500






Part No.	Package
CLT-9	1000

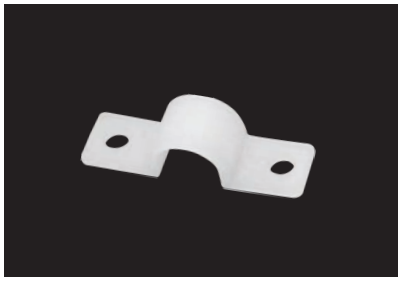




Part No.	Package
CLM-7.5	1000






- Material: Zinc Plated Steel

Part No.	Package
EM-514H	1000

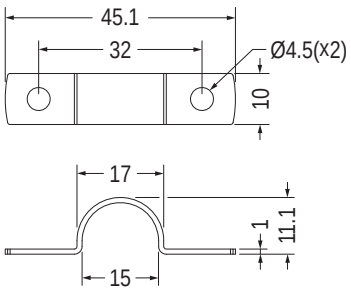


- Material: Aluminum

Part No.	Package
EM-646	1000




- Material: Steel

Part No.	Package
CLS-1	1000

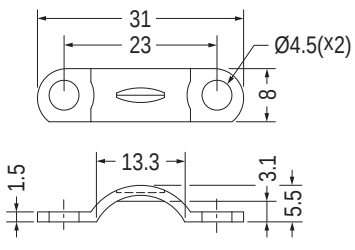

- Material: Steel


Part No.	Package
CLS-2	1000



- Material: Zinc Plated Steel


Part No.	Package
CLT-16	1000


用途：用於電線固定於軌道上。

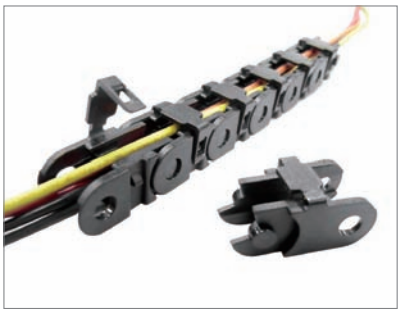


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm
- Patented（專利品）
- USA Patented（美國專利品）


- 線材請勿超過橫切面的70%
- Please don't fill the cross-section more than 70%.

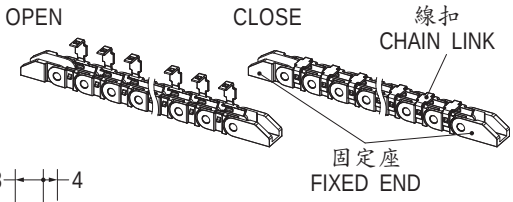






PRINCIPLE SKETCH - BEND RA-DIUS

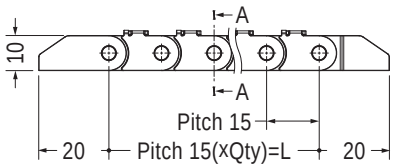






SECTION A-A

Part No.
GULY-1AB-XXF




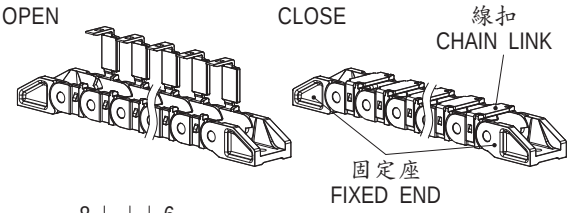







PRINCIPLE SKETCH - BEND RA-DIUS

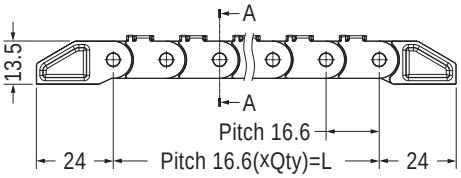






SECTION A-A

Part No.
GULY-2AB-XXF

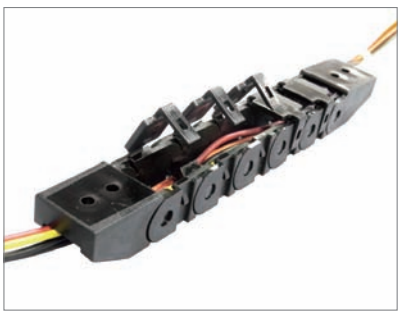


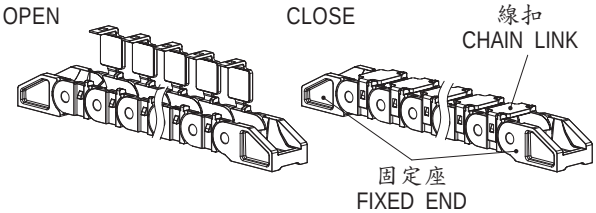






PRINCIPLE SKETCH - BEND RA-DIUS

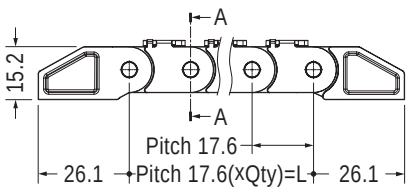




SECTION A-A


Part No.
GULY-3AB-XXF


用途：用於電線固定於軌道上。

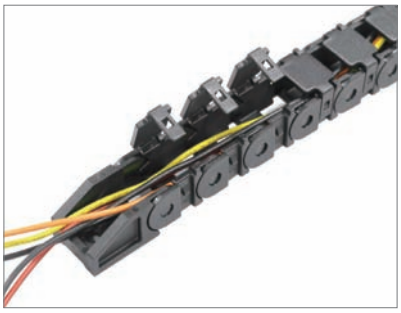


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm
- Patented（專利品）
- USA Patented（美國專利品）


- 線材請勿超過橫切面的70%
- Please don't fill the cross-section more than 70%.

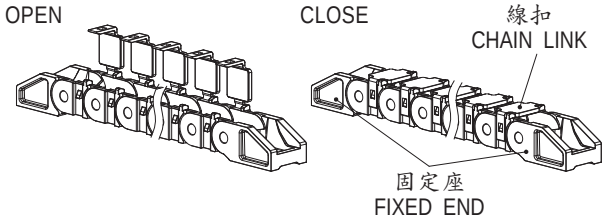


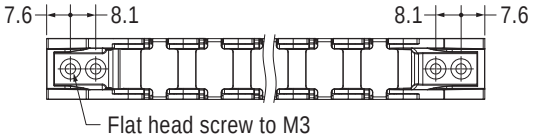



PRINCIPLE SKETCH - BEND RA-DIUS

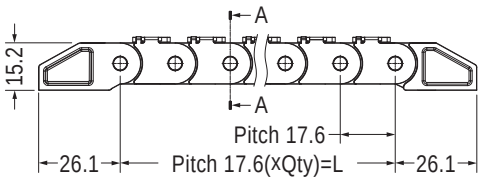






SECTION A-A

Part No.
GULY-3FG-XXF




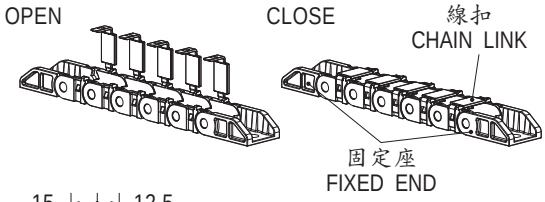


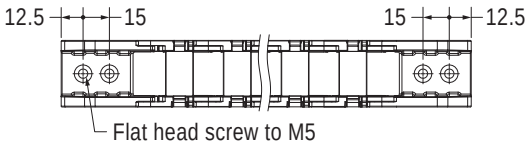



PRINCIPLE SKETCH - BEND RA-DIUS

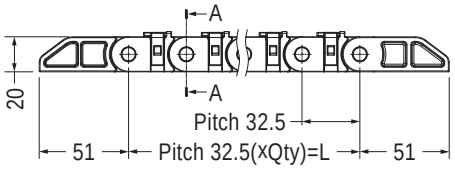






SECTION A-A

Part No.
GULY-5AB-XXF




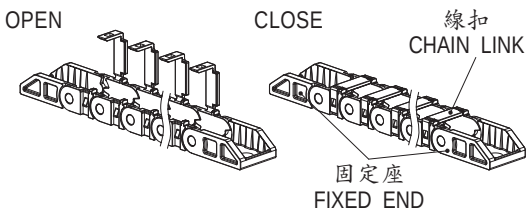






PRINCIPLE SKETCH - BEND RA-DIUS

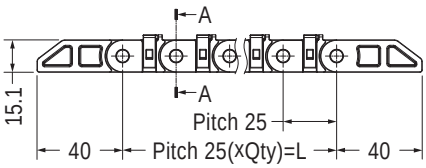



SECTION A-A


Part No.
GULY-6AB-XXF


用途：用於電線固定於軌道上。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm
- Patented（專利品）
- USA Patented（美國專利品）


- 線材請勿超過橫切面的70%
- Please don't fill the cross-section more than 70%.

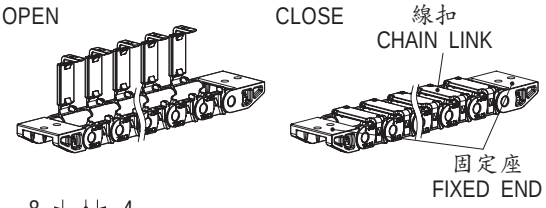


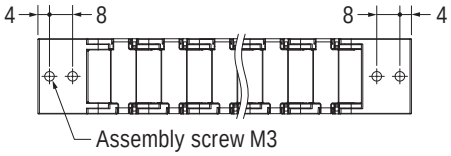




PRINCIPLE SKETCH - BEND RA-DIUS








SECTION A-A

Part No.
GULY-7AB-XXF

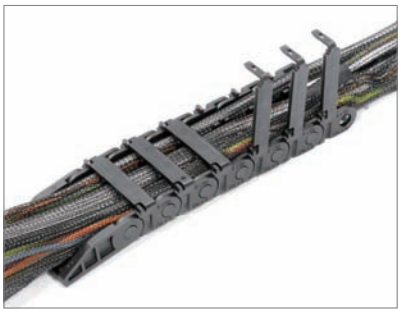


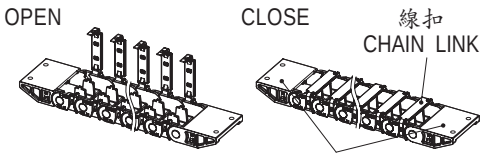






PRINCIPLE SKETCH - BEND RA-DIUS

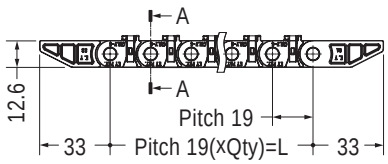






SECTION A-A

Part No.
GULY-8AB-XXF




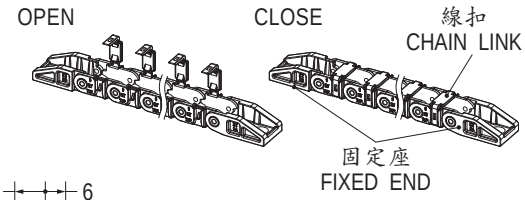






PRINCIPLE SKETCH - BEND RA-DIUS

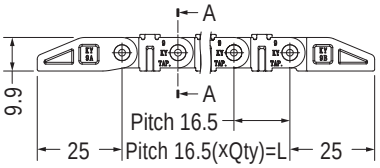




SECTION A-A


Part No.
GULY-9AB-XXF


用途：用於電線固定於軌道上。

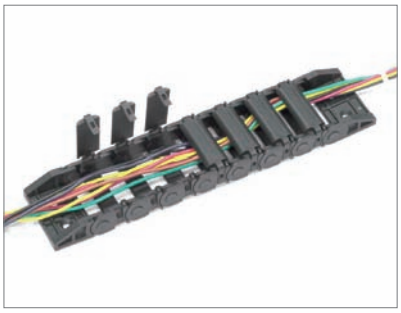


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm
- Patented（專利品）
- USA Patented（美國專利品）


- 線材請勿超過橫切面的70%
- Please don't fill the cross-section more than 70%.

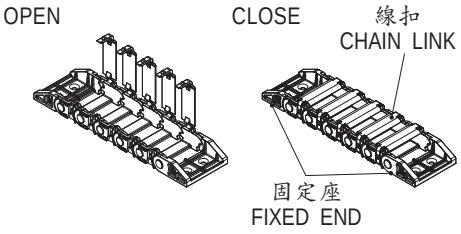


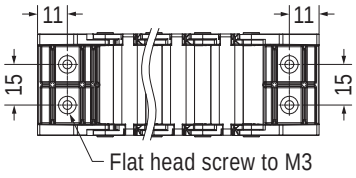



PRINCIPLE SKETCH - BEND RA-DIUS








SECTION A-A


Part No.
GULY-13AB-XXF



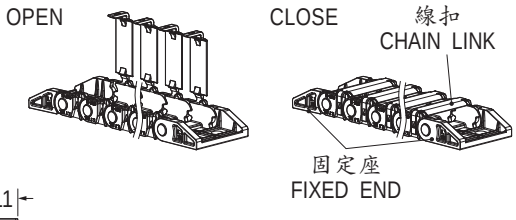

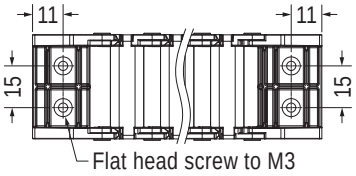







SECTION A-A


NEW

Part No.
GULY-31AB-XXF




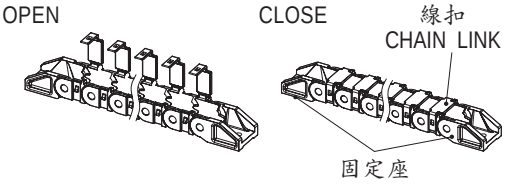






PRINCIPLE SKETCH - BEND RA-DIUS

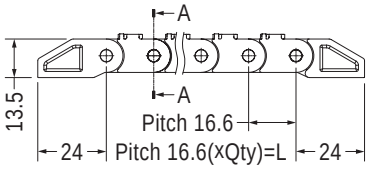




SECTION A-A


Part No.
GULY-15AB-XXF


用途：用於電線固定於軌道上。

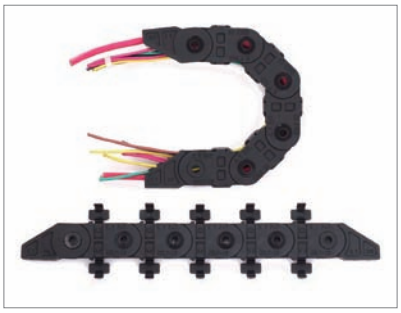


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm
- Patented（專利品）
- USA Patented（美國專利品）


- 線材請勿超過橫切面的70%
- Please don't fill the cross-section more than 70%.

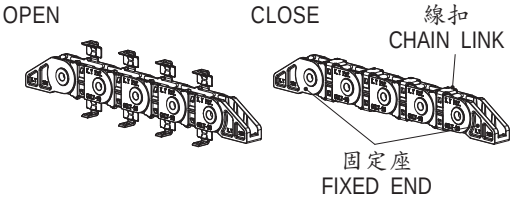




PRINCIPLE SKETCH - BEND RA-DIUS

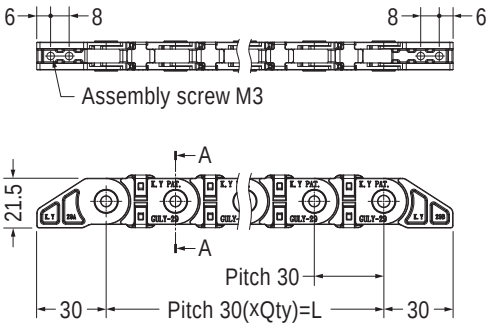





SECTION A-A


Part No.
GULY-29AB-XXF

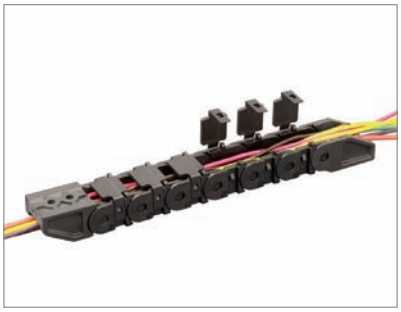




PRINCIPLE SKETCH - BEND RA-DIUS

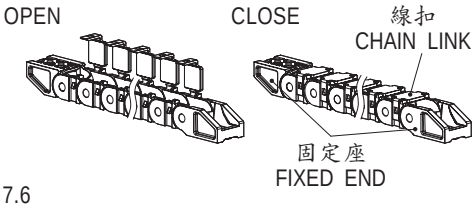


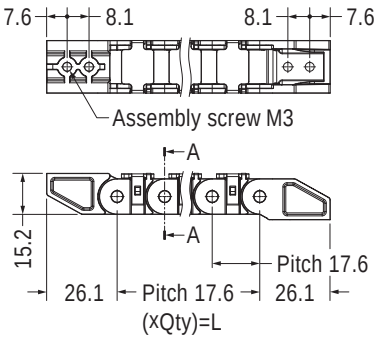





SECTION A-A


Part No.
GULY-3HI-XXCF

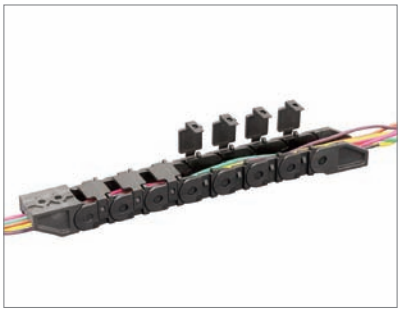




PRINCIPLE SKETCH - BEND RA-DIUS

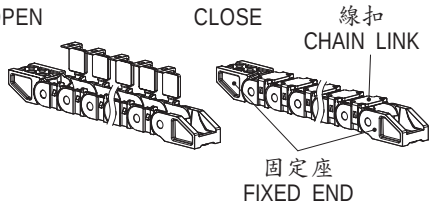

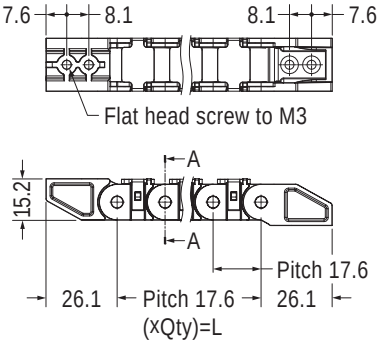



SECTION A-A

Part No.
GULY-3JK-XXCF


旋轉軌道式線扣組 ROTARY CABLE CARRIER


用途：用於電線固定於軌道上，可轉方向，方便使用。


- 線材請勿超過橫切面的70%
- Please don't fill the cross-section more than 70%.




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm
- Patented（專利品）
- USA Patented（美國專利品）

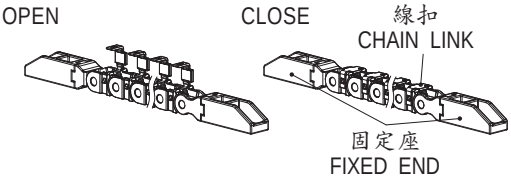






PRINCIPLE SKETCH - BEND RA-DIUS

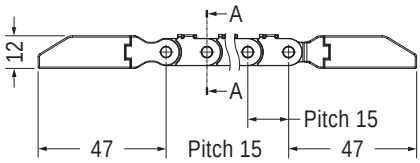





SECTION A-A


使用說明
Installation Guide

Part No.
GULY-1CDE-XXF




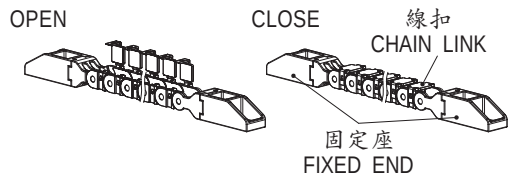






PRINCIPLE SKETCH - BEND RA-DIUS

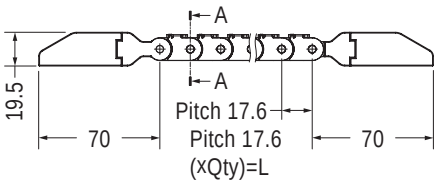




SECTION A-A

Part No.
GULY-3CDE-XXF


軌道式線扣組 CABLE CARRIER


用途：用於電線固定於軌道上。

- 線材請勿超過橫切面的70%
- Please don't fill the cross-section more than 70%.

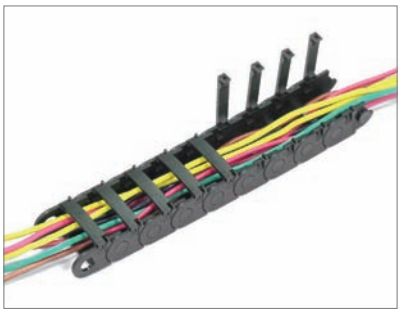


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm
- Patented（專利品）
- USA Patented（美國專利品）

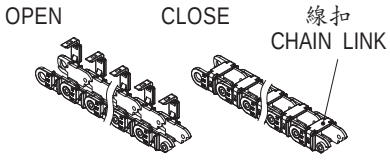




SECTION A-A




PRINCIPLE SKETCH - BEND RA-DIUS

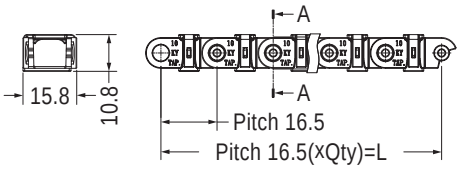

Part No.
GULY-10-XXF


軌道式線扣組 CABLE CARRIER

用途：用於電線固定於軌道上。

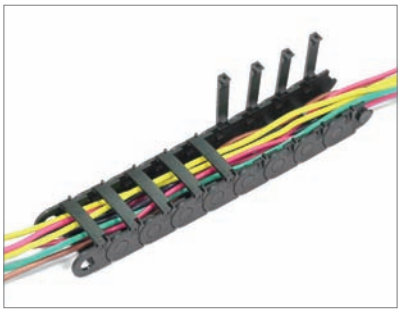



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm
- Patented（專利品）
- USA Patented（美國專利品）

- 線材請勿超過橫切面的70%
- Please don't fill the cross-section more than 70%.




PRINCIPLE SKETCH - BEND RA-DIUS

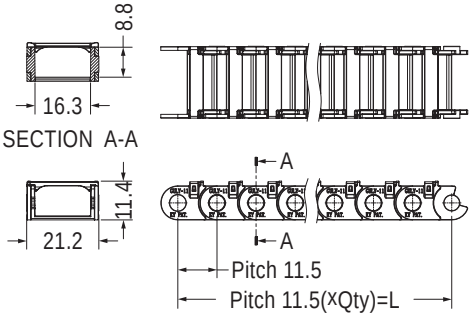


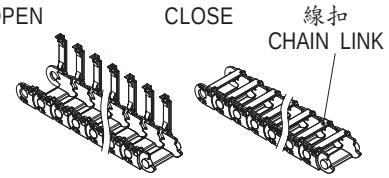


Part No.
GULY-11-XXF



PRINCIPLE SKETCH - BEND RA-DIUS

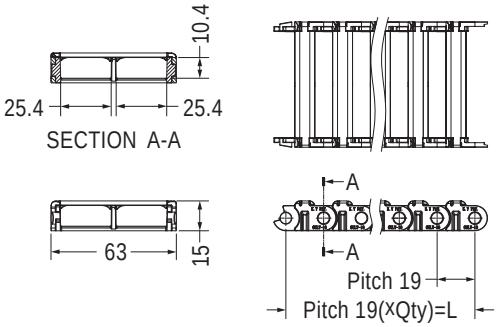

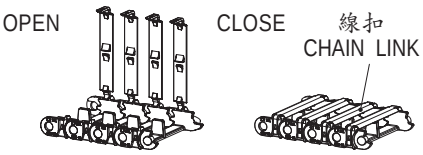


Part No.
GULY-19-XXF

電線束線環 HOSE CLAMP

用途：用於配線中，電線整理美觀不脫落。




- Material: POM (UL)/POM/Nylon 66 (UL)
- Flame Class: 94HB/94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	A(MIN.~MAX.)	B	Package
SMAP-5	8.0~9.0	6.0	500
SMAP-6	10.0~11.0	5.5	
SMAP-7	10.0~12.5	5.9	
SMAP-7S	8.0~10.0	6.5	
SMAP-10	14.0~16.0	5.9	
SMAP-11	11.0~12.0	5.5	
SMAP-16	17.5~21.0	5.9	250
SMAP-18	20.0~22.0	6.0	
SMAP-19	21.0~24.0	5.9	
SMAP-22	23.3~26.65	5.9	
SMAP-24	25.0~27.0	7.4	
SMAP-24S	22.2~25.4	5.6	
SMAP-28	27.0~32.0	7.3	
SMAP-32	29.0~34.0	7.3	
SMAP-34	33.0~37.0	7.4	


防高壓線環 F.B.T CABLE CLIP

用途：保護C.R.T高壓與管壁間之絕緣，使用方便。

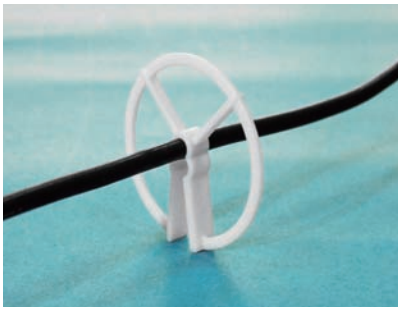

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural
- Unit: mm

E217732
UL 1565



FIT CABLE: F


Part No.	A	B	C	D	F	Package
FBT-1	49.5	7.8	22.0	5.0	4.5~5.3	100
FBT-2	49.2	7.8	22.0	5.0	3.5~4.5	
FBT-3	50.2	7.4	23.0	5.0	2.5~3.5	
FBT-4	49.5	8.0	22.5	4.6	4.0~4.5 or 5.0~5.5	
FBT-5	49.2	8.0	22.0	4.7	3.7~4.2 or 4.5~5.2	


光纖固定座 FIBER OPTICS CABLE HOUSING


用途：配合THA-、CH-系列產品使用，可固定光纖，不折斷，不衰減。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2
- Color: Natural
- Unit: mm









MOUNTING HOLE


Part No.	Fitting	Package
FSB-1	Screw	50
FSB-1A	Adhesive	

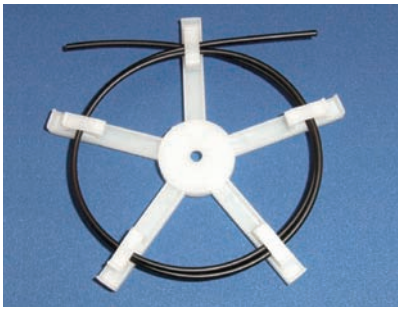

- Material: Nylon 66 (UL)
- Flame Class: 94V-2
- Color: Natural
- Unit: mm

用途：配合WPEM系列產品使用，可固定光纖，不折斷，不衰減。

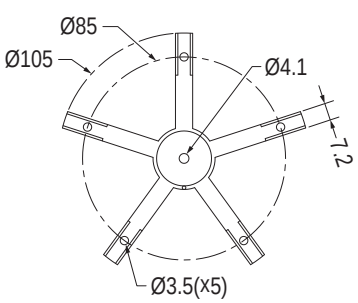




MOUNTING HOLE


Part No.	Package
FSB-2	50


光纖固定座 FIBER OPTICS CABLE HOUSING

用途：保護和固定光纖，不折斷，不衰減。

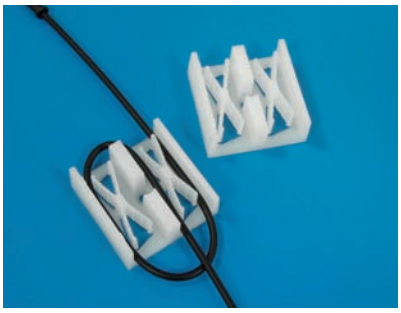

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm






Part No.	Package
OFS-1	200

固定座 MOUNT

用途：汽車鈑金件之固定。




- Material: POM
- Color: Black
- Unit: mm

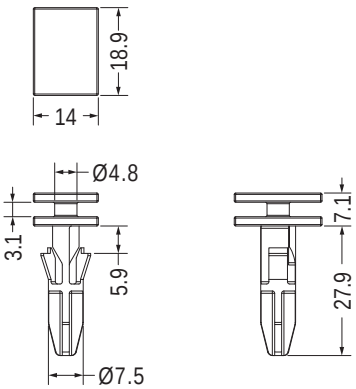


NEW


・料號尾碼加-C，做為車規識別

Part No.	Package
CCMN-1-C	500

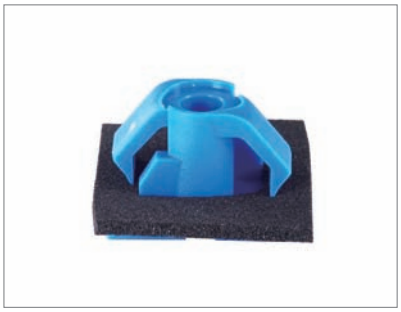

- Material: POM
- Color: Blue
- Unit: mm

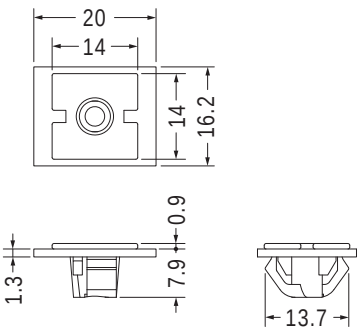



NEW

・料號尾碼加-C，做為車規識別
・可使用螺絲固定

Part No.	組合件(ASSY)	Package
CCMO-1-CF	CCMO-1-C	1000
	CR-13	




5

- 護線環
  Snap Bushing
- 橡膠線環
  Grommet
- 抗震線環
  Anti-Vibration Grommet
- 扣式塞頭
  Hole Plug
- 電源線扣
  Strain Relief Bushing
- 束線帶/黏扣帶
  Cable Tie / Velcro
- PVC套管
  PVC Tube
- 熱縮套管
  Heat Shrink Tubing
- 黏貼標誌貼紙
  Wire Label
- 工具
  Tool


護線環 SNAP BUSHING

用途：用於機殼的電線出線口，保護電線不受機殼刮傷，裝配容易。

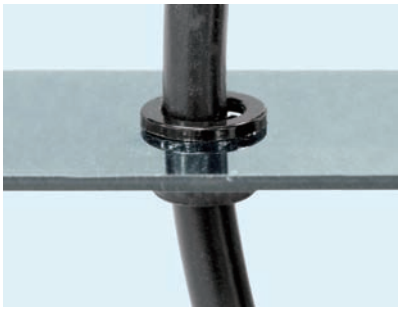

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm







MOUNTING HOLE: ØG

Part No.	A	B	C	D	G	Thread	搭配螺帽	Package
MGM-10	15.0	12.0	7.0	6.5	10.0~10.5	M10x1.5P	M-10N	500
MGM-12	18.0	12.0	8.8	8.5	12.0~12.5	M12x1.5P	KGB12-07A	
MGM-16	21.7	13.5	11.2	11.0	16.0~16.5	M16x1.5P	KGB16-10A	
MGM-20	26.8	13.5	15.2	15.0	20.0~20.5	M20x1.5P	KGB20-14A	100
MGM-25	32.6	14.0	19.2	19.0	25.0~25.5	M25x1.5P	KGB25-16A	
MGM-32	42.0	19.0	26.2	26.0	32.0~32.5	M32x1.5P	KGB32-25A	



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm







MOUNTING HOLE: ØG
THICKNESS: T

E127489

Part No.	A	B	C	G	T	Package
312-3	9.5	8.2	5.2	8.0	0.8~1.8	1000
375-4	12.0	10.3	6.6	9.5	0.8~3.3	
0811	13.6	10.3	8.4	11.1	0.8~3.3	
0813	15.1	10.3	9.8	12.7	0.8~3.3	
1216	18.2	10.3	12.8	16.0	0.8~3.3	







MOUNTING HOLE Ø15.8
THICKNESS 0.8~1.6

E127489

Part No.	Package
NB-1215	1000





MOUNTING HOLE: ØG
THICKNESS: T

E127489


Part No.	A	B	C	G	T	Package
NB-0710	12.1	6.6	7.2	10.0	0.8~1.8	1000
NB-1217	20.0	10.3	12.7	17.5	0.8~3.3	200
NB-1419	21.5	11.3	14.3	19.0	0.8~3.3	
NB-1722	25.1	11.2	18.6	22.2	0.8~3.3	100
NB-1922	23.8	6.3	19.0	22.2	0.8~1.6	
NB-1925	28.0	10.8	19.4	25.4	0.8~3.3	
NB-2428	31.5	11.3	24.1	28.0	1.0~3.3	200
NB-2430	34.0	11.7	24.5	30.1	0.8~3.3	
NB-2535	37.8	11.3	25.8	35.0	0.8~3.5	
NB-2935	37.8	11.3	29.7	35.0	0.8~3.5	
NB-2634	38.0	11.5	26.2	34.2	1.0~3.1	
NB-3034	38.0	11.5	30.4	34.2	1.0~3.1	
NB-3338	41.2	11.6	33.3	38.0	1.0~3.3	
NB-4150	53.8	11.4	41.8	50.8	0.8~3.2	100
NB-4450	53.8	11.4	44.3	50.8	0.8~3.2	
NB-4757	63.0	18.1	47.3	57.1	6.35	
NB-5063	67.5	18.1	50.5	63.5	6.35	
NB-5563	67.5	18.1	55.5	63.5	6.35	

開口式護線環 SNAP BUSHING

用途：用於機殼的電線出線口，保護電線不受機殼刮傷，裝配容易。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm
- 採開口式量法



MOUNTING HOLE: ØG
THICKNESS: T

E127489


Part No.	A	B	C	G	T	Package	UL
0609C	11.9	6.5	7.3	9.5	0.6~1.6	1000	UL
0813C	15.0	9.8	9.7	12.7	0.8~3.3		UL
1014C	16.6	10.3	10.6	14.3	0.8~3.2		
1216C	18.4	10.4	12.8	15.9	0.8~3.3		UL
1419C	20.7	10.4	15.1	19.0	0.8~3.3		UL



MOUNTING HOLE: ØG
THICKNESS: T

E127489


Part No.	A	B	C	G	T	Package
NB-09	12.4	6.0	7.6	9.5	0.8~1.2	1000
NB-12	16.8	7.3	10.8	12.7	0.8~1.2	
NB-16	20.3	7.3	14.1	15.9	0.8~1.0	500
NB-19	22.5	7.3	16.5	19.0	0.8~1.0	
NB-22	26.0	7.3	20.0	22.0	0.8~1.0	
NB-25	28.6	7.9	22.0	25.4	0.8~1.6	



MOUNTING HOLE: ØG
THICKNESS: T

E127489


Part No.	A	B	C	G	T	Package
NB-07A	10.4	4.8	6.0	7.0	0.8~1.0	1000
NB-12A	16.2	5.2	10.8	12.7	0.8~1.0	
NB-16A	19.3	5.2	13.0	16.0	0.8~1.0	500
NB-19A	23.0	5.5	15.6	19.0	0.8~1.0	
NB-21A	25.0	5.6	19.0	21.0	0.8~1.0	
NB-22A	25.8	5.5	19.5	22.0	0.8~1.0	
NB-23A	26.4	5.5	20.4	23.0	0.8~1.0	
NB-24A	27.0	5.3	20.8	24.0	0.8~1.0	
NB-27A	34.6	6.0	27.0	27.0	0.8~1.0	
NB-29A	34.0	7.0	26.3	29.0	0.8~1.0	
NB-30A	36.25	7.0	28.0	30.0	0.8~1.0	
NB-32A	36.9	6.7	30.0	32.0	0.8~1.2	



MOUNTING HOLE: ØG
THICKNESS 0.8~1.2

E127489

Part No.	A	B	C	G	Package
NB-27C	34.6	6.0	27.0	27.0	500
NB-29C	34.6	7.0	27.0	29.0	
NB-32C	36.9	6.7	30.0	32.0	




MOUNTING HOLE: ØG
THICKNESS: T

E127489

Part No.	A	B	C	G	T	Package
NB-22T	26.4	5.5	20.3	22.0	0.6~0.8	500
NB-25T	30.3	8.0	23.3	25.4	0.6~1.4	
NB-25TS	30.3	8.0	23.3	25.0	0.6~1.6	


開口式護線環 SNAP BUSHING

用途：用於機殼的電線出線口，保護電線不受機殼刮傷，裝配容易。

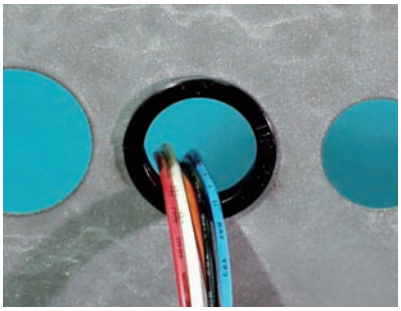


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm
- 採開口式量法






MOUNTING HOLE Ø19.5
THICKNESS 0.6


Part No.	Package
NB-19.5T	500






MOUNTING HOLE Ø22.0
THICKNESS 0.8~1.0

Part No.	Package
NB-22U	500







MOUNTING HOLE Ø22.0
THICKNESS 0.6~0.8

Part No.	Package
NB-22J	500



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural
- Unit: mm
- 採開口式量法







MOUNTING HOLE Ø7.25
THICKNESS 1.1

Part No.	Package
NC-7	1000

- Material: Nylon 66 (UL)/POM
- Flame Class: 94HB/94V-2/94V-0
- Color: Natural/Black
- Unit: mm
- 採開口式量法






MOUNTING HOLE Ø28.0

Part No.	Package
NC-28A	500




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




MOUNTING HOLE Ø11.1
THICKNESS 0.6~3.2

Part No.	Package
SB-2	1000



MOUNTING HOLE Ø11.1
THICKNESS 0.6~3.2

Part No.	Package
NBA-0611C	1000




MOUNTING HOLE Ø9.5
THICKNESS 0.6~3.2

Part No.	Package
NBA-0309C	1000

開口式護線環 SNAP BUSHING

用途：用於機殼的電線出線口，保護電線不受機殼刮傷，裝配容易。

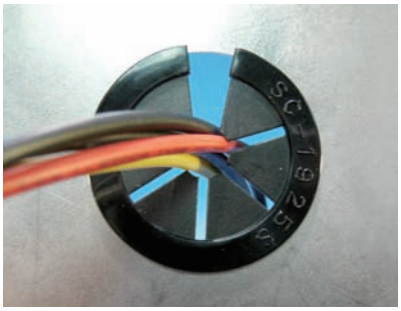

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm
- 採開口式量法



MOUNTING HOLE: ØG
THICKNESS: T


【 SC-1421S, SC-1422S 】



MOUNTING HOLE: ØG
THICKNESS: T




CLOSE



OPEN

E127489



MOUNTING HOLE: ØG
THICKNESS: T

E127489

Part No.	A	B	C	G	T	Package
SC-1925S	29.0	5.3	21.0	25.4	0.8~1.0	250
SC-1925A	29.0	11.4	21.0	25.4	0.8~3.0	
SC-1319A	22.6	9.75	15.3	19.0	0.8~3.2	500

Part No.	A	B	C	G	T	Package
SC-0712	15.3	9.8	10.3	12.7	0.8~3.3	1000
SC-1115	18.8	10.3	13.8	15.9	0.8~3.3	
SC-1421S	24.5	8.9	17.85	21.0	0.6~1.6	250
SC-1422	25.5	10.3	18.5	22.2	0.8~3.3	
SC-1422S	25.5	7.0	18.5	22.2	0.6~1.2	
SC-2027	31.5	10.3	25.5	27.8	0.8~3.3	200
SC-2331	38.7	10.3	29.3	31.8	0.8~3.3	
SC-2534	39.2	10.3	31.2	34.9	0.8~3.3	
SC-2638	42.6	10.7	32.6	38.1	0.8~3.3	


護線環 SNAP BUSHING

用途：用於機殼的電線出線口，保護電線不受機殼刮傷，裝配容易。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm






MOUNTING HOLE Ø15.9
THICKNESS 3.2


E127489

Part No.	Package
SC-1216	1000



MOUNTING HOLE
THICKNESS: T

【 NBR-7026, NBR-5520 】




MOUNTING HOLE
THICKNESS: T

E127489


Part No.	A	B	C	G	H	T	Package
NBR-3025	34.0	6.5	26.7	30.5	25.0	0.8~1.5	1000
NBR-3725	41.5	14.3	32.2	37.0	25.0	1.2~3.0	500
NBR-5030S	54.2	7.5	44.9	50.0	30.0	0.8~1.6	100
NBR-5030	54.2	14.3	44.9	50.0	30.0	1.2~3.0	
NBR-5520	59.2	14.3	49.9	55.0	20.0	1.2~3.2	
NBR-7026	74.2	14.3	64.7	70.0	26.0	1.2~3.2	
NBR-8054	84.5	14.3	71.4	80.0	54.0	1.2~3.0	50


護線環 SNAP BUSHING

用途：用於機殼的電線出線口，保護電線不受機殼刮傷，裝配容易。

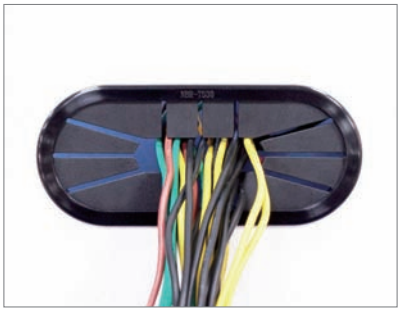

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm







MOUNTING HOLE
THICKNESS 1.2

Part No.	Package
NBR-7530	100









MOUNTING HOLE
THICKNESS 1.2

Part No.	Package
NBR-7530-2	100








MOUNTING HOLE
THICKNESS 0.8~2.5

E127489

Part No.	Package
NBS-6423	100






MOUNTING HOLE Ø12.0
THICKNESS 4.6


Part No.	Package
SBA-1	1000

線環 GROMMET

用途：用於電線之絕緣。

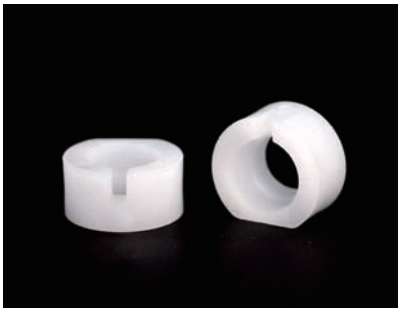

- Material: POM (UL)
- Flame Class: 94HB
- Color: Natural
- Unit: mm




Part No.	Package
010406	1000


橡膠線環 GROMMET

用途：用於機殼的電線出線口，保護電線不受機殼刮傷，裝配容易。




- Material: Rubber/Silicon Rubber
- Color: Black
- Unit: mm







MOUNTING HOLE




【 GM-16 】




【 GM-17 】




【 GM-38, GM-46, GM-71, GM-81 】




【 GM-40, GM-44, GM-55, GM-60, GM-65 】




【 GM-45 】




【 GM-49, GM-98 】



【 GM-53 】



【 GM-64 】



【 GM-68 】


Part No.	A	B	C	D	E	Package
GM-1	8.0	4.8	3.2	1.6	6.4	2000
GM-1A	9.5	6.4	4.0	1.6	6.4	
GM-2	10.8	8.0	4.5	1.6	4.5	1000
GM-3	14.4	9.5	6.3	1.6	7.0	
GM-3A	14.2	11.0	8.0	1.6	4.8	
GM-4	17.5	12.7	9.5	1.6	6.8	
GM-5	22.0	17.5	14.2	1.6	4.8	
GM-6	22.0	19.0	16.0	1.6	5.5	500
GM-6A	25.0	19.5	18.0	1.6	6.0	
GM-7	31.4	25.2	18.5	1.6	8.0	250
GM-8	19.5	14.0	6.0	1.0	7.0	1000
GM-9	15.9	12.7	9.5	1.6	6.4	
GM-11	7.9	4.8	3.2	1.6	4.8	2000
GM-14	17.46	11.11	7.94	2.38	8.73	500
GM-15	10.8	8.0	5.0	1.6	4.5	2000
GM-16	18.0	14.7	7.0	4.2	18.0	250
GM-17	18.0	14.6	8.0	3.8	12.0	500
GM-18	13.0	8.4	5.5	3.3	6.3	1000
GM-30	13.3	9.0	5.8	2.0	6.2	
GM-38	10.4	8.1	3.6	1.15	7.15	
GM-40	24.0	17.5	14.0	3.0	7.0	500
GM-42	27.0	20.8	12.7	1.6	7.8	250
GM-43	11.0	7.9	4.7	1.6	6.0	1000
GM-44	12.3	8.0	5.0	4.0	8.0	
GM-45	16.0	9.5	6.2	2.0	7.0	
GM-46	7.5	6.0	3.5	1.0	5.0	2000
GM-47	17.5	13.5	10.0	2.0	7.0	1000
GM-48	10.8	8.0	4.5	1.2	4.5	2000
GM-49	7.8	5.8	2.33	0.8	4.0	
GM-50	17.5	12.0	10.0	2.0	6.8	1000
GM-51	12.0	9.0	6.5	1.5	5.5	
GM-53	7.5	4.5	3.5	2.0	4.0	
GM-55	7.0	6.0	3.5	1.0	5.0	2000
GM-56	7.7	5.0	3.1	1.3	2.8	
GM-57	8.8	6.0	4.1	2.5	7.0	
GM-58	11.0	9.0	6.0	2.5	6.6	
GM-60	7.0	6.0	3.5	1.0	3.0	
GM-61	17.5	12.7	9.0	1.6	6.8	1000
GM-62	17.5	12.7	8.6	1.6	6.8	
GM-64	12.9	10.5	6.3	0.8	2.4	2000
GM-65	24.0	18.0	14.0	3.0	7.0	1000
GM-68	15.0	12.1	6.0	3.0	5.0	
GM-71	8.0	6.0	4.1	1.1	3.4	2000
GM-81	12.0	9.0	6.0	1.0	9.0	1000
GM-98	7.8	5.8	2.33	1.2	4.0	2000
GM-138	15.9	11.1	7.9	1.6	7.1	1000
GM-163	13.5	9.5	6.3	1.6	7.0	
GM-173	16.0	12.0	10.0	2.0	5.5	
GM-177	10.1	7.0	5.0	1.5	4.8	

橡膠線環 GROMMET


用途：用於機殼的電線出線口，保護電線不受機殼刮傷，裝配容易。




- Material: Rubber/Silicon Rubber
- Color: Black
- Unit: mm




【 GM-69, GM-80, GM-147 】




【 GM-99 】



【 GM-106 】




【 GM-154 】




【 GM-159 】

Part No.	A	B	C	D	E	Package
GM-69	12.0	9.0	6.0	1.5	7.0	1000
GM-80	14.0	11.0	7.0	1.5	7.0	
GM-99	11.1	8.5	5.0	2.0	3.6	
GM-106	10.0	6.0	4.0	1.35	5.35	
GM-147	14.0	11.0	6.1	1.5	7.0	
GM-154	13.0	8.8	6.3	3.0	9.0	
GM-159	4.8	3.8	2.2	0.8	2.4	







【 GM-35 】




【 GM-39 】



【 GM-70 】




【 GM-137 】




【 GM-139 】

Part No.	A	B	C	D	E	Package
GM-35	8.0	6.0	3.4	1.0	3.0	2000
GM-39	10.5	7.5	5.2	1.4	5.5	1000
GM-70	6.63	4.52	1.5	1.0	3.8	2000
GM-137	14.5	10.2	6.2	1.4	6.0	1000
GM-139	14.0	8.0	5.5	1.0	5.2	



【 GM-136 】




Part No.	A	B	C	D	E	F	H	Package
GM-67	17.5	9.5	7.2	2.0	6.7	14.5	6.8	1000
GM-73	17.5	9.5	6.8	2.0	6.7	14.5	6.3	
GM-74	18.5	10.5	8.2	2.0	6.7	15.5	7.8	
GM-75	19.5	11.5	9.2	2.0	6.7	16.5	8.8	
GM-77	21.8	13.8	10.8	2.0	6.7	18.8	10.8	
GM-82	17.5	9.5	6.2	2.0	6.7	14.5	5.8	
GM-96	17.5	11.5	7.2	2.0	6.7	16.5	6.8	
GM-97	17.5	11.5	7.6	2.0	6.7	16.5	7.2	
GM-136	12.0	8.5	6.7	1.1	3.6	9.5		2000

橡膠線環 GROMMET

用途：用於機殼的電線出線口，保護電線不受機殼刮傷，裝配容易。




- Material: Rubber/Silicon Rubber
- Color: Black
- Unit: mm



Part No.	Package
GM-158	1000







MOUNTING HOLE Ø15.0~Ø15.5

Part No.	Package
TF-346	500

裝配孔尺寸，僅供參考
Mounting holes are for reference only.








Part No.	Package
GM-92	1000



- Material: Silicon Rubber
- Color: Black
- Unit: mm





MOUNTING HOLE Ø16.6
THICKNESS 1.0

NEW


Part No.	Package
TF-1750	1000

橡膠線環 GROMMET

用途：用於機殼的電線出線口，保護電線不受機殼刮傷，裝配容易。




- Material: Silicon Rubber
- Color: Black
- Unit: mm

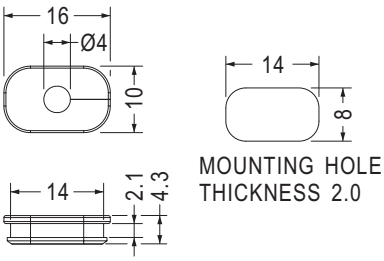

Part No.	Package
TF-1333	1000




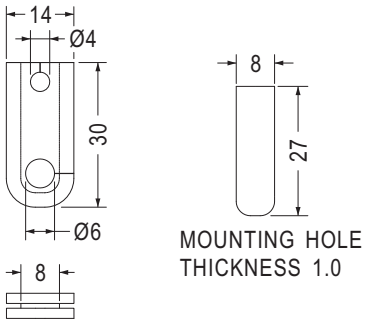

Part No.	Package
GM-140	1000



- Material: Silicon Rubber (UL)
- Flame: 94V-0
- Color: Black
- Unit: mm




Part No.	Package
TF-1654	1000

導電護線環 CONDUCTIVE BUSHING

用途：用於機殼的電線出線口，保護電線不受機殼刮傷，裝配容易。




- Material: Silicon Rubber(UL)
- Flame: 94V-0
- Color: Black
- Unit: mm




Part No.	A	B	C	D	E	Package
STGM-1	8.15	6.0	4.0	0.8	3.8	2000
STGM-2	7.0	5.5	3.9	0.9	3.4	

抗震線環 ANTI-VIBRATION GROMMET

用途：用於硬碟及精密零件之防震。
G:為45度硬度，H:為55度硬度

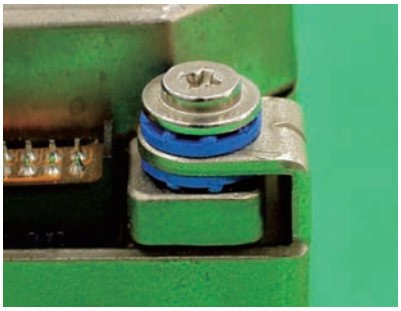


- Material: TPE (UL 94V-0 is optional)
  G: Hardness is Shore A45
  H: Hardness is Shore A55
- Color: Black/Blue
- Unit: mm




・TGM-128可配合TGM-128A螺絲用

Part No.	A	B	C	D	E	Package
TGM-14	14.0	9.5	4.85	1.6	8.1	1000
TGM-15	14.0	11.0	4.85	1.6	8.1	
TGM-16	14.0	9.5	4.85	1.0	7.5	
TGM-25	14.0	9.5	4.85	1.0	8.1	
TGM-29	14.0	9.5	4.85	1.2	7.4	
TGM-128	14.3	9.52	4.78	1.65	8.2	




・TGM-11可配合TGM3-10和TGM632-10螺絲用

Part No.	Package
TGM-11	1000




・TGM-17可配合TGM-17SW螺絲用

Part No.	Package
TGM-17	2000




Part No.	Package
TGM-18	1000




・Material: Silicon Rubber


Part No.	Package
TGM-21	1000




Part No.	Package
TGM-38	2000




Part No.	Package
TGM-40	1000



Part No.	Package
TGM-41	1000



Part No.	Package
TGM-64	1000



・TGM-10可配合TGM-10SW和TGM3-8SW螺絲用
・TGM-13可配合TGM-13SW螺絲用


Part No.	A	B	C	D	E	Package
TGM-10	9.62	6.3	3.9	1.6	5.8	1000
TGM-13	10.5	7.8	4.75	1.5	6.75	
TGM-22	9.62	6.3	3.9	3.0	7.0	
TGM-23	11.0	7.8	4.75	1.0	8.0	
TGM-24	9.62	6.3	3.9	1.0	5.8	
TGM-28	9.62	6.3	3.9	1.2	5.8	
TGM-42	12.0	9.0	6.0	1.0	9.0	2000
TGM-52	9.62	6.35	3.9	0.8	5.8	1000
TGM-82	9.5	7.0	4.3	2.6	6.6	
TGM-129	9.0	6.0	4.0	1.3	3.7	
TGM-151	9.2	6.5	4.1	1.0	4.6	
TGM-153	7.8	6.0	4.0	1.1	4.5	
TGM-161	19.0	13.8	9.0	3.0	10.2	
TGM-162	7.0	5.5	3.9	1.0	5.8	
TGM-163	10.5	7.8	4.75	2.0	7.25	
TGM-167	8.0	5.5	3.9	0.8	3.4	


抗震線環 ANTI-VIBRATION GROMMET

用途：用於硬碟及精密零件之防震。
G:為45度硬度，H:為55度硬度




- Material: TPE (UL 94V-0 is optional)
  G: Hardness is Shore A45
  H: Hardness is Shore A55
- Color: Black/Blue
- Unit: mm






【 TGM-46, TGM-86, TGM-97 】


Part No.	A	B	C	D	E	Package
TGU-1	12.0	9.0	6.0	1.0	9.0	1000
TGM-20	8.0	6.0	4.2	1.5	4.6	
TGM-46	7.0	5.5	4.0	0.6	5.5	
TGM-86	9.6	7.0	4.0	1.2	5.2	
TGM-97	8.0	6.0	4.2	0.8	2.9	
TGM-116	10.0	7.0	5.0	2.0	5.0	
TGM-131	8.8	6.6	3.6	0.8	3.8	
TGM-137	8.8	6.0	4.2	0.9	2.9	
TGM-143	8.0	6.0	4.2	0.9	2.9	
TGM-145	9.6	7.6	5.6	0.8	2.8	
TGM-146	6.5	5.0	4.0	1.0	3.8	
TGM-170	7.5	5.8	3.1	0.9	2.8	
TGM-177	24.0	18.0	14.0	3.0	7.0	




Part No.	A	D	Package
TGM-36	8.0	0.8	1000
TGM-164	8.5	1.1	




Part No.	A	B	C	D	E	Package
TGM-171	8.0	5.0	2.0	1.0	4.0	2000
TGM-180	16.0	12.0	10.0	3.0	8.0	1000
TGM-181	31.5	25.0	18.5	1.6	8.0	250
GM-131	30.0	25.5	22.0	1.6	8.0	




Part No.	A	B	C	D	E	Package
TGM-44	11.0	8.0	6.0	2.0	5.0	1000
TGM-50	7.0	5.5	3.9	0.9	2.8	
TGM-56	12.7	9.5	4.8	1.6	5.4	
TGM-81	14.2	9.5	4.9	1.0	4.9	
TGM-130	14.2	9.5	5.4	1.0	4.9	
TGM-138	8.6	7.0	5.5	0.8	7.8	
TGM-175	8.8	6.8	4.85	1.2	4.0	




Part No.	Package
TGM-51	1000




Part No.	Package
TGM-45	1000



Part No.	Package
TGM-65	1000




Part No.	Package
TGM-173	1000



- Material: Silicon Rubber


Part No.	Package
TGM-68	1000



Part No.	Package
TGM-83	1000


抗震線環 ANTI-VIBRATION GROMMET

用途：用於硬碟及精密零件之防震。
G:為45度硬度，H:為55度硬度

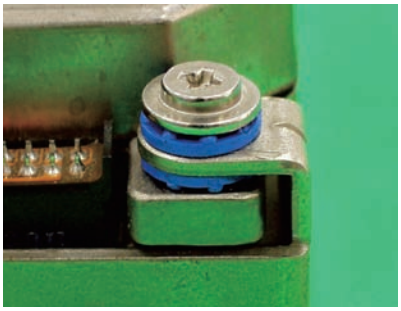


- Material: TPE (UL 94V-0 is optional)
  G: Hardness is Shore A45
  H: Hardness is Shore A55
- Color: Black/Blue
- Unit: mm

裝配孔尺寸，僅供參考
Mounting holes are for reference only.




Part No.	Package
TGM-166	1000




MOUNTING HOLE Ø7.0~Ø7.5

Part No.	Package
TGM-71	1000




- Material: Silicon Rubber


Part No.	Package
TGM-124	1000




Part No.	Package
TGM-140	1000




Part No.	Package
TGM-149	2000




Part No.	Package
TGM-141	1000




Part No.	Package
TGM-49	1000




Part No.	Package
TGM-174	1000



Part No.	Package
TGM-123	2000




Part No.	Package
TGM-88	1000




MOUNTING HOLE Ø6.0

Part No.	Package
TGM-76	1000




Part No.	Package
TGM-67	1000




Part No.	Package
TGM-152	1000

墊片 WASHER

用途：風扇螺絲墊片抗震性良好。

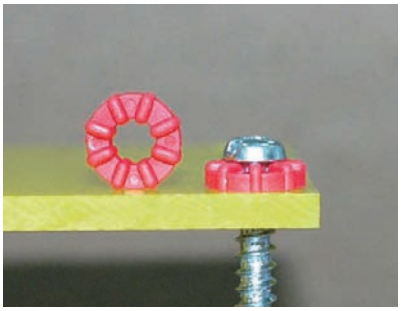

- Material: TPE
- Color: Black/Red
- Unit: mm



Part No.	Package
WSQ4-2	2000


抗震線環 ANTI-VIBRATION GROMMET


用途：用於硬碟及精密零件之防震。
G:為45度硬度，H:為55度硬度



裝配孔尺寸，僅供參考
Mounting holes are for reference only.

- Body Material: TPE (UL 94V-0 is optional)
  G: Hardness is Shore A45
  H: Hardness is Shore A55
- Pin Material: Zinc Plated Steel
- Color: Black
- Unit: mm





MOUNTING HOLE


Part No.	Package
TGM-96	1000




裝配孔尺寸，僅供參考
Mounting holes are for reference only.


- Body Material: TPE
- Pin Material: Zinc Plated Steel
- Color: Black/Blue
- Unit: mm

用途：用於硬碟及精密零件之防震。





FOR TGM-117
PIN



MOUNTING HOLE

・TGM-117為專利品
・TGM-117 is patented


Part No.	Package
TGM-73	1000
TGM-117	

用途：用於硬碟及精密零件之防震。




- Body Material: TPE
- Pin Material: Zinc Plated Steel
- Color: Black/Blue
- Unit: mm


裝配孔尺寸，僅供參考
Mounting holes are for reference only.

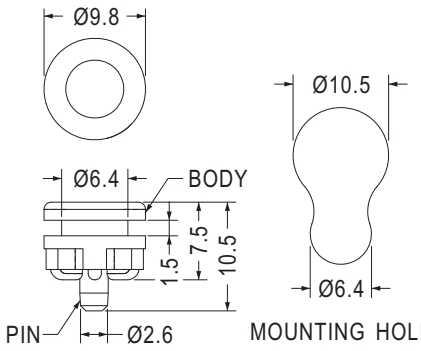


Part No.	Package
TGM-74	1000

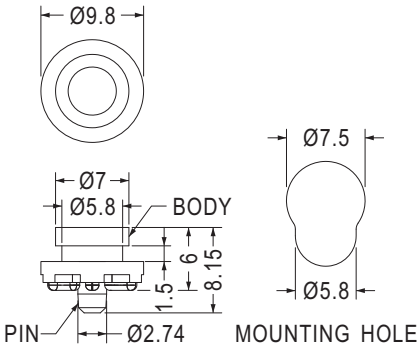


Part No.	Package
TGM-126	1000

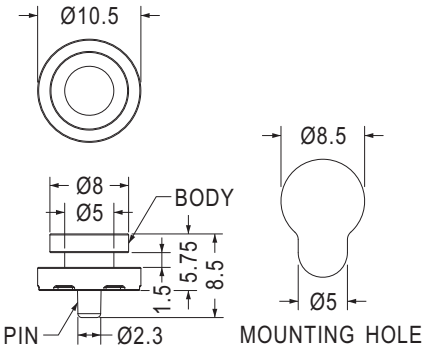

Part No.	Package
TGM-132	1000

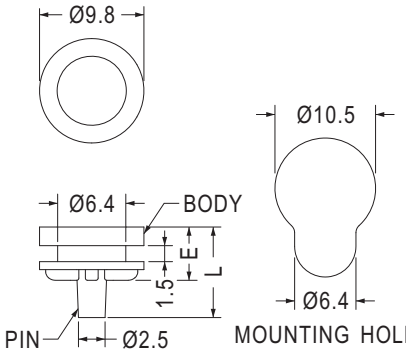


Part No.	E	L	Package
TGM-58	5.0	8.5	1000
TGM-112	5.5	9.0	



Part No.	Package
TGM-176	1000




裝配孔尺寸，僅供參考
Mounting holes are for reference only.

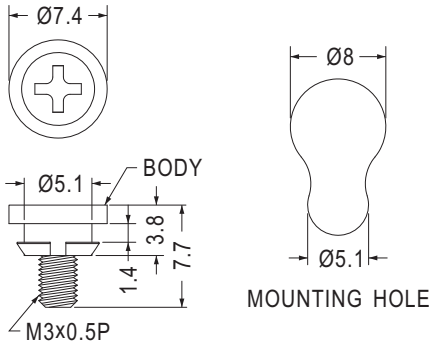


Part No.	Package
TGM-69	1000

螺絲 SCREW

用途：硬碟及精密零件之抗震線環用螺絲，可配抗震線環使用。

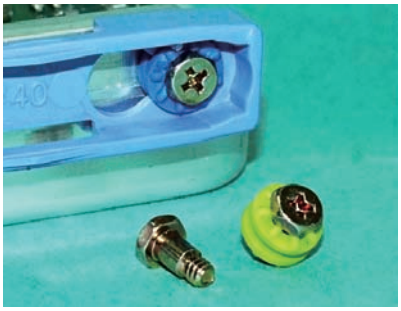


- Material: Steel
- Finish: Nickel Plating
- Unit: mm




・可配抗震線環TGM-11使用

Part No.	Thread	Package
TGM3-10	M3x0.5	1000
TGM632-10	6-32 UNC	




・可配抗震線環TGM-10使用


Part No.	Package
TGM3-8SW	1000



・可配抗震線環TGM-17使用


Part No.	Package
TGM-17SW	1000






【 TGM3-9.8SW 】

Part No.	A	B	C	D	E	Thread	Package
TGM3-9.8SW	10.0	3.4	4.8	1.0	6.4	M3x0.5	1000
TGM3-11SW	6.0	4.0	4.0	3.0	4.01		
TGM4-11SW	8.0	5.15	5.0	2.7	4.01	M4x0.7	
★TGM4-14SW	8.0	7.8	5.0	2.7	4.0		




Part No.	Package
TGM4-13ST-1	1000



・可配抗震線環TGM-10使用

Part No.	Package
TGM-10SW	1000



・可配抗震線環TGM-13使用


Part No.	Package
TGM-13SW	1000

插銷 PIN

用途：硬碟及精密零件之抗震線環用插銷，可配抗震線環TGM-128使用。



- Material: PC (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm
- Patented (專利品)

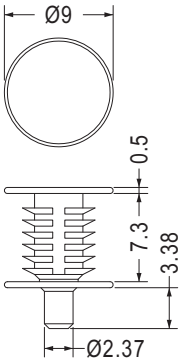


Part No.	Package
TGM-128A	1000


用途：用於硬碟及精密零件之防震。




- Material: NBR/Rubber/Silicon Rubber
- Color: Black
- Unit: mm




Part No.	Package
GM-25	1000




Part No.	Package
GM-26	1000




Part No.	Package
GM-27	1000




Part No.	Package
GM-28	1000




Part No.	Package
GM-31	1000



Part No.	Package
GM-32	1000



Part No.	Package
GM-33	1000




Part No.	Package
GM-34	1000

磁碟機防震座 HDD ANTI-VIBRATION BASE

用途：用於磁碟機之防震保護。



- Material: TPE
- Color: Black
- Unit: mm

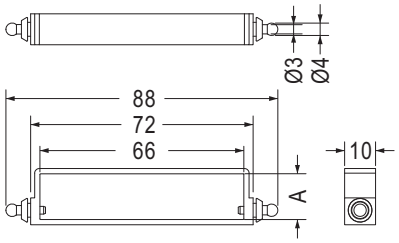


Part No.	A	HDD	Package
DKHR-1	14.8	3.5"	250
DKHR-7	6.7	2.5"	100
DKHR-9	9.3		

護線環 SNAP BUSHING

用途：用於機殼的電線出線口，保護電線不受機殼刮傷，裝配容易。



- Material: TPE
- Color: Black
- Unit: mm



MOUNTING HOLE: ØG


Part No.	A	B	G	Package
LGT-2	6.0	2.3	4.0	1000
LGT-6G	7.0	3.0	4.8	

矽膠護線環 SILICON SNAP BUSHING

用途：用於機殼的電線出線口，保護電線不受機殼刮傷，裝配容易。



- Material: Silicon Rubber
- Color: Black
- Unit: mm




Part No.	Package
TF-395	1000

天線護線環 ANTENNA SNAP BUSHING

用途：用於天線之絕緣與保護。



- Material: Silicon Rubber
- Color: White/Black
- Unit: mm




Part No.	Package
ANTCV-2	500


扣式塞頭 HOLE PLUG

用途：可將多餘的機殼出線口遮蓋，裝配容易。



- Material: TPE (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm







RECOMMEND MOUNTING HOLE

Part No.	Package
MHDS-1	1000

裝配孔尺寸，僅供參考
Mounting holes are for reference only.

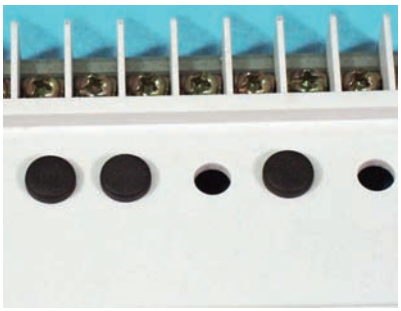


- Material: TPE/TPE (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm



MOUNTING HOLE: ØG


裝配孔尺寸，僅供參考
Mounting holes are for reference only.



MOUNTING HOLE: ØG or M4


【 MHD-3.3 】

Part No.	A	B	G	Package
MHD-3.3	7.5	3.55	3.3	1000
MHD-4.5	6.0	4.7	4.5	
MHD-5	7.0	5.2	5.0	
MHD-5L	7.0	5.2	5.0	
MHD-5.5	7.0	5.6	5.5	
MHD-5.5I	7.0	5.6	5.5	
MHD-6	8.0	6.2	6.0	
MHD-6.5	8.0	6.9	6.5	
MHD-7	9.0	7.2	7.0	
MHD-7S	9.0	7.3	7.0	
MHD-7.5I	10.0	7.9	7.5	
MHD-8	10.0	8.2	8.0	
MHD-9	11.0	9.4	9.0	
MHD-10L	12.0	10.4	10.0	
MHD-17I	17.0	13.6	12.0	




MOUNTING HOLE: ØG

【 MHD-4.5 】




MOUNTING HOLE: ØG

【 MHD-5L 】




MOUNTING HOLE: ØG

【 MHD-5.5, MHD-5.5I 】



MOUNTING HOLE: ØG


【 MHD-7S 】



MOUNTING HOLE: ØG

- Material: Silicon Rubber

【 MHD-7.5I 】




MOUNTING HOLE: ØG

- Material: Silicon Rubber

【 MHD-17I 】






MOUNTING HOLE Ø6.35

- Material: Silicon Rubber

Part No.	Package
MHD-6.3I	1000

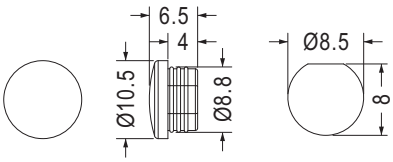

MOUNTING HOLE


Part No.	Package
MHD-16	1000

扣式塞頭 HOLE PLUG

用途：可將多餘的機殼出線口遮蓋，裝配容易。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



MOUNTING HOLE Ø3.0

Part No.	Package
MBH-1	1000




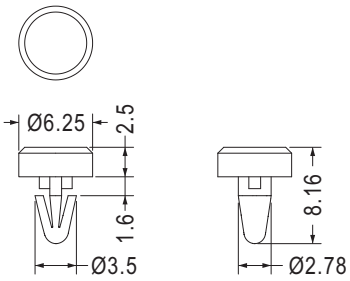

MOUNTING HOLE Ø2.8
THICKNESS 1.2


Part No.	Package
FIXE-1	1000





MOUNTING HOLE Ø12.0
CHASSIS THICKNESS 3.0


Part No.	Package
MHF-1	1000



MOUNTING HOLE Ø12.0
CHASSIS THICKNESS 3.0

Part No.	Package
MHF-2	1000






MOUNTING HOLE Ø11.0


Part No.	Package
MHE-11	1000





MOUNTING HOLE Ø5.5

Part No.	Package
MHCA5.5-5.6	1000



MOUNTING HOLE Ø7.5

Part No.	Package
MHC-1	1000


裝配孔尺寸，僅供參考
Mounting holes are for reference only.


扣式塞頭 HOLE PLUG

用途：可將多餘的機殼出線口遮蓋，裝配容易，輕微防水。




- Material: Nylon 66 (UL)/TPU
- Flame Class: 94V-2
- Color: Black
- Unit: mm






MOUNTING HOLE: ØG
THICKNESS 1.0~1.6

Part No.	A	B	G	Package
MBP-12.7	23.4	2.0~5.1	12.7	1000
MBP-15.9	26.2	3.3~9.5	15.9	
MBP-19.1	29.2	4.4~10.2	19.1	
MBP-22.2	32.5	3.3~11.4	22.2	500
MBP-25.4	36.3	5.1~18.2	25.4	
MBP-27.8	38.9	6.4~19.4	27.8	

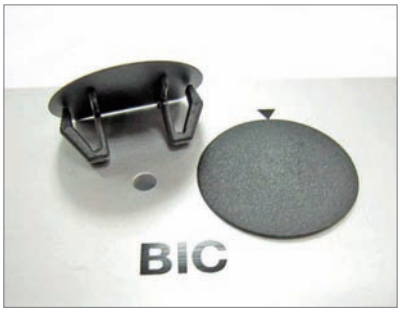


用途：可將多餘的機殼出線口遮蓋，裝配容易。


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




MOUNTING HOLE: ØG
THICKNESS: T



MOUNTING HOLE: ØG
THICKNESS: T
【 MBWK4-1 】



MOUNTING HOLE: ØG
THICKNESS: T
【 MBWK-8 】




MOUNTING HOLE: ØG
THICKNESS: T
【 MBWK-7 】

Part No.	A	B	C	D	G	T	Package
MBWK-1	18.5	9.8	10.4	1.7	11.0~14.0	0.8~3.5	500
MBWK-2	30.0	15.5	11.6	1.9	22.0~26.0	0.8~3.5	
MBWK4-1	16.0	8.5	12.6	1.6	9.5~11.0	0.8~3.2	
MBWK-7	52.0	43.6	11.5	2.2	44.7~49.0	0.8~3.2	200
MBWK-8	8.0	4.7	6.0	1.5	5.0~6.0	0.8~1.6	500



- Material: POM
- Color: Black
- Unit: mm




MOUNTING HOLE Ø22.0~Ø25.5
THICKNESS 0.8~3.2


Part No.	Package
MBWK-9	500

扣式塞頭 HOLE PLUG

用途：可將多餘的機殼出線口遮蓋，裝配容易。

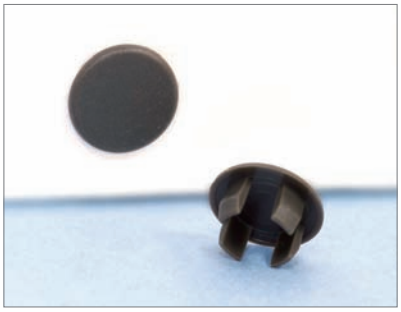


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



MOUNTING HOLE Ø4.75~Ø5.1
THICKNESS 3.3~3.5

Part No.	Package
MBT-14	1000




MOUNTING HOLE: ØG
THICKNESS 0.8~3.8

Part No.	A	D	G	Package
MBPP-6	10.4	1.1	6.0	1000
MBPP-6.4	10.4	1.1	6.4	
MBPP-12	16.0	1.3	12.0	




- Material: TPE
- Color: Natural/Black
- Unit: mm




MOUNTING HOLE Ø22.0
THICKNESS 0.8~2.0

Part No.	Package
CDELT-11	500



MOUNTING HOLE: ØG
THICKNESS 0.8~1.0


Part No.	A	E	G	Package
CDELT-1	24.0	4.0	22.0	1000
CDELT-4	16.0	3.5	13.0	



MOUNTING HOLE Ø13.0
THICKNESS: T

Part No.	E	T	Package
CDELT-6	3.5	1.0	1000
CDELT-7	5.1	1.0~1.2	


- Material: TPE (UL)
- Flame Class: 94HB
- Color: Black
- Unit: mm



MOUNTING HOLE: ØG
THICKNESS 1.6

Part No.	A	E	G	T	Package
CDELT-16	38.2	7.5	31.5	1.6	200
CDELT-17	18.7	5.6	12.7	1.6	1000
★CDELT-18	43.7	8.2	38.2~38.5	1.5	200

- Material: TPE (UL)
- Flame Class: 94HB
- Color: Black
- Unit: mm



MOUNTING HOLE: ØG
THICKNESS 0.8~2.0


Part No.	A	D	G	Package
CDELT-12	19.0	5.0	10.0	500
CDELT-13	25.0	5.0	16.0	
CDELT-14	39.0	5.5	30.0	200


扣式塞頭 HOLE PLUG


用途：可將多餘的電源線扣機殼出線口遮蓋，裝配容易。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm









MOUNTING HOLE
THICKNESS: T

E127489


Part No.	A	B	G	H	T	Package	UL
M9.5U	12.0	10.5	7.9	9.5	0.8~3.5	1000	UL
M11U	14.5	10.6	9.9	11.0	3.3		UL
M12U	16.2	10.6	11.5	12.7	0.8~3.0	500	UL
M14U	17.8	10.6	13.4	14.3	3.3		UL
M16U	18.6	10.6	14.0	15.9	0.8~3.5		UL
M19U	22.7	10.6	16.5	19.0	0.8~3.0		UL
M22U	25.6	10.6	20.5	22.1	0.8~3.3		UL
★M28U	32.0	13.5	25.4	28.2	0.8~3.3	200	






MOUNTING HOLE: ØG
THICKNESS: T

【 M13.5 】





MOUNTING HOLE: ØG
THICKNESS: T

E127489

Part No.	A	B	G	T	Package
M11	14.0	10.1	11.0	3.3	500
M12	14.3	10.1	12.0	3.3	
M13	14.6	10.1	12.7	3.3	
M13.5	15.2	6.2	13.5	2.2	
M14	16.3	10.1	14.0	3.3	
M15	17.3	10.1	15.0	3.3	
M16	18.7	10.6	16.0	3.3	
M16S	20.0	7.7	15.9	2.0	1000
M17	19.3	10.1	17.0	3.3	500
M19	23.2	10.3	19.0	3.3	
M20	24.0	10.6	20.0	3.3	
M22	25.4	11.0	22.2	3.3	200
M25	28.4	11.0	25.4	3.3	
M28	32.0	13.5	28.0	3.3	
M30	34.2	11.3	30.0	3.3	
M30L	34.0	11.8	30.1	0.8~3.2	
M32	36.0	12.0	32.0	3.3	
M35	38.1	11.5	35.0	3.2	
M38	42.4	11.8	38.1	3.2	
M44	48.4	11.8	44.5	3.2	
M50	56.4	17.0	50.8	6.4	
M53	57.5	19.0	53.0	0.8~6.5	100
M63	71.2	19.1	63.5	0.8~6.4	200


Part No.	A	B	G	T	Package
M04	6.35	5.5	4.8	1.6	2000
M05	6.4	6.0	5.0	0.6~2.0	
M06	7.6	5.6	6.4	1.6	
M07	10.9	7.0	7.0	0.8~1.8	
M07S	8.7	6.4	7.0	1.8	1000
M08	9.5	7.6	8.0	1.6	
M09A	11.5	10.1	9.0	3.3	
M09S	13.0	5.5	9.5	1.4	
M09	11.9	10.1	9.5	3.3	
M10	11.9	6.4	10.3	1.6	500


扣式塞頭 HOLE PLUG

用途：可將多餘的電源線扣機殼出線口遮蓋，裝配容易。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

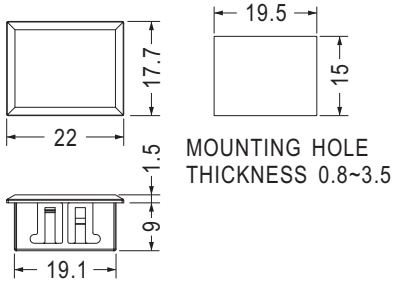

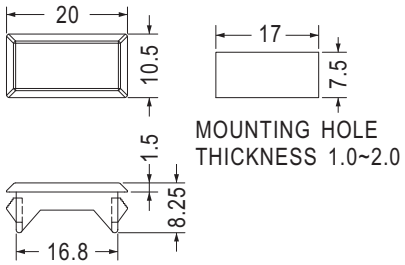

Part No.	Package
MSQ-14	500

Part No.	Package
MSQ-8	500

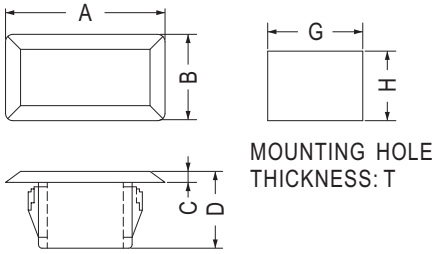


Part No.	A	B	C	D	G	H	T	Package
MSQ-1	21.8	11.8	1.5	10.5	13.0	9.5	0.8~3.5	500
MSQ-2	35.0	11.9	1.5	10.5	26.0	9.5	0.8~3.5	
MSQ-4	16.0	12.0	1.5	10.5	13.0	9.5	1.4~3.5	
MSQ-5	15.0	15.0	2.0	11.0	13.5	13.5	0.75~3.8	
MSQ-6	24.3	14.0	1.5	10.5	16.0	11.5	0.8~3.5	
MSQ-7	18.0	8.0	1.5	10.5	16.5	6.5	0.8~3.5	
MSQ-9	19.3	19.0	1.5	10.5	17.3	17.0	0.8~3.5	
MSQ-10	39.0	15.7	1.5	10.5	35.5	12.2	1.4~3.5	

塞頭 HOLE PLUG


用途：可將多餘的電源線扣機殼出線口遮蓋，裝配容易。




- Material: TPE/TPE (UL)
- Flame Class: 94HB
- Color: Black
- Unit: mm




Part No.	Package
DGB-12	1000




Part No.	Package
DGB-42	100



Part No.	Package
DGBD-12	1000




Part No.	Package
DGBE-1	500



MOUNTING HOLE Ø19.0

- Material: Rubber

Part No.	Package
DGB-19	500



MOUNTING HOLE Ø19.0


- Material: Rubber

Part No.	Package
DGB-19A	500

用途：可將多餘的電源線扣機殼出線口遮蓋，裝配容易。




- Material: Rubber
- Color: Black
- Unit: mm



MOUNTING HOLE Ø25.4


Part No.	Package
DGB-25	500



MOUNTING HOLE Ø28.5

Part No.	Package
DGB-26	500


裝配孔尺寸，僅供參考
Mounting holes are for reference only.



MOUNTING HOLE Ø40.0
THICKNESS 2.0

- Material: Silicon Rubber


Part No.	Package
DGB-40	200



MOUNTING HOLE Ø22.0

- Material: TPE


Part No.	Package
GDBB-1	1000



MOUNTING HOLE Ø25.5

- Material: TPE (UL)
- Flame Class: 94HB

Part No.	Package
GDBB-2	1000




- Material: Silicon Rubber

Part No.	Package
DGBB-1	1000

用途：可將多餘的電源線扣機殼出線口遮蓋，裝配容易。




- Material: Silicon Rubber
- Color: Black
- Unit: mm



MOUNTING HOLE Ø7.0~Ø7.3
THICKNESS 1.0~1.5

Part No.	Package
TF-140	1000




MOUNTING HOLE Ø7.0

Part No.	Package
TF-039	1000


裝配孔尺寸，僅供參考
Mounting holes are for reference only.





MOUNTING HOLE Ø5.5~Ø5.8

Part No.	Package
TF-618	1000



MOUNTING HOLE Ø8.3


Part No.	Package
TF-461	1000

塞頭 HOLE PLUG

用途：做為電纜線出線口之輕微防水及固定。



- Material: EPDM
- Color: Black
- Unit: mm



MOUNTING HOLE Ø11.5
THICKNESS 1.2~1.5


Part No.	Package
TF-1643	1000

裝配孔尺寸，僅供參考
Mounting holes are for reference only.

用途：可將多餘的機殼出線口遮蓋，亦可將M3螺絲孔塞住。



- Material: EPDM
- Color: Black
- Unit: mm




配合 M3 攻牙孔使用
FOR M3 TAPPED

Part No.	Package
TF-222	1000

用途：用於電纜防水接頭之塞頭。




- Material: PE
- Color: Black
- Unit: mm



MOUNTING HOLE Ø4.0

Part No.	Package
ACSRA-4.4	1000



Part No.	Package
ACSRC-4.1	1000


裝配孔尺寸，僅供參考
Mounting holes are for reference only.

塞頭 HOLE PLUG


用途：用於電纜防水接頭之塞頭。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	Package
ACSRB-12.7	1000



Part No.	Package
ACSRB-6	1000




Part No.	Package
ACSRA-4	1000



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

用途：可將多餘的機殼出線口遮蓋，裝配容易。

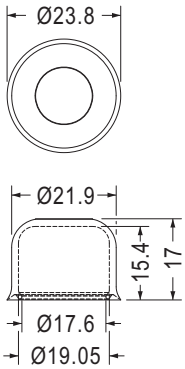


Part No.	Package
KPS-36	1000

螺紋塞頭 THREADED PROTECTION PLUG

用途：可將多餘的機殼出線口遮蓋，裝配容易。



- Material: PE
- Color: Red
- Unit: mm




Part No.	Package
10459	250

螺絲孔塞頭 SCREW HOLE PLUG

用途：用於內六角螺絲的孔塞。




- Material: PE
- Color: Black
- Unit: mm



MATING SCREW: S


Part No.	A	B	C	D	S	Package
MHDA4.2-3	9.0	4.2	1.3	2.5	M5	2000
MHDA5.2-3.1	10.0	5.2	1.4	3.1	M6	



MOUNTING HOLE Ø8.5

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0

Part No.	Package
MHCA8.5-6.9	1000




MATING SCREW: S

Part No.	A	B	C	D	S	Package
ACSRD-6.2	13.0	6.2	1.5	4.0	M8	1000
ACSRD-8.2	16.0	8.2	1.6	5.0	M10	
ACSRD-10.3	18.0	10.3	1.8	6.4	M12	




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm


用途：用於螺絲孔之防水及遮蔽。



Part No.	A	B	C	D	E	Thread	Package
MOTA-12	15.0	6.1	16.5	13.0	4.5	M12x1.5P	500
MOTA-16	19.0	8.1	20.5	13.0	4.5	M16x1.5P	
MOTA-20	24.0	8.1	25.5	14.5	5.5	M20x1.5P	


- Material: POM
- Color: Black
- Unit: mm





Part No.	Package
MOTB-8	500

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- O-Ring Material: NBR
- Color: Black
- Unit: mm




Part No.	A	B	C	D	E	Thread	Package
MOTA-12F	15.0	6.1	16.5	13.0	4.5	M12x1.5P	500
MOTA-16F	19.0	8.1	20.5	13.0	4.5	M16x1.5P	
MOTA-20F	24.0	8.1	25.5	14.5	5.5	M20x1.5P	

螺絲孔塞頭 SCREW HOLE PLUG


用途：可將多餘的機殼出線口遮蓋，具防水功能，裝配容易。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm



Part No.	Package
SPM-16	500



Part No.	A	C	D	Thread	Package
SPMA-10	15.0	12.5	8.5	M10x1.5	500
SPMA-12	15.0	10.0	6.0	M12x1.5	
SPMA-16	20.2	11.5	8.0	M16x1.5	
SPMA-20	24.0	12.5	7.5	M20x1.5	
SPMA-25	30.0	15.0	11.0	M25x1.5	
SPMA-32	37.0	15.7	10.8	M32x1.5	
SPMA-32S	38.0	13.8	10.0	M32x1.5	
SPMA-40	46.0	17.5	12.0	M40x1.5	

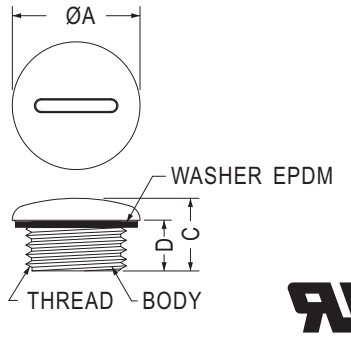

✓通過IP68防水測試

E127489


Part No.	A	C	D	Thread	Package
SPMB-10	15.0	12.0	8.5	M10x1.5	500
SPMB-12	15.0	10.0	6.0	M12x1.5	
SPMB-16	20.2	11.5	8.0	M16x1.5	
SPMB-20	24.0	12.5	7.5	M20x1.5	
SPMB-25	30.0	15.0	11.0	M25x1.5	
SPMB-32	37.0	15.7	10.8	M32x1.5	
SPMB-32S	38.8	13.8	10.0	M32x1.5	
SPMB-40	46.0	17.5	12.0	M40x1.5	

塞頭 THREADED HOLE PLUG

用途：端子的保護與防塵。




- Material: PC+ABS (UL)
- O-Ring Material: Silicon Rubber
- Flame Class: 94V-0
- Color: Black
- Unit: mm




Part No.	組合件(ASSY)	Package
SPMA-12LF	SPMA-12L	500
	OR10.6-1.25I	


電源線扣 STRAIN RELIEF BUSHING

用途：用於電子電器電源出線口，固定扣牢和保護電源免於被機殼刮傷，造成短路。

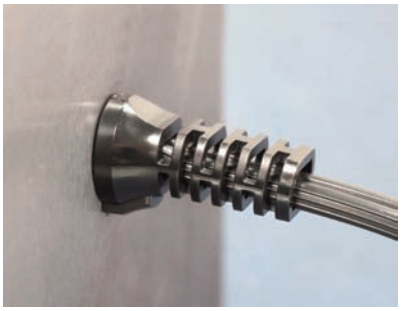

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm







MOUNTING HOLE
THICKNESS 0.8~2.3

E127489

Part No.	Wires Accommodate		適用線材斷面形狀 Section Shape	Package
	UL Type Designation	Size		
SB4F-9	SPT-2	4.6x8	扁線用 Flat Type	500










MOUNTING HOLE
THICKNESS 1.5~2.0

E127489

Part No.	Will Fit These Cable		Chassis Dimension		適用線材斷面形狀 Section Shape	Package
	UL Type Designation	Size	G	H		
SB4L-6	SPT-2	3.3x6.6	10.9	12.7	扁線用 Flat Type	500
		3.6x7.2		13.2		

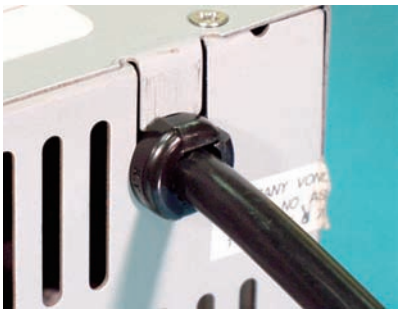





MOUNTING HOLE


CHASSIS THICKNESS: T

E127489

Part No.	Will Fit These Cable		Dimension		Chassis Dimension		Chassis Thickness	Package	UL
	UL/CSA Description	Size	C	D	G	H	T		
SB4F-2	SPT-2	4.1x 8.6	12.4	4.0	11.8	12.7	1.8~2.5	500	UL
SB5P-2	SJT2C#18	Ø6.8~Ø7.8	12.5	4.4	11.8	12.7	0.8~2.6		UL
SB5R-2	SJT3C#16	Ø8.2~Ø9.2	11.5	4.8	11.5	12.7	0.8~1.6		


電源線扣 STRAIN RELIEF BUSHING

用途：用於電子電器電源出線口，固定扣牢和保護電源免於被機殼刮傷，造成短路。

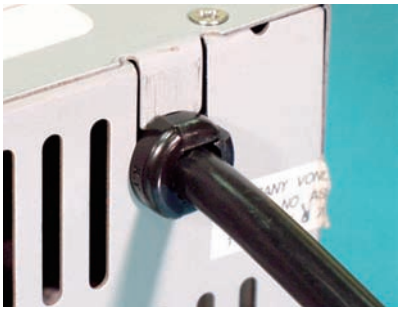


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm


E127489

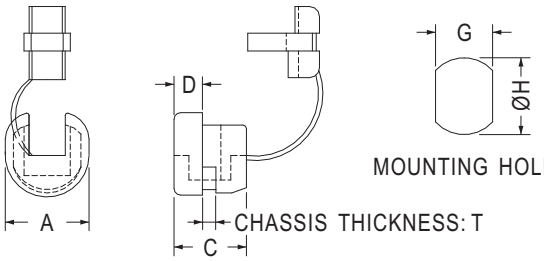

Part No.	Will Fit These Cable		Dimension			Chassis Dimension		Chassis Thickness	Package
	UL/CSA Description	Size	A	C	D	G	H	T	
SB5R-4	SJT3C#16	Ø8.2~Ø9.2	13.4	10.9	4.2	11.5	13.1	0.8~1.6	500
	SJT3C#18	Ø7.6	13.4	10.9	4.2	11.5	12.7	0.8~1.6	
SB5F-4	SPT-3	5.0x10.0	15.5	15.4	6.2	13.4	14.3	0.8~1.6	250
SB5F-6	SPT-3	5.0x10.0	15.5	15.4	6.2	13.4	14.3	1.8~3.2	
SB6R-6	SJT3C#16	Ø8.2~Ø9.2	16.6	14.6	5.6	14.0	15.9	0.8~1.6	

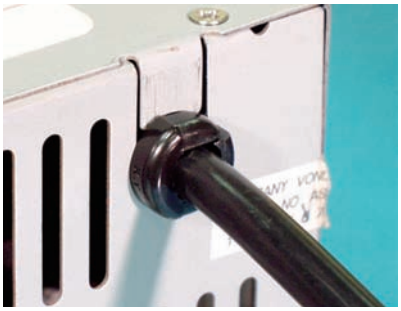


E127489

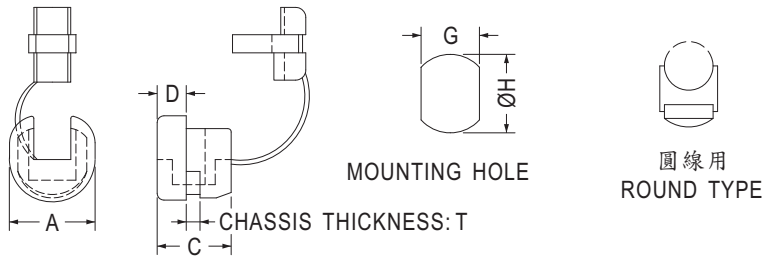

Part No.	Will Fit These Cable			Dimension			Chassis Dimension		Chassis Thickness	適用線材斷面形狀 Section Shape	Package
	UL Type Designation	AWG / Conductor	Size	A	C	D	G	H	T		
SB8R-2	SJT	12/3C	Ø13.5~Ø15.2	22.6	20.4	8.4	21.7	22.0	1.8~2.5	圓線用 Round Type	100
SB9R-2		10/3C	Ø15.2~Ø16.3	27.5	25.2	10.6	25.4	28.0	1.2~7.0		
		10/3C	Ø17.5	27.5	25.2	10.6	25.4	30.2	1.2~7.0		



E127489

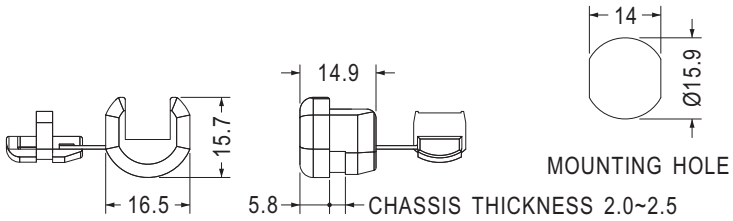

Part No.	Will Fit These Cable			Package
	UL Type Designation	AWG / Conductor	Size	
SB6P4-4	SPT-2	18/3	3.0x7.6	500
		16/3	4.1x10.4	


電源線扣 STRAIN RELIEF BUSHING

用途：用於電子電器電源出線口，固定扣牢和保護電源免於被機殼刮傷，造成短路。

E127489




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

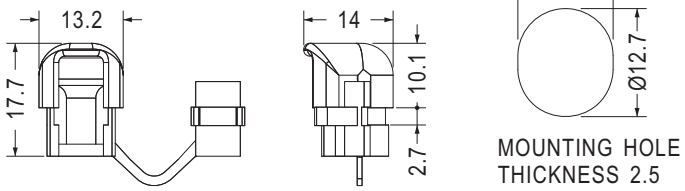

Part No.	Will Fit These Cable		Package
	UL Type Designation	Size	
SB4L-4	SPT-2	3x6.6	500
SB5L-4	SVT	6.0	




E127489

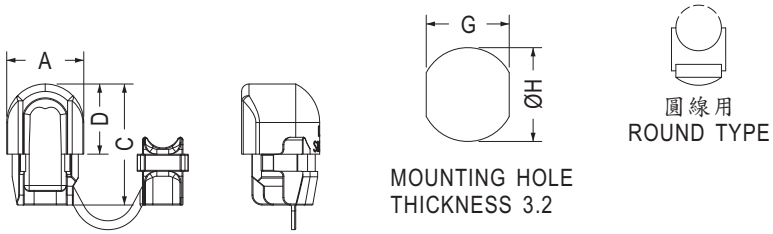

Part No.	Will Fit These Cable			Dimension			Chassis Dimension		適用線材斷面形狀 Section Shape	Package
	UL Type Designation	AWG / Conductor	Size	A	C	D	G	H		
SB6L-6	SJT	18/3C	Ø7.4~Ø8.2	15.4	24.5	14.2	14.0	15.9	圓線用 Round Type	100
SB7L-2		14/3C	Ø9.2~Ø10.5	19.5	27.8	16.3	16.5	19.0		




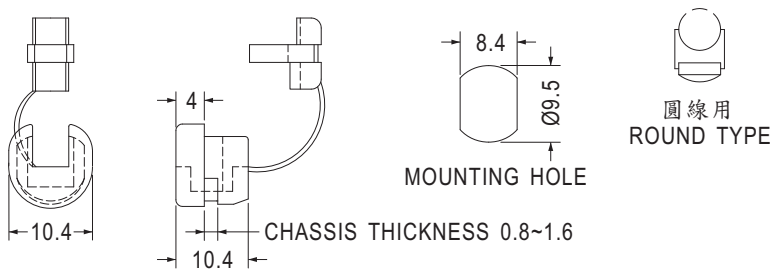

Part No.	Will Fit These Cable	適用線材斷面形狀 Section Shape	Package
	Size		
2P-1	Ø3.0~Ø4.7	圓線用 Round Type	500


電源線扣 STRAIN RELIEF BUSHING

用途：用於電子電器電源出線口，固定扣牢和保護電源免於被機殼刮傷，造成短路。

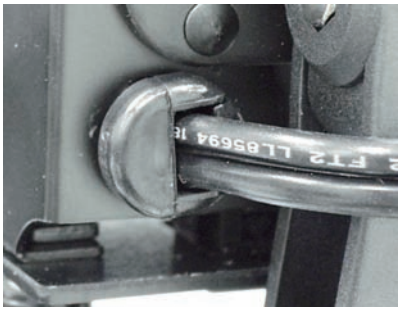

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

E127489






圓線用
ROUND TYPE




扁線用
FLAT TYPE

Part No.	Will Fit These Cable			Dimension			Chassis Dimension		Chassis Thickness	適用線材斷面形狀 Section Shape	Package
	UL Type Designation	AWG / Conductor	Size	A	C	D	G	H	T		
2P-4	SPT-1	18/2C	3.0x5.6	10.4	10.4	4.0	8.7	9.5	1.6	扁線用 Flat Type	1000
3P-4		18/2C	3.0x5.6	11.5	10.4	4.0	9.9	11.0	1.6		
3W-1		18/2C	3.0x5.6	11.5	10.4	4.0	9.9	11.0	2.5		
4N-4	SPT-2	18/2C	3.71x7.6	13.3	10.4	4.0	11.8	12.7	1.6		
		16/2C	3.8x7.6	13.3	10.4	4.0	11.8	13.1	1.6		
4K-4		18/2C	3.71x7.6	13.3	10.5	4.0	11.8	12.7	2.5		
		16/2C	3.8x7.6	13.3	10.5	4.0	11.8	13.1	2.5		
5N-4	SVT	18/3C	Ø6.4~Ø7.4	13.5	10.9	4.2	11.5	12.7	1.6	圓線用 Round Type	
		18/3C	Ø6.4~Ø7.4	13.5	10.9	4.2	11.5	13.1	1.6		
5P-4		18/3C	Ø6.4~Ø7.4	13.5	10.9	4.2	11.5	12.7	2.5		
		18/3C	Ø6.4~Ø7.4	13.5	10.9	4.2	11.5	13.1	2.5		
6N-4	SJT	18/3C	Ø7.6	16.8	14.8	5.6	14.0	15.9	1.6		500
6P-4		18/3C	Ø7.6	16.8	14.8	5.6	14.0	15.9	3.2		
6N3-4		16/3C	Ø8.2~Ø9.2	16.2	15.0	5.6	14.0	15.9	1.6		
6P3-4		16/3C	Ø8.2~Ø9.2	16.2	14.8	5.7	14.0	15.9	3.2		
7N-2		14/3C	Ø9.2~Ø10.5	19.5	19.1	7.8	16.5	19.0	1.6		100
		14/3C	Ø11.0	19.5	19.1	7.8	16.5	19.8	1.6		
7P-2		14/3C	Ø9.2~Ø10.5	19.5	19.4	7.8	16.5	19.0	3.2		
		14/3C	Ø11.0	19.5	19.4	7.8	16.5	19.8	3.2		

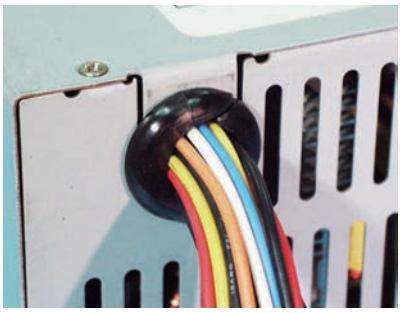


E127489




Part No.	Will Fit These Cable		Dimension		Package	UL
	UL/CSA Description	Size	A	C		
SB7R-7	SJT3C#10	14.0~17.0	25.0	17.0	100	UL
SB7R-7SP		12.0~15.2	25.3	17.8		


方形線扣 SQUARE STRAIN RELIEF BUSHING


用途：用於電子電器電源出線口，固定扣牢和保護電源免於被機殼刮傷，造成短路。

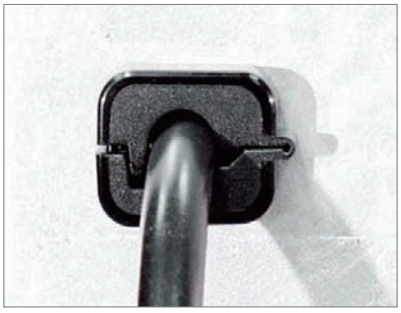


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm









MOUNTING HOLE





【 SB4F-4 】



【 SB5R-5 】








【 SB4F-6 】


MOUNTING HOLE
THICKNESS 0.8~1.2

E127489

Part No.	Will Fit These Cable		Package
	UL/CSA Description	Size	
SB4F-4	SPT-1, SPT-2	3x5.6, 3.71x7.6	250
SB5R-5	SVT3C#18	Ø6.6~Ø7.2	
SB4F-6	SPT-1, SPT-2	3x5.6, 3.71x7.6	200








MOUNTING HOLE


Part No.	Will Fit These Cable		Package
	UL/CSA Description	Size	
SB4F-8	SPT-1, SPT-2	3x5.6, 3.71x7.6	200






扣合前

Part No.	Package
SBU4-4	1000



扣合後



扣合前


Part No.	Package
SBU4-4-1	1000

電線線扣 STRAIN RELIEF BUSHING

用途：用於電子電器電源出線口，固定扣牢和保護電源免於被機殼刮傷，造成短路。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

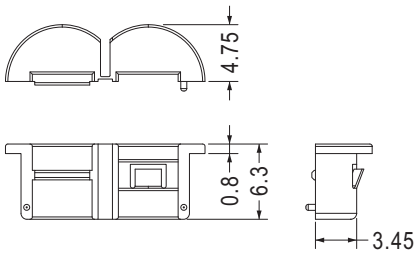


MOUNTING HOLE Ø7.0
THICKNESS 0.6~1.1

Part No.	Package
SBU-1	2000



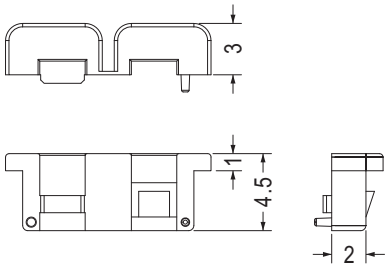




MOUNTING HOLE
THICKNESS 0.8~1.0

Part No.	Package
SBU-2	2000




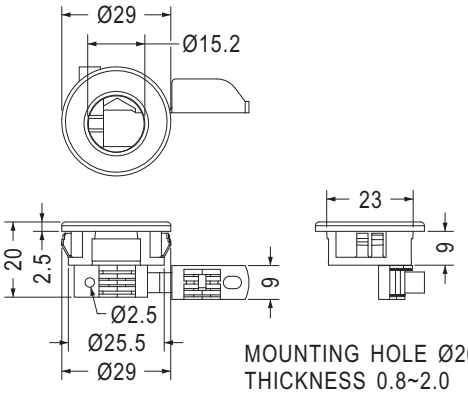

MOUNTING HOLE Ø26.0
THICKNESS 0.8~2.0

Part No.	Package
SBB-1	200




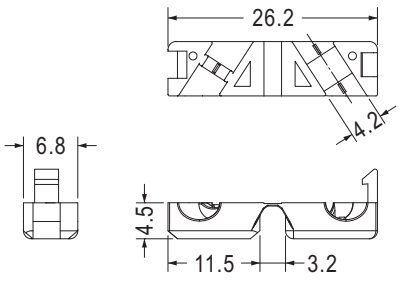


Part No.	Package
SBQC-1	100

電線固定夾 WIRE CLIP

用途：用於機殼的電線出線口，避免電源線被拉出。

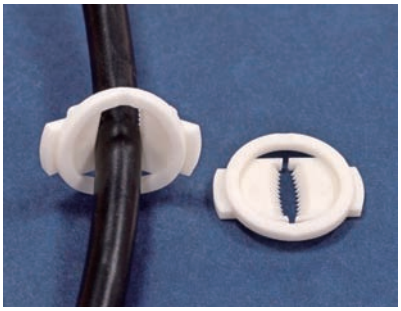

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	A	B	C	Suggested Cable Diameter Range	Package
SBCR-7	17.7	20.8	3.75	Ø7.0	1000
SBCR-9	22.2	25.5	4.0	Ø9.0	

電纜固定頭 CABLE GLAND


用途：電纜防水接頭。

✓通過IP68防水測試

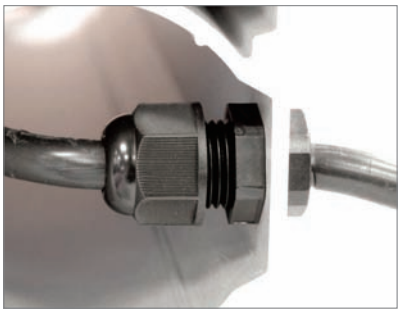

- Material: A,C,E=Nylon 66 (UL)
  B,D=EPDM
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

E530317

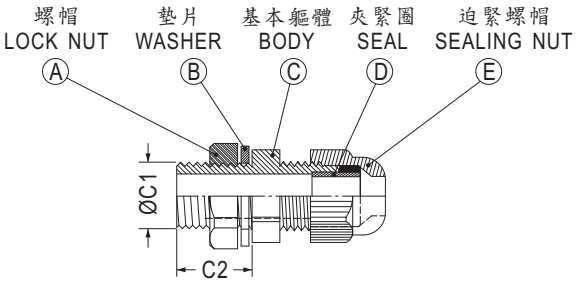

Part No.	標準螺牙 Threaded Entry Metric	適用電纜 Cable Range	螺紋外徑 Threaded O. D. C1	螺紋長度 Threaded Length C2	機板口徑 Panel Mounting Hole	板手徑 Spanner Size A & E	Package	UL
KGB12-07	M12x1.5P	Ø6.8~Ø4.0	Ø11.8	15.0	Ø12.0~Ø12.3	18/15	100	UL
KGB12-07-ST		Ø6.8~Ø4.0	Ø11.8	8.5	Ø12.0~Ø12.3	18/15		UL
KGB12-08		Ø8.5~Ø4.5	Ø11.8	8.5	Ø12.0~Ø12.3	18/15		UL
KGB16S-8.5-ST	M16x1.5P	Ø8.5~Ø5.0	Ø15.8	10.0	Ø16.0~Ø16.3	22/22		UL
KGB16-10		Ø10.4~Ø6.4	Ø15.8	15.0	Ø16.0~Ø16.3	22/22		UL
KGB16-10-ST		Ø10.4~Ø6.4	Ø15.8	10.0	Ø16.0~Ø16.3	22/22		UL
KGB20-14	M20x1.5P	Ø14.0~Ø8.5	Ø19.8	15.0	Ø20.0~Ø20.3	27/27	50	UL
KGB20-14-ST		Ø14.0~Ø8.5	Ø19.8	10.0	Ø20.0~Ø20.3	27/27		UL
KGB25-16	M25x1.5P	Ø16.0~Ø12.0	Ø24.9	15.0	Ø25.0~Ø25.4	33/33		UL
KGB25-16-ST		Ø16.0~Ø12.0	Ø24.9	10.0	Ø25.0~Ø25.4	33/33		UL
KGB32-25	M32x1.5P	Ø25.0~Ø18.0	Ø32.0	15.5	Ø32.0~Ø32.4	41/42		UL
KGB32-25-ST		Ø25.0~Ø18.0	Ø32.0	10.5	Ø32.0~Ø32.4	41/42		UL
KPGB7-5	PG7	Ø5.5~Ø3.0	Ø12.3	8.0	Ø12.5~Ø12.8	17/15	200	UL
KPGB7-5-1		Ø5.5~Ø3.0	Ø12.3	8.0	Ø12.5~Ø12.8	17/15	100	
KPGB9-9	PG9	Ø8.0~Ø4.5	Ø15.1	8.5	Ø15.2~Ø15.5	22/19		UL
KPGB11-7	PG11	Ø7.0~Ø4.0	Ø18.4	10.0	Ø18.6~Ø18.9	24/22		UL
KPGB13.5-8	PG13.5	Ø9.0~Ø5.0	Ø20.2	10.0	Ø20.4~Ø20.7	27/24		UL


透氣壓力平衡固定頭 PRESSURE BALANCE GLAND


用途：用於機器透氣和防水。
✓通過IP68防水測試
✓典型透氣量2500ml/分鐘 (壓差7kpr)




- Material: A=Nylon 66 (UL)
  B=EPDM
  C,D=PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


防水透氣布
測試影片

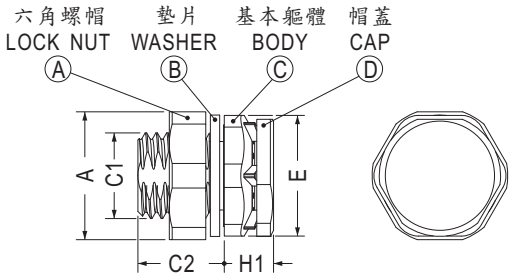



Part No.	標準螺牙 Threaded Entry Metric C1	螺紋長度 Threaded Length C2	高度 Height H1	板手徑 Spanner Size A & E	Package
MOR12-12	M12x1.5P	12.0	7.0	18/17	500





Part No.	標準螺牙 Threaded Entry Metric C1	螺紋長度 Threaded Length C2	高度 Height H1	板手徑 Spanner Size A & E	Package
MOR8-10	M8x1.0P	10.0	6.15	12/12	500

透氣壓力平衡固定扣 PRESSURE BALANCE FASTENER


用途：用於機器透氣和防水。
✓通過IP68防水測試
✓典型透氣量2500ml/分鐘 (壓差7kpr)





- Material: A,B=PC (UL)
  C=Silicon Rubber
- Flame Class: 94V-0
- Color: Black
- Unit: mm

裝配孔尺寸，僅供參考
Mounting holes are for reference only.

防水透氣布
測試影片

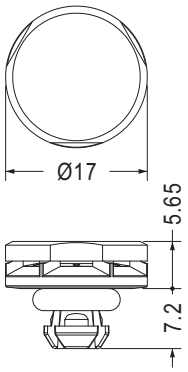






Part No.	Package
MOR-6.4	500


方型護線環 SQUARE SNAP BUSHING

用途：用於鐵板間電線出入刮傷之保護，不易脫落，使用方便，不佔空間之優點。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm








MOUNTING HOLE
THICKNESS 0.8~2.0


裝配孔尺寸，僅供參考
Mounting holes are for reference only.

Part No.	A	B	C	D	E	F	G	H	I	Package
SQE-1	19.8	12.1	7.3	11.5	4.5	2.3	14.0	12.3	2.8	1000
SQE-2	26.0	21.0	14.0	17.0	4.6	2.3	21.0	21.0	2.7	500
SQE-2-1	26.0	21.0	14.0	17.0	4.6	1.87	21.0	21.0	2.7	
SQE-3	33.2	28.8	22.4	22.7	4.5	2.3	27.0	29.0	2.8	











MOUNTING HOLE
THICKNESS: T

Part No.	T	Package
SQF-1	0.8~1.2	500
SQF-7	1.9~2.0	




MOUNTING HOLE
THICKNESS 1.2~2.8

Part No.	Package
SQF-2	500





MOUNTING HOLE
THICKNESS 1.2

Part No.	Package
SQF-4	500

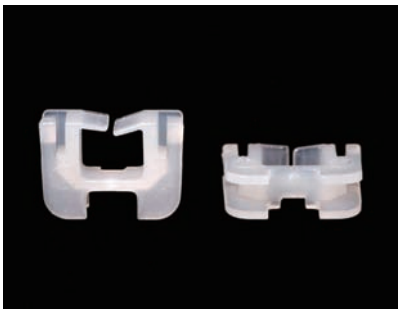

裝配孔尺寸，僅供參考
Mounting holes are for reference only.







MOUNTING HOLE
THICKNESS: T

Part No.	A	B	C	D	G	J	K	T	Package
SQF-5	11.6	8.4	3.7	5.2	8.1	9.1	3.6	0.8~1.8	500
SQF-6	16.9	9.1	3.4	10.2	12.8	13.8	3.4	0.9~2.0	
SQF-8	16.9	9.0	3.2	10.2	13.0	14.0	3.4	0.9~2.0	



裝配孔尺寸，僅供參考
Mounting holes are for reference only.






MOUNTING HOLE
THICKNESS 1.0


Part No.	Package
SQE-5	500


方型護線環 SQUARE SNAP BUSHING

用途：用於鐵板間電線出入刮傷之保護，不易脫落，使用方便，不佔空間之優點。

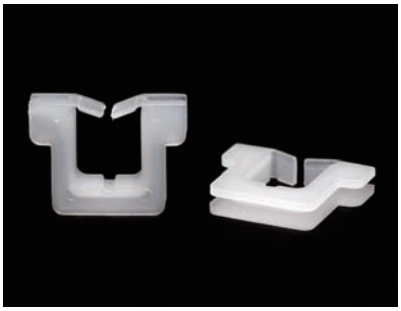


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm






Part No.	Package
SQK-1	1000

装配孔尺寸，僅供參考
Mounting holes are for reference only.







Part No.	Package
SQD-1	1000




装配孔尺寸，僅供參考
Mounting holes are for reference only.

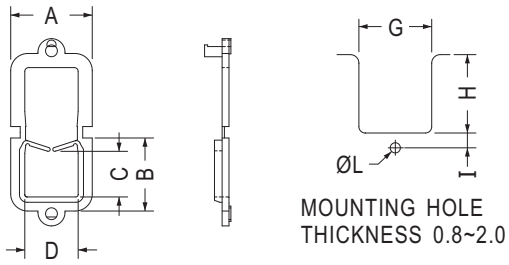


Part No.	A	B	C	D	G	H	I	L	Package
SQB-1	18.4	14.5	8.9	11.0	14.0	12.3	2.7	2.7	500
SQB-2	21.5	18.8	11.9	13.9	17.2	18.5	3.5	3.0	

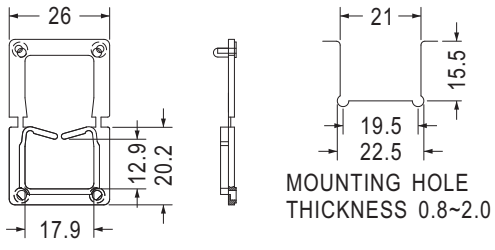


Part No.	Package
SQB-3	500

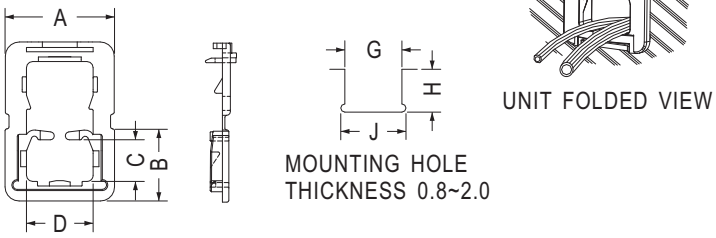


Part No.	A	B	C	D	G	H	J	Package
SQB-4	22.0	14.2	9.0	14.0	17.0	13.5	19.0	500
SQB-5	17.9	11.8	6.8	10.9	14.0	10.5	16.0	1000

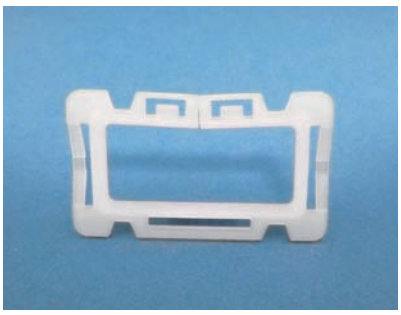

装配孔尺寸，僅供參考
Mounting holes are for reference only.

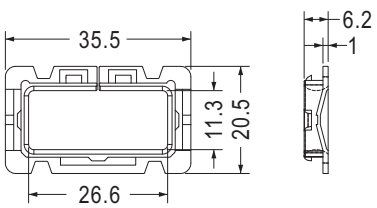




Part No.	Package
SQL-1	500

方型護線環 SQUARE SNAP BUSHING

用途：用於鐵板間電線出入刮傷之保護，不易脫落，使用方便，不佔空間之優點。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

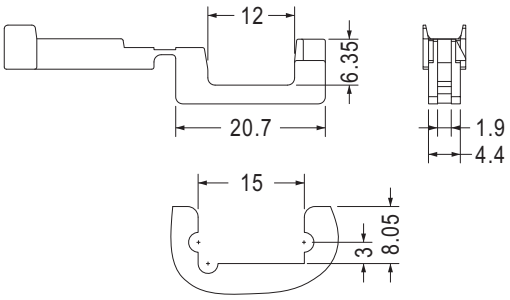


MOUNTING HOLE
THICKNESS 1.5

Part No.	Package
SQJ-3	1000

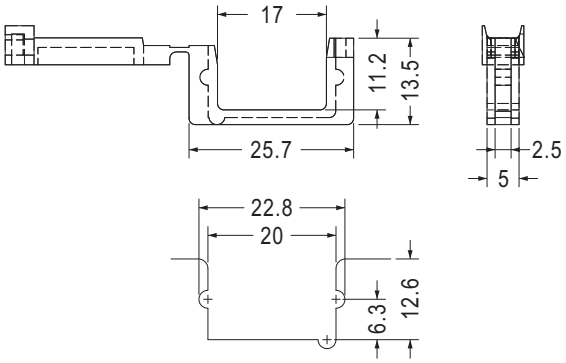


MOUNTING HOLE
THICKNESS 2.1

Part No.	Package
SQJ-1	1000

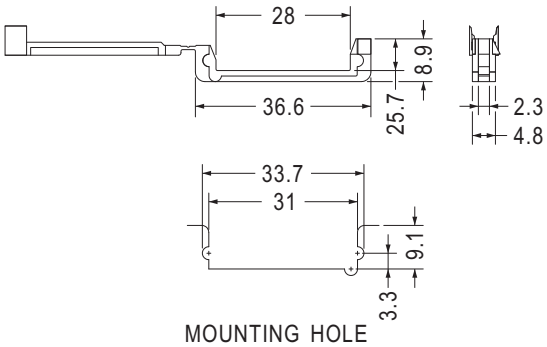

MOUNTING HOLE
THICKNESS 2.0


Part No.	Package
SQJ-2	1000

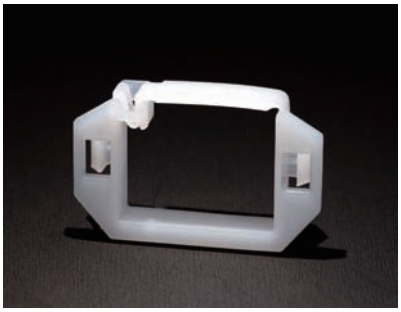


裝配孔尺寸，僅供參考
Mounting holes are for reference only.

PANEL MOUNTING DETAILS


THROUGH HOLE INSTALLATION





EDGE INSTALLATION



THICKNESS 0.8~1.6
【 SQJA-1 】

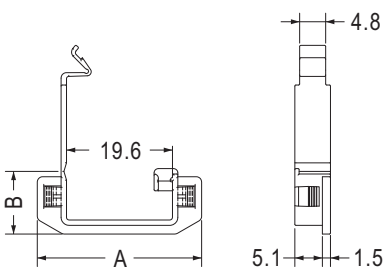





THICKNESS 2.0
【 SQJA-2 】

Part No.	A	B	G	H	I	Package
SQJA-1	30.4	11.6	21.8	10.7	4.1	500
SQJA-2	31.0	18.6	22.0	18.0	5.0	


方型護線環 SQUARE SNAP BUSHING


用途：用於鐵板間電線出入刮傷之保護，不易脫落，使用方便，不佔空間之優點。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


裝配孔尺寸，僅供參考
Mounting holes are for reference only.






MOUNTING HOLE
THICKNESS 0.8~1.8


Part No.	Package
SQI-1	1000

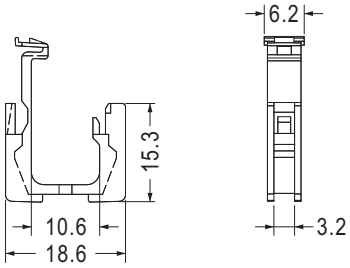




MOUNTING HOLE
THICKNESS 0.8~3.0


Part No.	Package
SQA-1	1000






MOUNTING HOLE
THICKNESS 0.8~3.0


Part No.	Package
SQA-2	1000






MOUNTING HOLE
THICKNESS 3.0

Part No.	Package
SQA-3	1000





MOUNTING HOLE
THICKNESS 2.0


Part No.	Package
SQR-1	500

方型護線環 SQUARE SNAP BUSHING


用途：用於鐵板間電線出入刮傷之保護，不易脫落，使用方便，不佔空間之優點。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




CLOSE PART




MOUNTING HOLE
THICKNESS 0.8~1.0


Part No.	B	C	D	E	Package
SQG-1	10.6	4.8	4.2	1.2	1000
SQG-3	10.9	4.5	2.3	1.1	
SQG-4	10.7	4.6	4.6	1.1	
SQG-6	10.9	6.8	2.3	1.2	

装配孔尺寸，僅供參考
Mounting holes are for reference only.

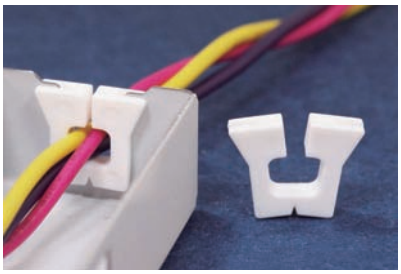



CLOSE PART




MOUNTING HOLE
THICKNESS 0.5~0.8

Part No.	Package
SQG-15	1000

装配孔尺寸，僅供參考
Mounting holes are for reference only.



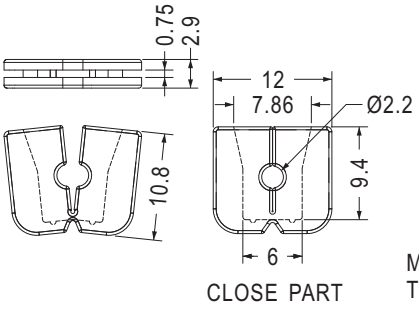


CLOSE PART

MOUNTING HOLE
THICKNESS 0.6

Part No.	Package
SQG-9	1000

装配孔尺寸，僅供參考
Mounting holes are for reference only.



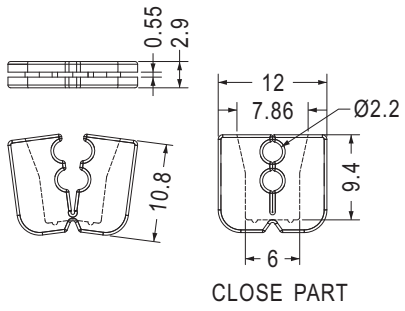



CLOSE PART

MOUNTING HOLE
THICKNESS 0.6

Part No.	Package
SQG-10	1000

装配孔尺寸，僅供參考
Mounting holes are for reference only.

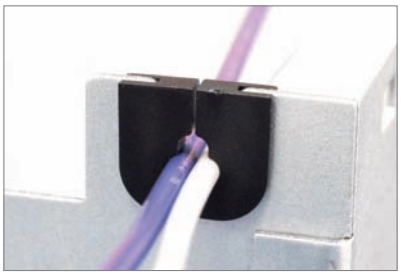

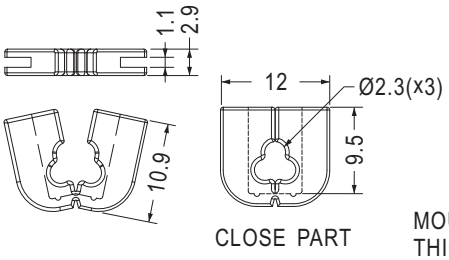

CLOSE PART


MOUNTING HOLE
THICKNESS 0.8~1.0

Part No.	Package
SQG-8	1000


装配孔尺寸，僅供參考
Mounting holes are for reference only.


方型護線環 SQUARE SNAP BUSHING

用途：用於鐵板間電線出入刮傷之保護，不易脫落，使用方便，不佔空間之優點。

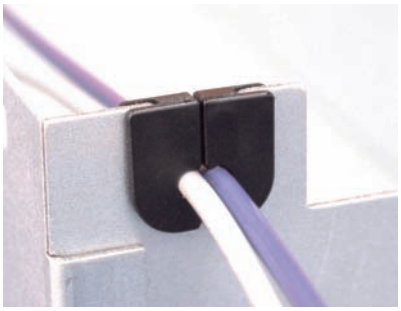


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm






CLOSE PART





MOUNTING HOLE
THICKNESS 0.8~1.0

Part No.	Package
SQG-12	1000

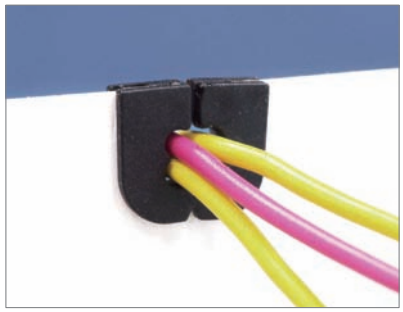


裝配孔尺寸，僅供參考
Mounting holes are for reference only.





CLOSE PART





MOUNTING HOLE
THICKNESS 0.8~1.0

Part No.	Package
SQG-14	1000




裝配孔尺寸，僅供參考
Mounting holes are for reference only.






CLOSE PART





MOUNTING HOLE
THICKNESS 0.8~1.0

Part No.	Package
SQG-5	1000

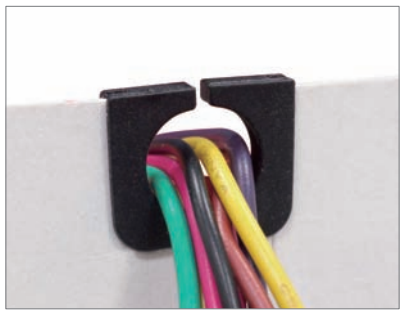


裝配孔尺寸，僅供參考
Mounting holes are for reference only.







CLOSE PART




MOUNTING HOLE
THICKNESS 0.8

Part No.	Package
SQG-13	1000










MOUNTING HOLE
THICKNESS 1.0
(RECOMMEND FOR
REFERENCE ONLY)

Part No.	Package
SQN-1	1000







MOUNTING HOLE
THICKNESS 1.0


Part No.	Package
SQN-2	1000


護線環 SNAP BUSHING


用途：用於電線、電纜之固定及保護。




- Material: PC+ABS (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm











Part No.	Package
SBUT-1	1000


U型護線環 U TYPE SNAP BUSHING

用途：用於鐵板間電線出入刮傷之保護，不易脫落，使用方便，不佔空間之優點。

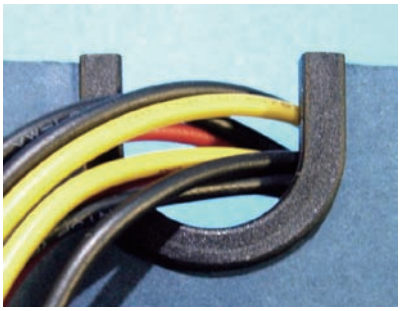


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm







裝配孔尺寸，僅供參考
Mounting holes are for reference only.


Part No.	A	B	C	D	E	F	G	H	T	Package
SQH-1	24.0	21.0	18.0	16.0	3.7	1.8	18.0	18.0	1.7	1000
SQH-2	24.3	27.0	24.5	17.5	3.9	1.9	19.3	24.5	1.7~1.8	
SQH-2L	24.3	27.0	24.5	17.5	4.1	2.1	19.3	24.5	2.0	
SQH-6	28.3	29.5	26.5	20.7	4.0	2.0	22.0	26.7	1.6~1.8	






Part No.	E	F	T	Package
SQM-1	5.0	1.3	0.8~1.2	1000
SQM-1L	5.8	2.1	2.0	







Part No.	Package
SQHB-14	1000

- Material: PE
- Color: Natural
- Unit: mm









Part No.	Package
SQHB-10	1000


U型護線環 U TYPE SNAP BUSHING

用途：用於鐵板間電線出入刮傷之保護，不易脫落，使用方便，不佔空間之優點。

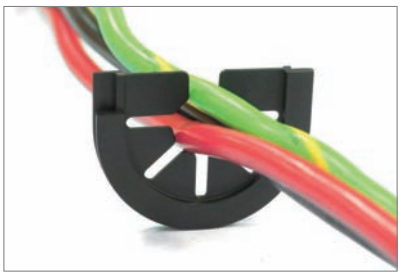

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

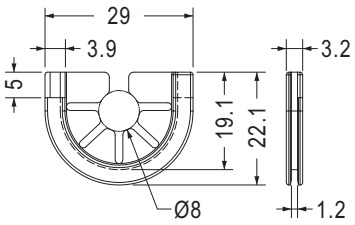






MOUNTING HOLE
THICKNESS 1.0

Part No.	Package
SQHB-1	1000

裝配孔尺寸，僅供參考
Mounting holes are for reference only.

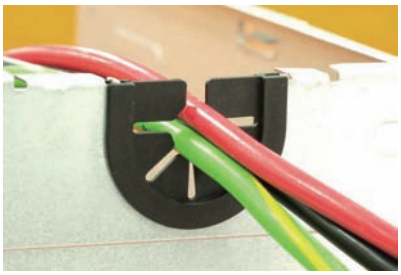







MOUNTING HOLE
THICKNESS 1.0

Part No.	Package
SQHB-7	1000

裝配孔尺寸，僅供參考
Mounting holes are for reference only.









MOUNTING HOLE
THICKNESS 1.5

Part No.	Package
SQHB-5	1000

裝配孔尺寸，僅供參考
Mounting holes are for reference only.









MOUNTING HOLE
THICKNESS 1.5

Part No.	Package
SQHB-6	1000

裝配孔尺寸，僅供參考
Mounting holes are for reference only.







MOUNTING HOLE
THICKNESS 1.6

Part No.	Package
SQHB-3	1000

裝配孔尺寸，僅供參考
Mounting holes are for reference only.


U型護線環 U TYPE SNAP BUSHING


用途：用於鐵板間電線出入刮傷之保護，不易脫落，使用方便，不佔空間之優點。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


裝配孔尺寸，僅供參考
Mounting holes are for reference only.







Part No.	Package
SQHB-8	1000





Part No.	Package
SQHB-9	1000






Part No.	Package
SQHB-13	1000


方型護線環 SQUARE SNAP BUSHING


用途：用於鐵板間電線出入刮傷之保護，不易脫落，使用方便，不佔空間之優點。

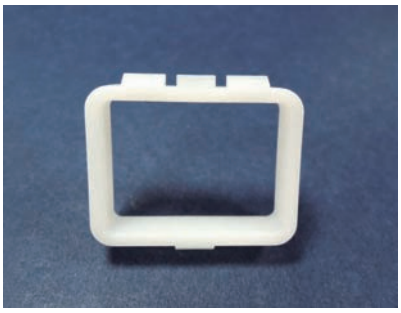


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


裝配孔尺寸，僅供參考
Mounting holes are for reference only.







Part No.	Package
SQS-1	500

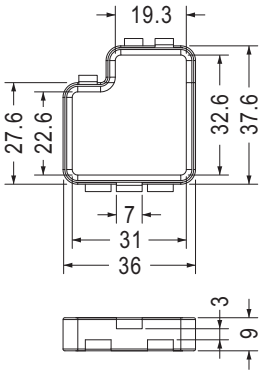





Part No.	Package
SQS-3	1000






Part No.	Package
SQS-2	500






Part No.	Package
SQS-4	500

用途：捆紮電線、物品。

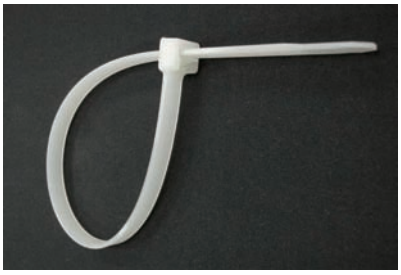

- Material: Nylon 66 (UL)
- Flame Class: 94V-2
- Color: Natural/Black
- Unit: mm
- UL Recognized


E127489

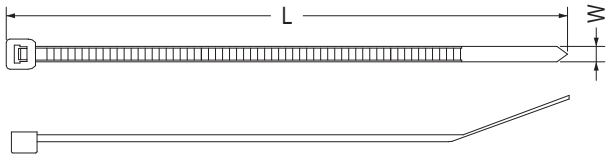


【 Self-Locking Tie 】

New Part No.	Part No.	Approx. Length mm(in) L	Approx. Width mm(in) W	Max. Bundle mm(in)	Min. Loop Tensile Strength kgs.(lbs.)	Package
GT-80M	YJ-80	80(3.15")	2.5(0.10')	17(0.67")	8(18)	
GT-90M	YJ-90	90(3.54")	2.5(0.10")	21(0.83")	8(18)	
GT-100M	YJ-98	98(3.86")	2.5(0.10")	22(0.87")	8(18)	
GT-100M	YJ-100	100(4.00")	2.5(0.10")	23(0.91")	8(18)	
GT-120M	YJ-120	120(4.72")	2.5(0.10")	30(1.18")	8(18)	1000
GT-140M	YJ-142S	142(5.59")	2.5(0.10")	36(1.42")	8(18)	
GT-160M	YJ-160	160(6.30")	2.5(0.10")	42(1.66")	8(18)	
--------	YJ-181	181(7.13")	2.5(0.10")	49(1.92")	8(18)	
GT-200M	YJ-203S	203(8.00")	2.5(0.10")	56(2.21")	8(18)	
--------	YJ-102	102(4.00")	3.6(0.14")	22(0.87")	18(40)	500
GT-120I	YJ-122	122(4.80")	3.6(0.14")	29(1.14")	18(40)	
GT-140I	YJ-142	142(5.59")	3.6(0.14")	34(1.34")	18(40)	1000
--------	YJ-163	163(6.41")	3.6(0.14")	40(1.57")	18(40)	
GT-180I	YJ-185	185(7.28")	3.6(0.14")	47(1.85")	18(40)	
GT-200I	YJ-203	203(8.00")	3.6(0.14")	55(2.17")	18(40)	
GT-250I	YJ-232	232(9.13")	3.6(0.14")	63(2.48")	18(40)	500
GT-250I	YJ-249	249(9.13")	3.6(0.14")	63(2.48")	18(40)	
--------	YJ-263	263(10.35")	3.6(0.14")	73(2.87")	18(40)	
GT-300I	YJ-295	295(11.61")	3.6(0.14")	83(3.27")	18(40)	1000
--------	YJ-331	331(13.00")	3.6(0.14")	96(3.78")	18(40)	
GT-370I	YJ-370	370(14.57")	3.6(0.14")	108(4.25")	18(40)	
GT-120ST	YJ-115	115(4.53")	4.8(0.19")	29(1.15")	23(50)	
GT-150ST	YJ-140	140(5.50")	4.8(0.19")	34(1.34")	23(50)	
GT-160ST	YJ-162	162(6.38")	4.8(0.19")	42(1.66")	23(50)	
GT-190ST	YJ-188	188(7.40")	4.8(0.19")	49(1.93")	23(50)	
GT-200ST	YJ-201	201(8.00")	4.8(0.19")	53(2.08")	23(50)	
GT-216ST	YJ-216	216(8.50")	4.8(0.19")	58(2.28")	23(50)	500
GT-250ST	YJ-242	242(9.53")	4.8(0.19")	66(2.60")	23(50)	
GT-266ST	YJ-266	266(10.47")	4.8(0.19")	72(2.84")	23(50)	
GT-300ST	YJ-292	292(11.50")	4.8(0.19")	82(3.23")	23(50)	
--------	YJ-330	330(13.00")	4.8(0.19")	93(3.66")	23(50)	
GT-370ST	YJ-368	368(14.49")	4.8(0.19")	106(4.17")	23(50)	
GT-430ST	YJ-410	410(16.14")	4.8(0.19")	122(4.80")	23(50)	
GT-450ST	YJ-450	450(17.72")	4.8(0.19")	135(5.31")	23(50)	
--------	YJ-148	148(5.83")	7.6(0.30")	36(1.42")	54(120)	
GT-200HD	YJ-182	182(7.17")	7.6(0.30")	46(1.81")	54(120)	
--------	YJ-215	215(8.46")	7.6(0.30")	59(2.32")	54(120)	
GT-250HD	YJ-254	254(10.00")	7.6(0.30")	71(2.80")	54(120)	
GT-300HD	YJ-293	293(11.54")	7.6(0.30")	84(3.30")	54(120)	
--------	YJ-332	332(13.00")	7.6(0.30")	95(3.74")	54(120)	
GT-370HD	YJ-368L	368(14.49")	7.6(0.30")	109(4.29")	54(120)	
--------	YJ-420	420(16.54")	7.6(0.30")	124(4.88")	54(120)	
--------	YJ-470	470(18.50")	7.6(0.30")	140(5.51")	54(120)	
--------	YJ-520	520(20.47")	7.6(0.30")	156(6.14")	54(120)	100
--------	YJ-178	178(7.00")	9.0(0.35")	45(1.76")	80(175)	
--------	YJ-229	229(9.00")	9.0(0.35")	61(2.40")	80(175)	
--------	YJ-280	280(11.00")	9.0(0.35")	77(3.03")	80(175)	
--------	YJ-329	329(13.00")	9.0(0.35")	93(3.66")	80(175)	
--------	YJ-382	382(15.00")	9.0(0.35")	110(4.33")	80(175)	
--------	YJ-458	458(18.00")	9.0(0.35")	135(5.32")	80(175)	
GT-530HD	YJ-530	530(20.87")	9.0(0.35")	155(6.10")	80(175)	
--------	YJ-655	655(25.79")	9.0(0.35")	194(7.64")	80(175)	
GT-780HD	YJ-780	780(30.71")	9.0(0.35")	234(9.21")	80(175)	
GT-830HD	YJ-815	815(32.00")	9.0(0.35")	247(9.72")	80(175)	

用途：捆紮電線、物品，此系列為可重複性使用。

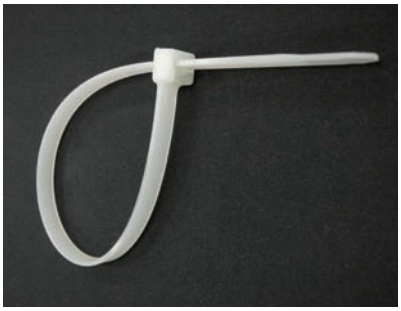


- Material: Nylon 66 (UL)
- Flame Class: 94V-2
- Color: Natural/Black
- Unit: mm

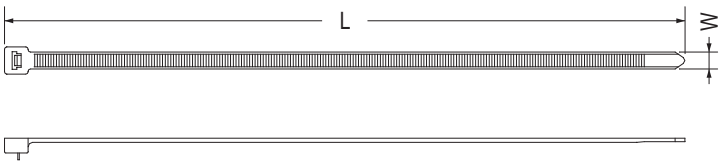

【 Releasable Tie 】

Part No.	Approx. Length mm(in)	Approx. Width mm(in)	Max. Bundle mm(in)	Min. Loop Tensile Strength kgs.(lbs.)	Package
	L	W			
YJ-R300	300(11.81")	7.6(0.30")	86(3.38")	23(50)	100
YJ-R350	350(13.87")		102(4.02")		
YJ-R400	400(15.75")		118(4.65")		
YJ-R655	655(25.79")	9.0(0.35")	194(7.64")	80(175)	
YJ-R780	780(30.71")		234(9.21")		
YJ-R815	815(32.00")		247(9.72")		



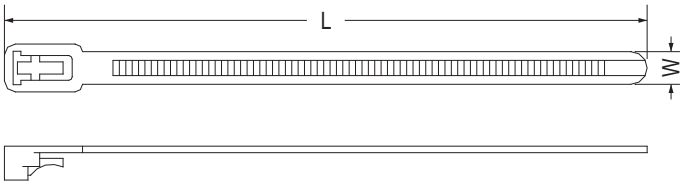


【 Releasable Tie 】

Part No.	Approx. Length mm(in)	Approx. Width mm(in)	Max. Bundle mm(in)	Min. Loop Tensile Strength kgs.(lbs.)	Package
	L	W			
YJ-R150	150(5.90")	7.5(0.295")	39(1.54")	23(50)	100
YJ-R200	200(7.87")		56(2.21")		
YJ-R250	250(9.84")		72(2.83")		

用途：捆紮電線、物品，此系列為可重複性使用。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2
- Color: Natural/Black
- Unit: mm

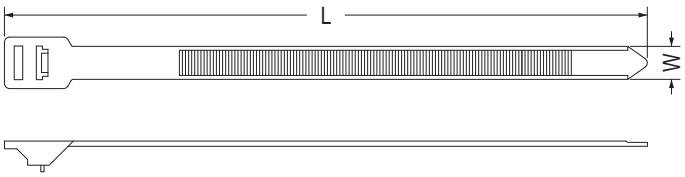


【 Releasable Tie 】

Part No.	Approx. Length mm(in)	Approx. Width mm(in)	Max. Bundle mm(in)	Min. Loop Tensile Strength kgs.(lbs.)	Package
	L	W			
YJ-R228	228(9.00")	12.7(0.50")	54(2.12")	114(250)	100
YJ-R256	256(10.00")		62(2.44")		
YJ-R279	279(11.00")		70(2.75")		
YJ-R305	305(12.00")		78(3.07")		
YJ-R328	328(13.00")		86(3.38")		
YJ-R355	355(14.00")		94(3.70")		
YJ-R380	380(15.00")		102(4.00")		
YJ-R405	405(16.00")		110(4.33")		
YJ-R430	430(17.00")		118(4.64")		
YJ-R455	455(18.00")		127(5.00")		
YJ-R485	485(19.00")		135(5.31")		
YJ-R510	510(20.00")		143(5.62")		
YJ-R534	534(21.00")		151(5.94")		
YJ-R560	560(22.00")		159(6.25")		
YJ-R585	585(23.00")		167(6.57")		
YJ-R610	610(24.00")		175(6.88")		
YJ-R635	635(25.00")		183(7.20")		
YJ-R660	660(26.00")		191(7.51")		
YJ-R685	685(27.00")		199(7.83")		
YJ-R710	710(28.00")		207(8.14")		
YJ-R735	735(29.00")		215(8.46")		
YJ-R760	760(30.00")		224(8.81")		
YJ-R790	790(31.00")		232(9.13")		
YJ-R813	813(32.00")		243(9.57")		
YJ-R915	915(36.00")		274(10.79")		
YJ-R1042	1042(41.00")		314(12.36")		

用途：捆紮電線、物品。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2
- Color: Natural/Black
- Unit: mm

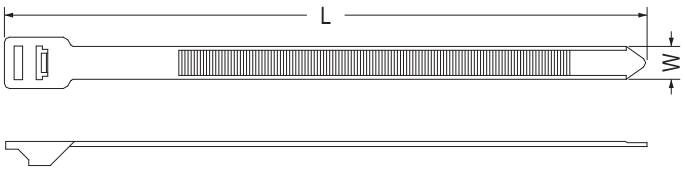

【 Self-Locking Tie 】


Part No.	Approx. Length mm(in)	Approx. Width mm(in)	Max. Bundle mm(in)	Min. Loop Tensile Strength kgs.(lbs.)	Package
	L	W			
YJ-228	228(9.00")	12.7(0.50")	54(2.12")	114(250)	100
YJ-256	256(10.00")		62(2.44")		
YJ-279	279(11.00")		70(2.75")		
YJ-305	305(12.00")		78(3.07")		
YJ-328	328(13.00")		86(3.38")		
YJ-355	355(14.00")		94(3.70")		
YJ-380	380(15.00")		102(4.00")		
YJ-405	405(16.00")		110(4.33")		
YJ-430	430(17.00")		118(4.64")		
YJ-455	455(18.00")		127(5.00")		
YJ-485	485(19.00")		135(5.31")		
YJ-510	510(20.00")		143(5.62")		
YJ-534	534(21.00")		151(5.94")		
YJ-560	560(22.00")		159(6.25")		
YJ-585	585(23.00")		167(6.57")		
YJ-610	610(24.00")		175(6.88")		
YJ-635	635(25.00")		183(7.20")		
YJ-660	660(26.00")		191(7.51")		
YJ-685	685(27.00")		199(7.83")		
YJ-710	710(28.00")		207(8.14")		
YJ-735	735(29.00")		215(8.46")		
YJ-760	760(30.00")		224(8.81")		
YJ-790	790(31.00")		232(9.13")		
YJ-813	813(32.00")		243(9.57")		
YJ-915	915(36.00")		274(10.79")		
YJ-1042	1042(41.00")		314(12.36")		

用途：捆紮電線、物品。

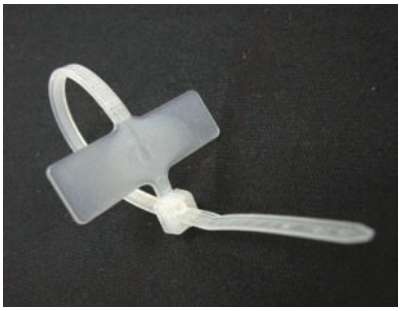

- Material: Nylon 66 (UL)
- Flame Class: 94V-2
- Color: Natural/Black
- Unit: mm
- UL Recognized


E127489

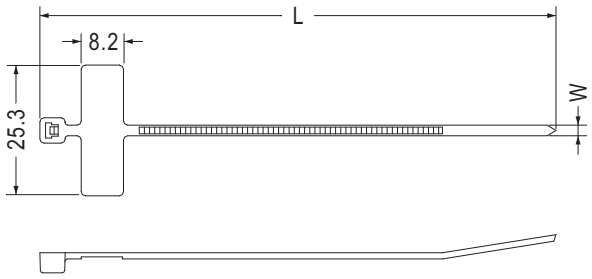

【 Marker Tie 】

Part No.	Approx. Length mm(in)	Approx. Width mm(in)	Max. Bundle mm(in)	Min. Loop Tensile Strength kgs.(lbs.)	Package
	L	W			
YJ-98X	100(4.00")	2.5(0.10")	22(0.87")	8(18)	500




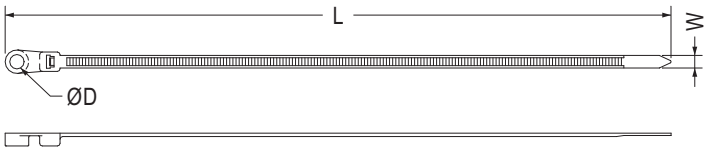

【 Clamp Mounting Tie 】


Part No.	D	Approx. Length mm(in)	Approx. Width mm(in)	Max. Bundle mm(in)	Min. Loop Tensile Strength kgs.(lbs.)	Package
		L	W			
YJ-110	3.2	110(4.33")	2.8(0.11")	23(0.91")	10(22)	500
YJ-156	4.2	156(6.14")	3.6(0.14")	35(1.38")	18(40)	1000
YJ-205	5.4	205(8.00")	4.8(0.19")	51(2.01")	23(50)	
YJ-255	5.4	255(10.00")	4.8(0.19")	67(2.64")	23(50)	
YJ-304	5.4	304(12.00")	4.8(0.19")	83(3.27")	23(50)	500
YJ-356	5.4	356(14.00")	4.8(0.19")	101(3.98")	23(50)	
YJ-406	5.4	406(16.00")	4.8(0.19")	118(4.64")	23(50)	
YJ-230	6.4	230(9.00")	7.6(0.30")	58(2.28")	54(120)	100
YJ-306	6.4	306(12.00")	7.6(0.30")	84(3.31")	54(120)	
YJ-381	6.4	381(15.00")	7.6(0.30")	108(4.25")	54(120)	
YJ-460	6.4	460(18.00")	7.6(0.30")	133(5.24")	54(120)	
YJ-535	6.4	535(21.00")	7.6(0.30")	155(6.10")	54(120)	

用途：捆紮電線、物品。

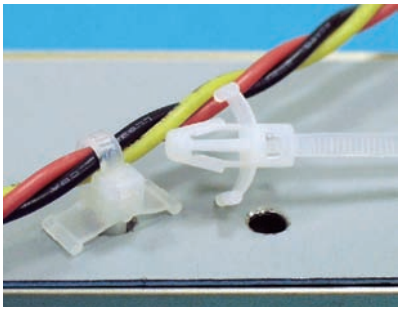


- Material: Nylon 66 (UL)
- Flame Class: 94V-2
- Color: Natural/Black
- Unit: mm
- UL Recognized


E127489

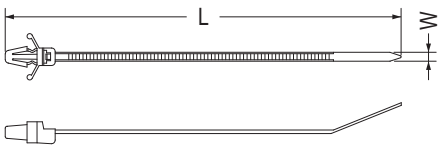


【 GTP-130ST, GTP-170ST, GTP-190ST, GTP-110M 】

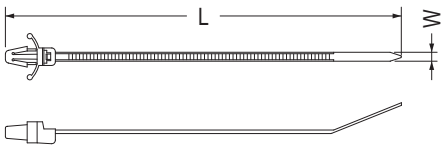

【 GTP-110MA 】

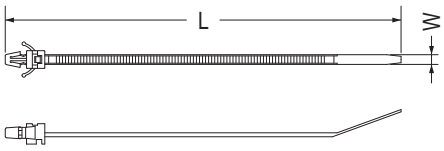

【 GTP-130I 】




【 GTP-150I, GTP-200ST 】

Part No.	Approx. Length mm(in)	Approx. Width mm(in)	Max. Bundle mm(in)	Min. Loop Tensile Strength kgs.(lbs.)	Hole Diameter Chassis mm(in)	Max. Panel Thickness mm(in)	Package
	L	W					
GTP-130ST	132(5.12")	4.8(0.19")	25(0.98")	22.2(50)	6.4(0.252")	3.2(0.126")	1000
GTP-170ST	175(6.69")	4.8(0.19")	38(1.50")	22.2(50)	6.4(0.252")	3.2(0.126")	
GTP-190ST	200(7.68")	4.8(0.19")	45(1.77")	22.2(50)	6.4(0.252")	3.2(0.126")	
GTP-110M	110(4.33")	2.5(0.10")	22(0.87")	8.1(18)	4.8~5.0 (0.189")~(0.197")	0.8~2.4 (0.03")~(0.09")	
GTP-110MA							
GTP-130I	130(5.12")	3.2(0.13")	28(1.10")	13.6(30)	4.0(0.157")	1.0~2.0	
GTP-150I	150(5.91")	3.6(0.14")	32(1.26")	13.6(30)	5.2(0.205")	1.0~2.8	
GTP-200ST	200(7.87")	4.8(0.19")	46(1.81")	22.2(50)	6.3(0.248")	3.6(0.141")	




- Material: Nylon 66 (UL)
- Flame Class: 94V-2
- Color: Natural/Black
- Unit: mm

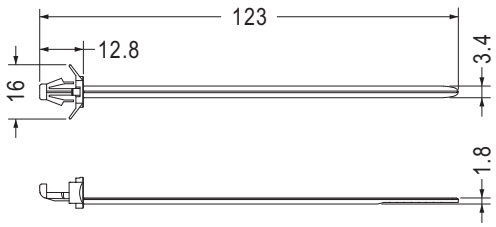


MOUNTING HOLE Ø5.4
THICKNESS 2.0~3.2

Part No.	Package
STCC-123	500

用途：捆紮電線、物品，此系列為可重複性使用。

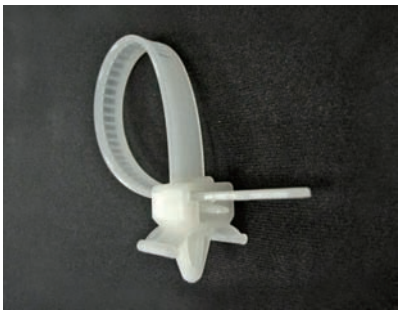



- Material: Nylon 66 (UL)
- Flame Class: 94V-2
- Color: Natural/Black
- Unit: mm

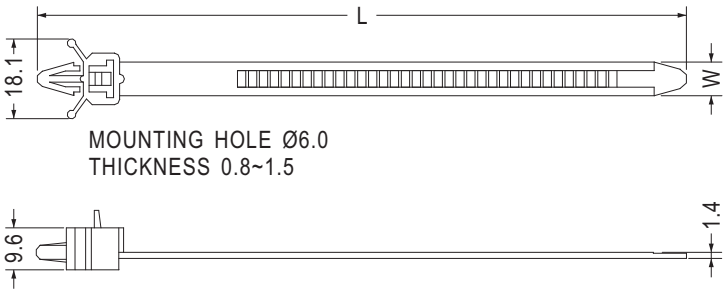


【 Push Releasable Tie 】

Part No.	Approx. Length mm(in)	Approx. Width mm(in)	Max. Bundle mm(in)	Min. Loop Tensile Strength kgs.(lbs.)	Package
	L	W			
YJ-R151	151(6.00")	7.8(0.30")	37(1.45")	40(88)	100
YJ-R191	191(7.50")		49(1.92")		
YJ-R231	231(9.00")		62(2.44")		

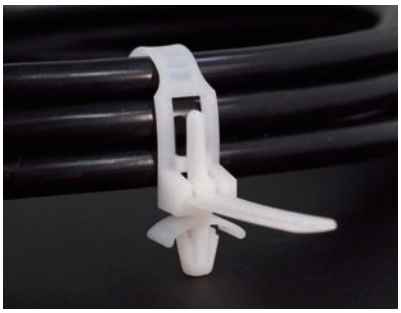

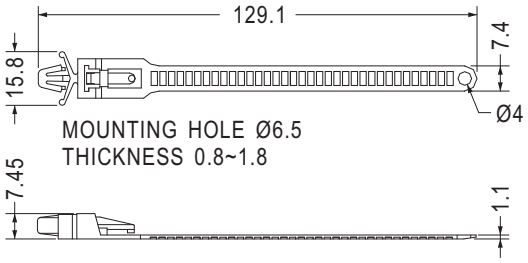


Part No.	Package
KYCB-129	250

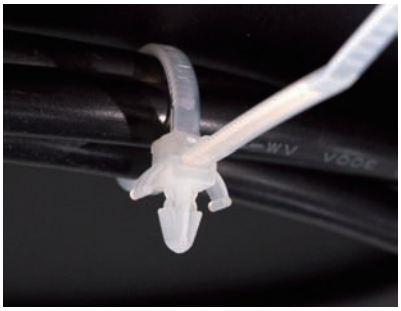

- Material: Nylon 66 (UL)
- Flame Class: 94V-2
- Color: Natural/Black
- Unit: mm

用途：捆紮電線、物品。

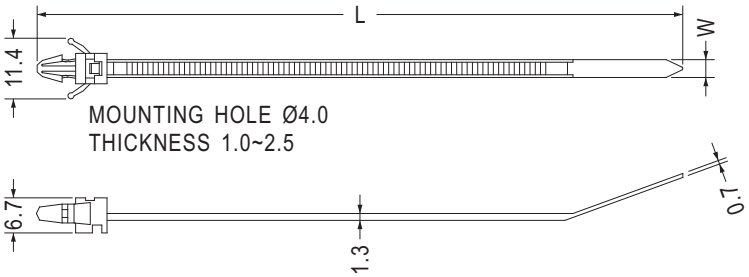


【 Push Self-Locking Tie 】

Part No.	Approx. Length mm(in)	Approx. Width mm(in)	Max. Bundle mm(in)	Min. Loop Tensile Strength kgs.(lbs.)	Package
	L	W			
YJ-123	123(4.84")	3.4(0.13")	25.4(1.00")	18(40)	500


用途：捆紮電線、物品。



- Material: Nylon 66 (UL)/PE
- Flame Class: 94V-2
- Color: Natural/Black
- Unit: mm

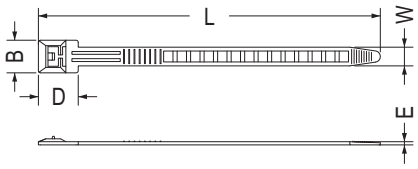


Part No.	B	D	E	L	W	Package
ST-1SN	15.0	18.3	1.5	157.0	8.6	500
ST-1	15.0	18.3	1.5	157.0	8.6	
ST-2	15.8	21.4	1.2	135.0	10.0	
ST-3	15.4	24.5	1.2	140.0	10.0	
ST-4	15.0	18.3	1.7	205.0	8.6	
ST-5	13.0	16.0	1.45	125.0	7.5	
ST-5NS	13.0	16.0	1.0	125.0	7.5	
ST-11N	15.0	18.3	1.7	300.0	8.6	

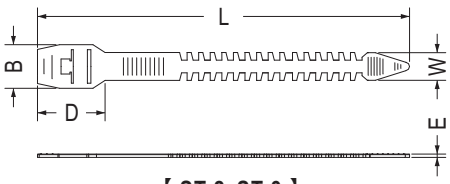


【 ST-2, ST-3 】




- Material: TPE
- Color: Black/Blue
- Unit: mm

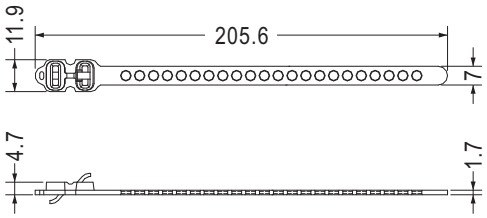

Part No.	Package
ST-6	250

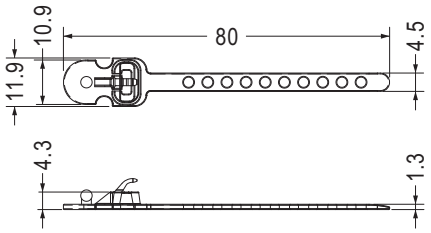


Part No.	Package
ST-13	500

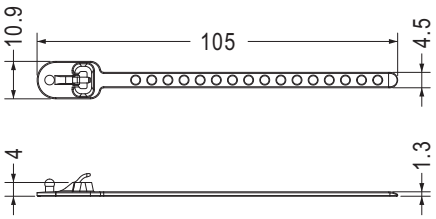

Part No.	Package
ST-15	500




- Material: PE
- Color: Natural
- Unit: mm

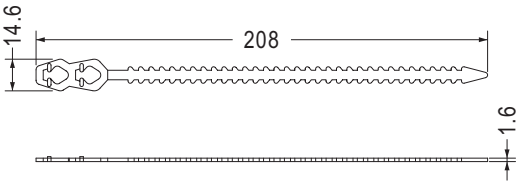

Part No.	Package
ST-7	500



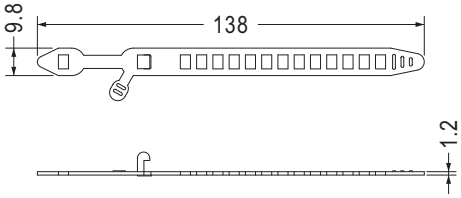


- Color: Black

Part No.	Package
ST-8	500

用途：捆紮電線、物品。




- Material: PP (UL)
- Flame Class: 94HB
- Color: Natural
- Unit: mm

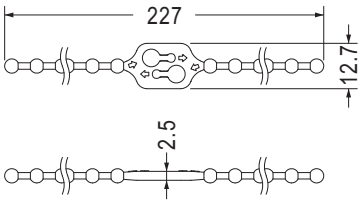

Part No.	Package
ST-23	200




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




MOUNTING HOLE Ø6.4
THICKNESS 0.8~1.6

Part No.	Package
ST-9	500

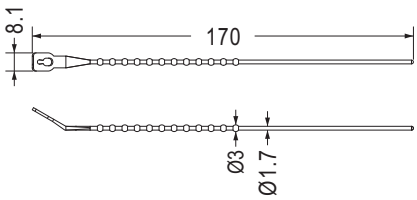


Part No.	Package
ST-19	500




- Material: PE
- Color: Natural

Part No.	Package
STO-166	500

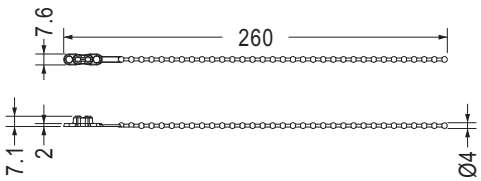


- Material: PE
- Color: Natural

Part No.	Package
★STO-260	500




Part No.	A	L	Package
GTB-70	2.4	70.0	1000
GTB-100	2.3	112.0	

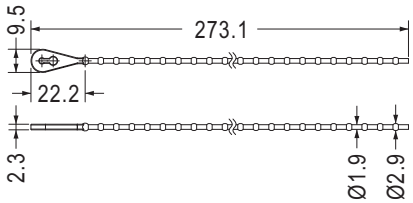


- Material: PP
- Color: Natural

Part No.	Package
GTBA-273	500

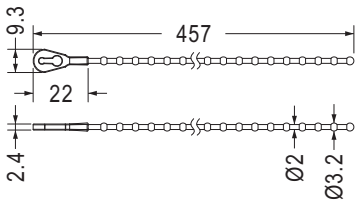

- Material: PP (UL)
- Flame Class: 94HB
- Color: Natural


Part No.	Package
GTBA-457	500



MOUNTING HOLE Ø3.0
THICKNESS 0.6~1.8

Part No.	L	Package
GTB-85	85.0	1000
GTB-103	103.0	




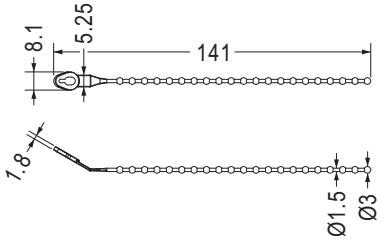


NEW

Part No.	Package
GTBA-141	500

用途：捆紮電線、物品。

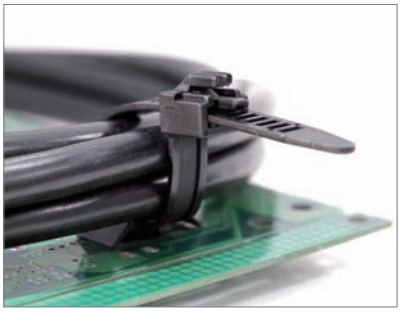


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

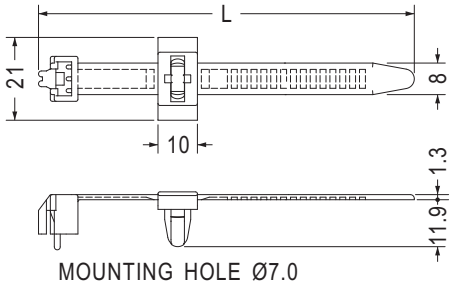


MOUNTING HOLE Ø7.0
THICKNESS 4.0

Part No.	L	Package
STC-115	115.3	200
STC-175	175.0	

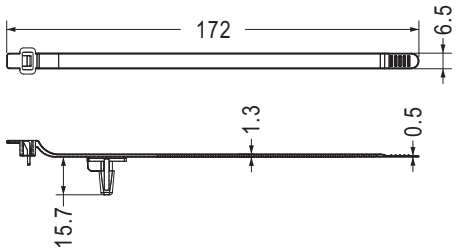

MOUNTING HOLE
THICKNESS 3.8

Part No.	Package
STC-173	200

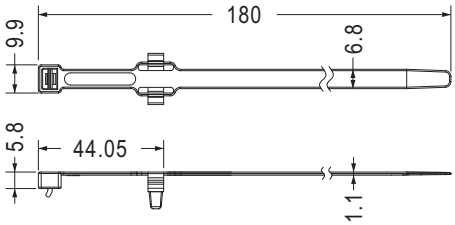


MOUNTING HOLE Ø5.5
THICKNESS: T

Part No.	T	Package
STC-180	0.8~2.0	200
STC-180L	2.3~2.5	



MOUNTING HOLE Ø7.0
THICKNESS 3.0

【 STC-171B 】




【 STC-171A 】

Part No.	組合件(ASSY)	Package
STC-171	STC-171A+STC-171B	250




MOUNTING HOLE Ø5.5
THICKNESS 3.0

【 STC-172B 】




【 STC-172A 】

Part No.	Part No.	Package
STC-172	STC-172A	100
	STC-172B	
	此為子母包:內容物包含右方零件	




MOUNTING HOLE Ø7.0
THICKNESS 3.0

【 STC-171B 】




【 STC-174A 】

Part No.	Part No.	Package
STC-174	STC-174A	100
	STC-171B	
	此為子母包:內容物包含右方零件	

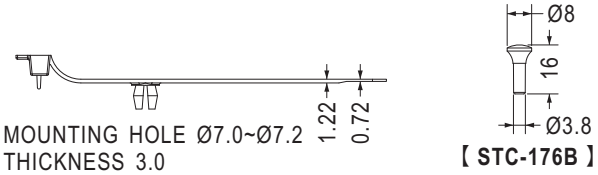

MOUNTING HOLE Ø7.0~Ø7.2
THICKNESS 3.0

【 STC-176B 】




【 STC-121A, STC-176A 】

Part No.	Part No.	L	Package
STC-121	STC-121A	121.0	100
	STC-176B		
STC-176	STC-176A	171.2	
	STC-176B		
此為子母包:內容物包含右方零件			


用途：捆紮電線、物品。



- Material: PE
- Color: Black
- Unit: mm



Part No.	Package
STCA-161	500

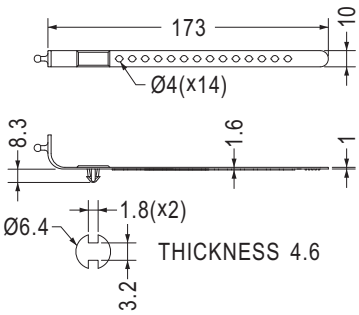


Part No.	Package
STCA-172	500







- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

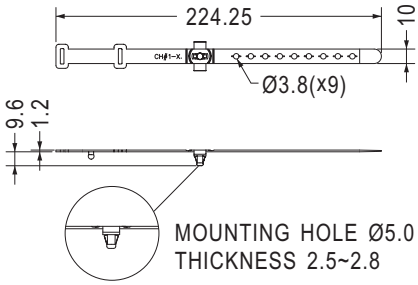


Part No.	Package
STCA-224	500

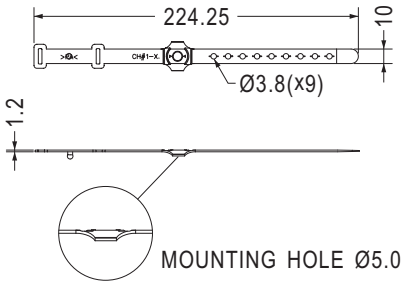

Part No.	Package
STCA-225	500

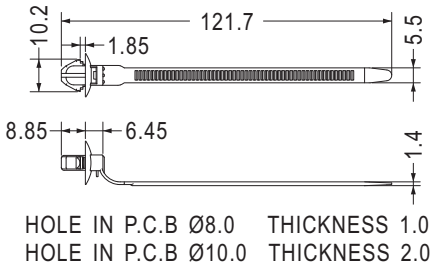


Part No.	Package
STCB-110	1000

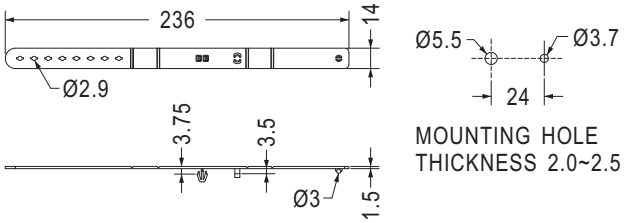

Part No.	Package
STCA-235	500




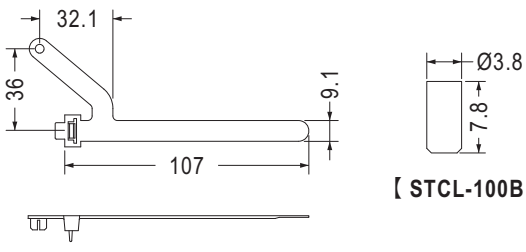


Part No.	組合件(ASSY)	Package
STCL-100	STCL-100A+STCL-100B	100

電源線束線帶 STRAP TIE

用途：捆紮電線、物品。

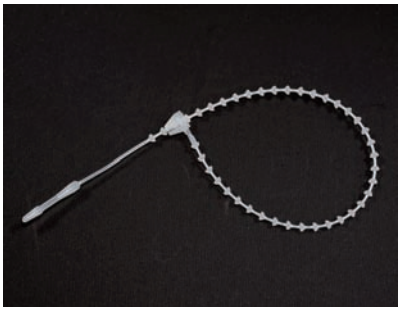


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

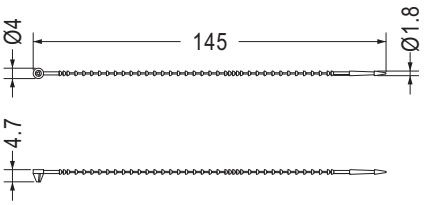


Part No.	Package
LOCK-145	1000


- Material: PP
- Color: Natural
- Unit: mm

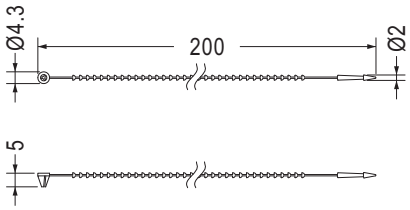

Part No.	Package
LOCK-200	1000

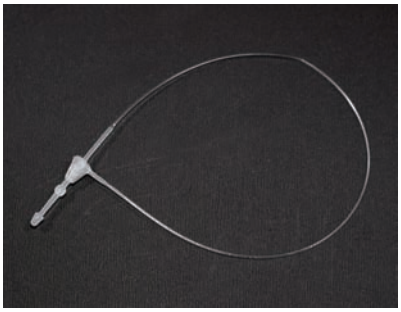

- Material: PP
- Color: Natural
- Unit: mm

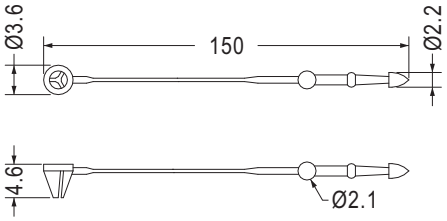

Part No.	Package
LOCK-150	1000


水管座 PIPE MOUNT TIE

用途：車用管材之固定。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm





【 SWPK-15A 】




【 SWPK-1B 】


Part No.	組合件(ASSY)	Package
SWPK-15F	SWPK-15A+SWPK-1B	100

吊勾 HANDLE GRIP

用途：用於電線之固定。

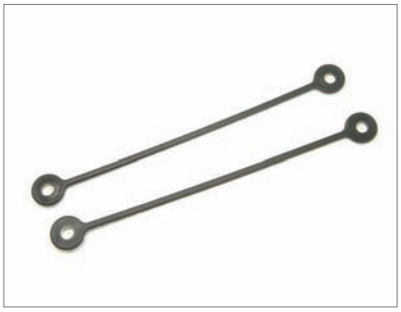


- Material: PE
- Color: White/Black
- Unit: mm

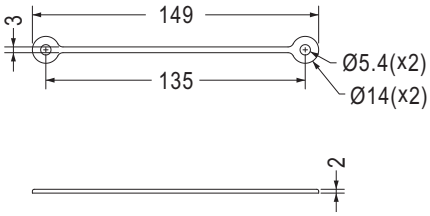


Part No.	Package
SFA-1	1000

束線座 CABLE MOUNT

用途：配合寬度2.5mm束線帶，可固定電線於機板上。

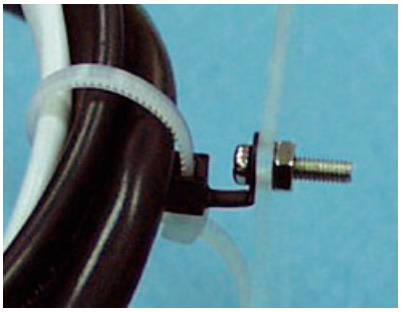


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	A	Package
ASUS-1	2.8	2000
ASUS-3	3.1	

束線帶扣 CABLE TIE BUCKLE

用途：用於束線帶定位與固定用。

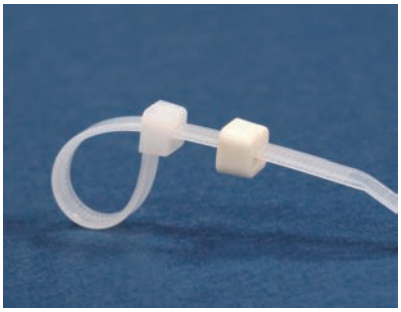

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
YJHH-4.8	1000

用途：捆紮電線、物品。


依不同尺寸，可接受訂製。
Different size available per request.




- Material: Nylon/Nylon(UL)
- Flame Class: 94V-2
- Color: Black
- Unit: mm

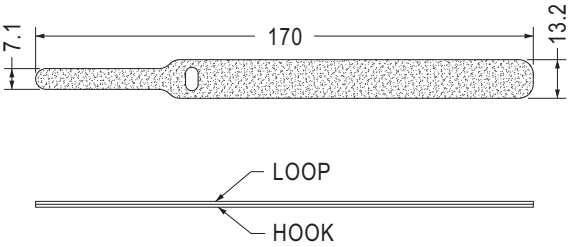


Part No.	Package
VCO-7NL	500

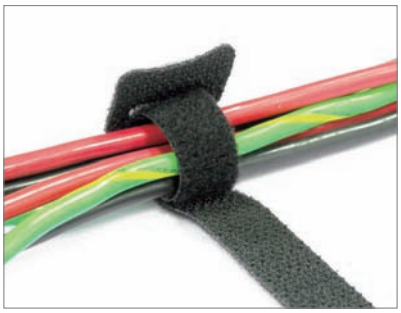


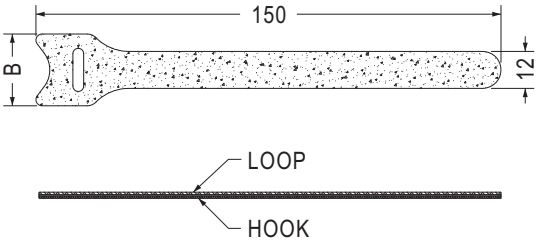


Part No.	B	Package
VCO15023	23.3	500
VCO-39	24.0	

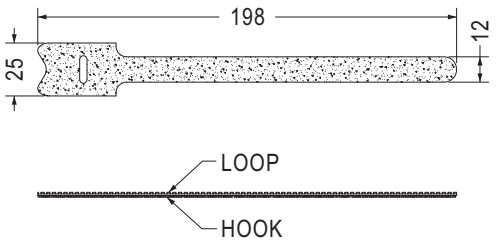


Part No.	Package
VCO19812	500

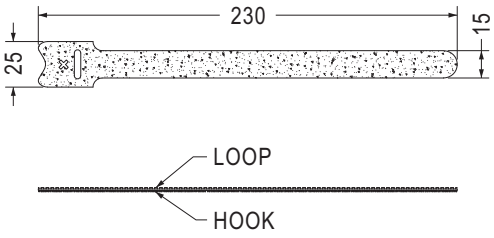

Part No.	Package
VCO23015	500

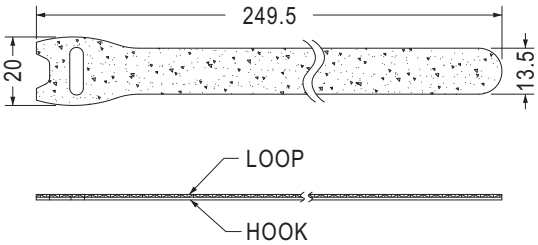


Part No.	Package
VCO25020	500

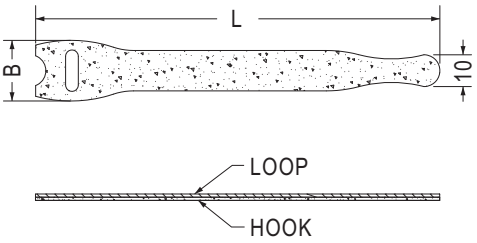


Part No.	B	L	Package
VCO-888	19.1	127.0	500
VCO-888-1	19.1	155.0	
★VCO-888-2	19.05	95.0	

用途：捆紮電線、物品。

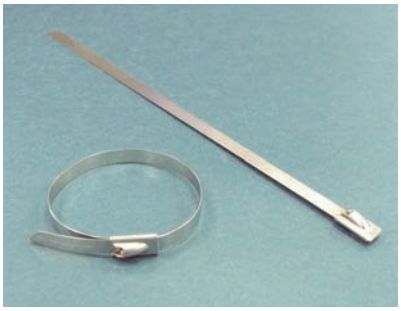

- Material: SUS
- Unit: mm

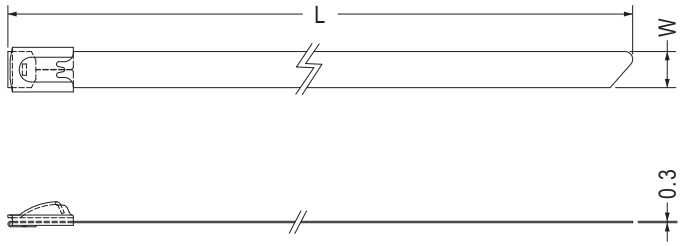


【 Self-Locking Tie 】

Part No.	Max. Bundle mm(in)	Approx. Length mm(in) L	Approx. Width mm(in) W	Min. Loop Tensile Strength kgs.(lbs.)	Package
STB-152S	25(1.00")	152(6.00")	4.5(0.177")	45.3(100)	100
STB-200S	50(2.00")	200(8.00")			
STB-360S	102(4.00")	360(14.0")			
STB-520S	152(6.00")	520(20.0")			
STB-680S	203(8.00")	680(27.0")			
STB-840S	254(10.0")	840(33.0")			
STB-1050S	318(12.5")	1050(41.0")			50


Part No.	Max. Bundle mm(in)	Approx. Length mm(in) L	Approx. Width mm(in) W	Min. Loop Tensile Strength kgs.(lbs.)	Package
STB-152M	25(1.00")	152(6.00")	8.0(0.315")	113.3(250)	100
STB-200M	50(2.00")	200(8.00")			
STB-360M	102(4.00")	360(14.0")			
STB-520M	152(6.00")	520(20.0")			
STB-680M	203(8.00")	680(27.0")			
STB-840M	254(10.0")	840(33.0")			
STB-1050M	318(12.5")	1050(41.0")			50

Part No.	Max. Bundle mm(in)	Approx. Length mm(in) L	Approx. Width mm(in) W	Min. Loop Tensile Strength kgs.(lbs.)	Package
STB-290L	80(3.10")	290(11.0")	12.0(0.472")	272.0(600)	50
STB-360L	102(4.00")	360(14.0")			
STB-430L	121(4.70")	430(17.0")			
STB-520L	152(6.00")	520(20.0")			
STB-600L	175(6.80")	600(24.0")			
STB-680L	203(8.00")	680(27.0")			
STB-750L	230(8.70")	750(30.0")			
STB-840L	254(10.0")	840(33.0")			
STB-910L	273(10.7")	910(36.0")			25
STB-1000L	302(11.9")	1000(39.0")			
STB-1070L	325(12.8")	1070(42.0")			
STB-1200L	351(13.8")	1200(47.0")			

用途：捆紮電線、物品。

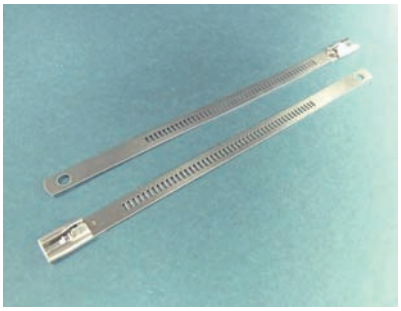

- Material: SUS
- Unit: mm

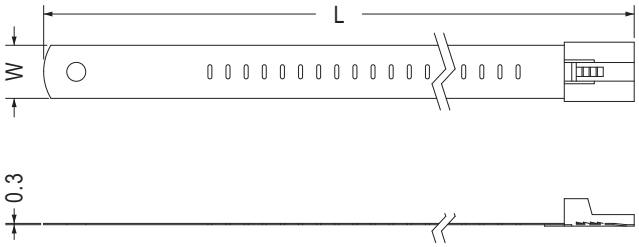


【 Self-Locking Tie 】


Part No.	Max. Bundle mm(in)	Approx. Length mm(in) L	Approx. Width mm(in) W	Min. Loop Tensile Strength kgs.(lbs.)	Package
STL-150S	22(0.86")	150(5.90")	7.0(0.28")	113.4(250)	100
STL-195S	45(1.70")	195(8.00")			
STL-255S	64(2.50")	255(10.0")			
STL-335S	89(3.50")	335(13.0")			
STL-490S	139(5.40")	490(19.0")			
STL-635S	185(7.20")	635(25.0")			

Part No.	Max. Bundle mm(in)	Approx. Length mm(in) L	Approx. Width mm(in) W	Min. Loop Tensile Strength kgs.(lbs.)	Package
STL-150M	22(0.86")	150(5.90")	12.0(0.472")	113.4(250)	100
STL-195M	45(1.70")	195(8.00")			
STL-255M	64(2.50")	255(10.0")			
STL-335M	89(3.50")	335(13.0")			
STL-490M	139(5.40")	490(19.0")			
STL-635M	185(7.20")	635(25.0")			

用途：用於電線、零件接頭之絕緣。

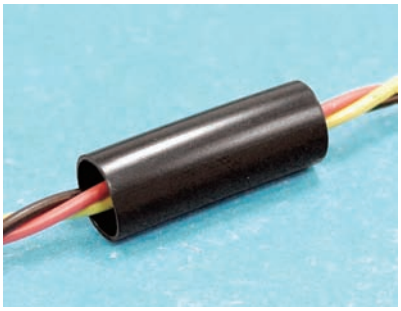


- Material: P.V.C (UL)
- Flame Class: VW-1
- Color: Black/Transparent
- Unit: mm

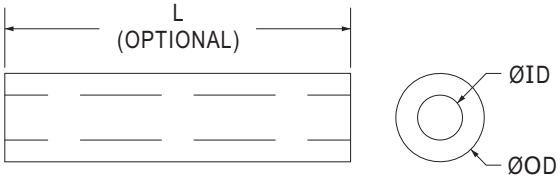


Package			
Part No.	Feet/1 Roll	M/1 Roll	mm/1 Roll
P0.864~P5.94	1000	304.8	304800
P6.68~P11.1B	500	152.4	152400
P12.7B			
P11.1	250	76.2	76200
P12.7			

Part No.	Size AWG	Inside Diameter	Cat.No. DEV-300(300V.105°C)			Cat.No. DEV-600 (600V.105°C)		
			Outside Diameter	Average Thickness	Min. Thickness At Any Point	Outside Diameter	Average Thickness	Min. Thickness At Any Point
P0.864	20	0.864	1.70	0.40	0.330	2.10	0.60	0.431
P0.965	19	0.965	1.80	0.40	0.330	2.20		
P1.067	18	1.067	1.90	0.40	0.330	2.30		
P1.19	17	1.19	2.00	0.40	0.330	2.60	0.70	0.559
P1.34	16	1.34	2.15	0.40	0.330	2.75		
P1.50	15	1.5	2.30	0.40	0.330	2.90		
P1.68	14	1.68	2.50	0.40	0.330	3.10		
P1.93	13	1.93	2.70	0.40	0.330	3.35		
P2.16	12	2.16	3.00	0.40	0.330	3.60		
P2.41	11	2.41	3.20	0.40	0.330	3.80		
P2.69	10	2.69	3.50	0.40	0.330	4.10		
P3.00	9	3.00	4.10	0.55	0.431	4.40		
P3.38	8	3.38	4.50	0.55	0.431	4.80		
P3.76	7	3.76	4.90	0.55	0.431	5.20		
P4.22	6	4.22	5.35	0.55	0.431	5.65		
P4.72	5	4.72	5.85	0.55	0.431	6.15		
P5.28	4	5.28	6.40	0.55	0.431	6.70		
P5.94	3	5.94	7.05	0.55	0.431	7.35		
P6.68	2	6.68	7.80	0.55	0.431	8.10		
P7.47	1	7.47	8.60	0.55	0.431	8.90		
P8.38	0	8.38	9.50	0.55	0.431	9.80		
P7.92	5/16"	7.92				9.35		
P9.53	3/8"	9.53				10.95		
P11.1	7/16"	11.10				12.50		
P12.7	1/2"	12.70				14.10		

用途：用於電線、零件接頭之絕緣。

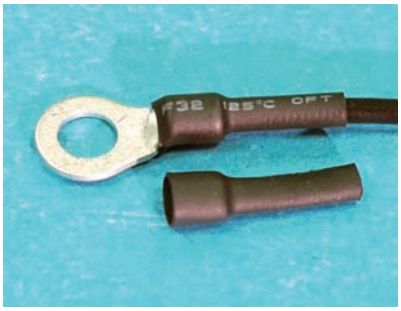


- Material: Polyolefin (UL)
- Flame Class: VW-1
- Color: Black
- Unit: mm

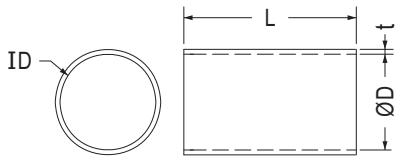


Part No.	收縮前狀態 Dimensions Before Shrinkage		收縮後狀態 Dimensions After Shrinkage		Package	
	內徑(D) Inside Dia.	管壁厚度(t) Thickness	內徑 Inside Dia.	管壁厚度(t) Thickness	M/1 Roll	mm/1 Roll
Ø1.0	1.3	0.2	0.5	0.33	200	200000
Ø1.5	2.0	0.2	0.75	0.36		
Ø2.0	2.5	0.2	1.0	0.44		
Ø2.5	3.0	0.25	1.25	0.44		
Ø3.0	3.5	0.25	1.5	0.44		
Ø3.5	4.0	0.25	1.75	0.44		
Ø4.0	4.5	0.25	2.0	0.44		
Ø5.0	5.4	0.25	2.5	0.56	100	100000
Ø6.0	6.4	0.25	3.0	0.56		
Ø7.0	7.4	0.25	3.5	0.56	50	50000
Ø8.0	8.4	0.25	4.0	0.56		
Ø9.0	9.4	0.25	4.5	0.56		
Ø10.0	10.4	0.25	5.0	0.56		
Ø11.0	11.4	0.25	5.5	0.56		
Ø12.0	12.4	0.25	6.0	0.56		
Ø13.0	13.5	0.3	6.5	0.69		
Ø14.0	14.5	0.3	7.0	0.69		
Ø15.0	15.5	0.3	7.5	0.69		
Ø16.0	16.8	0.3	8.0	0.69		
Ø18.0	18.7	0.35	9.0	0.77		
Ø20.0	21.2	0.35	10.0	0.77		
Ø22.0	23.2	0.4	11.0	0.77		
Ø25.0	26.1	0.4	12.5	0.87		
Ø28.0	29.0	0.5	14.0	0.87		
Ø30.0	32.0	0.5	14.8	0.87		
Ø35.0	37.0	0.5	17.5	0.87		
Ø40.0	43.0	0.5	20.0	0.97		
Ø50.0	53.0	0.5	24.7	0.97		

織布管 SILICON FIBERGLASS SLEEVING

用途：用於電線之絕緣。

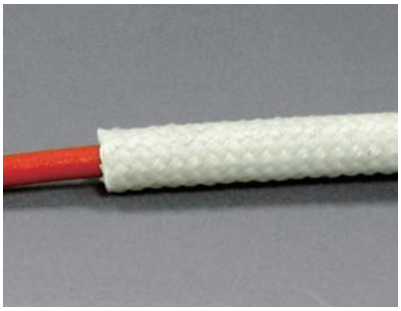

- Material: Glass-Fiber
- Color: White
- Unit: mm



Part No.	內徑(D) Inside Diameter	管壁厚度(t) Thickness	Package	
			M/1 Roll	mm/1 Roll
T1	1.0	0.28	200	200000
T2	2.0	0.28		
T3	3.0	0.28	100	100000
T4	4.0	0.30		
T5	5.0	0.30		
T6	6.0	0.30		
T7	7.0	0.30		
T8	8.0	0.35	50	50000
T9	9.0	0.35		
T10	10.0	0.35		
T12	12.0	0.36		
T14	14.0	0.36		
T16	16.0	0.36		


護線套 MOVEABLE BUSHING

用途：用於電線出線口，防止電線機殼刮傷。




- Material: Nylon 6
- Color: Natural
- Unit: mm

- Material: Nylon 6 (UL)
- Flame Class: 94V-2




CHASSIS THICKNESS 0.8~1.2

Part No.	L	Package
KGA13-185	185.0	500
KGA13-260	260.0	




CHASSIS THICKNESS 1.0~1.2

Part No.	L	Package
KGC-013-45	45.0	500
KGC-013-70	70.0	

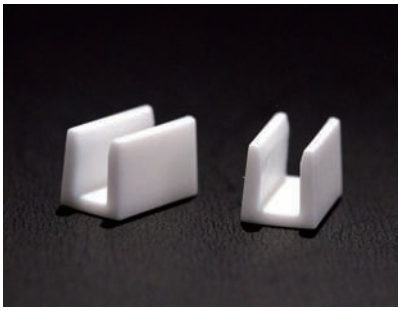

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural
- Unit: mm

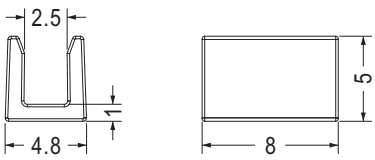


Part No.	Package
KGC-025-8	500

活用護線套 MOVEABLE BUSHING

用途：用於電線出線口，防止電線機殼刮傷。




- Material: PE
- Color: Natural
- Unit: mm




切型

【 KG-16S 】




平面型

【 KG-016C 】




THICKESS: T

Part No.	A	B	T	Length L (M)
KG-010	1.1	5.2	0.9~1.1	10
KG-012	1.3	5.4	1.1~1.3	
KG-016	1.7	5.4	1.45~1.75	
KG-016S	1.6	5.3	1.45~1.75	
KG-016C	1.7	5.4	1.45~1.75	
KG-020	2.2	5.4	1.8~2.2	
KG-024	2.7	5.7	2.25~2.6	
KG-030	3.3	6.1	2.85~3.25	
KG-040	4.3	6.5	3.85~4.25	

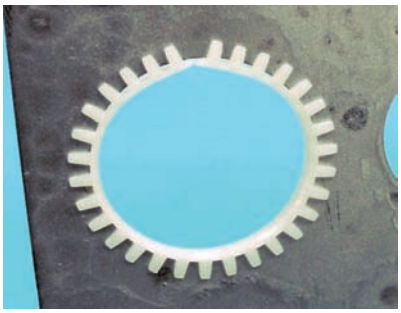


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural
- Unit: mm



CHASSIS THICKNESS: T

Part No.	A	B	C	D	L	T	Package
KG-006N	0.6	3.8	3.1	0.8	260.0	0.5~0.7	500
KG-008N	0.8	3.8	3.1	0.8	260.0	0.7~0.9	
KG-010N	1.0	3.8	3.3	0.8	260.0	0.9~1.1	
KG-012N	1.2	3.8	3.5	0.8	260.0	1.1~1.3	
KG-014N	1.4	3.8	3.65	0.8	260.0	1.3~1.5	
KG-014N-290	1.4	3.8	3.65	0.8	290.0	1.3~1.5	
KG-016N	1.6	3.8	3.9	0.8	260.0	1.4~1.7	
KG-016LN	1.6	5.3	4.5	0.8	256.0	1.0~1.5	
KG-016LV-2600	1.6	5.3	4.5	1.4	260.0	1.0~1.5	
KG-020N	2.0	3.8	4.3	0.8	260.0	1.8~2.0	
KG-025N	2.5	3.8	4.8	0.8	260.0	2.0~2.5	
KG-030N	3.0	4.8	6.2	0.8	260.0	2.5~3.0	




APPLICABLE BOARD THICKNESS 1.4~1.7


Part No.	L	Package
KG-016N-0180	18.0	1000
KG-016N-0930	93.0	500
KG-016N-1080	108.0	

黏貼標誌貼紙 WIRE LABEL

用途：軟式背膠，上印有文字，數字及符號可貼於不同規格電線電纜上，做為電線之標示。

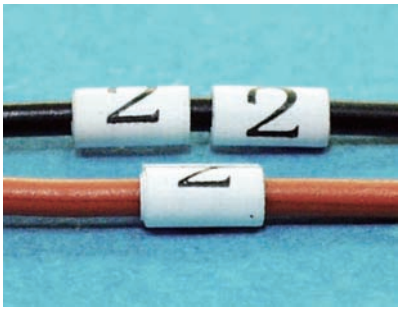


- Material: Vinyl Chloride
- Idenical Mark: 0~9 A~Z
- Unit: mm
- 100 pcs of 1 digit on one sheet.

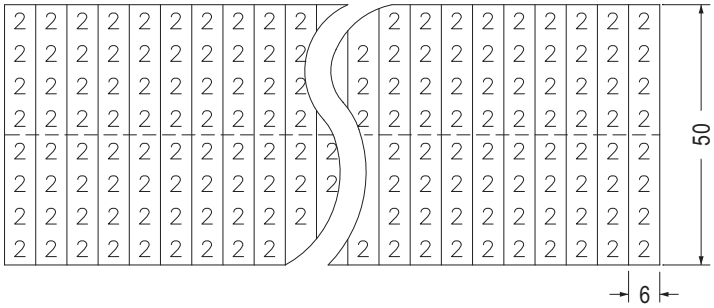


捲式保護帶 SPIRAL WRAPPING BAND

用途：引導電線彎曲，電線不易磨損，外觀整齊美觀。

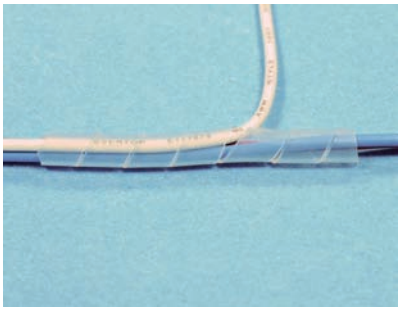

- Material: PE
- Color: Natural
- Unit: mm




Part No.	A	C	T	Length L (M)
SWB-2	3.0	4.6	0.4	10
SWB-3	4.0	7.6	0.5	
SWB-4S	5.0	8.5	0.5	
SWB-4	6.0	8.5	0.6	
SWB-6	8.0	13.0	0.7	
SWB-7.5	10.0	13.0	0.8	
SWB-9	12.0	15.0	0.85	
SWB-12	15.0	17.0	1.0	
SWB-16	19.0	19.0	1.2	
SWB-20	24.0	21.0	1.5	

快速捲束帶 FAST SPIRAL WRAPPING BAND AND CLAMP


用途：快速引導包覆電線，電線不易磨損，外觀整齊美觀。



- Spiral Wrap Material: PE
- Spiral Wrap Color: Natural
- Clamp Material: ABS
- Unit: mm

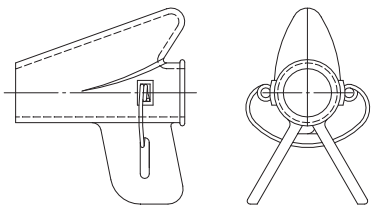

Part No.	The Suitable For Fast Spiral Wrapping Band
KST-08	KYST-8
KST-15	KYST-15
KST-20	KYST-20
KST-25	KYST-25

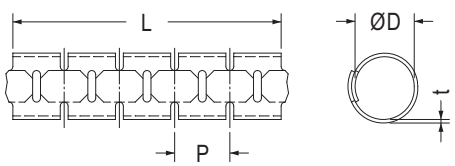

Part No.	Internal ØD (mm)	MAX. DIA (mm)	Pitch P (mm)	Thickness t (mm)	Length L (M)
KYST-08	8.0	10.0	10.0	0.8	5
KYST-15	15.0	16.0	14.0	0.8	
KYST-20	20.0	23.0	17.0	0.9	
KYST-25	25.0	29.0	20.0	1.0	



線扣工具 Bushing Tool	Part No.
	HT-205-1




進口束線槍 Cable Tie Gun	Part No.
	TGN-1



旗型端子工具 Crimp Tool for flag terminal	Part No.
	KY-1




國產束線槍 Cable Tie Gun	Part No.
	TGN-2

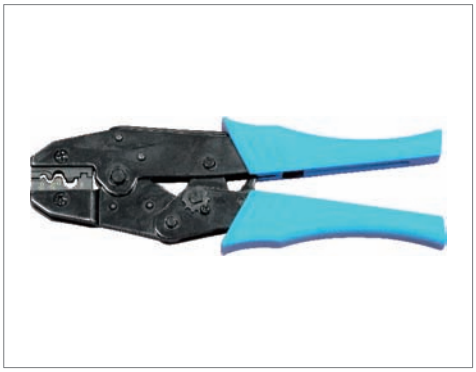

非絕緣端子工具 Non-Isolating Terminal Tool	Part No.
	KY-2



絕緣端子工具 Isolating Terminal Tool	Part No.
	HT-301H

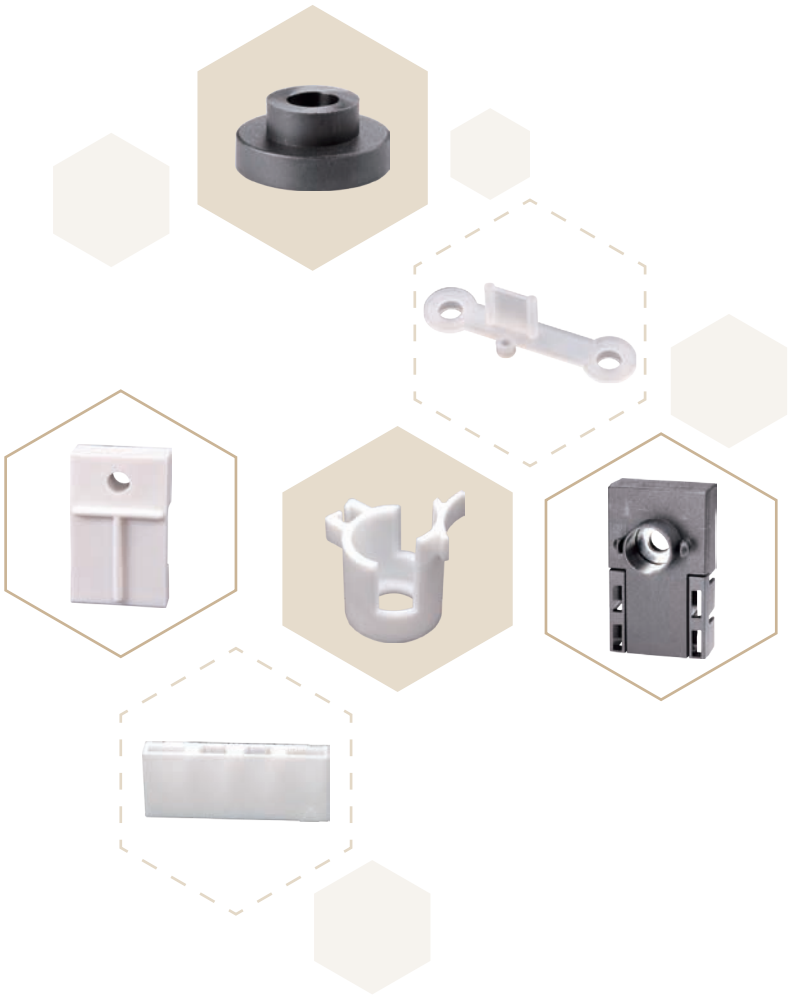


6


- 電晶體座
  Transistor Housing
- 電晶體墊片
  Transistor Washer
- 零件墊座
  Parts Housing
- 矽膠帽套
  Silicon Insulator Cover
- 軟質端子保護套
  Terminal Soft Sleeves
- 末端套管
  VCP Cap
- 保護蓋
  Insulated Cap
- 開關蓋
  Tact Switch Cap
- 麥克風套
  Mic Holder

電晶體蓋 TRANSISTOR COVER


用途：用於TO-220功率晶體，鎖於散熱片上之晶體外殼，絕緣性特佳，防止高壓跳火，耐高溫，提高可靠度增進美觀。

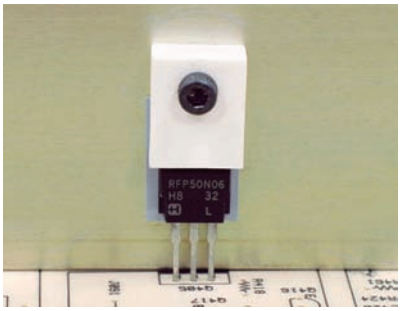


- Material: PBT (UL)/Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	A	C	D	E	F	H	I	Package
TC-1	16.0	6.2	10.7	8.0	3.5	3.4	0.8	500
TC-1A	19.3	6.2	10.7	10.0	3.6	3.2	0.8	
TC-1C	17.8	6.3	10.7	9.3	3.5	3.3	0.9	
TC-16	22.5	6.3	10.5	15.0	3.5	3.5	0.8	
TC-18	16.0	6.2	10.7	8.0	3.5	3.5	0.5	




Part No.	Package
TC-5A	500




Part No.	Package
TC-9	500




Part No.	A	C	D	E	H	I	Package
TC-6	13.0	6.2	10.7	6.8	3.3	0.8	500
TC-7	13.0	7.0	10.7	6.8	3.0	2.1	
TC-10	14.3	6.2	10.5	8.2	3.2	1.0	
TC-11	14.3	7.0	10.7	8.2	2.7	2.1	
TC-22	13.0	6.7	10.7	7.1	2.8	2.0	
TC-56	14.3	6.2	10.5	8.2	3.2	0.5	




Part No.	Package
TC-46	500




Part No.	Package
TC-75	1000




Part No.	Package
TC-4	1000



Part No.	Package
TC-21	1000

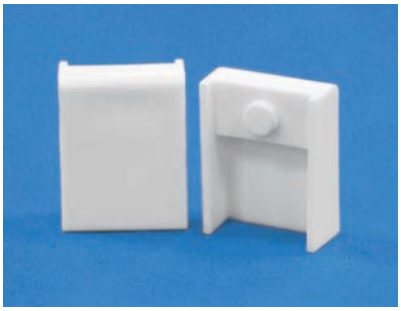

- Material: PBT (UL)
- Flame Class: 94V-0
- Color: Natural
- Unit: mm




Part No.	Package
TC-58	1000

電晶體蓋 TRANSISTOR COVER


用途：用於TO-220功率晶體，鎖於散熱片上之晶體外殼，絕緣性特佳，防止高壓跳火，耐高溫，提高可靠度增進美觀。




- Material: PBT (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
TC-49	1000



Part No.	A	B	Package
TC-70	12.65	6.85	1000
TC-71	11.45	5.65	

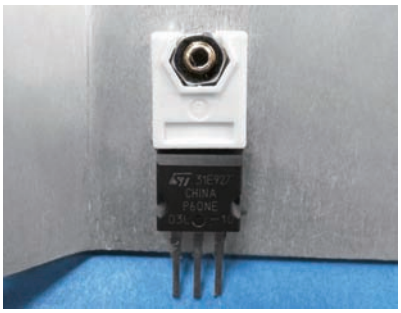


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural
- Unit: mm




Part No.	Package
TC-77	1000


- Material: PBT(UL)
- Flame Class: 94V-0
- Color: Natural
- Unit: mm




Part No.	Package
TC-50	1000

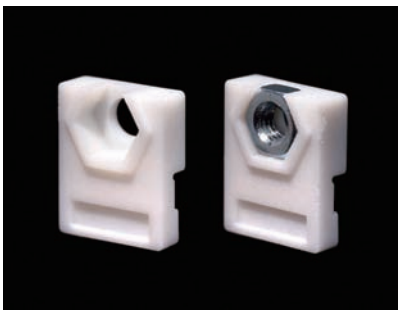


- Material: Nylon 66 (UL) / PBT (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural
- Unit: mm






Part No.	Steel Nut	Package
TC-51		1000
TC-76		
TC-76F	M3x0.5P	

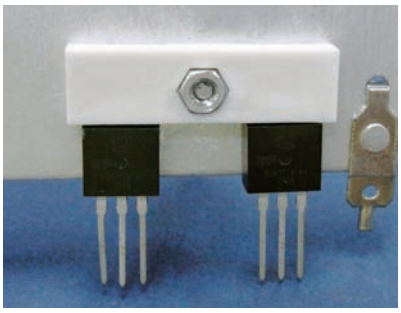


- Material: PBT (UL)
- Flame Class: 94V-0
- Color: Natural
- Unit: mm

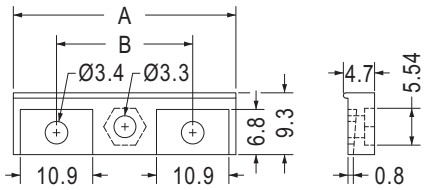


Part No.	A	B	Package
TC-29	33.5	20.5	1000
TC-53	34.3	21.7	

電晶體蓋 TRANSISTOR COVER

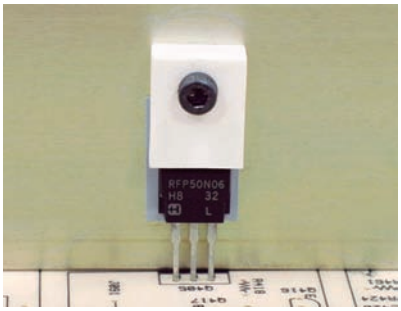


- Material: PBT (UL)
- Flame Class: 94V-0
- Color: Natural/Black
- Unit: mm


用途：用於TO-218功率晶體，鎖於散熱片上之晶體外殼，絕緣性特佳，防止高壓跳火，耐高溫，提高可靠度增進美觀。



Part No.	Package
TC-2	500




Part No.	A	E	F	H	Package
TC-23	19.1	11.8	3.5	3.6	500
TC-45	22.2	14.9	3.6	3.5	

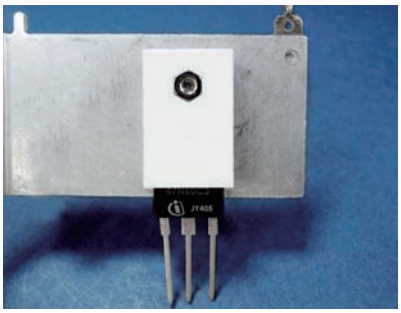


- Material: PBT (UL)
- Flame Class: 94V-0
- Color: Natural
- Unit: mm


用途：用於TO-3P功率晶體，鎖於散熱片上之晶體外殼，絕緣性特佳，防止高壓跳火，耐高溫，提高可靠度增進美觀。




Part No.	Package
TC-3	200




Part No.	Package
TC-19	200




Part No.	Package
TC-48	250




Part No.	Package
TC-68	1000



Part No.	Package
TC-73	500




Part No.	Package
TC-74	500

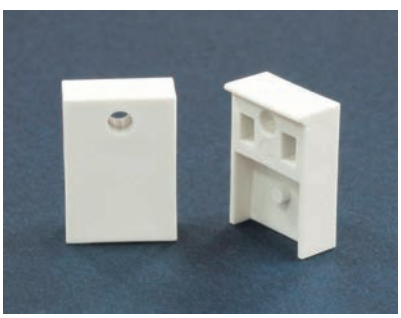


- Material: PBT (UL)
- Flame Class: 94V-0
- Color: Natural
- Unit: mm

用途：用於TO-247功率晶體，鎖於散熱片上之晶體外殼，絕緣性特佳，防止高壓跳火，耐高溫，提高可靠度增進美觀。




Part No.	E	I	Package
TC-60	14.1	1.8	200
TC-67	14.1	3.3	
TC-72	16.5	3.3	

電晶體蓋 TRANSISTOR COVER

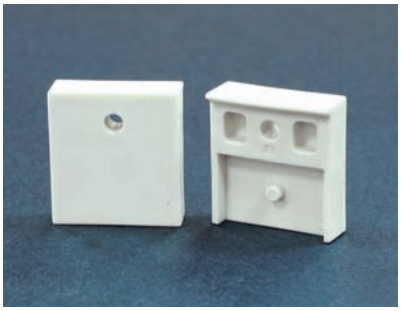


- Material: PBT (UL)
- Flame Class: 94V-0
- Color: Natural
- Unit: mm

用途：用於TO-264功率晶體，鎖於散熱片上之晶體外殼，絕緣性特佳，防止高壓跳火，耐高溫，提高可靠度增進美觀。




Part No.	Package
TC-61	1000

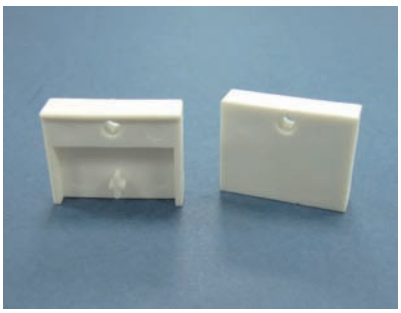


- Material: PBT (UL)
- Flame Class: 94V-0
- Color: Natural
- Unit: mm

用途：用於整流器電晶體，鎖於散熱片上之晶體外殼，絕緣性特佳，防止高壓跳火，耐高溫，提高可靠度增進美觀。




Part No.	Package
TC-8	500

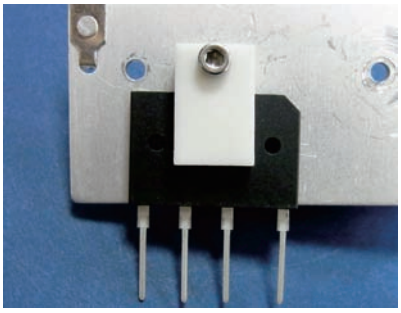


- Material: PBT (UL)
- Flame Class: 94V-0
- Color: Natural
- Unit: mm


用途：鎖於散熱片上之晶體外殼，絕緣性特佳，防止高壓跳火，耐高溫，提高可靠度增進美觀。




Part No.	Package
TC-13	500




Part No.	Package
TC-20	500



Part No.	Package
TC-35	500




Part No.	Package
TC-38	500




Part No.	Package
TC-40	500

電晶體蓋 TRANSISTOR COVER


用途：鎖於散熱片上之晶體外殼，絕緣性特佳，防止高壓跳火，耐高溫，提高可靠度增進美觀。

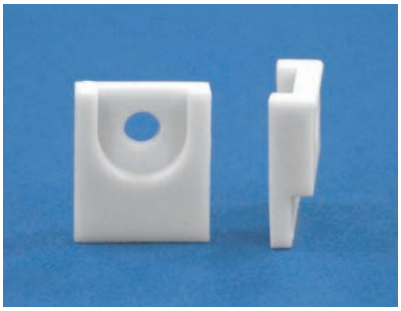


- Material: PBT (UL)/Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural
- Unit: mm




Part No.	Package
TC-39	1000




Part No.	Package
TC-41	1000

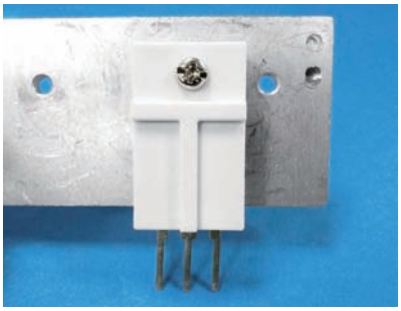

- Material: PBT (UL)
- Flame Class: 94V-0
- Color: Natural
- Unit: mm




Part No.	Package
TC-52	1000




NEW

Part No.	Package
TC-79	1000

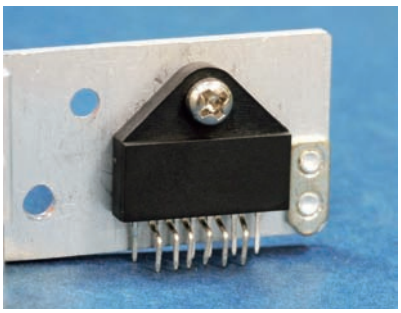

- Material: PBT (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm


用途：鎖於散熱片上之功率IC外殼，絕緣性特佳，防止高壓跳火，耐高溫，提高可靠度增進美觀。

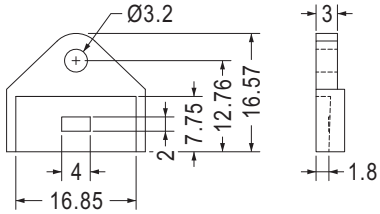


Part No.	Package
TC-62	1000

橋式整流蓋 BRIDGE RECTIFIER COVER

用途：鎖於散熱片上之橋式整流器外殼，絕緣性特佳，防止高壓跳火耐高溫，提高可靠度，增進美觀。

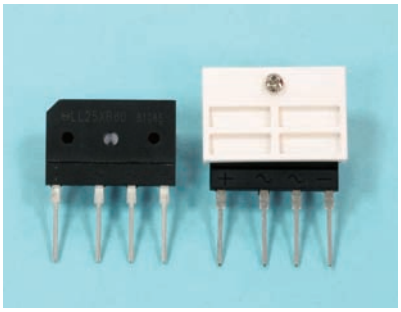


- Material: PBT (UL)
- Flame Class: 94V-0
- Color: Natural
- Unit: mm

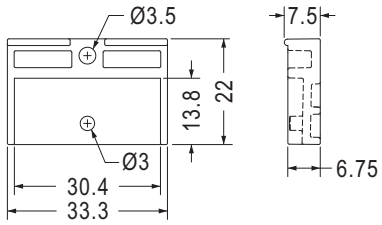


Part No.	Package
TC-59	500

功率IC蓋 POWER IC COVER


用途：鎖於散熱片上之功率IC外殼絕緣性特佳，防止高壓跳火耐高溫，提高可靠度，增進美觀。

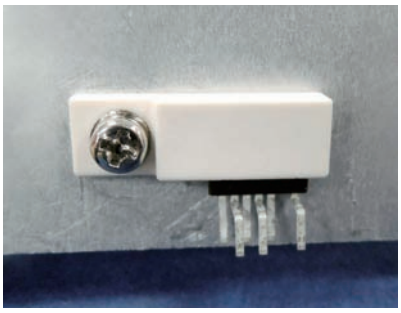


- Material: Nylon 66 (UL)/PBT (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural
- Unit: mm

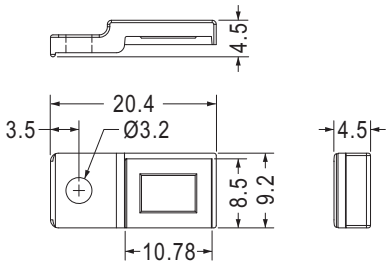


Part No.	Package
TC-26	1000

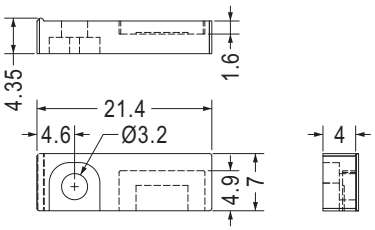


Part No.	Package
TC-31	1000

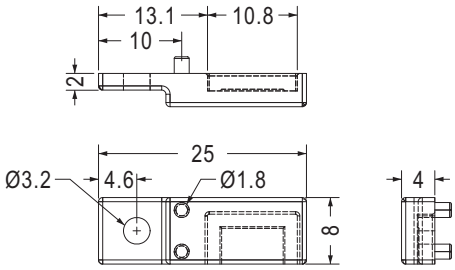




MOUNTING HOLE


Part No.	Package
PH-44	1000

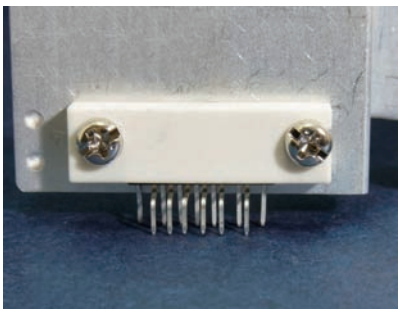

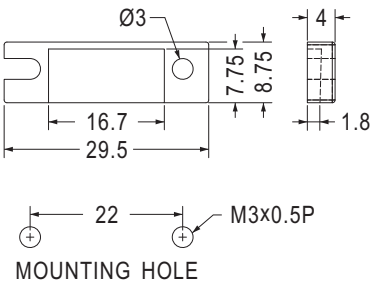


MOUNTING HOLE

Part No.	Package
TC-42	1000

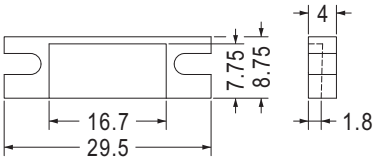

MOUNTING HOLE

Part No.	Package
TC-47	1000

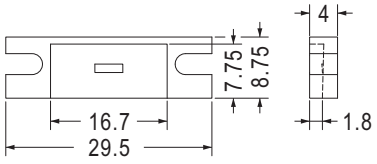


MOUNTING HOLE


Part No.	Package
TC-63	1000


功率IC蓋 POWER IC COVER

用途：鎖於散熱片上之功率IC外殼絕緣性特佳，防止高壓跳火耐高溫，提高可靠度，增進美觀。

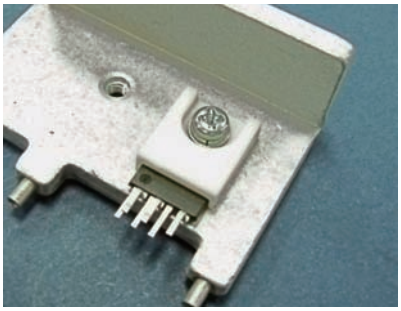


- Material: Nylon 66 (UL)/PBT (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural
- Unit: mm

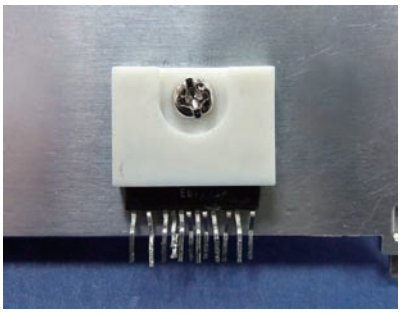




【 TC-24, TC-30 】




【 TC-25 】

Part No.	B	C	D	I	Package
TC-24	12.2	4.4	10.5	2.0	500
TC-25	12.2	4.35	10.5	2.0	1000
TC-30	19.0	4.35	17.0	1.6	

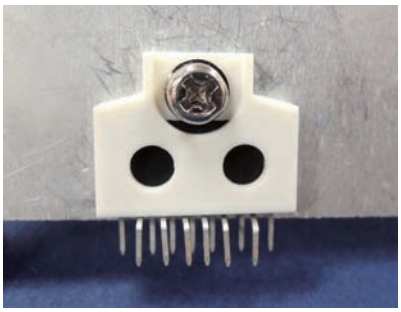


- Material: PBT (UL)
- Flame Class: 94V-0
- Color: Natural
- Unit: mm

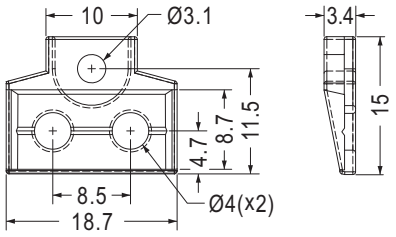


Part No.	Package
TC-54	1000

電晶體蓋 TRANSISTOR COVER

用途：用於功率晶體之外殼絕緣。

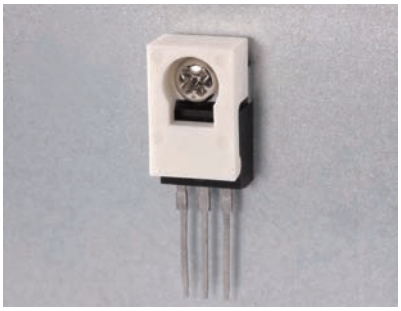


- Material: PBT (UL)
- Flame Class: 94V-0
- Color: Natural
- Unit: mm

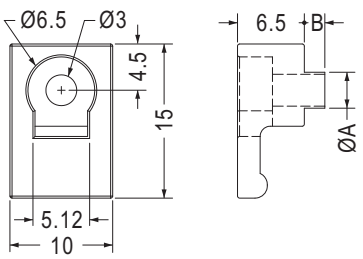


Part No.	A	B	Package
TC-28-1	3.6	1.0	2000
TC-28-2	3.6	2.0	
★TC-78	3.5	1.65	

電晶體座 TRANSISTOR COVER

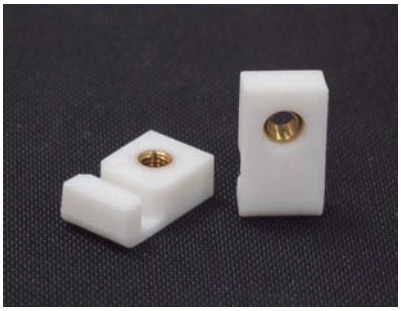

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural
- Unit: mm

用途：鎖於散熱片上之功率IC外殼絕緣性特佳，防止高壓跳火耐高溫，提高可靠度，增進美觀。

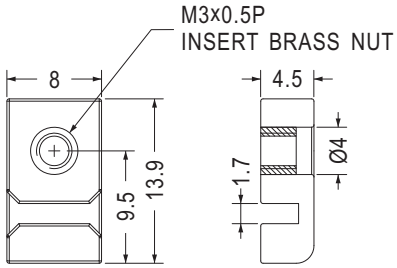


Part No.	Package
TC-65	1000



- Body Material: Nylon 66 (UL)/PPS (UL)
- Flame Class: 94V-2/94V-0
- Clip Material: SUS
- Color: Black
- Unit: mm

用途：鎖於散熱片之晶體外殼，絕緣性特性，防止高壓跳火耐高溫，提高可靠度，增進美觀。

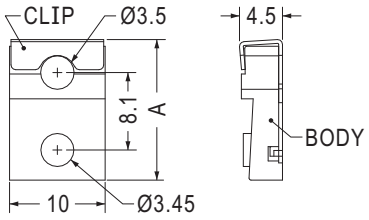


Part No.	A	Package
TCSE-1	14.5	1000
TCSE-7	14.7	



- Body Material: PPS (UL)
- Flame Class: 94V-0
- Clip Material: SUS
- Color: Black
- Unit: mm

用途：用於TO-220功率晶體，鎖於散熱片上之晶體外殼，絕緣性特佳，防止高壓跳火，耐高溫，提高可靠度，增進美觀。

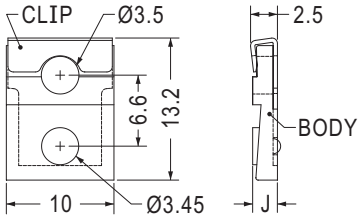


Part No.	J	Package
TCSE-2F	2.1	1000
TCSE-3F	2.2	



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Clip Material: Nickel Plated Steel
- Color: Black
- Unit: mm


用途：用於TO-3P功率晶體，保護晶體立於PC板上，使接腳不彎曲、折斷、短路，且高度一致。

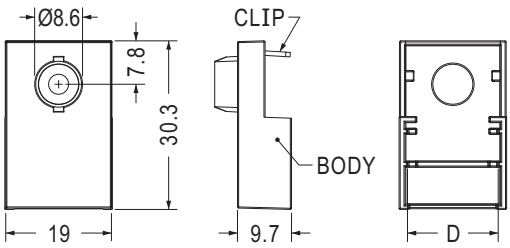


Part No.	D	Package
TCSE-8F	15.8	1000
TCSE-8SF	15.5	

壓板 DEPRESSOR

用途：用於壓著電子零件或功率晶體。

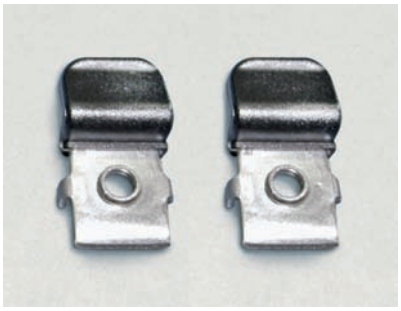


- Material: Nylon 66 (UL) 94V-2
- Metal Material: SUS
- Color: Black
- Unit: mm



Part No.	Package
TRK-17AF	1000






Part No.	Package
TRK-16F	1000

功率晶體壓板 POWER TRANSISTOR CLAMP DEPRESSOR

用途：可將功率晶體快速固定於散熱片上，方便、耐高壓。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm




Part No.	Package
TRK-35	500


功率晶體壓板 POWER TRANSISTOR CLAMP DEPRESSOR

用途：可將功率晶體快速固定於散熱片上，方便、耐高壓。



- Material: PBT (UL)
- Metal Material: Steel Zinc Plated
- Flame Class: 94V-0
- Color: Black
- Unit: mm







RECOMMEND
MOUNTING HOLE

• Patent Pending(專利申請中)


Part No.	Package
TCSF-2F	75



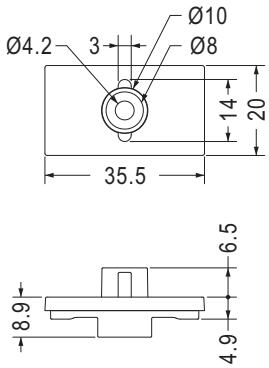





RECOMMEND
MOUNTING HOLE




Part No.	Package
TCSF-3F	100

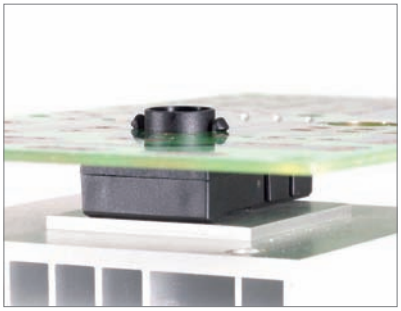

- Material: Nylon 66 (UL)
- Metal Material: Steel Zinc Plated
- Flame Class: 94V-0
- Color: Black
- Unit: mm






MOUNTING HOLE
THICKNESS 3.0

RECOMMEND ASSEMBLY DIAGRAM

POWER TRANSISTOR
CLAMP DEPRESSOR



Part No.	Package
★TCSF-5F	100


使用說明
Installation Guide

功率晶體壓板 POWER TRANSISTOR CLAMP DEPRESSOR


用途：可將功率晶體快速固定於散熱片上，方便、耐高壓。




- Material: Zinc Plated SPCC
- Unit: mm




Part No.	Package
TRK-11	500




Part No.	Package
TRK-54	500

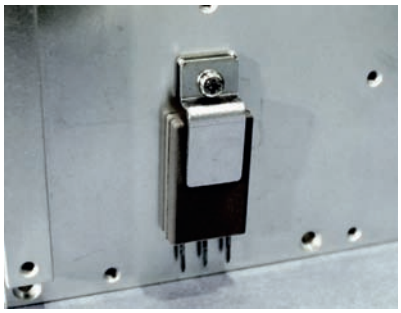

- Material: Zinc Plated Steel
- Unit: mm




Part No.	Package
TRK-1	250




Part No.	Package
TRK-2	250



- Material: SUS
- Unit: mm




Part No.	Package
TRK-6	1000




Part No.	Package
TRK-67	1000



- Material: SUS
- Unit: mm



Part No.	A	B	C	D	Package
TRK-24	12.33	6.0	2.8	3.2	2000
TRK-52	12.73	6.8	3.2	3.4	




- Material: Zinc Plated Steel

Part No.	Package
TRK-56	1000

用途：可將功率晶體快速固定於散熱片上，方便、耐高壓。




- Material: Zinc Plated Spring Stainless
- Unit: mm



Part No.	Package
TRK-40	500




- Material: SUS
- Unit: mm




Part No.	Package
TRK-22	1000




- Material: Zinc Plated Spring Stainless
- Unit: mm




Part No.	Package
TRK-12	1000

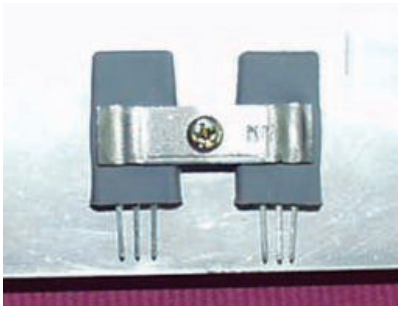


- Material: Zinc Plated Steel
- Unit: mm




Part No.	Package
TRK-8	500



Part No.	Package
TRK-9	500

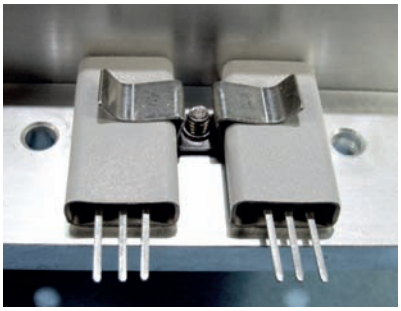


- Material: SUS
- Unit: mm




Part No.	Tapped	Package
TRK-10	M3x0.5P	1000
TRK-10(M4)	M4x0.8P	
TRK-10(632)	6-32 UNC	

電晶體固定彈片 TRANSISTOR CLAMP


用途：可將功率晶體快速固定於散熱片上，方便、耐高壓。

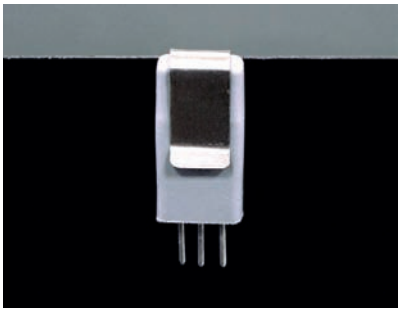


- Material: SUS
- Unit: mm




Part No.	Package
TRMC-154	1000




Part No.	Package
TRMC-1	1000




Part No.	Package
TRMC-7	1000




Part No.	Package
TRMC-141	1000




Part No.	Package
TRMC-20	1000




Part No.	Package
TRMC-26	1000




Part No.	Package
TRMC-23	1000




Part No.	Package
TRMC-17	1000




Part No.	Package
TRMC-30	1000




Part No.	Package
TRMC-61	1000




Part No.	Package
TRMC-34	1000




Part No.	Package
TRMC-40	1000



Part No.	Package
TRMC-59	1000




Part No.	Package
TRMC-2	1000




Part No.	Package
TRMC-9	1000

電晶體固定彈片 TRANSISTOR CLAMP


用途：可將功率晶體快速固定於散熱片上，方便、耐高壓。

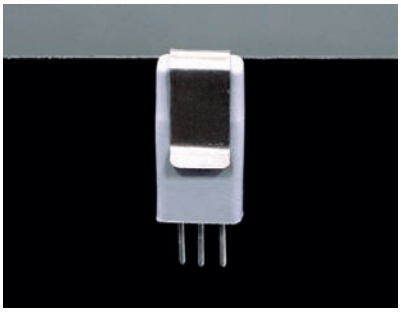


- Material: SUS
- Unit: mm




Part No.	A	B	Package
TRMC-123	7.1	5.3	1000
TRMC-124	7.22	5.35	




Part No.	Package
TRMC-122	1000




Part No.	Package
TRMC-5	1000




Part No.	Package
TRMC-6	1000




Part No.	Package
TRMC-35	1000





Part No.	Package
TRMC-49	1000

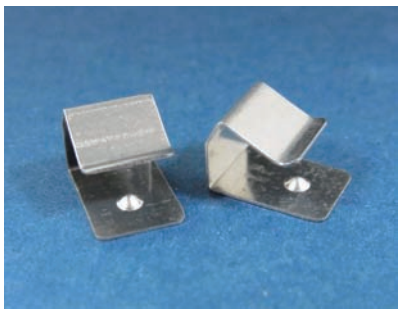




Part No.	A	B	C	D	E	Package
TRMC-76	8.0	6.1	3.5	3.5	13.0	1000
TRMC-77	6.9	7.5	4.5	4.0	11.0	
TRMC-78	6.9	8.5	5.8	4.0	11.0	

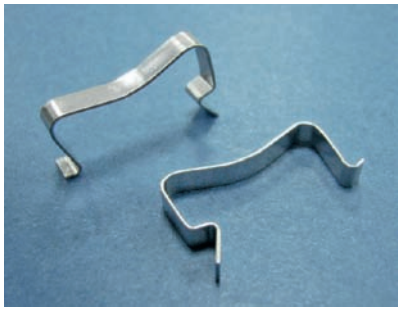





Part No.	Package
TRMC-121	1000




Part No.	Package
TRMC-126	1000

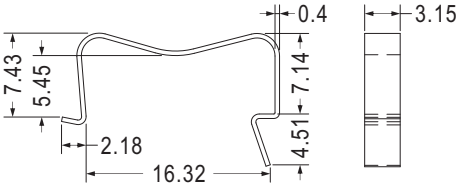

Part No.	Package
TRMC-8	1000






MOUNTING HOLE


Part No.	Package
TO-220ST	1000

電晶體固定彈片 TRANSISTOR CLAMP

用途：可將功率晶體快速固定於散熱片上，方便。

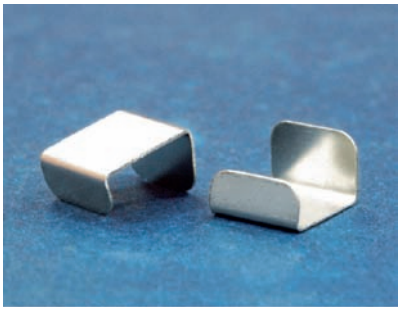


- Material: SUS
- Unit: mm




Part No.	Package
TRMC-135	1000

電晶體夾 TRANSISTOR CLIP


用途：用於零件之夾持。

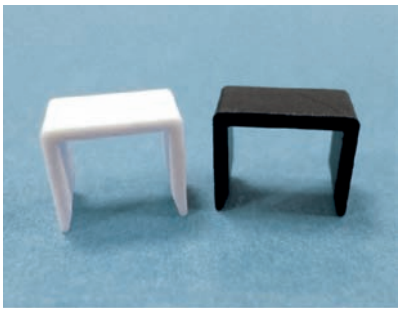

- Material: PBT (UL)
- Flame Class: 94V-0
- Color: Natural/Black
- Unit: mm




Part No.	A	Package
TRCMP-3	7.9	1000
TRCMP-4	8.6	

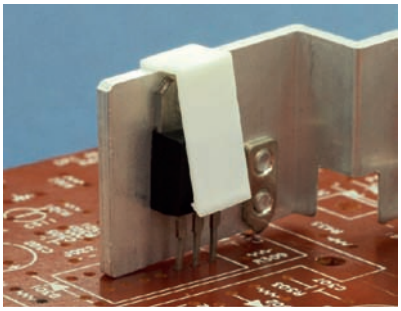


- Material: Nylon 66 (UL)/PBT (UL)
- Flame Class: 94V-0
- Color: Natural
- Unit: mm

用途：用於功率晶體及散熱片之固定，可配合灌膠使用。



Part No.	A	B	C	D	Package
TRCMP-2	12.55	7.0	5.2	10.0	1000
TRCMP-5	12.6	7.5	5.7	10.0	
TRCMP-6	17.25	6.8	5.0	14.7	




Part No.	Package
TRCMP-1	1000

彈片 CLAMP

用途：做為插銷彈片。



- Material: Tin Plated Brass
- Unit: mm




Part No.	Package
TRMC-53	1000


用途：做為彈片。



- Material: Zinc Plated Steel
- Unit: mm




Part No.	Package
TRMC-68	1000

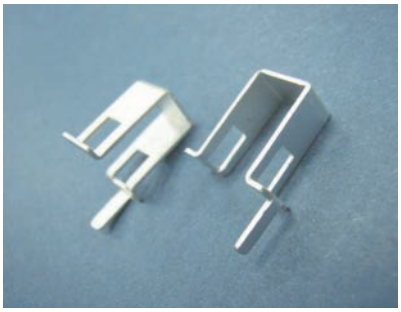

- Material: Tin Plated SPCC
- Unit: mm

用途：做為導電彈片。




Part No.	Package
TRMC-10	1000




- Material: Tin Plated Phosphor Bronze
- Unit: mm

用途：做為彈片。

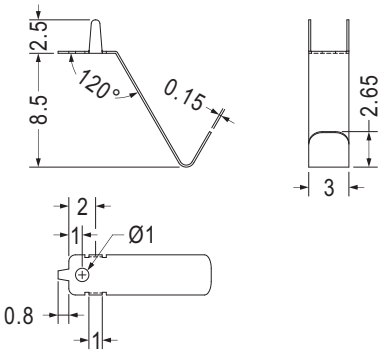


Part No.	Package
TRMC-11	2000

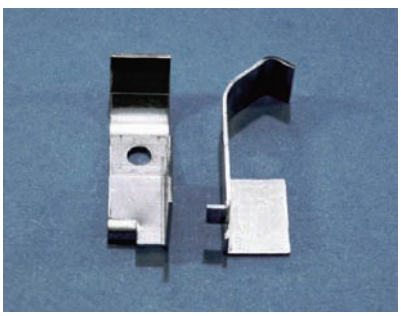


- Material: SUS
- Unit: mm

用途：做為彈片使用，彈性佳。




Part No.	Package
TRMC-12	1000


用途：用於熱敏電阻接腳之固定與保護。

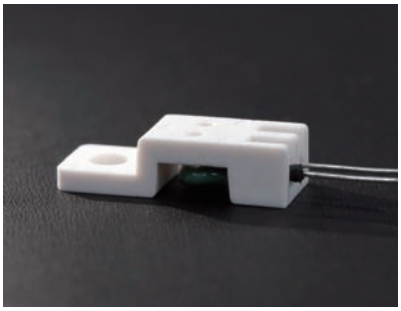


- Material: PBT (UL)
- Flame Class: 94V-0
- Color: Natural
- Unit: mm




Part No.	Package
PH-49	1000

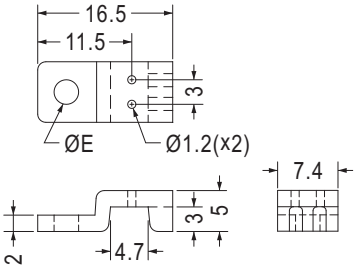


Part No.	E	Package
PH-1	3.2	1000
PH-47	5.15	




Part No.	A	B	C	D	Package
PH-1A	16.6	11.5	5.1	6.1	1000
PH-11	17.15	11.8	4.6	6.7	




Part No.	Package
PH-24	1000

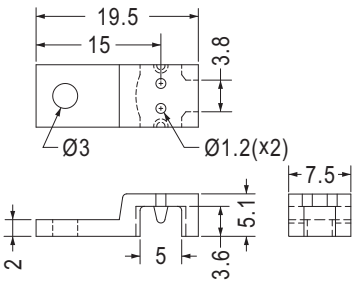


Part No.	Package
PH-7	1000

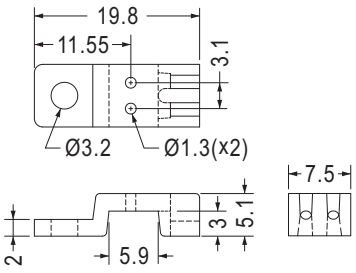


Part No.	Package
PH-5	1000

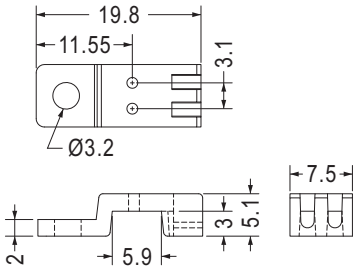


Part No.	Package
PH-53	1000




Part No.	Package
PH-14	1000

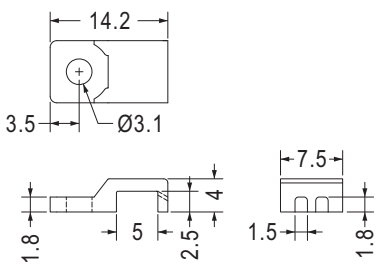

Part No.	Package
PH-46	1000




Part No.	Package
PH-3	1000

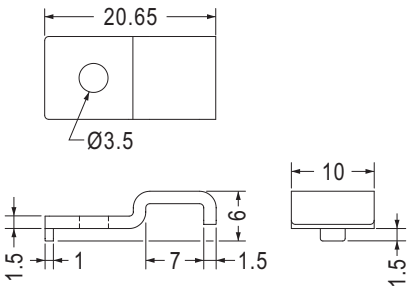


Part No.	Package
PH-12	1000


用途：用於熱敏電阻接腳之固定與保護。

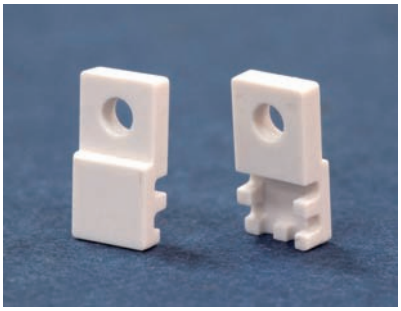


- Material: PBT (UL)
- Flame Class: 94V-0
- Color: Natural
- Unit: mm

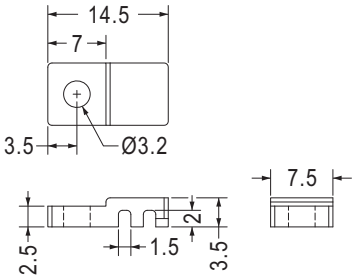


Part No.	Package
PH-50	1000

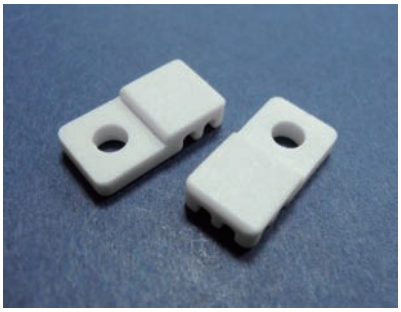





Part No.	Package
PH-2	1000

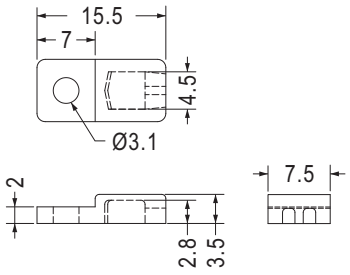


Part No.	Package
PH-2A	1000

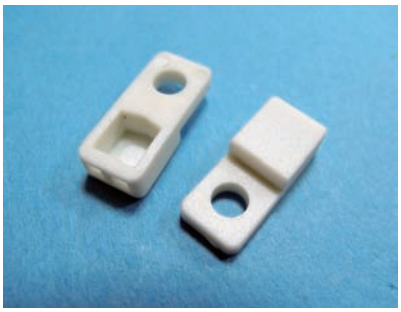

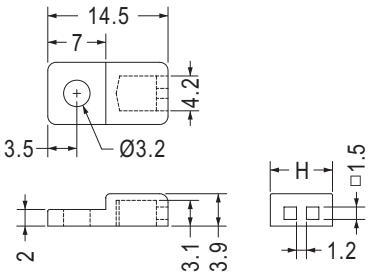


Part No.	H	Package
PH-16	7.5	1000
PH-18	6.3	

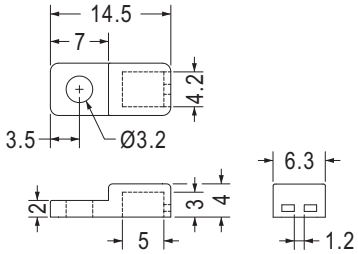

Part No.	Package
PH-20	1000



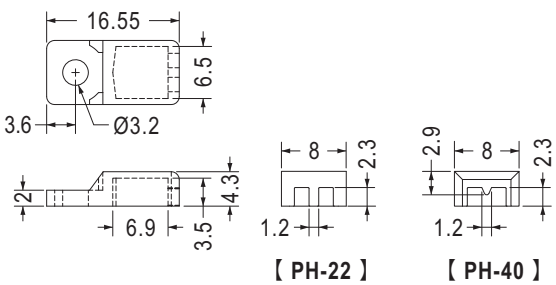


Part No.	Package
PH-22	1000
PH-40	

用途：用於熱敏電阻接腳之固定與保護。




- Material: Nylon 66 (UL)/PBT (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

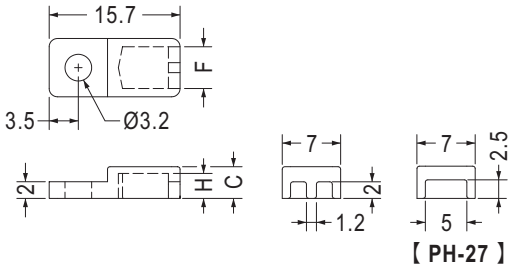

【 PH-27 】


Part No.	C	F	H	Package
PH-23	3.8	5.0	3.0	1000
PH-23L	3.8	5.4	3.4	
PH-27	4.3	5.0	3.5	

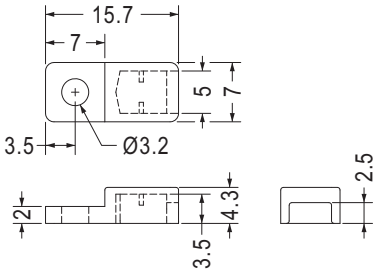


Part No.	Package
PH-31	1000




- Material: PC (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm

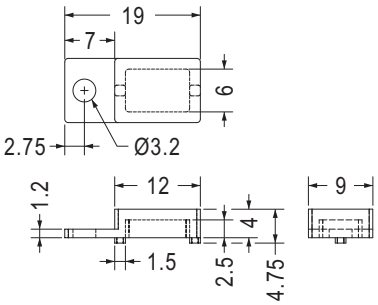


Part No.	Package
PH-30	1000

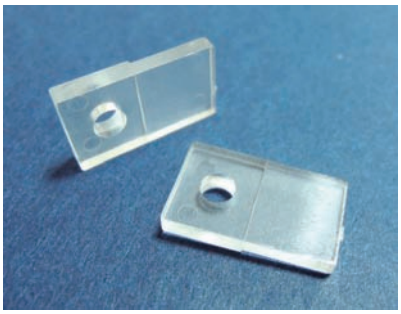


- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural
- Unit: mm

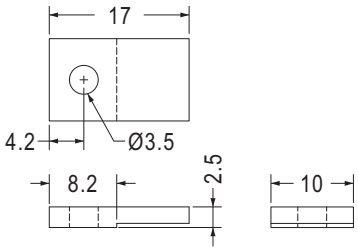


Part No.	Package
PH-13	1000

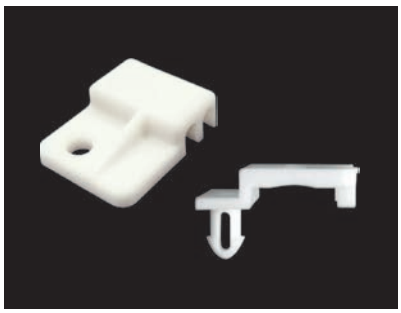

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

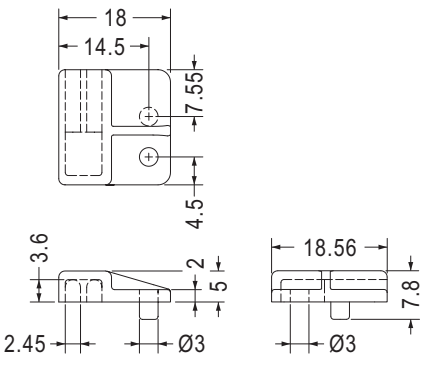


Part No.	Package
PH-21	1000




Part No.	Package
PHK-1	1000


用途：用於熱敏電阻接腳之固定與保護。

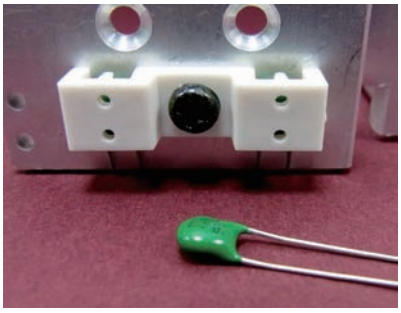


- Material: PC (UL)
- Flame Class: 94V-0
- Color: Natural
- Unit: mm

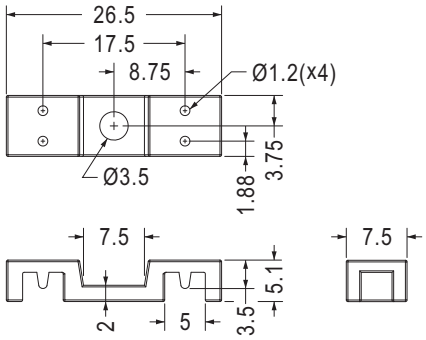


Part No.	Package
PH-37	1000

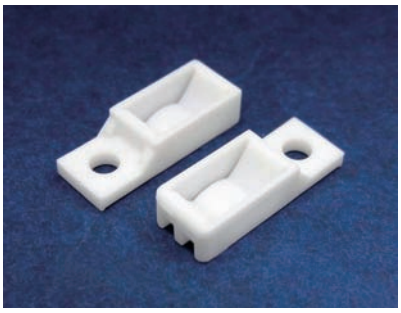


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

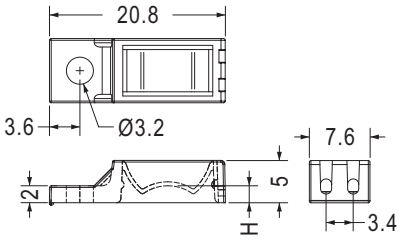


Part No.	H	Package
PHG-2	2.0	1000
PHG-3	0.71	

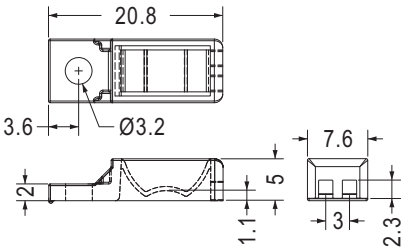


Part No.	Package
PHG-6	1000

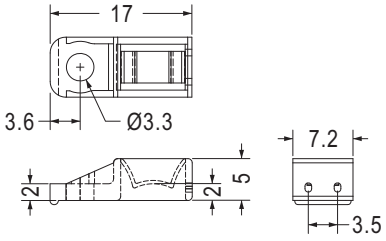


Part No.	Package
PHG-4	1000

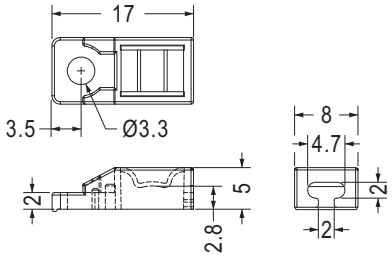

Part No.	Package
PHG-11	1000

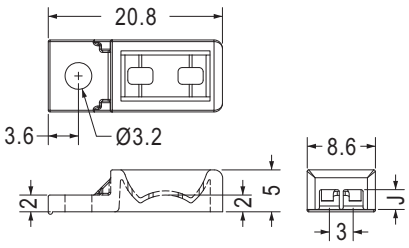

Part No.	J	Package
PHG-8	1.2	1000
PHG-10	2.5	

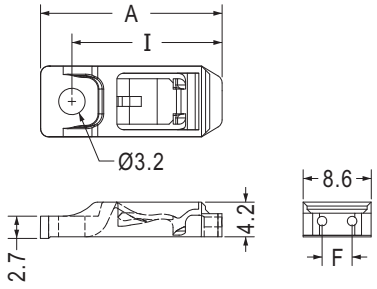


Part No.	A	F	I	Package
PHG-12	22.0	3.8	18.2	1000
PHG-14	21.5	3.5	17.7	


用途：用於熱敏電阻接腳之固定與保護。




- Material: PBT (UL)
- Flame Class: 94V-0
- Color: Natural
- Unit: mm

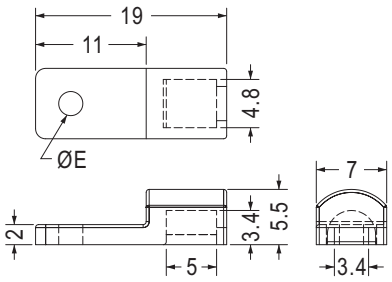


Part No.	E	Package
PH-28	2.4	1000
PH-48	3.2	

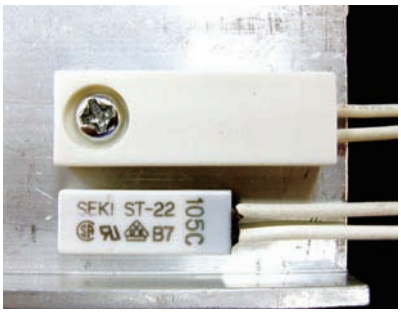

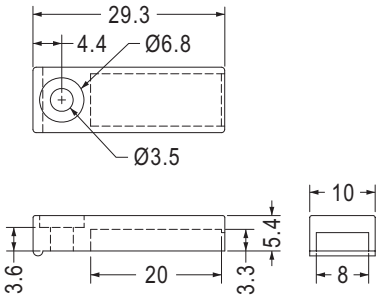


Part No.	Package
PH-15	1000

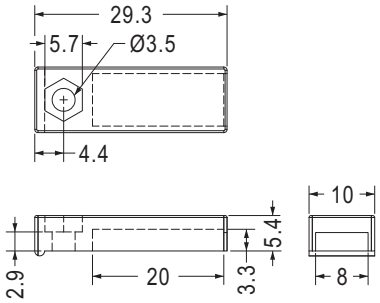


Part No.	Package
PH-43	1000




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

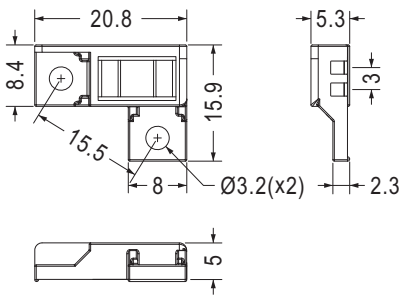


Part No.	Package
PHG-7	1000

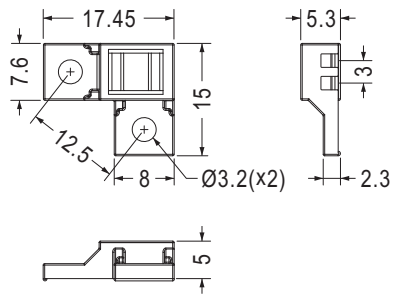

Part No.	Package
PHG-15	1000

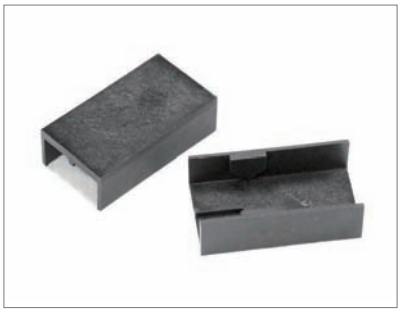

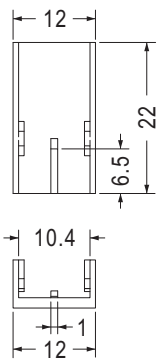


Part No.	Package
PH-34	1000

熱敏電阻座 THERMISTOR HOLDER

用途：用於熱敏電阻之固定。




- Material: Nickel Plated Brass
- Unit: mm




Part No.	Package
GND-27	1000






Part No.	Package
GND-48	1000

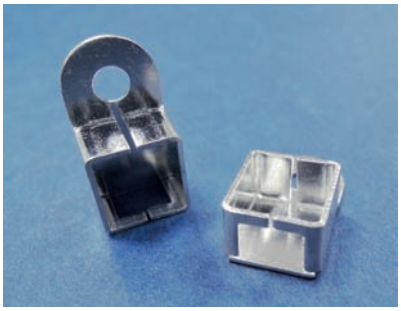


- Material: Bright Tin Plated Brass
- Unit: mm

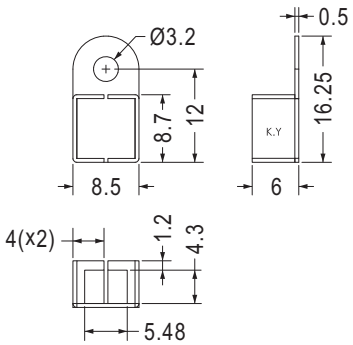


Part No.	Package
GND-75	1000

電晶體墊片 TRANSISTOR WASHER

用途：用於功率晶體之固定。

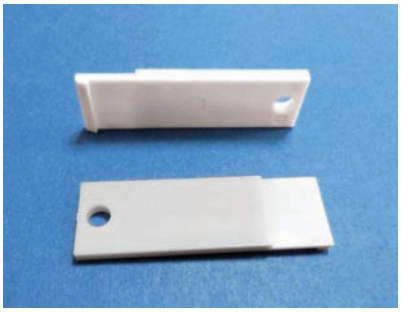

- Material: PBT (UL)
- Flame Class: 94V-0
- Color: Natural
- Unit: mm




Part No.	Package
TCP-1	1000

電晶體墊片 TRANSISTOR WASHER

用途：鎖於電晶體上，避免晶體外殼與散熱片間造成短路。



- Material: PBT/PC V-2/PC V-0/POM/ PPS/N46 V-0/N6 V-2/ N66 V-2/N66 V-0
- Color: Natural/Black
- Unit: mm

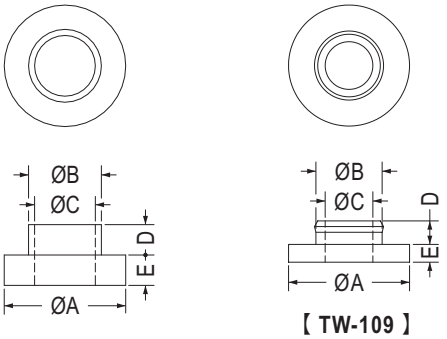

【 TW-109 】　【 TW-131, TW-148, TW-179 】

Part No.	A	B	C	D	E	Package
TW-1	6.0	3.6	3.0	1.5	1.5	2000
TW-2	6.2	3.5	3.0	3.0	1.5	
TW-3	6.2	3.55	3.0	2.5	2.0	
TW-4	6.0	3.5	3.0	2.0	2.0	
TW-5	6.2	3.5	3.0	1.2	1.0	
TW-6	6.2	3.5	3.0	1.4	1.2	
TW-7	8.0	3.8	3.1	2.8	1.2	
TW-8	8.0	3.8	3.1	1.2	1.2	
TW-9	10.0	6.0	5.0	5.0	1.0	
TW-10	10.0	5.0	4.0	4.0	1.0	
TW-11	9.5	6.3	4.5	1.2	1.2	1000
TW-12	9.5	6.3	4.1	0.8	1.7	
TW-14	9.9	8.3	6.5	1.5	1.0	
TW-15	6.2	3.6	3.0	2.4	1.9	2000
TW-16	6.1	3.5	3.0	1.6	1.4	
TW-17	6.1	3.55	3.0	1.5	2.0	
TW-18	6.35	5.15	3.5	1.6	0.6	
TW-20	6.5	3.5	3.0	4.0	0.9	
TW-21	7.0	5.0	3.0	5.8	2.0	
TW-22	11.9	7.9	4.0	3.0	2.6	
TW-23	7.1	5.0	3.0	2.3	2.0	
TW-24	6.4	3.55	2.95	2.0	1.3	
TW-25	7.92	4.83	3.05	0.8	1.14	
TW-26	6.0	3.6	3.0	5.2	1.0	
TW-27	6.0	3.55	2.95	1.4	1.4	
TW-29	14.0	7.5	6.0	1.8	1.2	
TW-30	14.0	9.8	6.6	1.7	0.9	
TW-31	16.0	11.4	10.0	0.8	0.7	
TW-33	6.0	3.5	2.5	7.2	5.0	
TW-34	6.0	3.5	2.5	11.0	5.0	
TW-35	6.0	3.55	2.95	1.2	1.3	
TW-36	15.7	9.7	4.5	6.5	5.0	1000
TW-37	6.0	3.55	2.95	3.2	2.0	2000
TW-38	6.1	3.5	2.95	1.5	1.1	
TW-39	5.46	3.43	2.95	0.81	1.02	
TW-41	6.6	4.95	2.6	6.0	1.5	
TW-42	6.35	4.78	3.94	1.57	3.18	
TW-43	25.4	11.0	8.3	2.29	1.58	1000
TW-48	11.0	8.0	5.5	8.0	1.3	2000
TW-49	6.4	3.53	3.0	2.0	1.2	
TW-53	11.8	6.0	4.0	1.9	0.5	
TW-57	10.0	4.3	3.45	3.0	1.0	
TW-58	6.2	3.5	3.0	2.5	2.7	


Part No.	A	B	C	D	E	Package
TW-59	6.2	3.5	3.0	2.5	2.0	2000
TW-60	6.4	3.5	3.0	2.0	1.3	
TW-61	6.0	3.5	3.0	3.2	2.0	
TW-62	6.1	3.5	3.0	1.5	1.1	
TW-63	10.0	5.0	3.95	4.0	0.5	
TW-64	4.0	2.7	2.1	0.8	0.8	
TW-65	6.0	3.55	3.0	4.6	2.0	
TW-70	6.2	3.6	2.95	2.9	1.9	
TW-73	9.0	6.0	4.5	8.0	2.0	
TW-75	7.0	4.4	3.2	7.5	0.5	
TW-77	5.0	4.1	2.2	1.2	1.2	
TW-78	21.0	17.4	16.2	2.8	0.8	
TW-79	6.0	3.6	2.95	2.4	1.2	
TW-80	6.0	3.6	2.95	4.8	1.2	
TW-84	6.2	3.6	2.95	12.0	1.9	
TW-85	6.1	3.5	2.9	1.85	1.4	
TW-88	6.0	3.5	3.0	2.3	1.8	
TW-90	6.3	3.5	3.0	2.6	1.2	
TW-97	9.0	3.5	3.0	3.5	1.0	
TW-99	6.0	3.8	3.1	6.5	1.2	
TW-100	6.1	3.5	3.0	2.1	1.4	
TW-101	6.1	3.5	3.0	2.7	1.4	
TW-102	12.7	6.7	4.3	1.5	1.46	
TW-104	15.0	7.9	6.2	4.0	1.5	
TW-106	9.5	6.5	5.1	10.7	1.5	
TW-107	6.2	3.5	3.0	2.9	1.9	
TW-108	6.4	3.5	3.0	2.0	1.2	
TW-109	17.0	9.3	6.7	3.3	2.5	
TW-110	9.5	6.0	3.7	1.5	1.0	
TW-111	6.0	3.4	2.7	2.5	1.0	
TW-113	6.0	3.55	3.0	1.6	1.3	
TW-115	6.3	3.5	3.0	2.6	2.0	
TW-123	8.2	4.65	4.05	3.6	0.5	
TW-127	6.2	3.5	3.0	4.1	2.0	
TW-131	12.0	6.6	4.2	1.9	3.8	
TW-135	13.0	7.9	6.6	2.4	1.7	
TW-136	6.2	3.55	3.0	0.6	1.2	
TW-143	6.3	3.9	3.2	1.5	2.5	
TW-145	12.0	8.0	3.0	3.0	1.4	
TW-146	14.0	8.1	3.1	1.8	2.5	
TW-148	7.6	3.9	3.1	4.0	2.0	
TW-149	6.2	4.1	3.2	2.0	1.0	1000
TW-150	7.6	3.5	3.1	4.0	2.0	2000

電晶體墊片 TRANSISTOR WASHER

用途：鎖於電晶體上，避免晶體外殼與散熱片間造成短路。



- Material: PBT/PC V-2/PC V-0/POM/ PPS/N46 V-0/N6 V-2/ N66 V-2/N66 V-0
- Color: Natural/Black
- Unit: mm

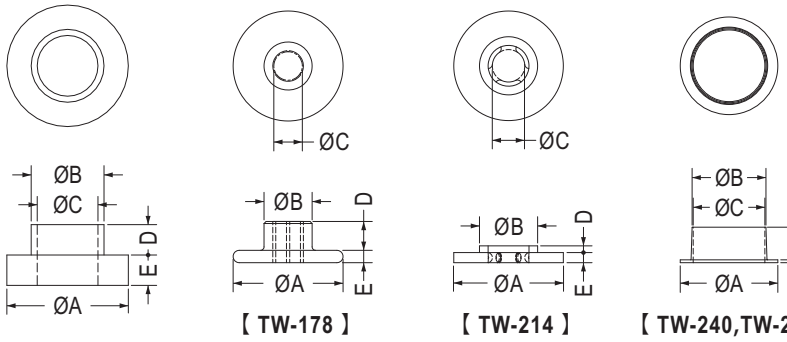

Part No.	A	B	C	D	E	Package
TW-151	6.1	3.5	3.0	2.25	2.0	2000
TW-153	6.1	3.5	3.0	0.8	2.0	
TW-156	6.0	3.5	3.0	0.9	1.3	
TW-157	6.2	3.5	3.0	4.6	2.0	
TW-159	25.0	10.0	8.2	12.0	4.5	500
TW-160	4.0	2.7	2.1	0.7	0.8	2000
TW-161	6.5	4.25	3.2	4.0	3.0	
TW-162	13.0	6.5	4.5	8.0	5.0	500
TW-163	24.0	11.2	9.0	3.0	1.1	1000
TW-165	12.0	7.6	6.1	16.5	2.0	
TW-168	6.2	3.5	3.0	2.0	1.9	2000
TW-169	14.0	8.6	7.95	5.0	2.0	
TW-171	13.0	7.9	6.6	6.4	1.7	
TW-172	10.36	6.1	5.59	4.75	1.57	
TW-173	6.0	4.2	3.2	3.5	0.6	
TW-175	10.0	6.3	4.2	10.5	7.0	
TW-176	10.0	6.3	4.2	15.5	7.0	
TW-177	11.0	8.2	5.5	15.0	2.0	
TW-178	16.0	7.0	4.15	4.2	1.8	1000
TW-179	14.0	7.6	5.2	2.0	3.0	2000
TW-182	6.0	3.8	3.2	1.1	2.9	
TW-185	6.0	3.5	2.5	5.2	3.1	
TW-186	6.0	3.5	2.5	8.6	3.1	
TW-188	15.75	10.0	6.5	19.0	3.0	500
TW-189	15.75	10.0	6.5	39.0	3.0	250
TW-192	6.2	4.3	3.1	2.0	1.0	2000
TW-194	5.0	3.6	2.95	4.8	1.2	
TW-198	8.7	5.4	4.6	6.5	2.0	
TW-199	8.1	3.6	2.95	2.5	1.3	
TW-202	4.8	3.0	2.6	3.5	1.2	
TW-203	3.0	2.0	0.9	3.5	0.5	
TW-204	6.2	3.55	2.95	8.0	2.2	
TW-207	11.0	6.2	5.0	4.9	1.0	
TW-208	11.1	6.35	5.1	6.35	7.9	
TW-209	8.0	4.25	3.2	3.0	2.0	
TW-213	6.5	5.4	5.1	2.5	1.0	
TW-214	13.0	6.0	3.85	0.8	1.2	
TW-215	9.0	6.0	4.0	6.3	2.0	
TW-219	4.6	3.0	2.3	1.6	1.2	
TW-222	3.0	1.8	0.9	1.0	0.5	
TW-223	6.0	3.1	2.6	1.5	1.0	
TW-224	20.0	11.9	6.5	2.5	3.0	1000
TW-225	11.0	8.0	5.5	8.0	3.0	


Part No.	A	B	C	D	E	Package
TW-226	4.2	3.0	2.6	1.0	2.25	2000
TW-227	23.7	13.0	10.0	13.0	2.0	500
TW-228	23.7	13.0	10.0	23.0	2.0	
TW-229	20.0	11.0	8.1	8.0	2.0	1000
TW-230	20.0	11.0	8.1	13.0	2.0	500
TW-234	8.0	4.4	3.2	0.9	2.0	2000
TW-235	13.0	7.9	6.6	1.6	1.7	
TW-237	13.0	9.8	4.5	10.3	2.0	1000
TW-240	8.0	4.65	3.7	12.0	1.0	2000
TW-242	6.1	3.55	3.0	1.5	0.9	
TW-243	10.5	9.5	8.0	0.7	1.0	
TW-245	11.5	7.5	6.7	2.0	1.0	
TW-246	15.0	7.9	4.2	2.0	1.5	
TW-249	8.5	5.75	5.2	3.0	1.2	
TW-250	8.7	5.2	4.4	0.8	1.6	
TW-252	16.0	8.0	5.0	1.55	0.85	
TW-253	22.0	16.0	10.5	4.5	1.5	1000
TW-256	8.7	5.2	4.4	4.7	1.6	2000
TW-257	12.0	9.0	6.0	6.0	2.0	
TW-258	20.0	12.0	8.0	10.0	3.0	1000
TW-259	20.0	12.0	8.0	7.0	2.0	
TW-260	10.0	7.0	5.0	10.0	1.0	2000
TW-261	20.0	10.0	8.0	3.0	3.0	1000
TW-262	20.0	12.0	10.0	2.0	3.0	
TW-263	25.0	12.0	10.0	5.0	1.0	
TW-264	18.0	16.0	12.0	9.0	1.0	
TW-266	15.0	7.9	6.2	2.0	2.0	2000
TW-268	15.0	9.9	8.2	2.0	1.5	
TW-270	20.0	10.0	8.0	12.0	3.0	1000
TW-273	15.0	8.9	6.2	3.0	1.5	2000
TW-274	16.0	12.0	10.0	4.0	2.0	
TW-275	10.0	7.0	5.0	2.0	1.0	
TW-276	26.0	16.0	14.0	5.0	5.0	1000
TW-278	12.0	8.0	5.0	7.0	2.0	2000
TW-279	12.0	6.0	4.0	15.0	2.0	1000
TW-282	12.0	8.0	6.0	3.0	1.0	2000
TW-283	14.0	8.0	6.0	3.0	3.0	
TW-284	16.0	12.0	10.0	3.0	1.0	
TW-287	16.0	8.0	6.0	6.0	5.0	
TW-289	27.5	20.8	20.2	9.2	0.8	1000
TW-291	12.0	7.0	5.0	6.0	2.0	2000
TW-292	5.5	3.5	3.0	2.6	0.6	
TW-301	19.0	9.4	8.2	1.7	0.8	1000


電晶體墊片 TRANSISTOR WASHER

用途：鎖於電晶體上，避免晶體外殼與散熱片間造成短路。




- Material: PBT/PC V-2/PC V-0/POM/ PPS/N46 V-0/N6 V-2/ N66 V-2/N66 V-0
- Color: Natural/Black
- Unit: mm



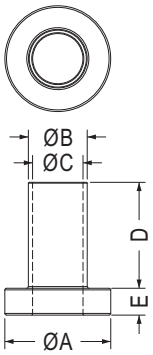


【 TW-317 】

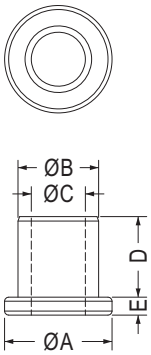


【 TW-319, TW-333, TW-354 】

Part No.	A	B	C	D	E	Package
TW-304	7.4	4.3	3.6	1.6	1.2	2000
TW-308	6.0	3.7	2.9	6.4	1.2	
TW-311	7.9	4.5	3.65	6.0	1.2	
TW-313	20.0	11.0	8.0	4.0	2.0	1000
TW-317	6.3	3.5	3.0	6.3	1.6	2000
TW-319	12.0	9.0	6.0	9.0	2.0	
TW-321	12.0	7.9	4.2	6.0	2.2	
TW-322	20.7	7.6	6.0	7.7	0.8	
TW-323	6.35	4.75	3.66	0.81	1.57	
TW-324	7.92	4.75	3.66	0.81	1.57	
TW-328	6.1	3.5	2.9	1.6	2.4	
TW-329	11.5	7.5	5.5	8.0	1.0	
TW-330	8.7	5.2	4.4	3.2	1.6	
TW-331	10.0	3.9	3.1	1.7	1.3	
TW-332	6.3	3.5	3.0	7.3	1.6	


Part No.	A	B	C	D	E	Package
TW-333	12.0	9.0	6.0	8.0	2.0	1000
TW-336	6.0	3.7	2.9	9.5	1.2	2000
TW-339	6.4	4.7	3.0	1.3	0.8	
TW-340	8.7	5.2	4.4	1.6	1.6	
TW-341	9.5	7.9	6.4	1.5	0.8	
TW-342	12.5	7.92	6.6	1.98	0.81	
TW-343	10.15	6.6	5.1	6.35	3.2	
TW-345	15.0	8.9	4.2	2.0	1.5	
TW-346	10.0	3.9	2.6	1.7	1.3	
TW-347	18.0	10.9	10.2	2.5	1.5	
TW-350	6.0	3.3	2.1	1.5	1.0	
TW-351	7.4	4.3	3.6	6.4	1.2	
TW-352	18.0	11.9	6.2	2.5	1.5	
TW-353	10.0	4.9	3.1	1.7	1.3	
TW-354	12.0	9.0	6.0	4.0	2.0	




【 TW-19 】




【 TW-68, TW-247, TW-320, TW-338 】




【 TW-181 】



【 TW-195 】



【 TW-233 】



【 TW-314 】


Part No.	A	B	C	D	E	Package
TW-19	6.22	3.56	3.02	1.02	1.02	2000
TW-68	13.0	8.75	5.8	2.4	1.0	
TW-181	13.0	7.7	5.8	0.8	1.0	
TW-195	9.53	8.26	5.72	1.27	1.91	
TW-233	20.0	11.9	6.5	1.8	3.0	1000
TW-247	13.0	8.75	5.8	1.9	1.0	2000
TW-314	6.4	3.55	3.0	2.0	1.3	
TW-320	10.4	8.4	6.4	0.5	1.0	
TW-338	16.0	10.16	8.86	1.0	0.85	

電晶體墊片 TRANSISTOR WASHER


用途：鎖於電晶體上，避免晶體外殼與散熱片間造成短路。




- Material: PBT/PC V-2/PC V-0/POM/ PPS/N46 V-0/N6 V-2/ N66 V-2/N66 V-0
- Color: Natural/Black
- Unit: mm




【 TW-6A 】




【 TW-66, TW-164 】




【 TW-105 】




【 TW-210 】




【 TW-211, TW-212, TW-239 】




【 TW-238 】




【 TW-288 】



【 TW-300, TW-335 】



【 TW-302 】




【 TW-337 】

Part No.	A	B	C	D	E	Package
TW-6A	6.2	3.55	3.0	1.4	1.2	2000
TW-66	12.0	5.0	3.2	4.0	1.8	
TW-105	11.5	7.3	3.1	2.6	0.6	
TW-164	6.6	3.5	2.5	11.0	5.0	1000
TW-210	11.5	3.2	1.8	4.15	0.53	
TW-211	15.0	10.0	8.0	6.0	1.0	2000
TW-212	9.0	5.0	4.2	3.0	1.0	
TW-238	16.2	14.2	12.0	2.49	1.19	
TW-239	2.4	1.6	1.2	0.6	0.3	
TW-288	13.0	7.0	6.0	2.0	1.2	
TW-300	10.0	5.8	3.2	1.6	6.0	
TW-302	20.0	9.0	6.9	6.0	2.5	1000
TW-335	8.7	5.2	4.4	6.4	1.6	2000
TW-337	8.13	3.0	2.5	3.63	5.08	



- Material: Nylon 46 (UL)/PPS (UL)
- Flame Class: 94V-0
- Color: Natural/Black
- Unit: mm

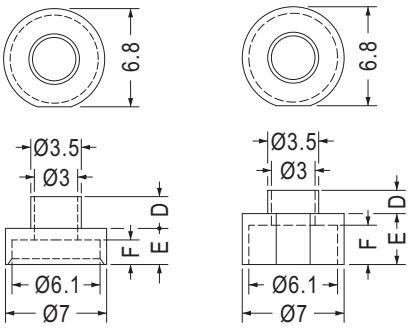

【 TW-124 】


Part No.	D	E	F	Package
TW-71	2.4	6.5	4.6	2000
TW-92	1.6	3.5	2.7	
TW-93	2.2	3.8	3.0	
TW-98	1.6	3.5	2.1	
TW-103	2.4	3.9	2.0	
TW-114	1.6	5.0	4.2	
TW-118	2.4	4.9	3.0	
TW-119	1.6	3.8	3.0	
TW-120	1.6	2.8	2.0	
TW-124	2.2	2.5	1.7	
TW-201	3.2	5.0	4.2	
TW-309	2.8	4.2	3.4	

電晶體墊片 TRANSISTOR WASHER


用途：鎖於電晶體上，避免晶體外殼與散熱片間造成短路。



- Material: PPS (UL)
- Flame Class: 94V-0
- Color: Natural(Brown)/Black
- Unit: mm



Part No.	E	F	Package
TW-147	1.2	0.8	2000
TW-297	1.0	1.6	




- Color: Natural(Brown)

Part No.	Package
TW-180	2000




- Material: POM
- Color: Black
- Unit: mm

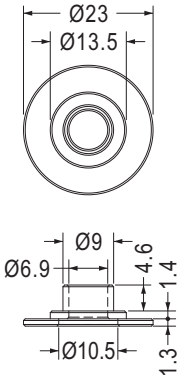


Part No.	Package
TW-312	1000




- Material: Nylon 6T (UL)
- Flame Class: 94V-0
- Color: Natural
- Unit: mm



Part No.	A	Package
TW-236	3.6	2000
TW-277	4.2	

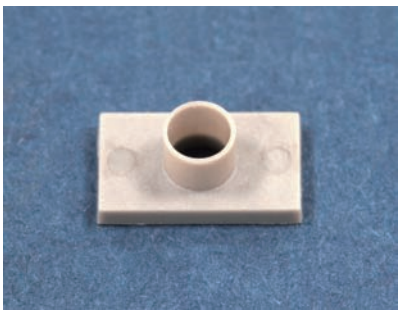


- Material: PET
- Color: Gray
- Unit: mm




Part No.	Package
TW-241	1000

電晶體墊片 TRANSISTOR WASHER

用途：鎖於電晶體上，避免晶體外殼與散熱片間造成短路。

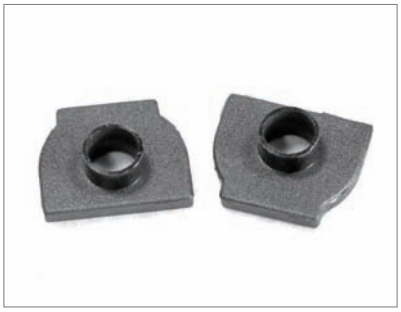

- Material: PPS (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm




Part No.	D	E	Package
TW-298	2.4	1.9	1000
TW-299	1.6	1.3	

零件墊片 WASHER

用途：做為零件之墊片。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	A	B	C	D	E	Package
TWC-7	7.6	5.84	3.25	1.27	0.38	2000
TWC-12	19.2	9.4	6.5	0.8	1.2	
TWC-13	15.0	10.0	5.5	1.2	2.5	
TWC-16	15.0	9.9	4.2	2.0	1.5	
TWC-21	9.52	6.35	4.32	0.81	0.81	
TWC-22	25.0	13.8	12.2	2.0	2.0	1000
TWC-23	10.0	5.9	5.2	1.7	1.3	2000
TWC-24	25.0	15.8	14.2	2.0	2.0	1000
TWC-25	25.0	17.8	16.2	2.0	2.0	
TWC-26	25.0	15.8	12.2	2.0	2.0	
TWC-27	15.0	6.9	3.1	2.0	1.5	2000
TWC-28	15.0	8.9	6.2	2.0	1.5	
TWC-29	9.52	7.82	4.98	0.81	1.57	
★TWC-30	15.0	6.9	4.2	2.0	1.5	
★TWC-31	15.0	8.9	3.1	2.0	1.5	

Part No.	A	B	C	D	E	Package
FUG-1	16.8	12.5	9.5	2.0	2.0	1000
FUG-3	11.1	7.9	6.4	0.81	0.81	

- Material: PC+ABS (UL)

Part No.	A	B	C	D	E	Package
TWC-3	13.0	8.5	5.5	1.0	2.0	2000
TWC-5	13.0	8.5	5.5	1.0	7.0	
TWC-6	14.6	10.1	4.5	0.4	1.9	

- Material: PPS(UL)


Part No.	A	B	C	D	E	Package
★TWC-35	10.1	6.6	5.1	2.4	1.6	2000
★TWC-38	13.0	7.8	4.1	2.9	3.0	

絕緣柱 ROUND SPACER


用途：用於零件之絕緣使用。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
TW-133	2000




Part No.	Package
TW-125	1000

絕緣柱 ROUND SPACER


用途：用於螺絲之絕緣使用。

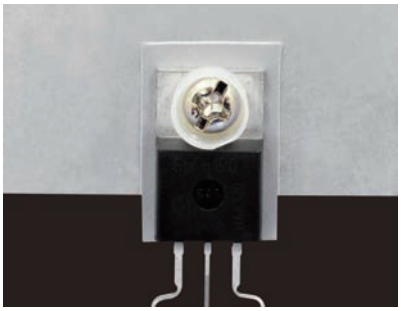

- Material: Nylon 46 (UL)/PPS (UL)
- Flame Class: 94V-0
- Color: Natural
- Unit: mm




Part No.	A	B	Package
UT-1	1.5	6.0	2000
UT-3	1.4	3.5	
UT-5	0.8	3.8	
UT-6	0.3	2.3	
UT-12	0.3	2.3	
UT-13	0.3	1.9	

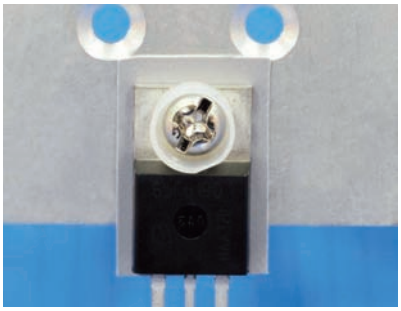


- Material: Nylon 66 (UL)
- Flame Class: 94V-2
- Color: Natural
- Unit: mm

用途：用於M3螺絲或螺母之絕緣使用。




Part No.	Package
UT-17	1000

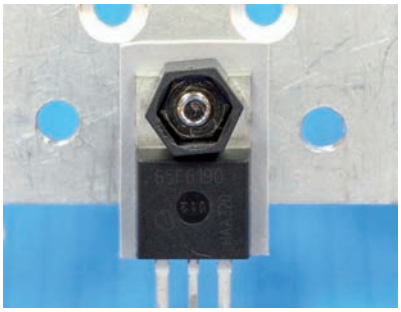

- Material: Nylon 46 (UL)
- Flame Class: 94V-0
- Color: Natural
- Unit: mm

用途：用於M3螺母之絕緣使用。

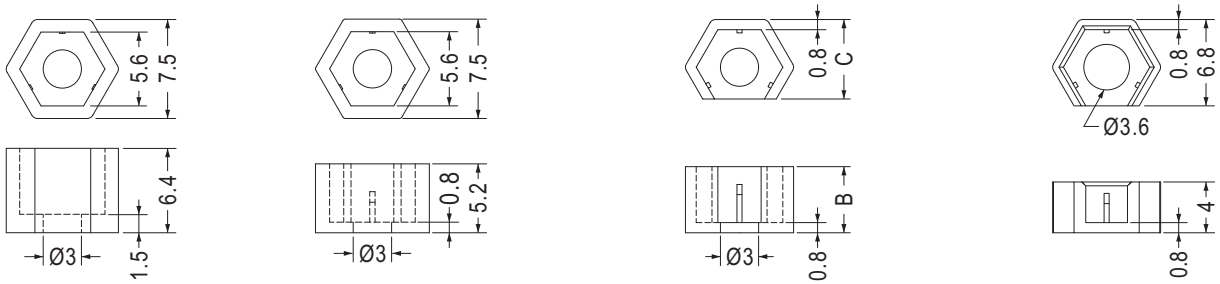

- Material: PPS (UL)
- Flame Class: 94V-0
- Color: Black

Part No.	Package
UT-2	2000


Part No.	Package
UT-8	2000

Part No.	B	C	Package
UT-4	5.2	6.25	2000
UT-7	4.0	5.8	
UT-11	4.0	6.25	


Part No.	Package
UT-19	2000

電晶體墊片 TRANSISTOR WASHER


用途：鎖於電晶體上，避免晶體外殼與散熱片間造成短路。

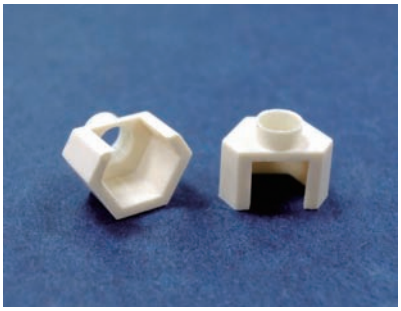


- Material: Nylon 46 (UL)
- Flame Class: 94V-0
- Color: Natural
- Unit: mm



Part No.	E	F	Package
TW-190	4.0	3.2	2000
TW-191	5.0	4.2	

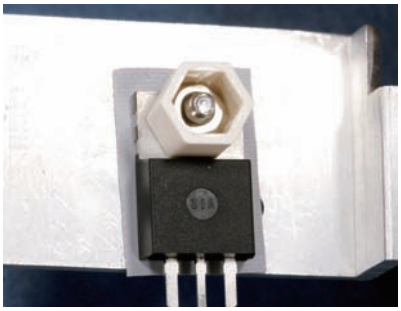


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
TW-290	2000

- Material: Nylon 46 (UL)/PPS (UL)
- Flame Class: 94V-0
- Color: Natural/Black
- Unit: mm



Part No.	D	E	F	Package
TW-72	1.6	6.4	5.0	2000
TW-94	1.6	5.0	4.2	
TW-95	2.2	5.2	4.4	
TW-112	1.6	4.0	3.2	
TW-121	2.4	6.3	4.4	
TW-122	1.6	5.2	4.4	
TW-248	1.6	3.4	2.6	

- Material: PPS (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm





Part No.	Package
TW-285	2000

用途：做為PC板與機板之絕緣用。




- Material: Nylon 66 (UL)/
  Nylon 6 (UL)/PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

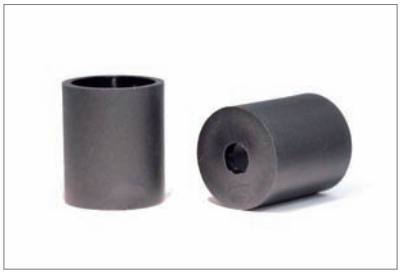





Part No.	Package
U-33	2000




Part No.	Package
U-40	2000

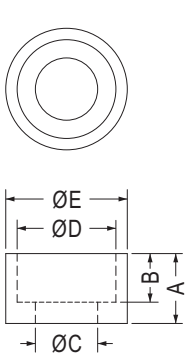


【 U-4 】

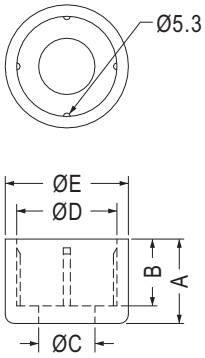


【 U-8, U-12, U-23 】




【 U-17, U-18, U-19 】




【 U-25 】




【 U-27 】




【 U-29 】




【 U-30 】



【 U-31 】



【 U-37 】



Part No.	A	B	C	D	E	Package
U-4	4.9	3.8	3.2	5.7	7.0	2000
U-5	4.6	3.2	4.1	6.5	8.0	
U-6	10.0	7.0	3.0	8.5	11.0	1000
U-7	3.1	2.1	3.0	5.5	7.5	2000
U-8	3.0	1.5	3.7	7.4	9.4	
U-10	4.6	3.6	3.6	7.6	9.1	
U-11	4.0	3.0	2.9	6.3	7.8	
U-12	4.2	2.7	3.2	5.3	8.74	
U-14	6.5	6.0	6.0	8.0	9.0	
U-15	7.1	5.1	4.8	8.9	15.7	
U-16	5.1	4.0	7.0	10.0	12.0	
U-17	3.8	3.05	3.2	5.4	7.0	


Part No.	A	B	C	D	E	Package
U-18	6.4	3.4	3.2	5.0	7.0	2000
U-19	6.0	3.0	2.8	5.1	7.5	
U-23	3.8	2.25	3.4	5.95	8.0	
U-25	4.8	2.5	6.8	4.5	12.5	
U-27	4.5	3.75	3.1	4.2	6.0	
U-28	4.8	3.3	3.4	6.5	9.5	
U-29	6.5	6.0	3.5	6.0	8.0	
U-30	3.75	2.65	3.2	5.4	7.0	
U-31	2.3	1.7	3.25	5.5	6.7	
U-37	2.5	2.0	3.5	6.0	7.0	
U-39	5.1	4.0	3.2	10.0	12.0	
U-42	20.0	17.5	5.2	14.0	17.0	500

絕緣柱 SPACER SUPPORT

用途：做為PC板與機板之絕緣用。



- Material: Nylon 46 (UL)/PPS (UL)
- Flame Class: 94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
UT-14	2000

絕緣柱 ROUND SPACER


用途：用於零件之絕緣使用。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	Package
UPA-1	1000




Part No.	Package
UPA-2	1000




- Material: POM

Part No.	Package
UPA-4	1000




- Material: PC (UL)

Part No.	Package
UPB-1	1000

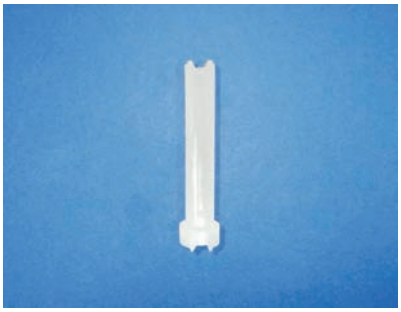


- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm

用途：做為PC板與機板之絕緣用。




Part No.	A	Package
EM-580	3.5	1000
EM-582	3.0	




Part No.	A	Package
EM-581	3.5	1000
EM-583	3.0	

電晶體墊片 TRANSISTOR WASHER

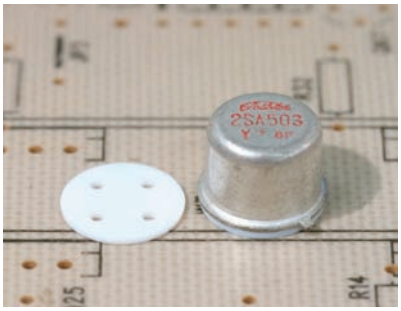


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

用途：保護TO-05晶體立於PC板上，且高度一致，不斷腳。




Part No.	Package
TO-05-1	1000

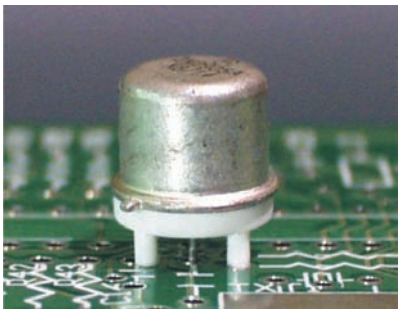


- Material: Nylon 66 (UL)/PBT (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


用途：保護TO-05晶體立於PC板上，使接腳不彎曲、折斷、短路，且高度一致，增加可靠度。



Part No.	Package
TO-05S	2000



Part No.	Package
TO-05	1000




Part No.	Package
TO-05C	1000




- Material: Nylon 66 (UL)/PBT (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


用途：保護TO-18晶體立於PC板上，使接腳不彎曲、折斷、短路，且高度一致，增加可靠度。



Part No.	Package
TO-18	1000



Part No.	Package
TO-18S	1000




Part No.	Package
TO-18M	2000



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

用途：用於橋式整流器或電晶體之墊高。




Part No.	A	B	C	Package
BW-1	9.0	2.0	4.2	2000
BW-2	14.0	1.0	2.1	


IC座 IC HOUSING

用途：8 PIN鐵殼IC之架高與絕緣。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm







Part No.	A	B	Package
ICV-1	2.0	2.2	1000
ICV-2	4.8	5.0	


電晶體墊片 TRANSISTOR WASHER

用途：保護TO-92功率晶體立於PC板上，高度一致，不斷腳。

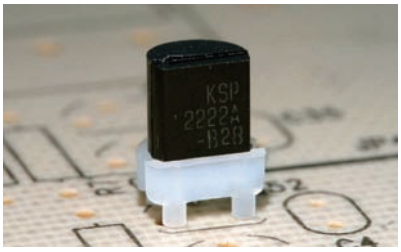


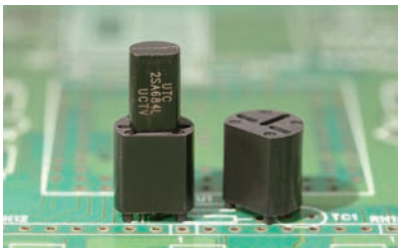


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	Package
TO-92	2000



Part No.	Package
TO-92-4	2000




Part No.	Package
TO-92-9	1000


電晶體座 TRANSISTOR HOUSING


用途：保護TO-92功率晶體立於PC板上，使接腳不彎曲、折斷、短路，且高度一致。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm








MOUNTING HOLE


Part No.	Package
TOA-92-9.5	2000



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

用途：保護晶體立於PC板上，使接腳不彎曲、折斷、短路，且高度一致。







Part No.	Package
TR3-11-1	1000

電晶體墊片 TRANSISTOR WASHER


用途：保護晶體立於PC板上，使接腳不彎曲、折斷、短路，且高度一致，增加可靠度。

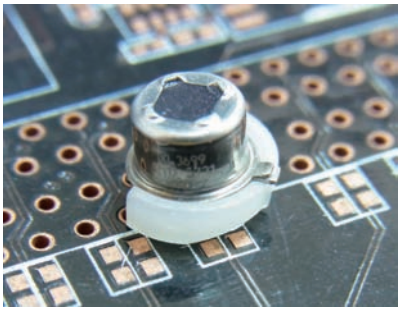


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

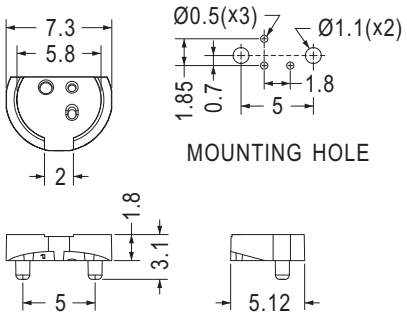


Part No.	Package
TRB-2	2000




Part No.	Package
TRB-19	2000




Part No.	Package
TRB-1	2000




Part No.	Package
TO-5	1000




Part No.	Package
TO-5-1	1000

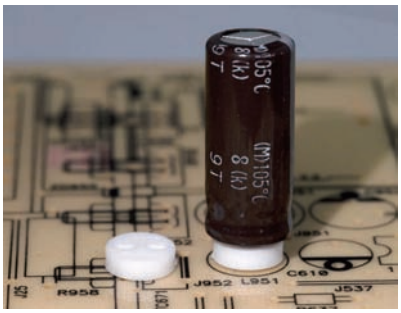

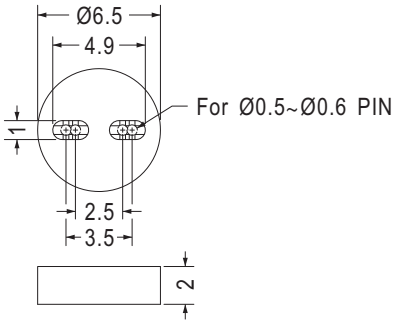

Part No.	Package
TRB-21	2000




Part No.	Package
TRB-22	2000


電晶體蓋 TRANSISTOR COVER

用途：用於TO-3功率晶體之外殼絕緣。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm






Part No.	組合件(ASSY)	Package
TRC-1	TRC-1+TRC-1R	200

TO-3電晶體座 TRANSISTOR HOUSING

用途：鎖於TO-3功率晶體與散熱片之間，作為絕緣與保護之用。





- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
TR-4	500











MOUNTING HOLE

Part No.	Package
TO-3APF	1000









Part No.	Package
TR-6	1000


TO-66電晶體座 TRANSISTOR HOUSING

用途：鎖於TO-66功率晶體與散熱片之間，作為絕緣與保護之用。

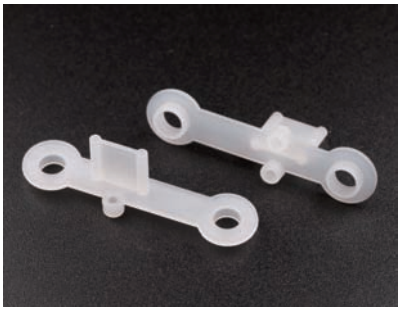

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm






NEW

Part No.	Package
TO-66	1000

用途：用於零件之墊片。




- Material: Nylon 46 (UL)
- Flame Class: 94V-0
- Color: Natural/Black
- Unit: mm

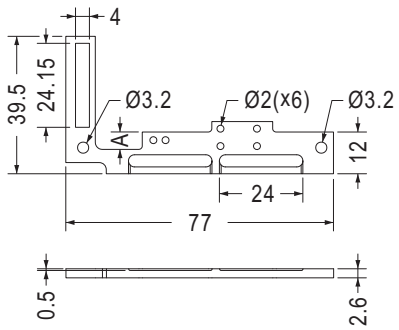

Part No.	A	Package
EM-51	5.0	500
EM-63	5.5	




- Material: Nylon 6T (UL)
- Flame Class: 94V-0
- Color: Natural/Black
- Unit: mm

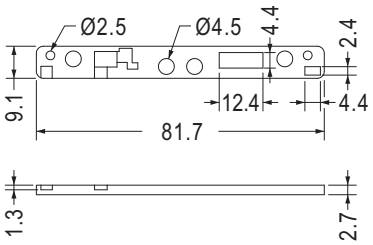


Part No.	Package
EMD-106	500



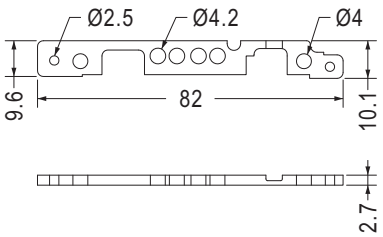


Part No.	Package
EMD-42	500






Part No.	Package
EMD-142	500



Part No.	A	Package
EMD-108	2.9	500
EMD-109	3.4	



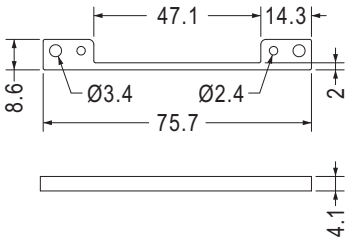


Part No.	Package
EMD-260	1000


用途：用於零件之墊片。




- Material: Nylon 46 (UL)
- Flame Class: 94V-0
- Color: Natural/Black
- Unit: mm

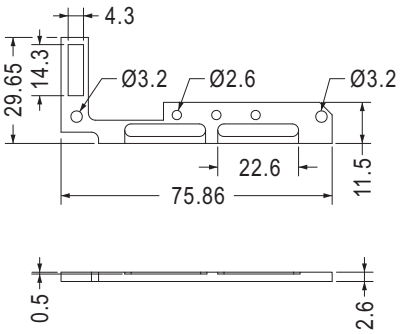



Part No.	Package
EML-7	200

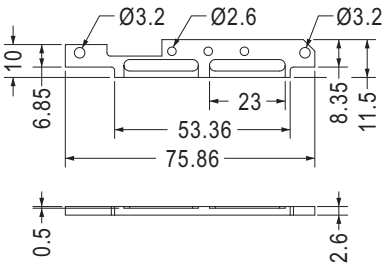


Part No.	Package
EML-10	500

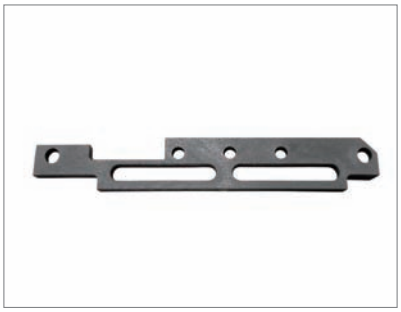

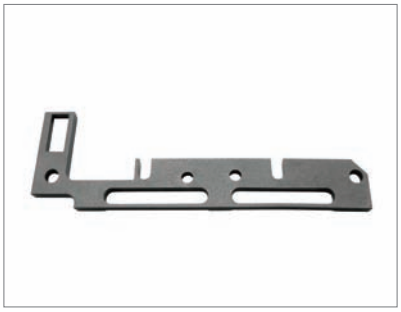


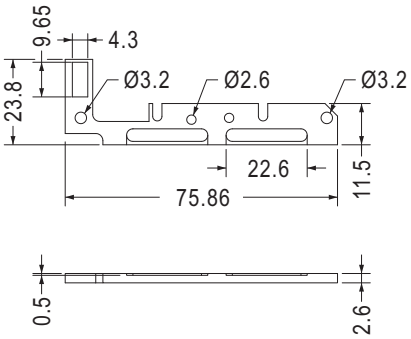


Part No.	Package
EML-13	200

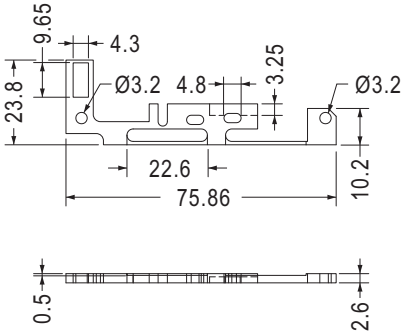


Part No.	Package
EML-23	200

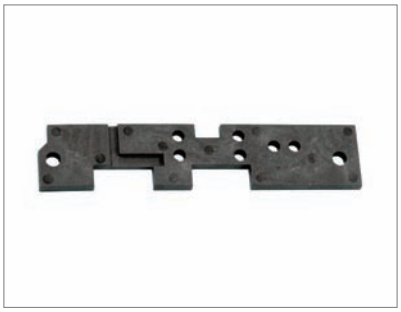



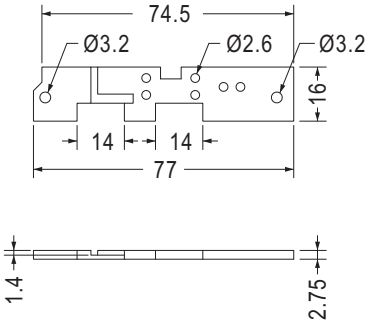

Part No.	Package
EML-22	500

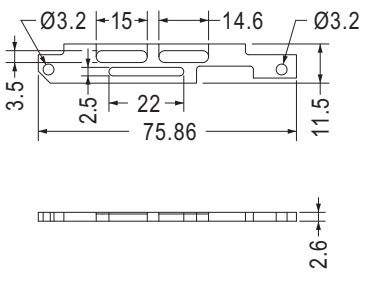


Part No.	Package
EML-52	500

用途：用於電源供應器，球擊測試的保護。




- Material: PC (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm

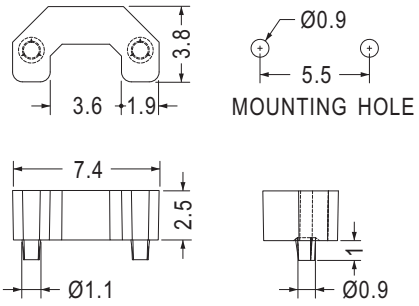


Part No.	Package
EMD-25	2000



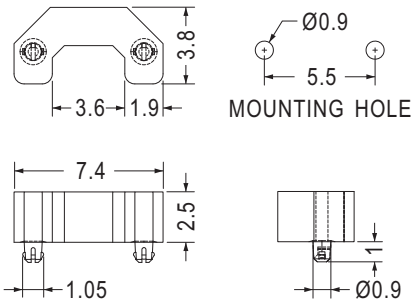


Part No.	Package
EMD-118	2000



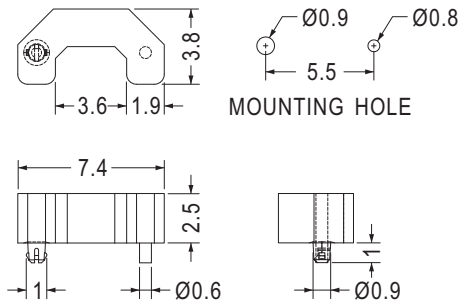


Part No.	Package
EMD-203	2000



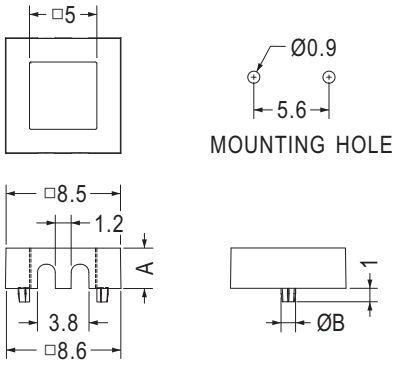


Part No.	A	B	Package
EMD-14	2.5	0.9	2000
EMD-136	3.0	1.08	


用途：用於電源供應器，球擊測試的保護。

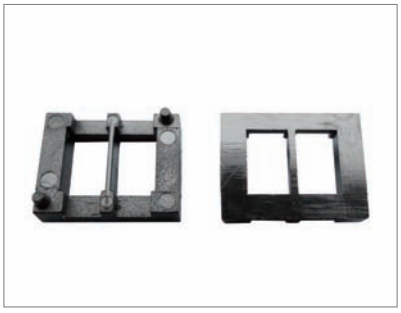


- Material: PC (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm

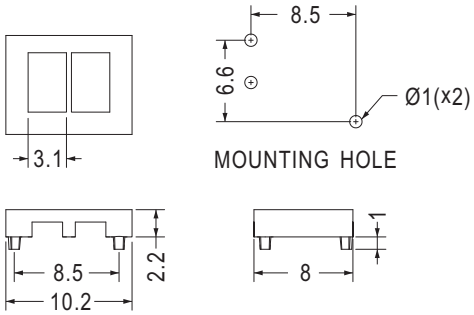


Part No.	Package
EMD-29	2000

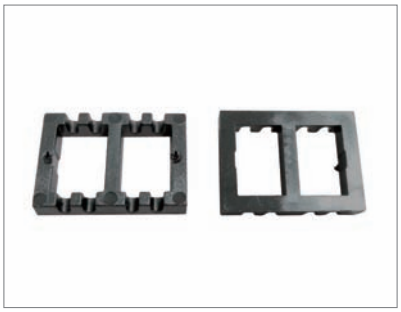

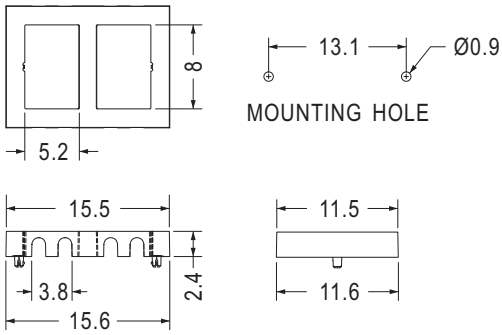


Part No.	Package
EMD-147	1000



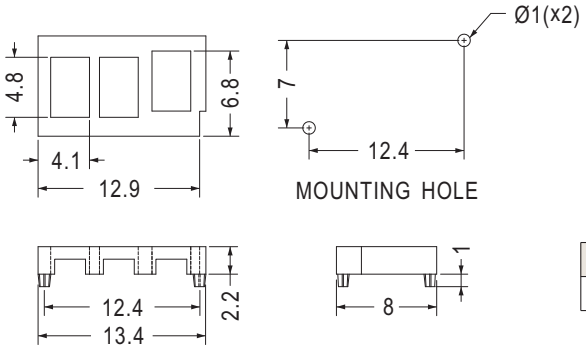


Part No.	Package
EMD-131	1000



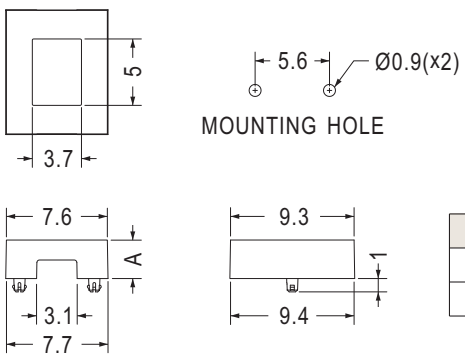


Part No.	A	Package
EMD-129	2.4	2000
EMD-140	2.9	


用途：做為球擊測試之緩衝墊片。

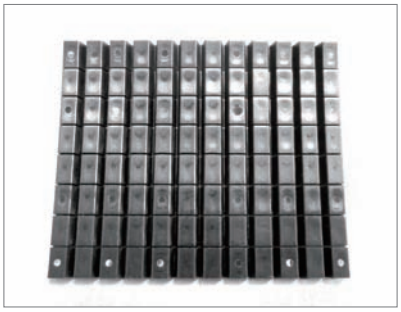


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

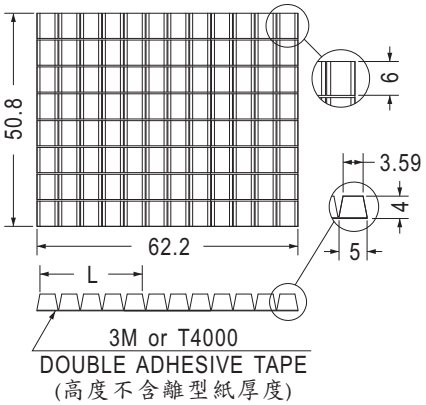


Part No.	L	Package
EMD-10-1	3.59	96PCS
EMD-10-2	8.79	
EMD-10-3	13.99	
EMD-10-4	19.19	
EMD-10-5	24.39	
EMD-10-6	29.59	

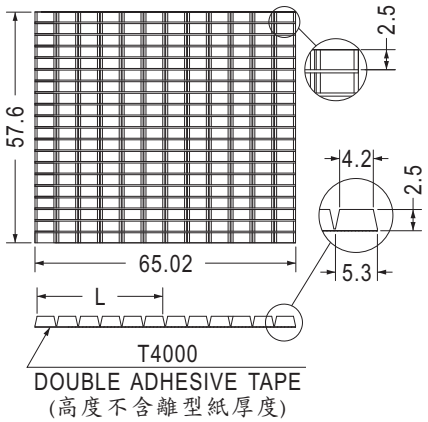


Part No.	L	Package
EM-18-1	4.2	240PCS
EM-18-2	9.65	
EM-18-3	15.1	
EM-18-4	20.5	
EM-18-5	25.95	
EM-18-6	31.4	

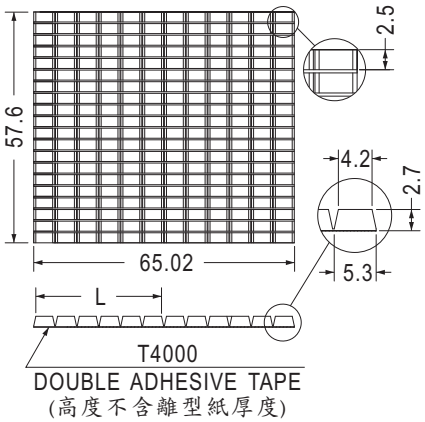


Part No.	L	Package
EMD-78-1	4.2	240PCS
EMD-78-2	9.65	
EMD-78-3	15.1	
EMD-78-4	20.5	
EMD-78-5	25.95	
EMD-78-6	31.4	

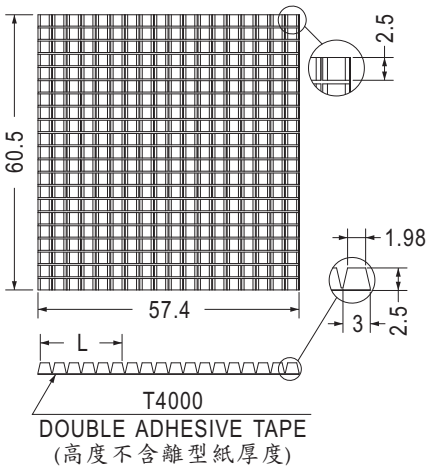

Part No.	L	Package
EM-40-1	1.98	378PCS
EM-40-2	5.18	
EM-40-3	8.38	
EM-40-4	11.58	
EM-40-5	14.78	
EM-40-6	17.98	

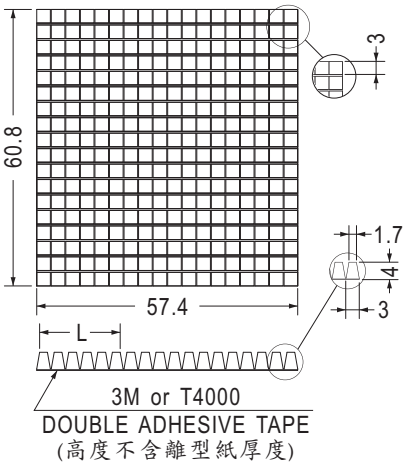


Part No.	L	Package
EM-535-1	1.7	324PCS
EM-535-2	4.9	
EM-535-3	8.1	
EM-535-4	11.3	
EM-535-5	14.5	
EM-535-6	17.7	

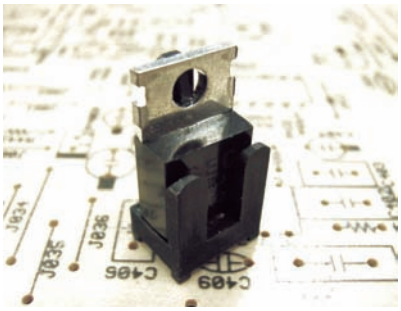

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


用途：保護TO-220包裝之晶體立於PC板上，使接腳不彎曲、折斷、短路、且高度一致，增加可靠度。

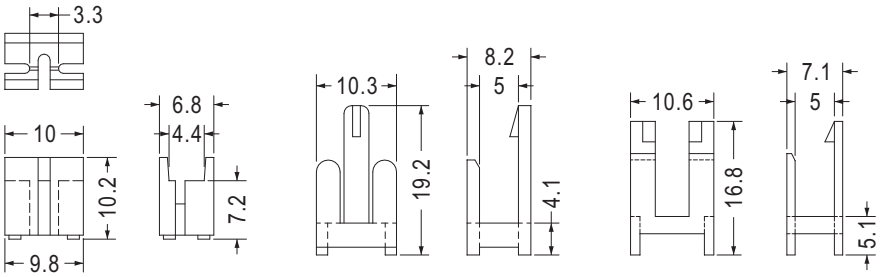

Part No.	Package
TR-1	1000


Part No.	Package
TR-2	1000

Part No.	Package
TR-5	1000

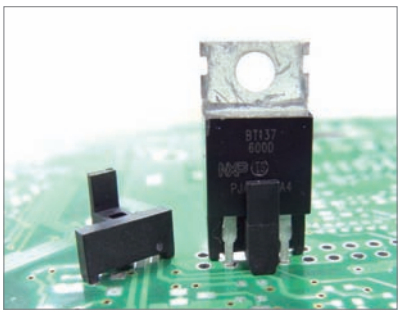



- Material: PBT (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm

用途：保護晶體立於PC板上，使接腳不彎曲、折斷、短路，且高度一致。

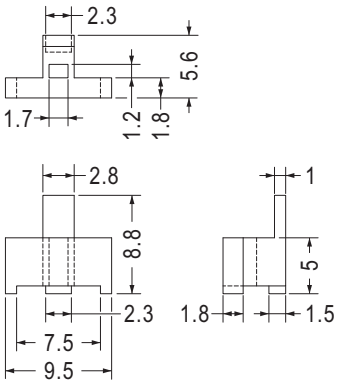


Part No.	Package
TR-30	1000

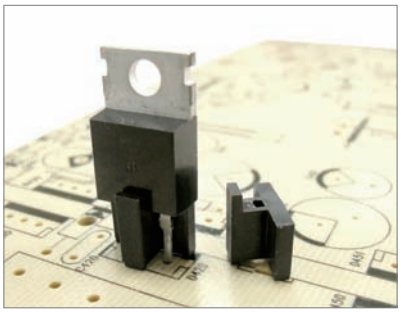

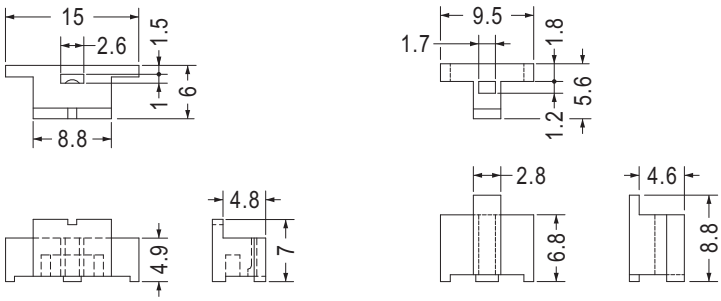


Part No.	Package
TR-7	1000

Part No.	Package
TR-8	1000

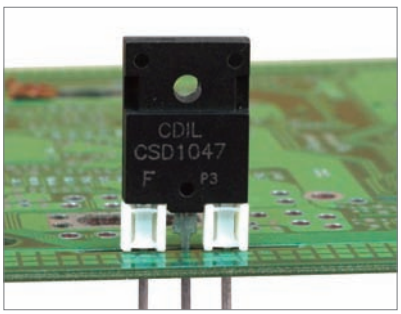


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

用途：保護TO-3P功率晶體，保護晶體立於PC板上，使接腳不彎曲、折斷、短路，且高度一致。




Part No.	A	Package
TR-34	4.2	1000
TR-36	6.0	
TR-38	4.6	


用途：保護晶體立於PC板上，使接腳不彎曲、折斷、短路，且高度一致。

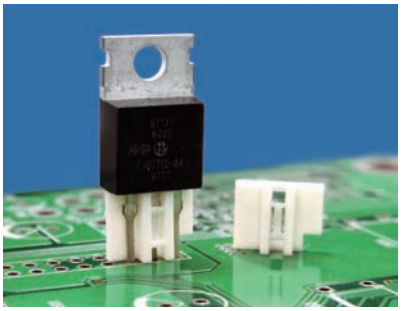


- Material: PBT (UL)
- Flame Class: 94V-0
- Color: Natural
- Unit: mm




Part No.	A	B	Package
TR-10A	5.5	0.5~0.6	1000
TR-10S	5.5	0.4	
TR-17	7.5	0.5~0.6	




Part No.	Package
TR-10	1000




Part No.	Package
TR-11	1000




Part No.	Package
TR-13	1000




Part No.	Package
TR-14	1000

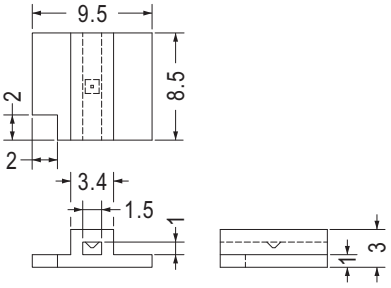


Part No.	Package
TR-16	1000




Part No.	Package
TR-21	1000

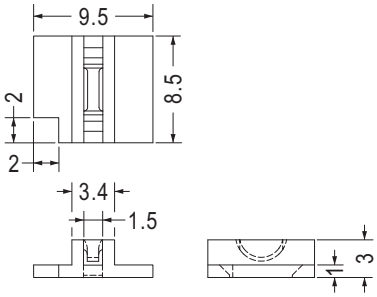


Part No.	Package
TR-22	1000




Part No.	Package
TR-29	1000

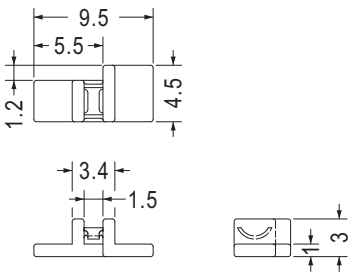


Part No.	Package
TR-35	1000



Part No.	Package
TR-23	1000




Part No.	D	Package
TR-23S	0.3	1000
TR-26	0.5	




Part No.	Package
TR-45	1000


用途：保護晶體立於PC板上，使接腳不彎曲、折斷、短路，且高度一致。

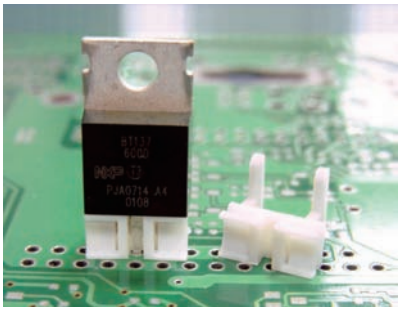


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
TR-24	1000

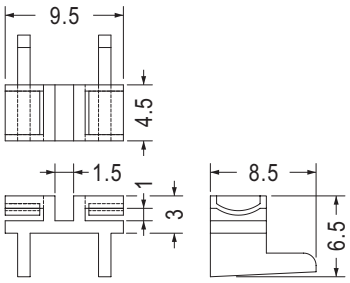


Part No.	Package
TR-25	1000

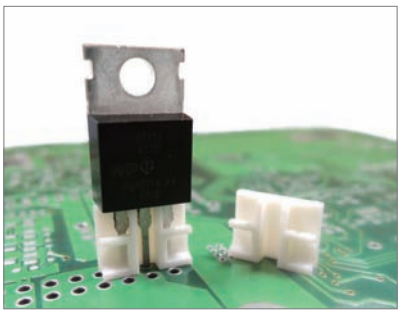





Part No.	Package
TR-18	1000




Part No.	Package
TR-37	1000

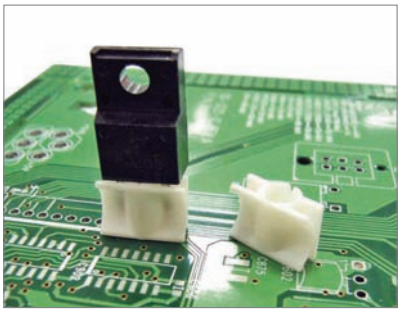


- Material: Nylon 66 (UL)/PBT (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




【 TRG-4.5L 】




Part No.	A	B	C	Package
TRG-3.5	3.5	1.0	3.0	1000
TRG-4	4.0	1.0	3.0	
TRG-4.5	4.5	1.0	3.0	
TRG-4.5L	4.5	1.0	3.0	
TRG-5	5.0	1.0	3.0	
TRG-5.5	5.5	1.0	3.0	
TRG-6	6.0	1.0	3.0	
TRG-6.5	6.5	1.0	3.0	
TRG-6.5L	6.5	1.3	3.3	
TRG-7	7.0	1.0	3.0	
TRG-7.5	7.5	1.0	3.0	
TRG-8	8.0	1.0	3.0	
TRG-8.5	8.5	1.0	3.0	
TRG-9	9.0	1.0	3.0	
TRG-9.5	9.5	1.0	3.0	
TRG-10	10.0	1.0	3.0	



Part No.	Package
TRGS-9	1000

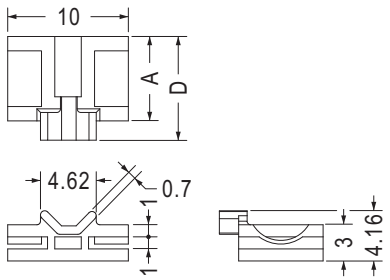


Part No.	A	D	Package
TRGV-5	5.0	6.6	1000
TRGV-6.7	6.7	8.3	
TRGV-7	7.0	8.6	




Part No.	Package
TRO-7.5	1000

電晶體座 TRANSISTOR HOUSING

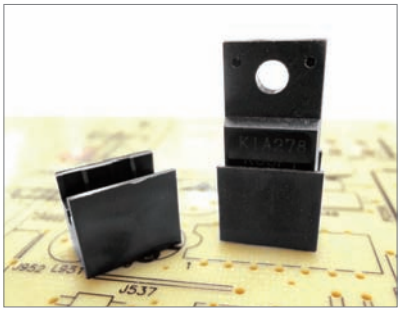


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


用途：保護晶體立於PC板上，使接腳不彎曲、折斷、短路，且高度一致。




Part No.	Package
TRD-1	1000

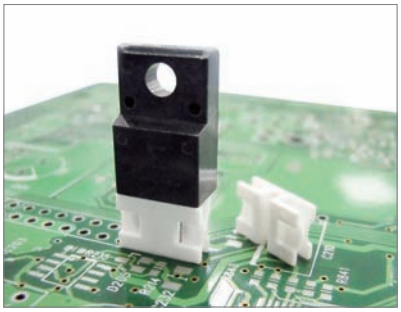


- Material: Nylon 66 (UL)/PBT (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
TRS-5	500



Part No.	B	Package
TRU-6.5	0.4	1000
TRU-6.5PV05	0.5	




Part No.	Package
TRS-6.5	500

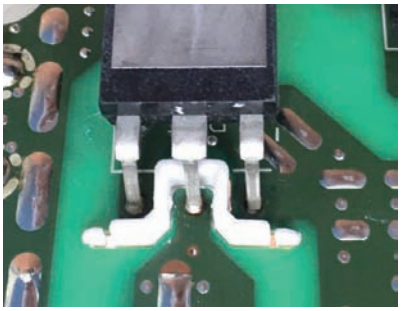


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

用途：保護電晶體接腳間之絕緣，不使接腳短路。

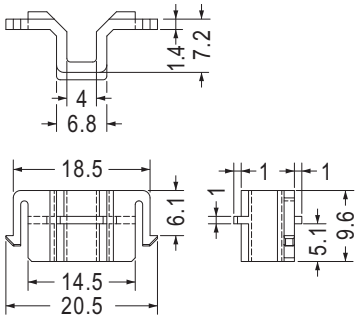


Part No.	Package
TRGL-1	1000

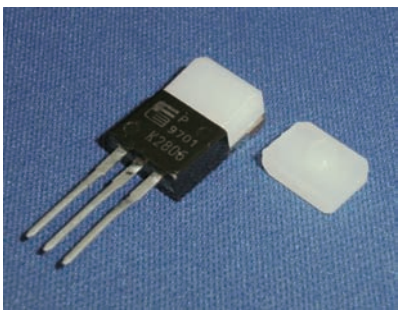


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

用途：用於TO-220功率晶體組裝。




Part No.	Package
TRF-1	2000


用途：保護TO-3P功率晶體，保護晶體立於PC板上，使接腳不彎曲、折斷、短路，且高度一致。

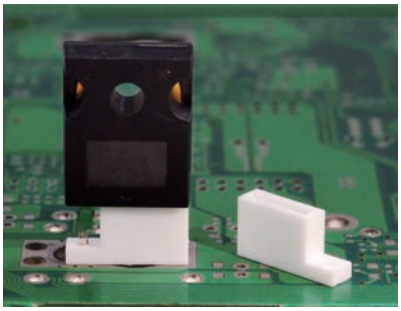


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	Package
TRWA-1	1000




Part No.	A	Package
TRW-8	8.0	1000
TRW-10	10.0	




Part No.	A	Package
TRWF-8	8.0	1000
TRWF-10	10.0	

用途：保護晶體立於PC板上，使接腳不彎曲、折斷、短路，且高度一致。

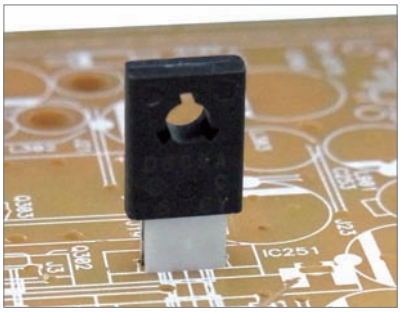


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
TR-9	1000


用途：適用於TO-247功率晶體，保護晶體立於PC板上，使接腳不彎曲、折斷、短路，且高度一致。

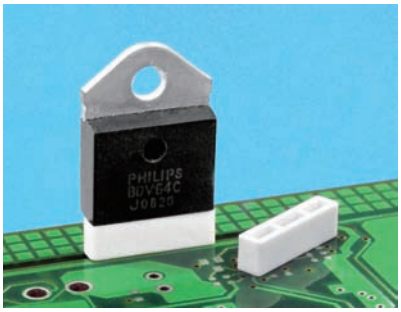

- Material: PBT (UL)
- Flame Class: 94V-0
- Color: Natural
- Unit: mm




Part No.	Package
TRW3-2	1000




Part No.	Package
TRW3-6	1000


用途：適用於功率晶體，保護晶體立於PC板上，使接腳不彎曲、折斷、短路，且高度一致。

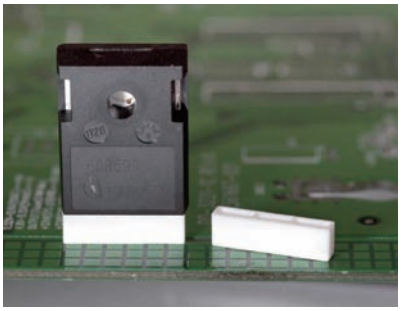

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	B	C	Package
TRW3-3	16.5	4.0	1000
TRW3-7	15.0	2.8	

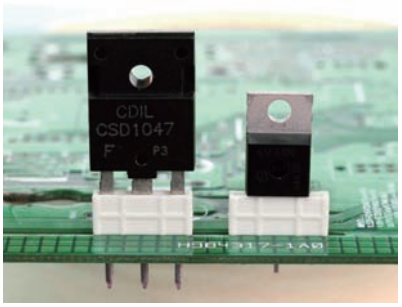


- Material: PBT (UL)
- Flame Class: 94V-0
- Color: Natural/White
- Unit: mm


用途：保護晶體立於PC板上，使接腳不彎曲、折斷、短路，且高度一致。



Part No.	Package
TRW3-4	1000




Part No.	Package
TRW3-5	1000

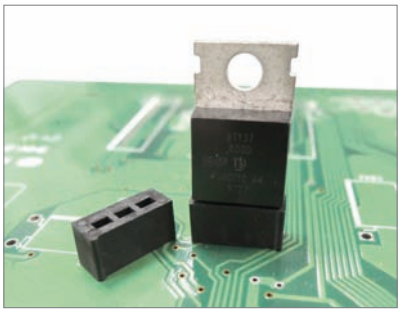


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


用途：保護TO-220晶體立於PC板上，使接腳不彎曲、折斷、短路，且高度一致，增加可靠度。



Part No.	A	B	Package
TR3-3S	3.0	9.8	1000
TR3-3	3.7	9.8	
TR3-4	4.0	9.8	
TR3-5	5.0	10.0	
TR-3	6.0	9.8	
TR3-7	7.0	9.8	
TR3-8.5	8.5	9.8	
TR3-9	9.0	9.8	
TR3-9.5	9.5	9.8	




Part No.	Package
TR-19	2000

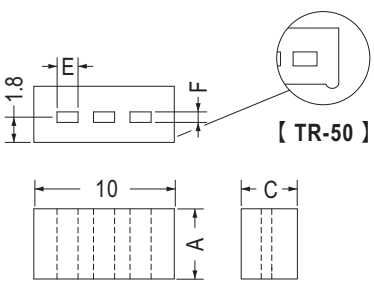


Part No.	A	C	E	F	Package
TR-12	5.0	4.0	1.5	0.75	1000
TR-31	3.0	3.0	1.5	0.75	
TR-50	5.0	4.3	1.7	1.0	


用途：保護晶體立於PC板上，使接腳不彎曲、折斷、短路，且高度一致。

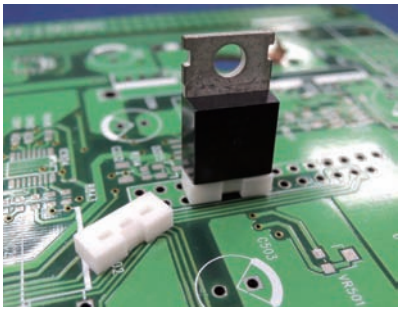


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

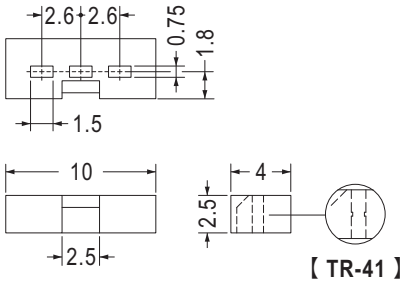


Part No.	Package
TR-32	1000
TR-41	




Part No.	Package
TR-43	1000

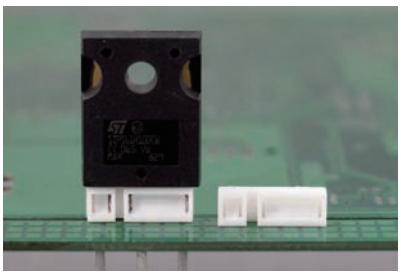

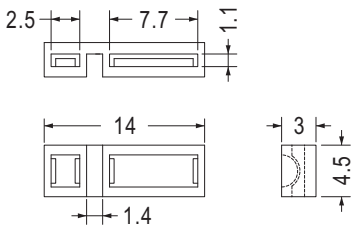


Part No.	Package
TRGC-4.5	1000

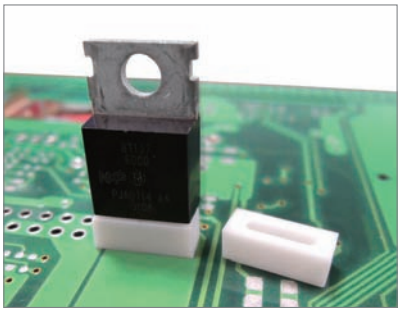


用途：用於電晶體或零件之墊高與保護。


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
TR-33	1000




Part No.	Package
TR-42	1000

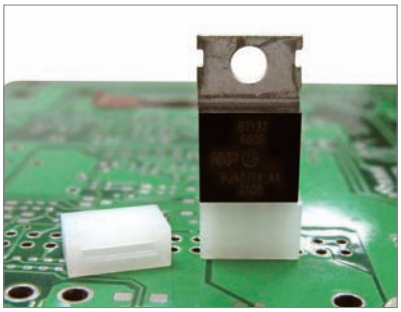




Part No.	Package
SUMA-6	1000




Part No.	Package
SUM-6	1000

電晶體座 TRANSISTOR HOUSING

用途：用於功率晶體之絕緣與防塵。

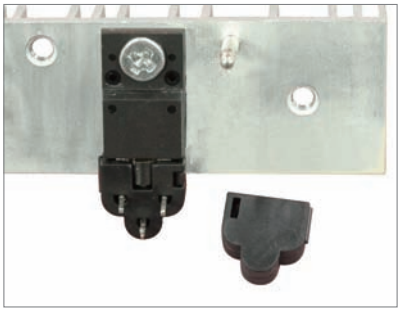


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
TRGB-1	1000

橋式整流座 BRIDGE RECTIFIER HOUSING


用途：保護橋式整流器立於PC板上使接腳不彎曲、折斷、短路且高度一致。

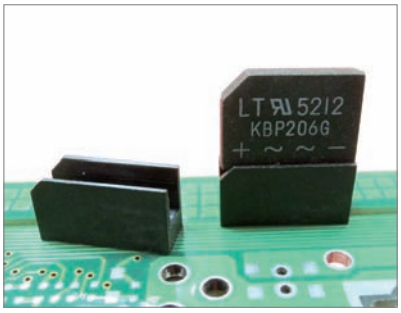


- Material: PBT (UL)
- Flame Class: 94V-0
- Color: Natural/ Black
- Unit: mm




Part No.	Package
BGCV-15	500




Part No.	Package
BGCV-22	500



Part No.	Package
BGCV-30	500

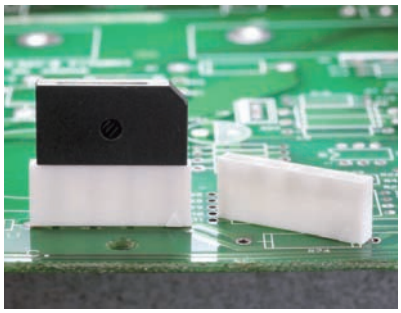

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm
- Patented (專利品)




NEW


Part No.	Package
BGC-8.5	1000

橋式整流座 BRIDGE RECTIFIER HOUSING


用途：保護橋式整流器立於PC板上使接腳不彎曲、折斷、短路且高度一致。

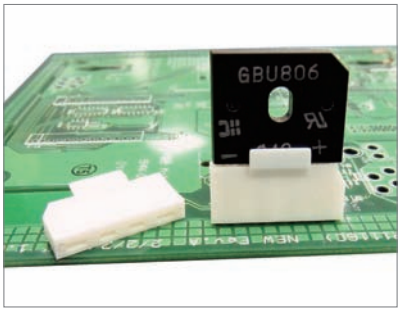


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

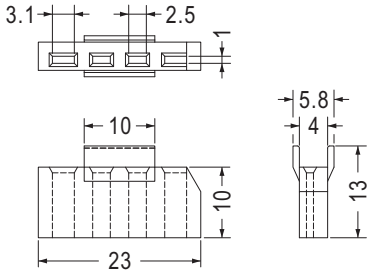


Part No.	Package
BGCV-23	500

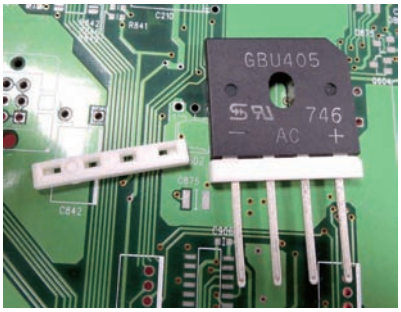


- Material: PBT (UL)
- Flame Class: 94V-0
- Color: Natural
- Unit: mm





Part No.	Package
BGCA-22	1000

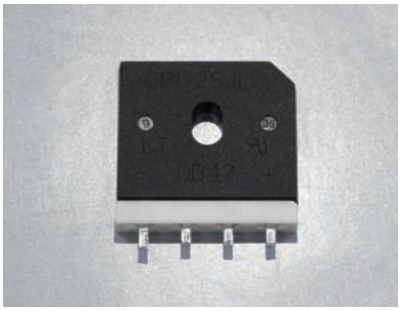




Part No.	A	Package
BGCC-22	3.0	1000
BGCC-22-5	5.0	

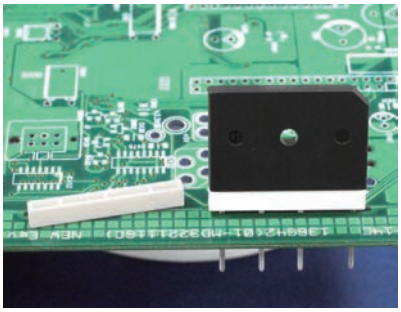



- Color: White

Part No.	A	Package
BGCB-30	4.5	1000
BGCB-30-8.5	8.5	




- Color: Black


Part No.	A	Package
BWC-1	9.0	1000
BWC-2	18.0	


霍爾晶體座 HALL EFFECT SENSOR HOUSING


用途：保護霍爾晶體立於PC板上，使接腳不彎曲、折斷、短路且高度一致。

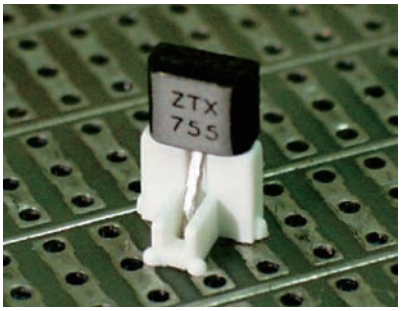

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm








MOUNTING HOLE


Part No.	A	B	C	D	Package
HLS-1	4.6	2.5	1.5	1.5	2000
HLS-2	10.5	2.4	1.7	1.4	


可變電阻蓋 VARIABLE RESISTOR COVER


用途：可變電阻調整好，避免誤觸。

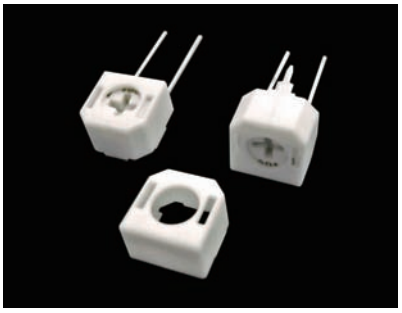

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm








Part No.	Package
VRCV-1	2000


熱敏電阻座 THERMISTOR HOLDER


用途：用於熱敏電阻接腳之固定與保護。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm








THICKNESS 0.8


Part No.	Package
TRE-1-1	2000


IR晶體座 IR RECEIVER HOLDER


用途：保護IR晶體立於PC板上，使接腳不彎曲、折斷、短路，且高度一致。

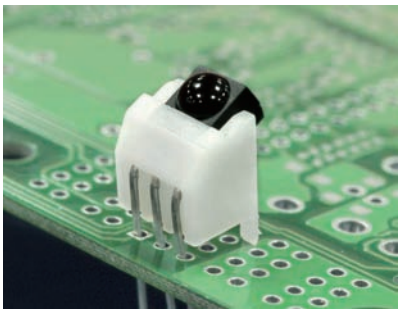

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm








MOUNTING HOLE
THICKNESS 1.6


Part No.	Package
RECD-3	1000

IR晶體座 IR RECEIVER HOLDER

用途：保護IR晶體立於PC板上，使接腳不彎曲、折斷、短路，且高度一致。

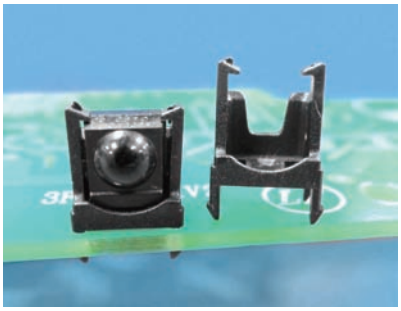


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm
- Patented (專利品)

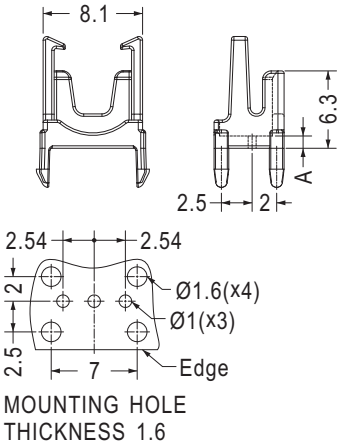


MOUNTING HOLE
THICKNESS 1.6

Part No.	A	Package
RECA-1	1.0	1000
RECA-1.5	1.5	
RECA-2	2.0	
RECA-2.5	2.5	
RECA-3	3.0	
RECA-3.5	3.5	
RECA-4	4.0	
RECA-4.5	4.5	
RECA-5	5.0	
RECA-5.5	5.5	
RECA-6	6.0	

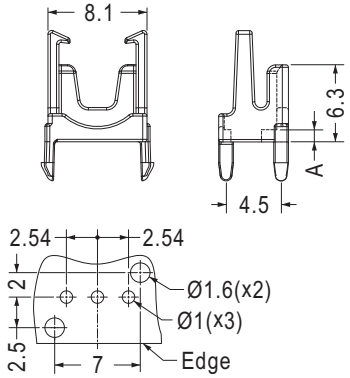


MOUNTING HOLE
THICKNESS 1.6

Part No.	A	Package
RECG-1	1.0	1000
RECG-1.5	1.5	
RECG-2	2.0	
RECG-2.5	2.5	
RECG-3	3.0	
RECG-3.5	3.5	
RECG-4	4.0	
RECG-4.5	4.5	
RECG-5	5.0	
RECG-5.5	5.5	
RECG-6	6.0	

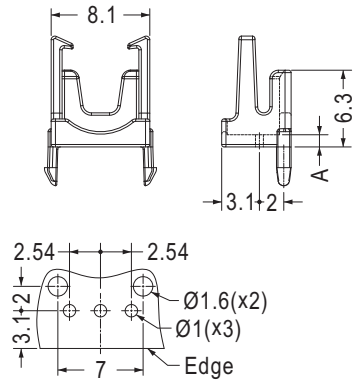


MOUNTING HOLE
THICKNESS 1.6

Part No.	A	Package
RECC-1	1.0	1000
RECC-1.5	1.5	
RECC-2	2.0	
RECC-2.5	2.5	
RECC-3	3.0	
RECC-3.5	3.5	
RECC-4	4.0	
RECC-4.5	4.5	
RECC-5	5.0	
RECC-5.5	5.5	
RECC-6	6.0	




MOUNTING HOLE
THICKNESS 1.6

Part No.	A	Package
RECE-1	1.0	1000
RECE-1.5	1.5	
RECE-2	2.0	
RECE-2.5	2.5	
RECE-3	3.0	
RECE-3.5	3.5	
RECE-4	4.0	
RECE-4.5	4.5	
RECE-5	5.0	
RECE-5.5	5.5	
RECE-6	6.0	
RECE-7	7.0	

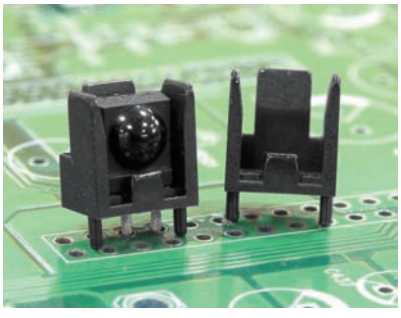

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

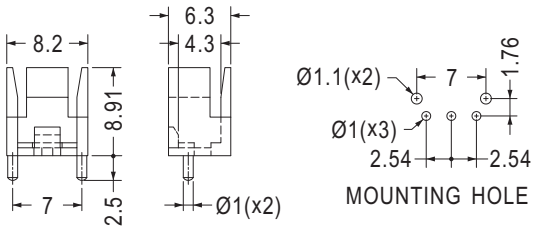


MOUNTING HOLE


Part No.	Package
RECI-1	1000

電晶體座 IR TRANSISTOR HOUSING


用途：保護IR晶體立於PC板上，使接腳不彎曲、折斷、短路，且高度一致。

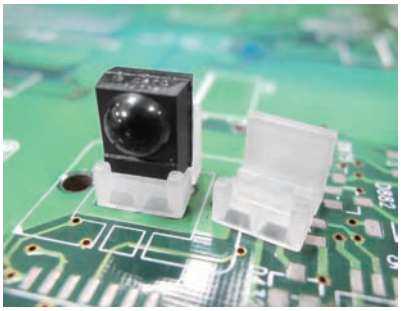


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	Package
TR-46	1000




Part No.	Package
TRA-1	1000




Part No.	A	B	C	Package
TRAC-1.2	5.2	1.2	2.6	1000
TRAC-2	6.0	2.0	3.4	
TRAC-5.3	9.3	5.3	6.7	







Part No.	Package
TRAD-0.9	1000



Part No.	Package
TRAE-2.35	1000

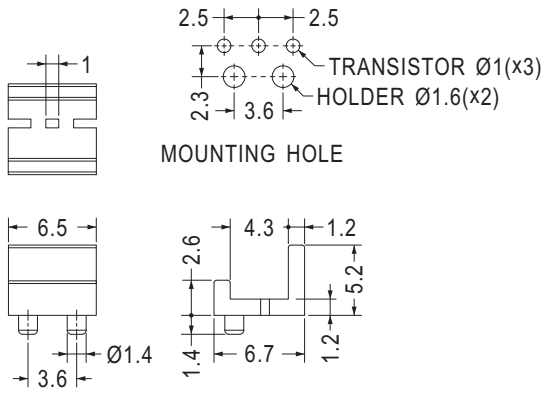


Part No.	Package
TRAB-1	1000

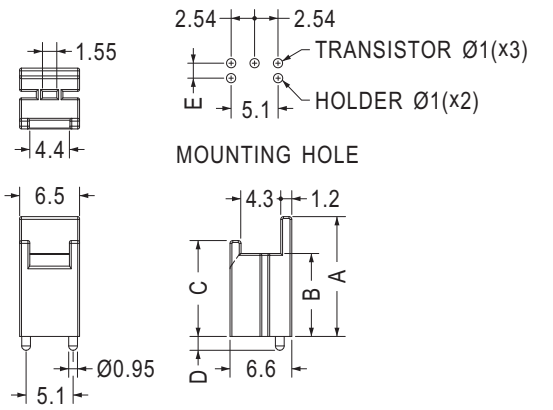


Part No.	A	B	C	D	E	Package
TRAC-9	13.0	9.0	10.4	1.5	1.6	1000
TRAC-10.8L	14.8	10.8	12.2	0.9	2.4	

光電晶體座 IR RECEIVER HOLDER


用途：用於光晶體腳座，固定高度可過錫爐，美觀整齊。

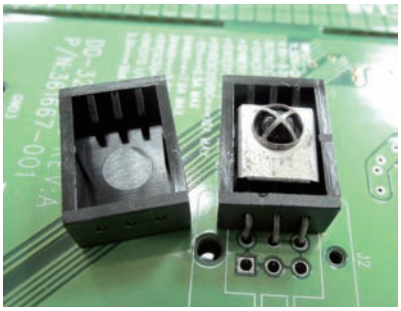


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
RCEA-2	1000




Part No.	A	Package
RCEA-3	3.0	1000
RCEA-5	5.0	
RCEA-6	6.0	
RCEA-12.6	12.6	

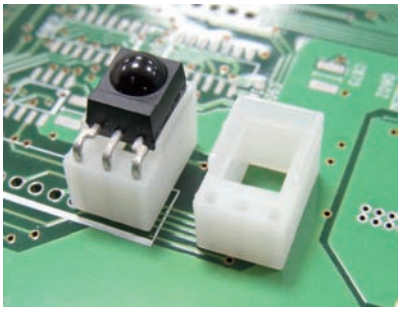


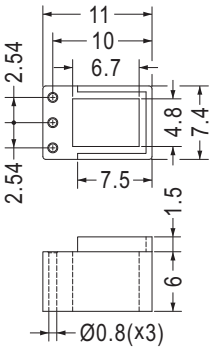


Part No.	Package
RCEA-10	1000




Part No.	Package
RCEA-4	1000

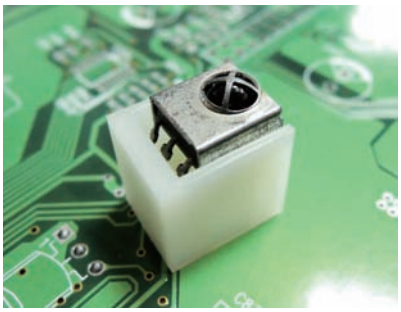


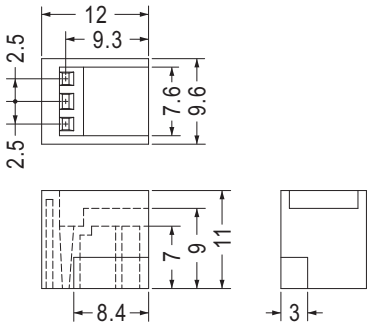


Part No.	Package
RCEA-9	1000

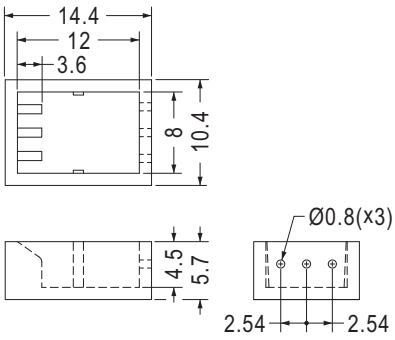

Part No.	Package
RCEC-2	1000

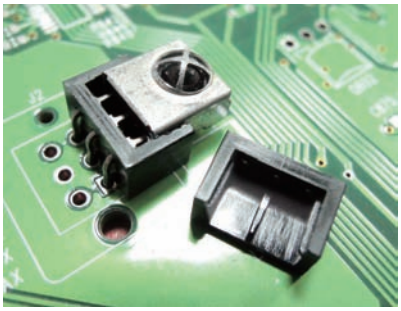


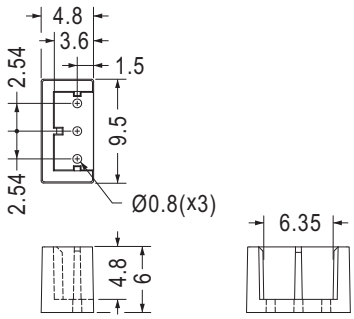


Part No.	Package
RCEF-1	1000

光電晶體座 IR RECEIVER HOLDER


用途：用於光晶體腳座，固定高度可過錫爐，美觀整齊。

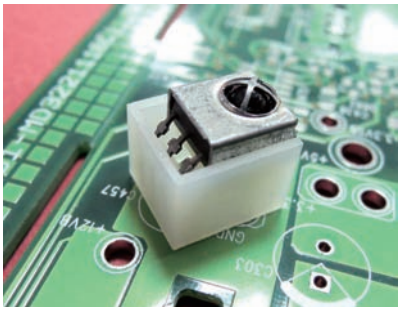




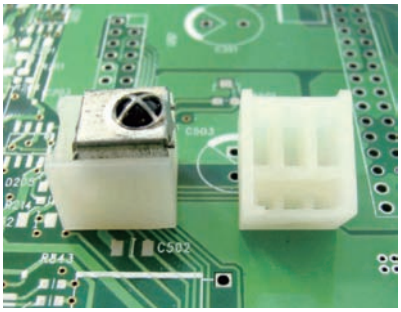


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

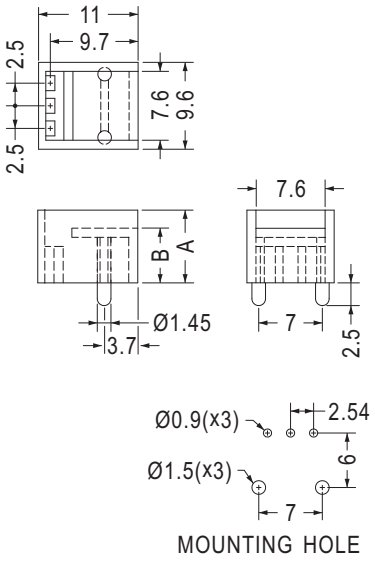


Part No.	A	B	Package
RCEB-4.5	6.5	4.5	1000
RCEB-6	8.0	6.0	

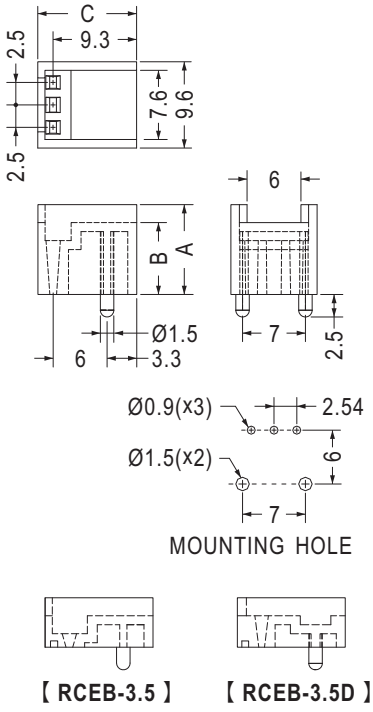


Part No.	A	B	C	Package
RCEB-3.5	5.5	3.5	12.0	1000
RCEB-3.5D	5.5	3.5	12.0	
RCEB-8	10.0	8.0	11.0	
RCEB-9	11.0	9.0	11.0	
RCEB-10.5	12.5	10.5	11.0	

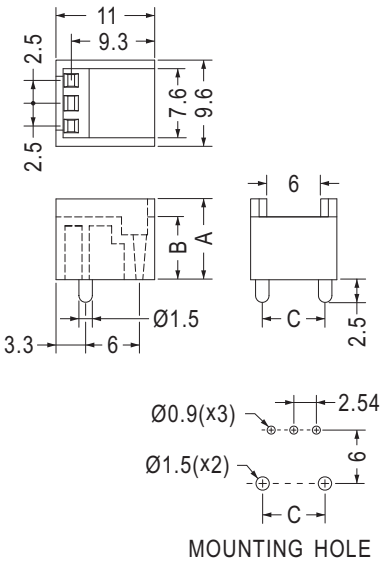

Part No.	A	B	C	Package
RCEB-7	9.0	7.0	7.0	1000
RCEB-15	17.0	15.0	6.0	

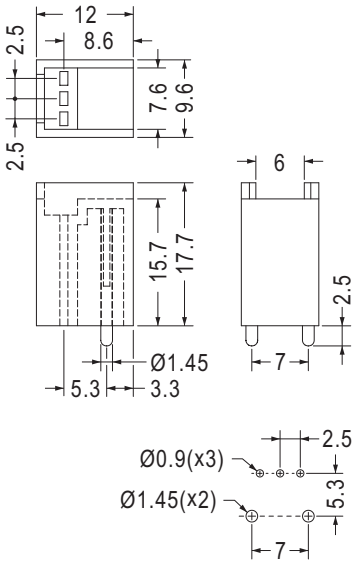


Part No.	Package
RCEB-15.7	1000

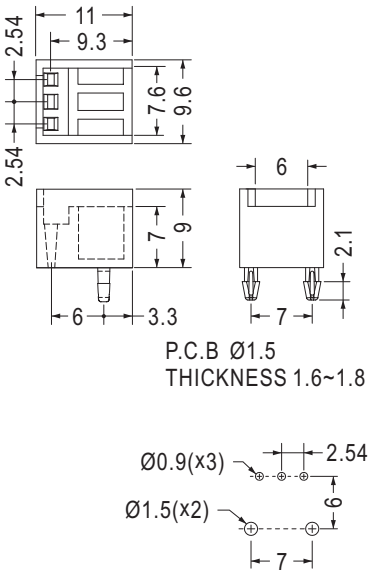


Part No.	Package
RCEE-7	1000


光電晶體座 IR RECEIVER HOLDER

用途：用於光晶體腳座，固定高度可過錫爐，美觀整齊。

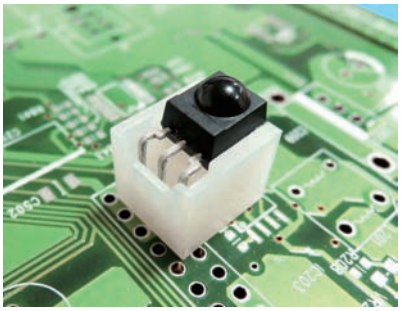


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

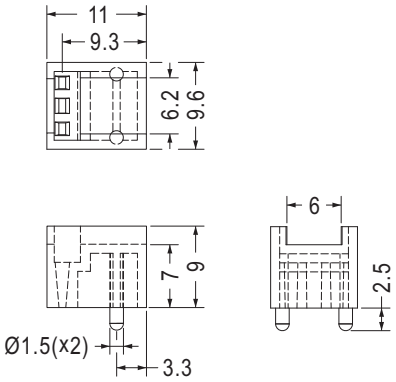





MOUNTING HOLE

Part No.	Package
RCEH-1	1000

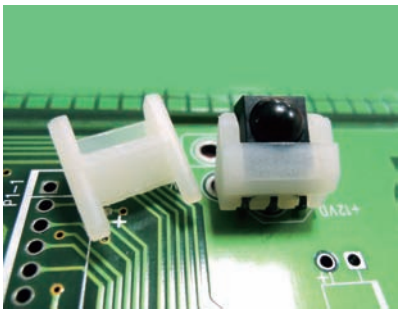






MOUNTING HOLE


Part No.	Package
RECD-1	1000


光纖晶體座 OPTICAL LENS HOLDER

用途：光纖晶體焊於PC板上，高度一致，有定位腳，不傾斜，可與OPC-1配合使用。

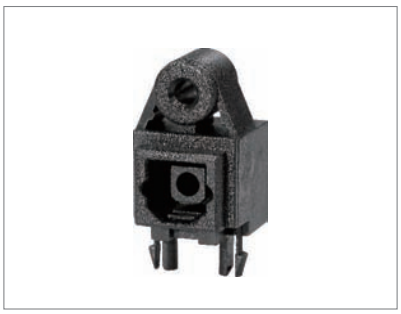

- Material: Nylon 66 (UL)
- Flame Class: 94HB
- Color: Black
- Unit: mm







Part No.	Package
PLT130T	1000

墊片 WASHER

用途：用於電源插座接點間之絕緣。

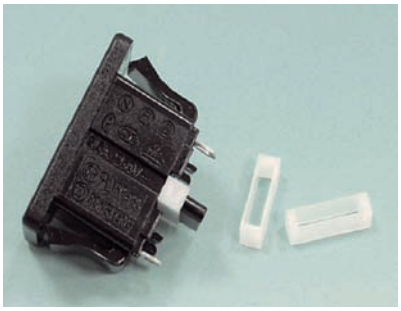


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
SQCP-3.4	2000

零件墊座 PARTS HOUSING

用途：用於零件之墊高。

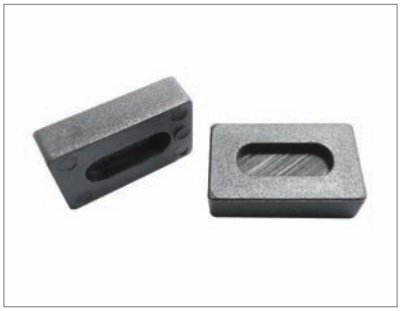

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
DVT-1	1000



- Material: PBT (UL)
- Flame Class: 94V-0
- Color: Natural
- Unit: mm


用途：做為零件之蓋片。




Part No.	Package
WPBT-1	1000

跳線座 JUMPER HOUSING

用途：立於PC板上，將兩跳線做隔離與保護固定用。

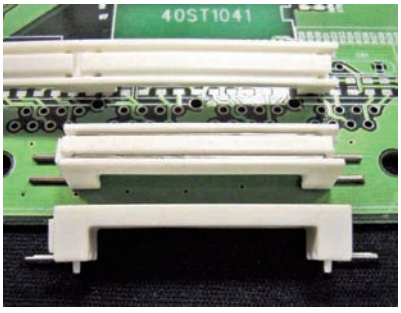


- Material: PBT (UL)
- Flame Class: 94V-0
- Color: Natural
- Unit: mm

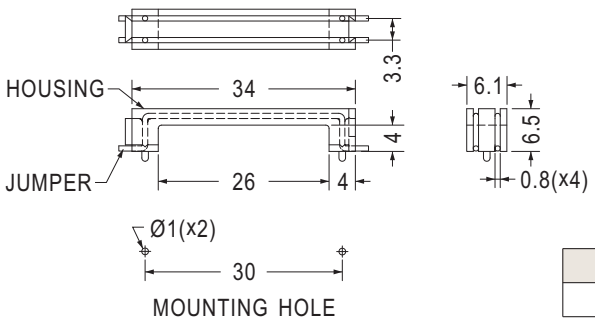


Part No.	Package
JPC-1	1000


墊片 WASHER

用途：用於零件，如高瓦特數電阻接腳之墊高，避免熱氣積存於PC板上。

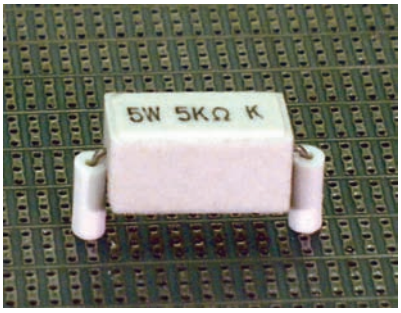

- Material: PBT (UL)
- Flame Class: 94V-0
- Color: Natural
- Unit: mm






Part No.	A	B	C	Package
PW-1	4.0	1.4	4.2	2000
PW-1A	4.5	1.8	4.2	
PW-2	4.0	1.4	8.0	1000
PW-3	4.0	1.3	3.0	2000
PW-4	3.5	1.3	3.6	
PW-5	5.0	2.0	2.0	
PW-6	3.2	1.4	2.5	
PW-7	3.2	1.4	1.0	
PW-8	2.4	1.3	3.1	
PW-9	4.4	1.6	7.0	1000
PW-10	2.5	1.25	5.0	2000
PW-11	2.2	0.8	5.0	
PW-12	2.8	1.3	1.8	
PW-13	2.5	1.1	2.5	
PW-15	2.2	0.9	10.5	1000

- Material: Nylon 6 (UL)
- Flame Class: 94V-2/94V-0


Part No.	C	Package
PW-14	7.9	1000
PW-16	1.5	2000

陶瓷零件墊片 CERAMIC PARTS WASHER

用途：用於零件，如高瓦特數電阻接腳之墊高，避免熱氣積存於PC板上。

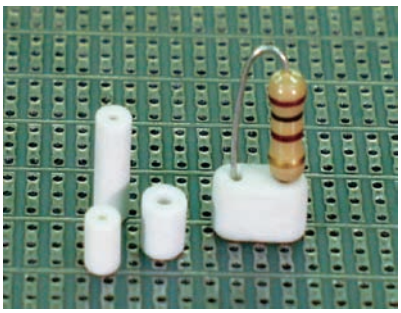

- Material: Ceramic
- Color: Natural/White
- Unit: mm




【 CHS-6 】


Part No.	A	B	C	Package
CHS-1	3.8	1.0	4.5	2000
CHS-2	3.8	1.0	9.0	
CHS-3	4.5	1.8	3.0	
CHS-4	4.5	1.8	4.5	
CHS-5	4.5	1.8	9.0	
CHS-6	10.0	1.3	5.0	
CHS-7	2.6	0.9	6.9	
CHS-8	2.5	1.1	3.1	
CHS-9	4.1	1.9	15.4	
CHS-10	4.1	1.9	13.0	1000
CHS-18	4.0	1.6	15.0	
CHS-19	4.5	1.8	2.0	2000

電阻保護座 ELECTRIC RESISTANCE HOLDER


用途：用於電阻接腳之固定與保護。

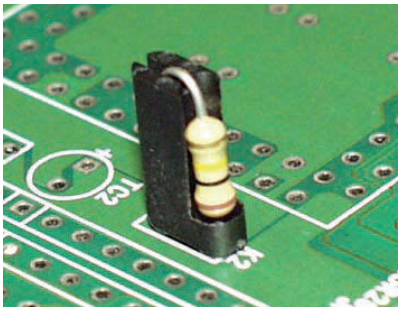

- Material: PPS (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm




Part No.	Package
RPCL-9	2000




Part No.	Package
RPCL-11	2000


用途：用於電感器絕緣並保護。

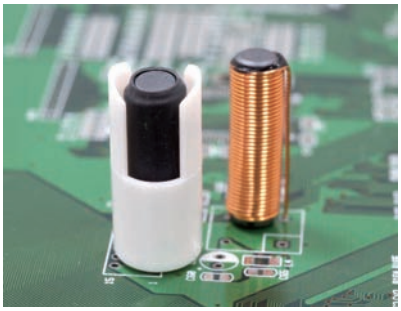

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

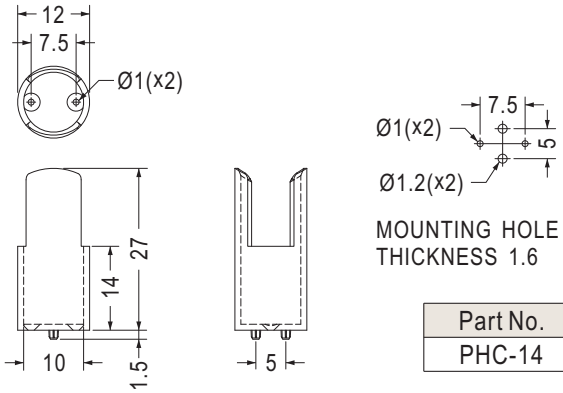


Part No.	Package
PHC-14	500

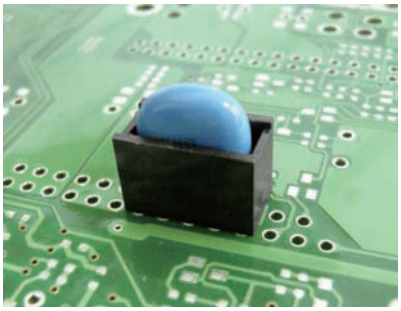


- Material: PPS (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm

用途：用於零件之墊座。

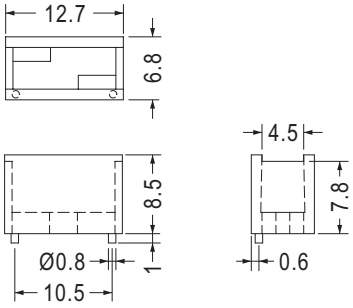


Part No.	Package
PH-26	1000

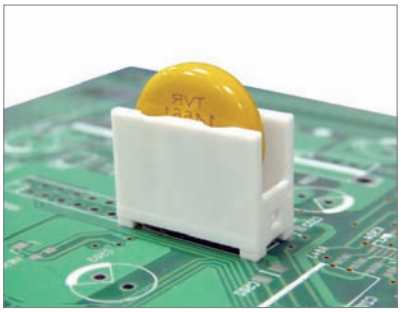


- Material: PBT (UL)/PPS (UL)
- Flame Class: 94V-0
- Color: Natural/Black
- Unit: mm


用途：用於零件接腳之墊高與保護。

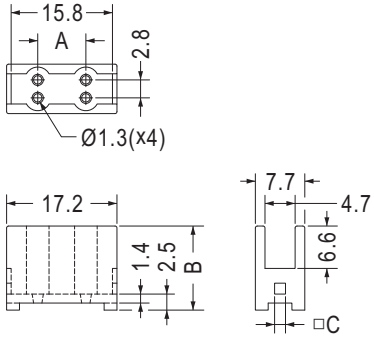

Part No.	A	B	C	Package
PHC-2	7.5	13.1		500
PHC-11	7.2	14.5		
PHC-12	7.5	13.1	1.7	

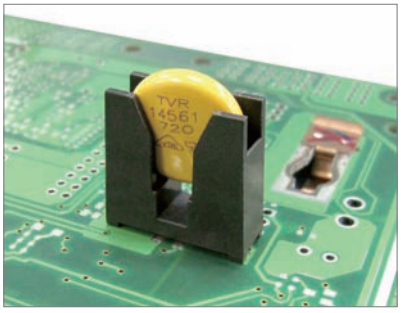


- Material: PBT (UL)
- Flame Class: 94V-0
- Color: Natural
- Unit: mm



Part No.	Package
PHC-1	500


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
PHC8NNHA	1000

零件墊座 PARTS HOUSING

用途：用於零件之墊座。

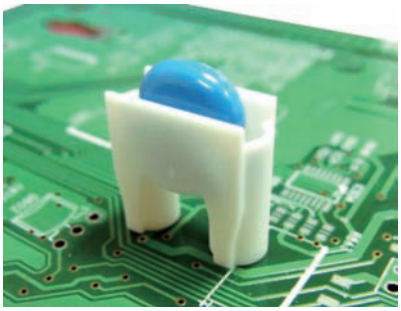


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
PHC-13	500

線圈座 PARTS HOUSING

用途：用於零件接腳之墊高與保護。

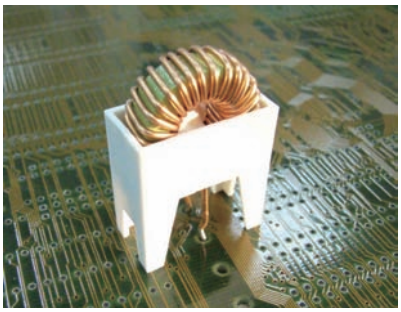


- Material: PBT (UL)
- Flame Class: 94V-0
- Color: Natural
- Unit: mm




Part No.	Package
COILC-21	500


濾波器墊片 ELECTRIC FILTER WASHER

用途：用於濾波器絕緣，立於PC板上，且高度一致增加可靠度。

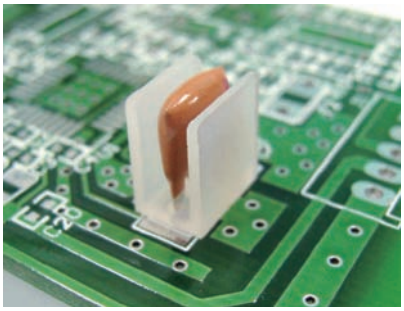

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm







MOUNTING HOLE

Part No.	Package
QCL-3	1000







MOUNTING HOLE


Part No.	Package
QCL-1	1000

電容器墊片 CAPACITOR WASHER


用途：用於電容器接腳保護。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
CWT-11	2000



Part No.	C	D	F	Package
CWT-5	1.5	5.08	3.2	2000
CWT-8	1.2	7.6	4.0	
CWT-10	1.2	10.1	5.0	







Part No.	A	B	D	E	Package
CWL-15	17.8	3.7	15.5	12.4	1000
CWL-22	25.0	7.0	22.5	17.0	

石英晶體墊片 CRYSTAL WASHER


用途：保護石英震盪晶體立於PC板上外殼不會與PC板短路，且高度一致增加可靠度。

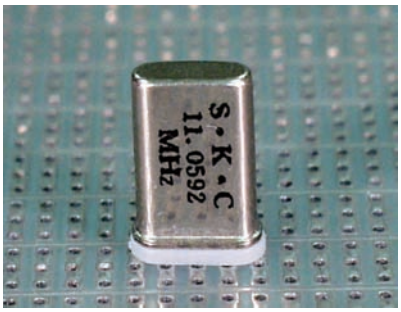


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	C	Package
QW-1	1.0	2000
QW-5	0.5	




Part No.	Package
QW-3	2000




Part No.	Package
QW-6	2000




Part No.	Package
QW-8	2000



Part No.	Package
QW-2	2000




Part No.	Package
QW-7	2000




Part No.	Package
SWS311030	1000

石英晶體墊片 CRYSTAL WASHER


用途：保護石英震盪晶體立於PC板上外殼不會與PC板短路，且高度一致增加可靠度。

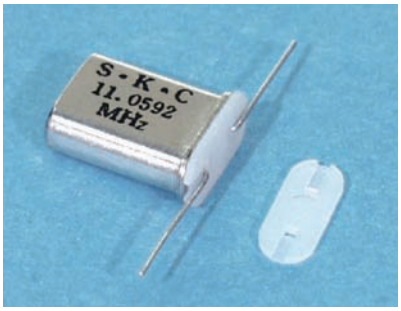


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	Package
QW-4	2000

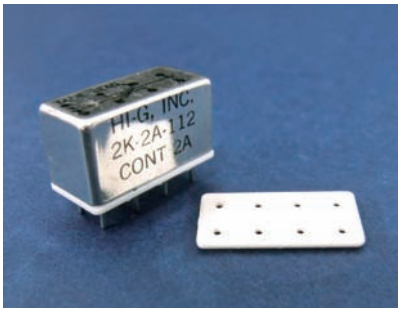


- Material: PBT (UL)
- Flame Class: 94V-0
- Color: Natural
- Unit: mm




Part No.	Package
PAD-1	500

電容器墊片 CAPACITOR WASHER


用途：用於大電容器之墊座。

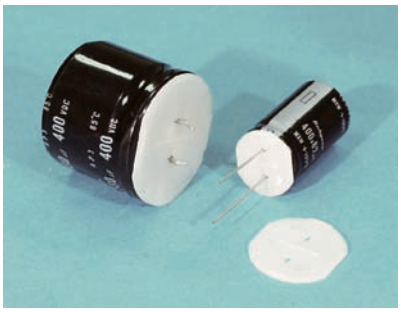


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	A	B	C	D	E	Package
CW-16	16.2	14.6	1.5	7.5	0.5	1000
CW-18	18.2	16.4	1.5	7.5	0.5	
CW-22	22.2	20.0	1.5	10.0	0.5	500
CW-25	25.7	23.0	1.5	10.0	0.5	
CW-30	30.3	27.2	1.5	10.0	0.5	
CW-35	35.3	31.8	1.5	10.0	0.5	
CW-35L	35.3	31.8	2.0	10.0	1.0	




Part No.	Package
CW-10S	1000



Part No.	Package
CW-25S	500




Part No.	Package
CW-12	1000




Part No.	Package
CW-1	500





Part No.	Package
CW-2	1000




Part No.	Package
CW-3	1000


電容器座 CAPACITOR HOUSING

用途：用於電容器接腳保護。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm







MOUNTING HOLE

Part No.	Package
CAPH-10	1000

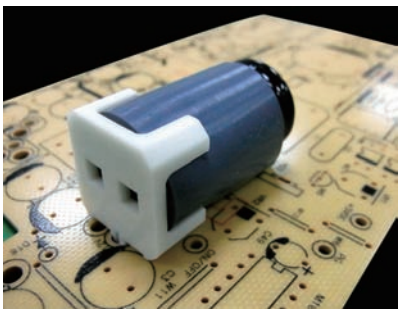








MOUNTING HOLE
THICKNESS 1.6

Part No.	Package
CAPI-18	500

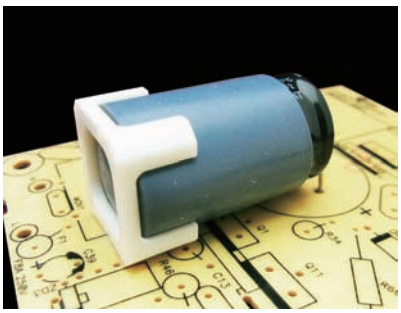







MOUNTING HOLE
THICKNESS 1.6

Part No.	Package
CAPJ-18	1000

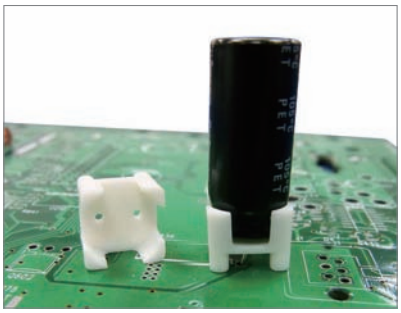




適用於 Ø10 的電容
For Ø10 CAPACITOR


Part No.	Package
CAPL-3.5	1000






Part No.	Package
TRB-12	1000


用途：用於電容器接腳保護。

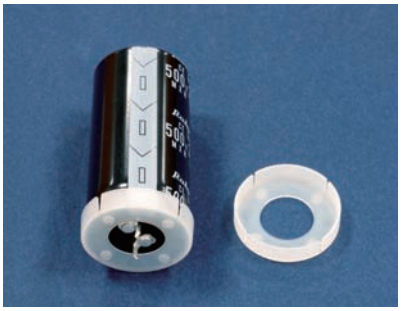


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	A	B	C	E	Package
CWCD-2	27.3	13.9	25.6	3.5	500
CWCD-3	32.3	16.4	30.5	3.5	
CWCD-4	37.3	16.4	35.8	3.5	
CWCD-5	18.3	8.9	16.6	2.7	1000
CWCD-6	20.3	8.9	18.6	2.7	
CWCD-7	12.3	6.4	10.6	2.5	

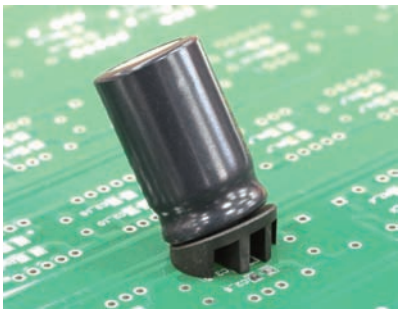




Part No.	Package
TRB-4	1000

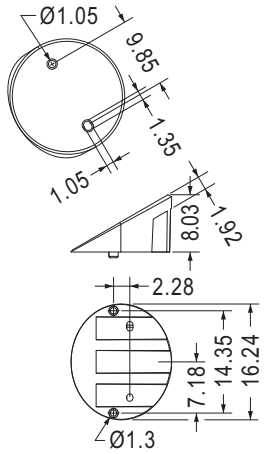


Part No.	Package
TRB-3	1000

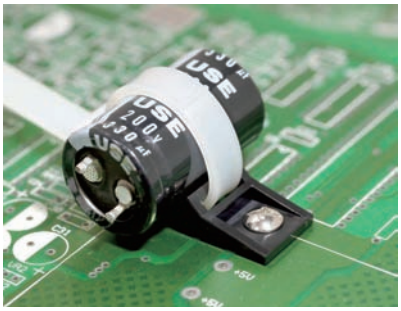


用途：配合束線帶固定用。


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

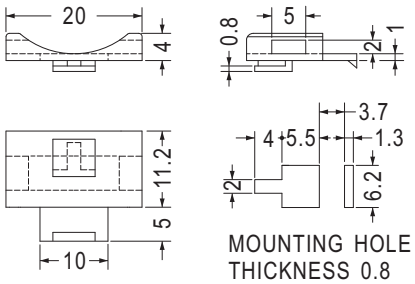

Part No.	Package
MTAC-1	500




【 MTAB-4, MTAB-6 】




Mounting Screw Size

Part No.	A	B	C	D	E	Screw Size	Package
MTAB-4	19.0	11.3	8.0	4.2	8.3	M4	1000
MTAB-5	17.4	13.5	5.7	5.3	10.1	#10	
MTAB-6	23.0	16.4	9.04	5.2	12.0	M5	
MTAB-10	27.4	21.4	10.3	8.4	16.7	5/16	500


用途：用於電容器接腳保護，配合束線帶固定使用。

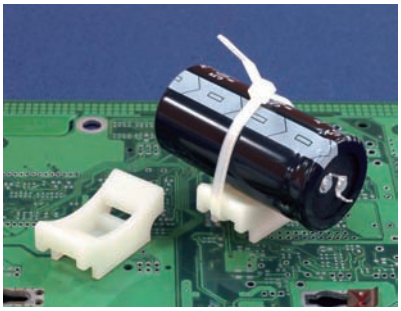


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

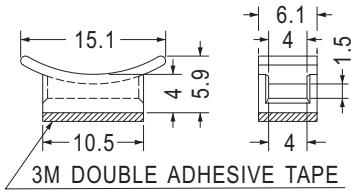


Part No.	Package
THMB-1	1000

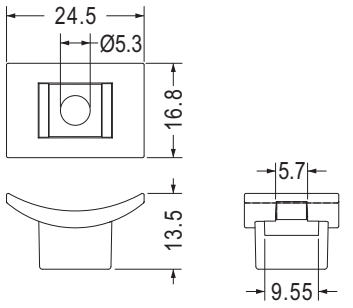

Part No.	Package
THMB-2	1000

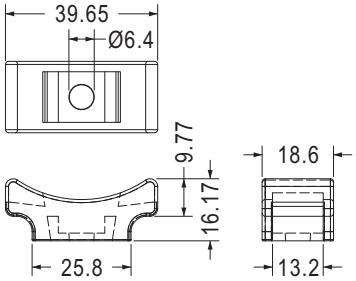


Part No.	Package
THMB-3	1000




3M DOUBLE ADHESIVE TAPE

Part No.	Package
THMC-1	1000




MOUNTING HOLE Ø3.0
THICKNESS 1.6

Part No.	Package
THMK-1	1000

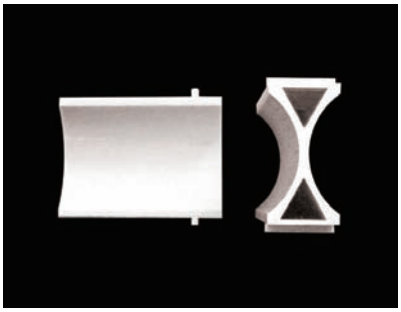

- Material: ABS (UL)
- Flame Class: 94HB
- Color: Gray
- Unit: mm


用途：用於電容器固定。

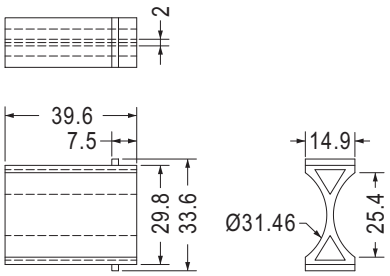

Part No.	Package
KYPC-40	250



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
DELT-20	100


電容器固定座 CAPACITOR MOUNT

用途：固定電容器於機板上，維修方便，不佔空間。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm






WALL THICKNESS 1.7


Part No.	Package
WLLC-1	500






Part No.	Package
CWCK-10	1000



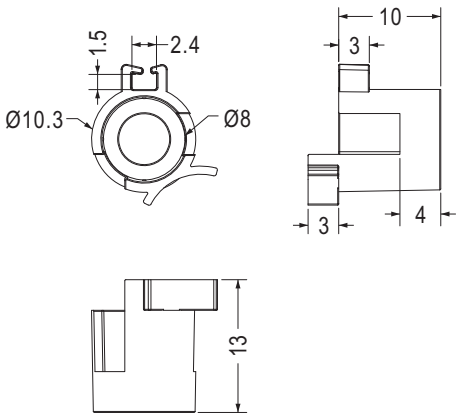


NEW

Part No.	Package
CWCF-8	1000

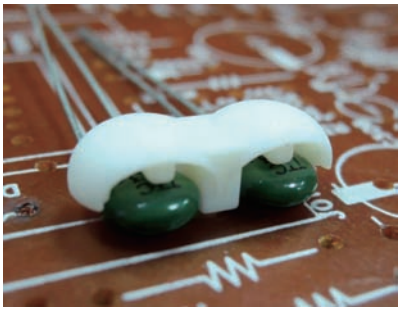

用途：用於電容器固定。

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

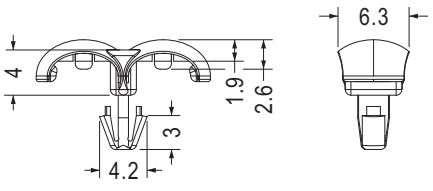

MOUNTING HOLE Ø3.0
THICKNESS 1.5


Part No.	Package
CLDK-1	1000


電容器墊片 CAPACITOR WASHER

用途：用於電容器接腳保護。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm






Part No.	A	B	C	D	Package
CWCA-10	24.5	11.2	5.0	5.0	1000
CWCA-16	31.8	16.5	7.4	7.4	

電容器蓋 CAPACITOR COVER


用途：用於電容器之絕緣與保護。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
BCB-16	500



Part No.	Package
★BCB-14.5	100

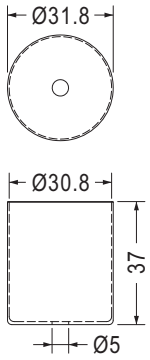



Part No.	Package
BCB-30	100



Part No.	E	Package
BCBA-18	40.5	200
BCBA-18-1	36.0	








Part No.	Package
BASE-L5	1000

用途：用於大電容器之絕緣與保護。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm





NEW

Part No.	E	Package
BCH13-6.8	10.3	1000
BCH13-13	13.2	



Part No.	A	B	C	D	E	Package
BCC-10.3	10.3	11.3	0.8	8.3	6.4	500
BCC-13	13.2	14.2	2.5	10.2	15.0	
BCC-16S	16.5	17.5	1.5	12.4	20.0	
BCC-16	16.7	18.2	1.75	13.7	10.2	
BCC-18	18.7	20.2	1.75	15.7	10.2	
BCC-22	22.2	23.4	1.05	18.0	8.0	2000
BCC-25	26.0	27.2	0.75	22.0	8.0	500
BCC-27	27.0	28.2	1.05	23.0	15.0	2000

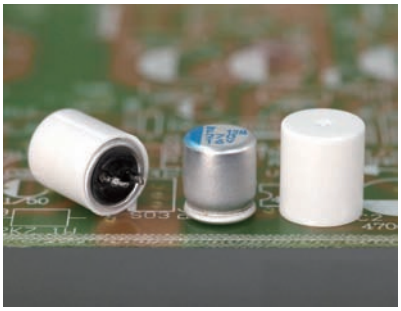


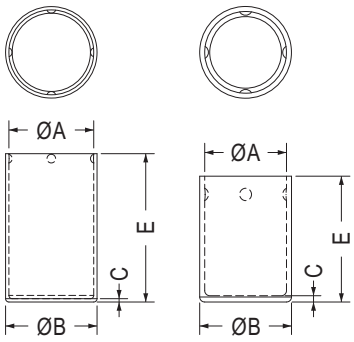


【 BCCA10.3-18 】

Part No.	A	B	C	E	Package
BCCA6.3-10	6.5	7.3	0.5	10.0	1000
BCCA6.3-12	6.5	7.3	0.4	12.0	
BCCA8-10	8.2	9.0	0.5	10.0	
BCCA8-13.4	8.2	9.0	0.4	13.4	
BCCA10.3-18	10.3	11.1	0.4	18.0	






Part No.	Package
BCD-10.3	500




Part No.	Package
BCC-18-20	500

陶瓷零件墊片 CERAMIC PAD


用途：用於零件之絕緣散熱，散熱性佳。

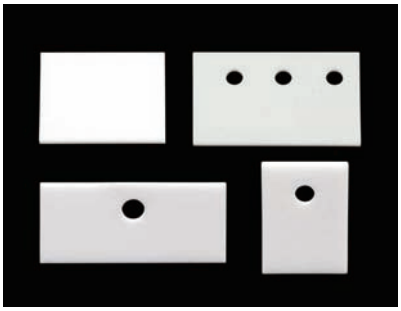

- Material: Ceramic
- Color: Natural
- Unit: mm




Part No.	Package
CHSA-1	100




Part No.	A	B	C	D	E	F	H	I	Package
CHSA-2	37.7	22.0	32.0	20.5	9.5	6.0	1.55	3.7	50
CHSA-4	34.8	20.0	28.8	17.3	5.8	4.0	1.0	3.7	100
CHSA-5	42.0	20.0	33.8	20.2	6.0	4.0	1.0	3.7	50
CHSA-6	30.0	13.6		15.0		4.5	1.0	3.5	100
CHSA-7	16.0	21.0		8.0		5.9	2.5	3.5	

散熱陶瓷墊片 CERAMIC HEAT SINK

用途：用於零件之絕緣散熱，散熱性佳。

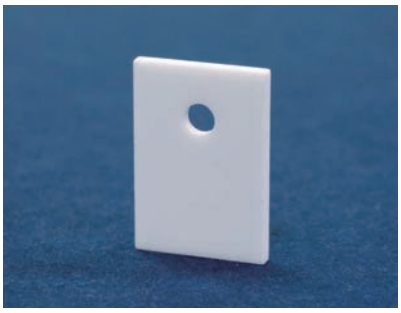

- Material: Ceramic
- Color: White
- Unit: mm



Part No.	A	B	D	F	H	I	Package
TO-3PAWO	15.0	21.9	7.5	6.0	1.6	3.5	200
TO-220AWO	13.7	19.0	6.85	5.0	2.0	3.8	100


CPU散熱矽膠片 CPU THERMAL TRANSFER SILICON PAD

用途：CPU或手提電腦散熱用，可用背膠(單面或雙面)。

尺寸可依客戶要求。
Different size available per request.




- Material: Silicon (UL)
- Flame Class: 94V-0
- Color: Gray
- Unit: mm
- Thickness: 0.5~4.0mm




Part No.
CPU140920A

矽膠片 SILICON INSULATOR


用途：鎖於功率晶體與散熱片之間導熱、絕緣性特佳。

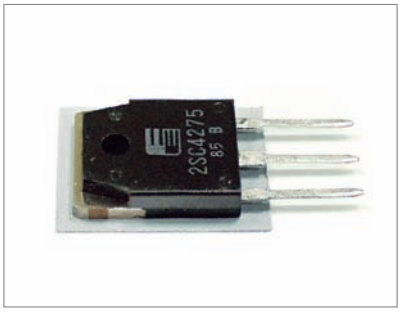


- Material: Silicon (UL)
- Flame Class: 94HB/94V-0
- Color: Gray
- Unit: mm



Part No.	A	B	D	Package
TO-3P	25.0	19.0	7.2	1000
TO-220	19.0	13.2	5.0	

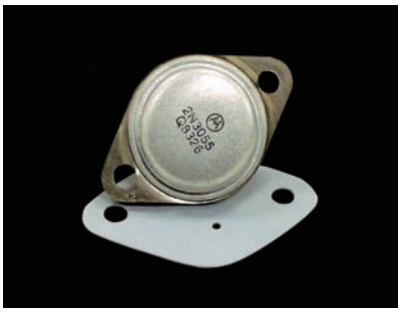





Part No.	Package
TO-3	1000

矽膠帽套 SILICON INSULATOR COVER


用途：固定於功率晶體與散熱片之間，絕緣性特佳。

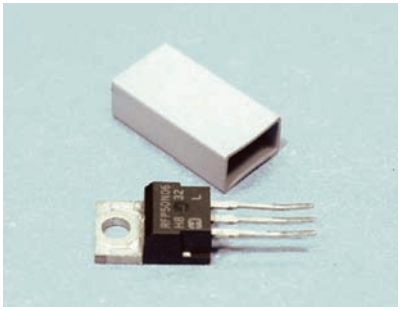


- Material: Silicon (UL)
- Flame Class: 94HB/94V-0
- Color: Gray
- Unit: mm

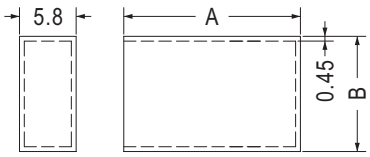

Part No.	A	B	Package
TO-3PCV	28.5	17.5	1000
TO-3PCV-C	25.0	17.5	
TO-220CV	21.7	11.5	

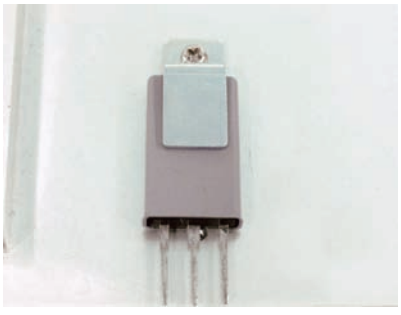





Part No.	A	B	C	E	Package
SRT-111158	11.0	11.5	5.8	0.45	2000
SRT-111758	16.0	11.4	5.5	0.45	1000
SRT-182864	28.5	18.0	6.4	0.75	
SRT-203464	35.0	20.0	6.4	0.75	

矽膠帽套 SILICON INSULATOR COVER


用途：固定於功率晶體與散熱片之間，絕緣性特佳。

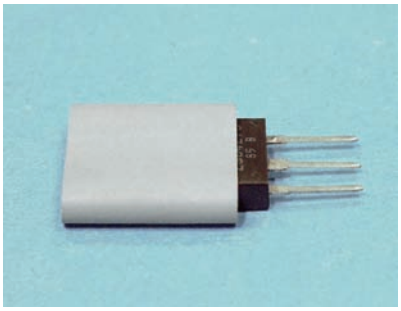

- Material: Silicon (UL)
- Flame Class: 94HB/94V-0
- Color: Gray
- Unit: mm

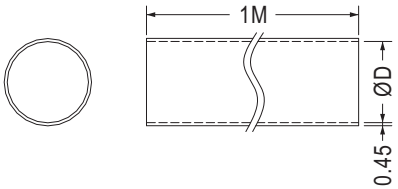


Part No.	D
SRT6	6.0
SRT8	8.0
SRT10	10.0
SRT12	12.0
SRT14	14.0
SRT16	16.0
SRT18	18.0

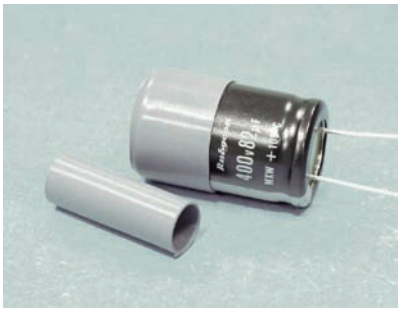

- Material: Silicon (UL)
- Flame Class: 94HB/94V-0
- Color: Gray
- Unit: mm

用途：用於大電解電容之外殼絕緣，絕緣性特佳。




Part No.	D	L	Package
SCT-0726	7.8	26.0	500
SCT-1315	13.0	15.0	
SCT-1615	16.7	15.0	
SCT-1825	18.5	25.0	

電池蓋 BATTERY COVER

用途：用於電池蓋之防塵與保護。



- Material: Silicon Rubber (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm




Part No.	Package
SRTA-1	1000

用途：用於保險絲之絕緣與防塵。





- Material: Soft P.V.C
- Color: Blue/Black
- Unit: mm



・如需UL認可材質，請在料號尾碼加UL下單
・Please add UL after Part Number for UL certified material.

Part No.	A	B	C	D	E	Package
FH-1	20.0	6.0	11.0	1.0	1.2	1000
FH-1L	22.0	6.0	11.0	1.0	1.5	
FH-1S	18.0	5.3	9.0	1.0	1.0	
FH-3A	31.8	9.1	12.0	1.5	1.2	
FH-3	31.8	9.5	13.0	1.5	1.3	
FH-4	41.0	12.8	19.0	2.0	1.2	
FHC-5	19.0	3.3	10.0	1.0	1.2	

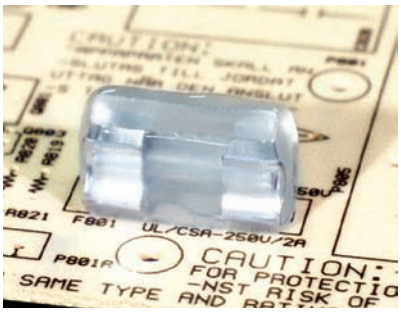


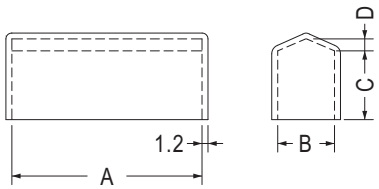

- Color: Natural


Part No.	A	B	C	D	Package
FUSE-1	20.0	6.0	11.0	1.0	1000
FUSE-2	31.8	9.5	13.0	1.5	500
FUSE-3	36.1	8.1	9.9	1.0	1000





- Color: Black

Part No.	Package
FH-13	1000




- Color: Blue

Part No.	Package
FH-17	1000



用途：用於SMT保險絲蓋之防塵與保護。

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
FUSEA-1	1000

矽膠帽套 SILICON INSULATOR COVER

用途：用於大電解電容之外殼絕緣，絕緣性特佳。



- Material: Silicon Rubber (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm




Part No.	Package
BCCA-1210	500

電容器護套 CAPACITOR COVER

用途：用於電容器之絕緣與防塵。




- Material: Soft P.V.C
- Color: Natural
- Unit: mm



・如需UL認可材質，請在料號尾碼加UL下單
・Please add UL after Part Number for UL certified material.

Part No.	A	B	C	D	E	Package
HU-8	8.5	7.5	10.0	3.0	3.0	1000
HU-10	10.5	9.0	12.3	3.0	4.0	
HU-12	12.0	10.0	15.0	3.8	4.8	



・如需UL認可材質，請在料號尾碼加UL下單
・Please add UL after Part Number for UL certified material.


Part No.	A	C	D	F	Package
HU-14	14.0	16.0	4.0	22.0	1000
HU-16	16.0	19.0	5.0	32.0	

末端套管 VCP CAP


用途：用於連接器之絕緣與防塵。



- Material: Soft P.V.C
- Color: Black
- Unit: mm




Part No.	Package
VC0707008	1000




Part No.	Package
VC907413	500

末端套管 VCP CAP

用途：特殊管末端切開時之保護套及各種電線，電纜運送途中防濕防塵用。

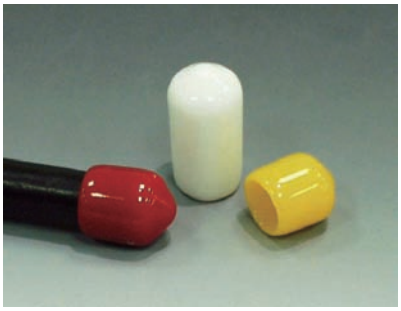

- Material: Soft P.V.C
- Color: Natural/Red/Black/Yellow/ Green/Blue/White
- Unit: mm




Part No.	A	C	E	Package
VCP02012	2.0	12.0	0.8	2000
VCP02607	2.6	7.0	0.8	
VCP02608	2.6	8.0	0.8	
VCP02609	2.6	9.0	0.8	
VCP03206	3.2	6.0	0.8	
VCP03210	3.2	10.0	0.8	
VCP03213	3.2	13.0	0.8	
VCP04006	4.0	6.0	0.8	1000
VCP04008	4.0	8.0	0.8	
VCP04809	4.8	9.0	1.0	
VCP04813	4.8	13.0	0.8	
VCP05708	5.7	8.0	1.0	
VCP05710	5.7	10.0	1.0	
VCP05713	5.7	13.0	1.0	
VCP06008	6.0	8.0	1.0	
VCP06012	6.0	12.0	1.0	

Part No.	A	C	E	Package
VCP06513	6.5	13.0	1.0	1000
VCP07013	7.0	13.0	1.0	
VCP07020	7.0	20.0	1.0	
VCP07608	7.6	8.0	1.0	
VCP07613	7.6	13.0	1.0	
VCP08008	8.0	8.0	1.0	
VCP08010	8.0	10.0	1.0	
VCP08509	8.5	9.0	1.0	
VCP08515	8.5	15.0	1.0	
VCP09516	9.5	16.0	1.0	
VCP10020	10.0	20.0	1.0	
VCP11420	11.4	20.0	1.2	
VCP12016	12.0	16.0	1.2	500
VCP14035	14.0	35.0	1.2	
VCP15014	15.0	14.0	1.2	
VCP17813	17.8	13.0	1.2	
VCP22016	22.0	16.0	1.2	200



- Material: TPE (UL)
- Flame Class: 94HB
- Color: Black
- Unit: mm

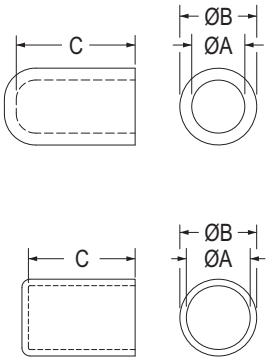


【 KS079132 】


Part No.	A	B	C	Package
KSK024066	2.4	5.6	6.6	1000
KSK024122	2.4	6.3	12.2	
KSK029122	2.9	6.3	12.2	
KSK032097	3.2	5.5	9.7	
KSK032142	3.2	7.0	14.2	
KSK040130	4.0	5.5	13.0	
KSK040970	4.0	5.5	9.7	2000
KSK070105	7.0	11.0	10.5	1000
KSK070130	7.0	9.8	13.0	
KSK070180	7.0	9.8	18.0	
KS079132	7.9	9.5	13.2	
KSK080242	8.0	10.5	24.2	

軟質端子保護套 TERMINAL SOFT SLEEVES

用途：用於端子壓著後端子與外界間之絕緣，可作為線材之分色標記，安全美觀。

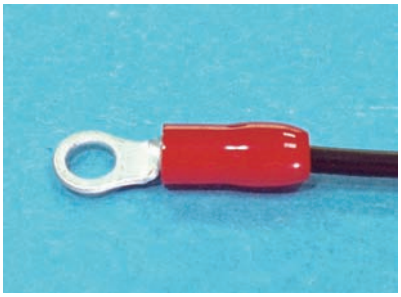

- Material: Soft P.V.C
- Color: Red/White/Black/Blue/ Yellow/Green
- Unit: mm




Part No.	Wire mm²	A	D	L	Package
V-1.25	1.25	3.3	3.1	15.0	100
V-2	2.0	4.5	3.7	16.0	
V-3.5	3.5	5.7	4.1	18.0	
V-5.5	5.5	5.7	5.2	20.0	
V-8	8.0	7.2	6.2	21.0	
V-14	14.0	10.0	8.0	28.0	
V-22	22.0	12.0	9.5	29.0	

Part No.	Wire mm²	A	D	L	Package
V-38	38.0	14.0	11.8	34.0	100
V-60	60.0	17.0	13.9	42.0	
V-70	70.0	17.9	15.1	45.0	
V-80	80.0	19.5	16.0	46.0	50
V-100	100.0	22.0	18.0	55.0	
V-125	125.0	24.4	20.0	60.0	
V-150	150.0	26.0	22.0	65.0	
V-185	185.0	29.0	24.0	66.7	
V-200	200.0	32.2	24.0	69.0	
V-250	250.0	37.5	26.5	75.0	
V-325	325.0	37.5	30.0	75.0	25
V-400	400.0	45.1	37.5	83.0	
V-500	500.0	48.2	40.2	85.0	
V-630	630.0	53.8	45.2	93.0	



- Material: Soft P.V.C
- Color: Natural/Blue
- Unit: mm

用途：用於端子壓著後端子與外界間之絕緣。



FLAT INSULATING SLEEVES

・如需UL認可材質，請在料號尾碼加UL下單
・ Please add UL after Part Number for UL certified material.

SERIES-110					
Part No.	A	D	L	Wire Size(O.D)	Package
S4020	4.0	2.0	22.0	2.0	1000
S4025	4.0	2.5	22.0	2.5	
S4028	4.0	2.8	22.0	2.8	
S4030	4.0	3.0	22.0	3.0	
S4035	4.0	3.5	22.0	3.0	
SERIES-187					
Part No.	A	D	L	Wire Size(O.D)	Package
S5825	5.8	2.5	22.0	2.5	1000
S5830	5.8	3.0	22.0	3.0	
S5835	5.8	3.5	22.0	3.5	
S5840	5.8	4.0	22.0	3.5	

・如需UL認可材質，請在料號尾碼加UL下單
・ Please add UL after Part Number for UL certified material.


SERIES-205					
Part No.	A	D	L	Wire Size(O.D)	Package
S6525	6.5	2.5	24.0	2.5	1000
S6530	6.5	3.0	24.0	3.0	
S6530/37	6.5	3.0	37.0	3.0	
S6535	6.5	3.5	24.0	3.5	
S6540	6.5	4.0	24.0	4.0	
SERIES-250					
Part No.	A	D	L	Wire Size(O.D)	Package
S8030	7.8	3.0	26.0	3.0	1000
S8035	7.8	3.5	27.0	3.5	
S8040	8.0	4.0	27.0	4.0	
S8045	8.0	4.5	27.0	4.5	
S8050	7.8	5.0	27.0	5.0	
S9535	9.5	3.5	26.0	3.5	

軟質端子保護套 TERMINAL SOFT SLEEVES

用途：用於端子壓著後端子與外界間之絕緣。




- Material: Soft P.V.C
- Color: Natural/Blue
- Unit: mm



Part No.	A	D	L	Package
R4028/38	5.0	2.8	32.0	1000
R5025	5.0	2.5	33.0	
R5028	5.0	2.8	33.0	
R5030	5.0	3.1	33.0	
R5035	5.2	3.5	33.0	
R5040	5.5	4.0	33.0	



- Material: Soft P.V.C
- Color: Natural
- Unit: mm

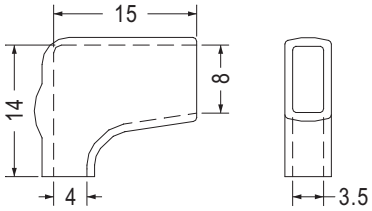


WIRE SIZE(O.D) Ø4.0


Part No.	Package
F8040	1000

PC端子保護套 TERMINAL HOUSING


用途：用於電池端子之絕緣與保護。

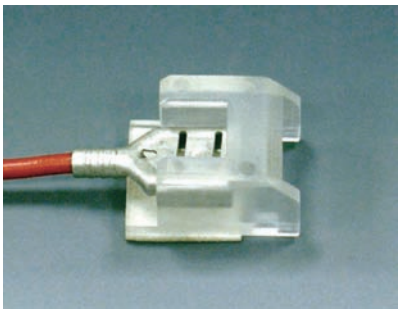


- Material: PC (UL)
- Flame Class: 94V-2
- Color: Natural
- Unit: mm

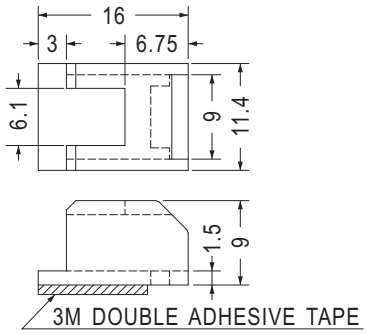


Part No.	Package
PCTT-1	1000

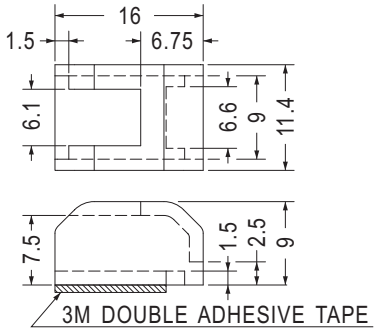


Part No.	Package
PCTT-2	1000

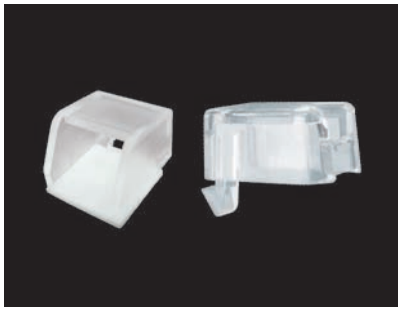

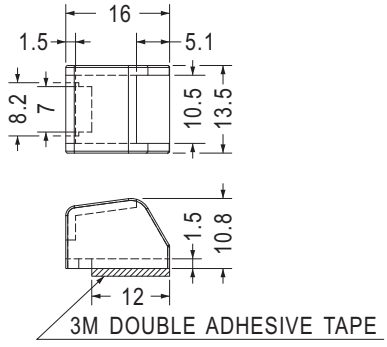

Part No.	Package
PCTT-3	1000

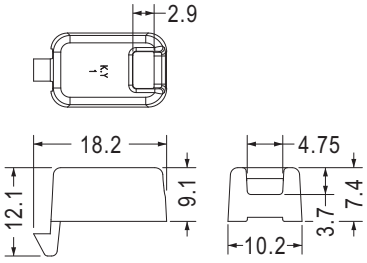


Part No.	Package
CVER-1	1000

保護蓋 INSULATED CAP

用途：用於HUB掛載孔之防塵與絕緣。




- Material: Nylon 66 (UL)/PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm




Part No.	A	B	C	Package
SCD-1	24.0	15.0	2.0	1000
SCD-2	31.5	18.0	2.4	
SCD-3	32.0	22.1	2.4	500
SCD-4	37.0	22.0	2.5	
SCD-8	26.0	18.6	2.3	2000
SCD-13	55.0	40.0	3.5	500
SCD-14	32.0	22.4	3.7	1000




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm




Part No.	Package
SCD-6	2000




Part No.	Package
SCD-5	1000




Part No.	A	B	C	D	E	Package
SCD-7	51.7	39.23	3.0	28.0	0.6	2000
SCD-15	42.0	24.6	4.5	24.0	0.5	1000



Part No.	Package
SCD-10	2000




Part No.	Package
SCD-12	2000

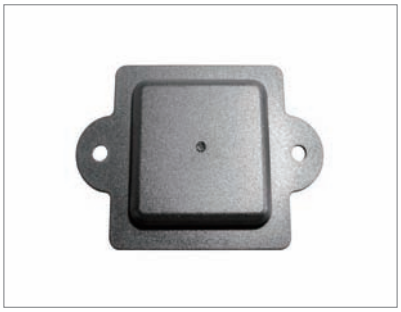

- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm


用途：用於維修用孔之防塵與絕緣，可用螺絲固定。




Part No.	Package
SCD-9	2000

保護蓋 INSULATED CAP

用途：用於零件之防塵與保護。

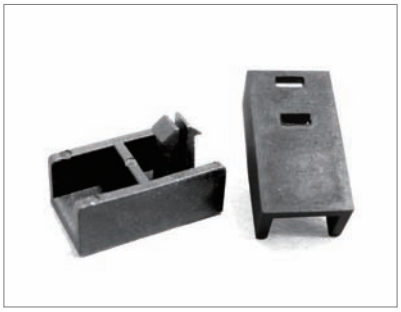


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

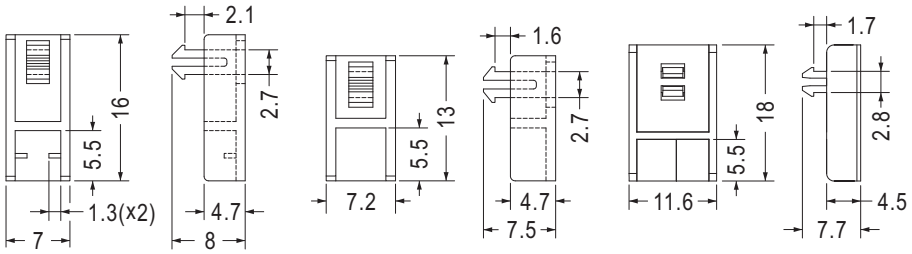

Part No.	Package
PH-25	1000


Part No.	Package
PH-41	1000

Part No.	Package
COVER-5	1000

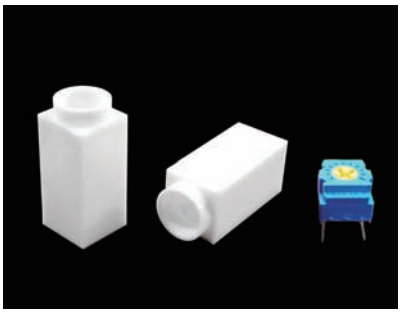

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


用途：用於機器之可調電阻，灌膠之保護，可配合MHD系列使用。




Part No.	A	B	C	D	Package
VRCVA-18	8.95	8.95	20.5	6.9	100
VRCVA-21.4	8.95	8.95	23.9	6.9	
VRCVA-27.5	8.95	8.95	30.0	6.9	
VRCVA-33	8.9	8.6	35.5	6.6	

開關蓋 TACT SWITCH CAP


用途：用於開關之加長與保護。

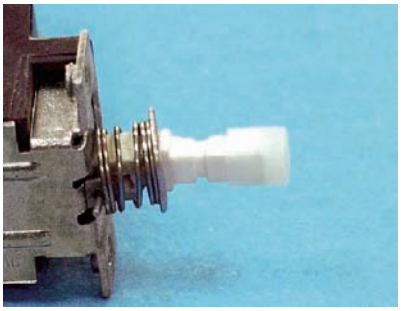

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	A	Package
SWC-1	5.6	2000
SWC-2	4.7	

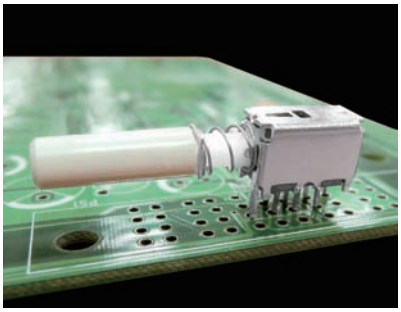


- Material: PC+ABS (UL)
- Flame Class: 94V-2/94V-0
- Color: White
- Unit: mm

用途：用於開關之帽蓋。



Part No.	Package
TSC-22	1000




- Color: Black


Part No.	Package
TSC-23	1000

開關蓋 TACT SWITCH CAP


用途：用於TACT開關之帽蓋。

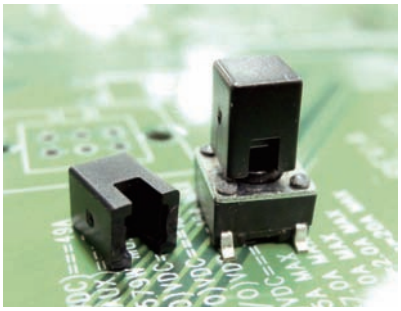

- Material: ABS (UL)
- Flame Class: 94HB
- Color: Black
- Unit: mm




Part No.	Package
TSC-1	1000




Part No.	A	Package
TSC-2	3.3	2000
TSC-2A	4.0	




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
TSC-10	1000




Part No.	Package
TSC-11	1000




Part No.	A	B	Package
TSC-8	6.0	2.5	1000
TSC-46	8.0	2.8	

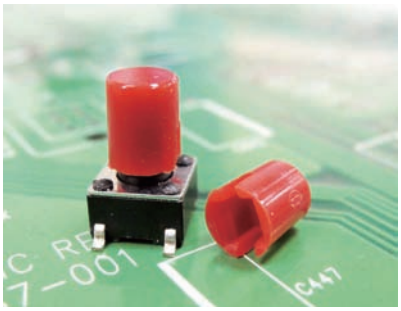

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black/Red/Gray
- Unit: mm




Part No.	Package
TSC-19	1000



Part No.	Package
TSC-33	1000

- Material: ABS (UL)
- Flame Class: 94HB
- Color: Black/White
- Unit: mm




Part No.	Package
TSC-32	1000

開關蓋 TACT SWITCH CAP

用途：將TACT開關固定於機板上。




- Material: ABS (UL)
- Flame Class: 94HB
- Color: Black
- Unit: mm



Part No.	Package
TSC-40	1000


- Material: ABS
- Color: White
- Unit: mm



Part No.	Package
TSC-45	1000




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	Package
TSC-26	1000


- Material: ABS (UL)
- Flame Class: 94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
TSC-49	2000



- Material: Nylon 66 (UL)/ABS (UL)
- Flame Class: 94HB/94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	A	B	C	Package
TSC-4	12.7	3.0	2.0	1000
TSC-5	12.7	4.2	3.0	
TSC-25	11.6	3.0	2.0	




Part No.	Package
TSC-6	1000

端子蓋 CONNECTOR COVER

用途：用於端子之絕緣。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
TSC-28	1000


測試針遮蓋 TEST PIN CAP

用途：把多餘PIN腳遮蓋，避免刺傷工作人員。

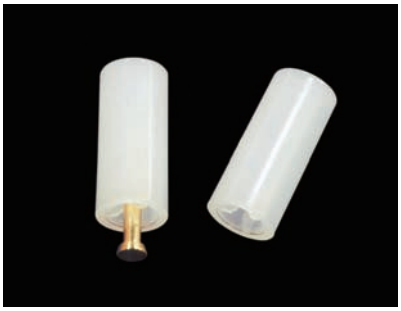

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm







Part No.	Package
TSC-42	1000


開關蓋 TACT SWITCH CAP

用途：用於TACT開關之帽蓋。

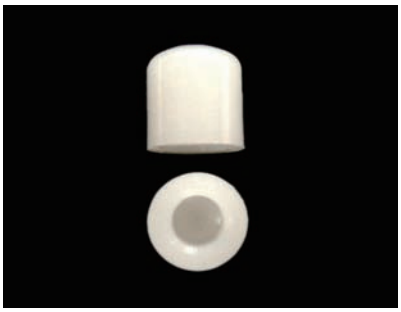

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm







Part No.	Package
PENCOMC-1	1000



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

用途：用於開關之按鍵。







Part No.	Package
TSC-20	1000



- Material: PC+ABS (UL)
- Flame Class: 94V-0
- Color: Black/Gray
- Unit: mm

用途：用於開關之帽蓋。







Part No.	Package
TSC-9	1000

開關蓋 TACT SWITCH CAP


用途：用於TACT開關之帽蓋。

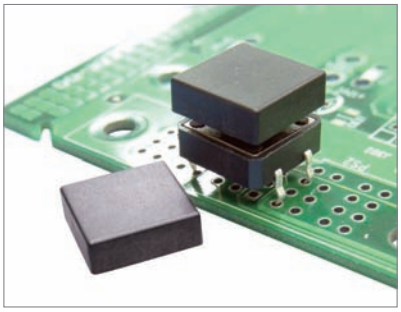


- Material: ABS (UL)
- Flame Class: 94HB
- Color: Black
- Unit: mm



Part No.	A	B	C	Package
TSC-3	12.0	12.0	3.1	1000
TSC-18	9.0	9.0	2.8	




Part No.	Package
TSC-36	1000

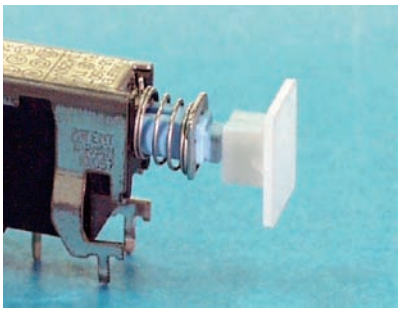


- Material: Nylon 66 (UL)/PC+ABS (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black/Gray
- Unit: mm


用途：用於開關之帽蓋。



Part No.	Package
SWCL-7	1000

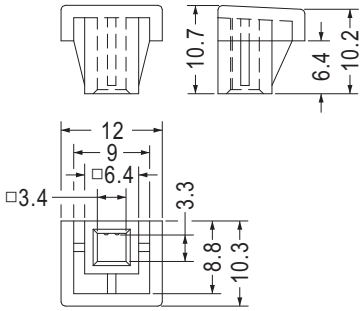


Part No.	Package
SWCL-10	1000

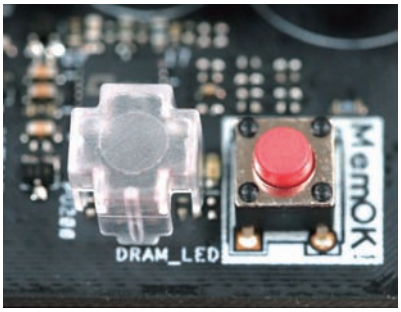

- Material: PC (UL)
- Flame Class: 94V-2
- Color: Transparent
- Unit: mm

用途：防止TACT開關之誤觸。




Part No.	Package
TSC-38	1000

LED按鍵蓋 LED PUSHBUTTON CAP

用途：用於LED按鍵蓋。



- Material: PC (UL)
- Flame Class: 94V-2
- Color: Transparent
- Unit: mm




Part No.	Package
LEM-72	1000

開關蓋 SWITCH COVER


用途：用於電源插座防塵與保護。



- Material: PVC
- Color: Transparent
- Unit: mm




Part No.	Package
ABSC-2318	1000

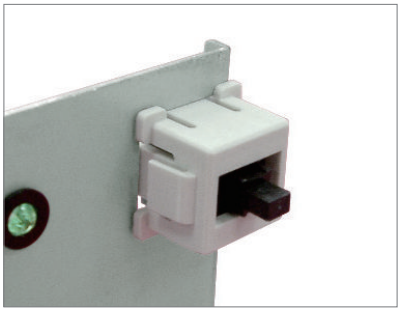


- Material: PC+ABS (UL)
- Flame Class: 94V-0
- Color: Natural/Black
- Unit: mm

用途：將TACT開關固定於機板上。

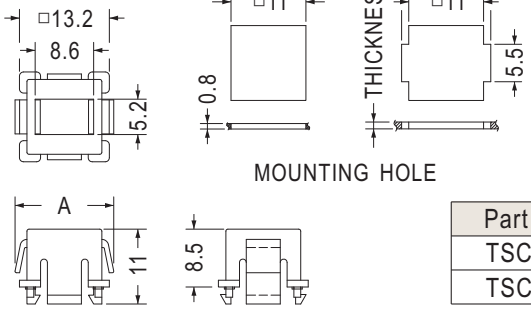


Part No.	A	T	Package
TSC-7	14.5	1.0	1000
TSC-7L	14.3	1.4	

- Material: ABS (UL)
- Flame Class: 94HB
- Color: Natural/Computer
- Unit: mm

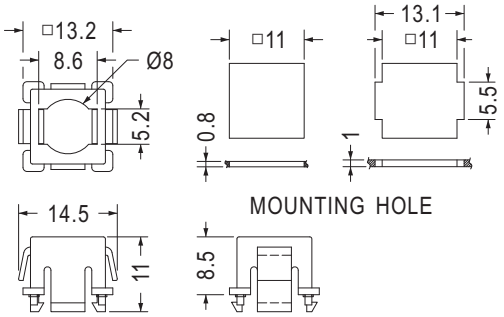


Part No.	Package
TSC-7T	1000

- Material: ABS (UL)
- Flame Class: 94HB/94V-0
- Color: Natural/Black/Computer
- Unit: mm

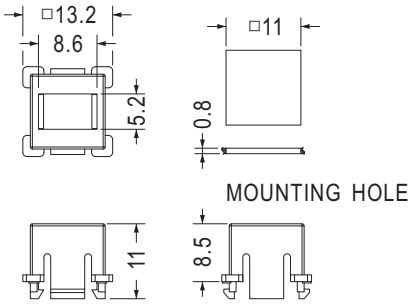


Part No.	Package
TSC-7Y	1000

- Material: PC+ABS (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

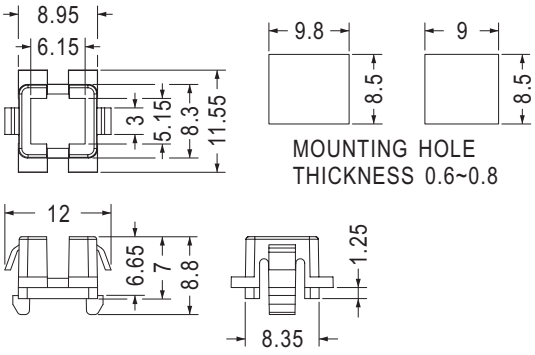

Part No.	Package
TSC-27	1000


- Material: ABS (UL)
- Flame Class: 94HB
- Color: Black
- Unit: mm

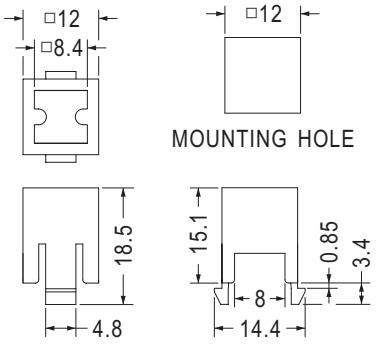


Part No.	Package
TSC-24	1000

麥克風或電容套 MIC OR CAPACITOR CAP

用途：用於麥克風或電容之帽套，防止共振。

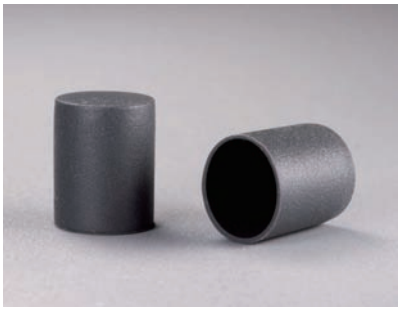

- Material: Rubber/Silicon Rubber (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm




Part No.	A	B	C	D	Package
MIC-3	10.8	9.2	7.0	7.5	1000
★MIC-40	9.6	12.0	11.5	8.6	
MIC-44	9.6	10.0	9.5	8.6	

麥克風套 MIC HOLDER


用途：用於麥克風之帽套，防止共振。




- Material: Rubber/Silicon Rubber/ Silicon Rubber (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm




Part No.	A	B	C	D	E	Package
MIC-1	12.0	8.6	7.0	9.5	3.0	1000
MIC-1A	12.5	9.0	7.0	9.5	3.0	
MIC-4	8.0	6.0	5.0	5.8	3.0	2000
MIC-9	7.1	3.3	2.5	6.0	4.0	
★MIC-30	8.4	5.5	5.0	7.6	4.5	
MIC-32	7.1	4.7	4.0	6.0	4.0	
MIC-36	10.5	6.8	6.0	10.0	4.0	1000
MIC-38	25.1	12.0	10.9	22.8	16.1	
★MIC-45	7.8	10.0	8.5	4.8	1.0	



Part No.	A	B	C	D	E	Package
MIC-5	8.0	4.0	3.0	6.0	2.8	2000
MIC-42	8.6	6.8	6.5	8.0	5.6	
★MIC-43	25.0	12.3	6.7	12.5	6.0	



Part No.	Package
MIC-6	2000

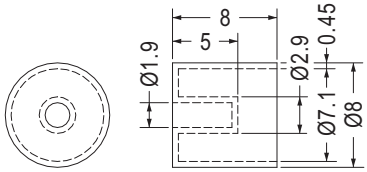


Part No.	Package
MIC-10	2000

矽膠蓋 SILICON RUBBER CAP


用途：用於零件之保護，防塵美觀。



- Material: Silicon Rubber (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm

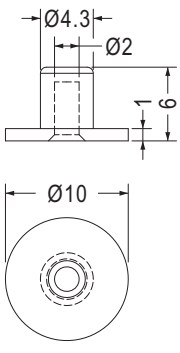

Part No.	Package
TF-1198	1000

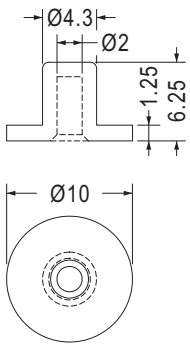


Part No.	Package
TF-1679	1000

矽膠蓋 SILICON RUBBER CAP


用途：用於零件之保護，防塵美觀。



- Material: Silicon Rubber
- Color: Black
- Unit: mm




Part No.	Package
TF-1639	1000

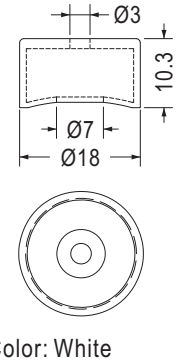

- Color: White


Part No.	Package
TF-1575	1000




Part No.	Package
MIC-39	1000

麥克風座 MIC HOLDER

用途：用於麥克風座，可降低雜音、噪音。

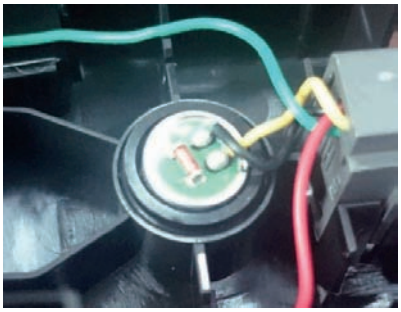

- Material: PE
- Color: Black
- Unit: mm




Part No.	Package
MIC-31	1000

開關蓋 TACT SWITCH CAP


用途：開關之絕緣。




- Material: PE
- Color: Black
- Unit: mm



Part No.	Package
EM-19	500






絕緣蓋 INSULATOR COVER

用途：用於波段開關旋扭。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

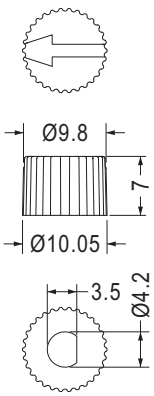

Part No.	Package
EMAC-463	1000




7


- USB座護蓋
  USB Housing
- 防塵蓋
  Connector Cover
- 光纖連接器護套
  Fiber Optic
  Connector Cover
- 電源插座防塵蓋
  Power Connector Cover
- 螺絲固定座
  Plastic Conical Anchors
- 鉚釘
  Snap Rivet
- 風扇鉚釘
  Fan Mount Rivet
- 散熱片扣件
  Heat Sink Rivet
- 門扣
  Door Lock

USB座護蓋 USB PORT COVER


用途：用於USB接頭防塵與保護。

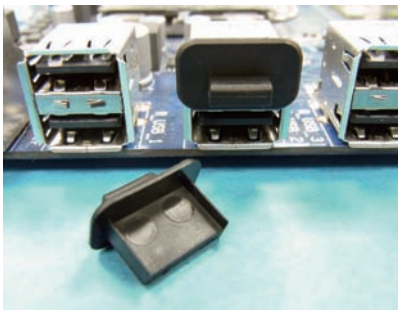


- Material: ABS (UL)
- Flame Class: 94HB
- Color: Black
- Unit: mm




Part No.	Package
USBC-2	1000




Part No.	Package
USBC-6	1000



Part No.	Package
USBC-24	1000




Part No.	Package
USBC-37	1000

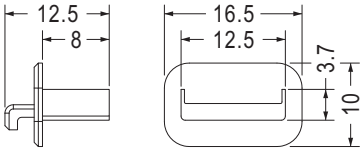


- Material: PP
- Color: Black

Part No.	Package
USBC-14	1000




- Material: PP (UL)
- Flame Class: 94HB
- Color: Natural/Black

Part No.	A	B	C	Package
USBC-33	13.2	7.8	3.7	1000
USBC-33-1	14.5	8.0	3.8	




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0

Part No.	Package
USBC-43	1000




- Material: TPE (UL)
- Flame Class: 94V-0

Part No.	Package
USBC-33-2	1000




- Material: TPE (UL)
- Flame Class: 94V-0

Part No.	Package
USBC-43-1	1000



- Material: PP
- Color: Black/Computer

Part No.	Package
USBC-4	1000




Part No.	Package
USBC-11	1000

USB座護蓋 USB PORT COVER




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

用途：用於重要的USB接頭之堵塞，避免重要資料洩漏。拔卸困難，兼具防塵與保護。




不可重複使用 Not Reusable

Part No.	Package
USBC-8	1000

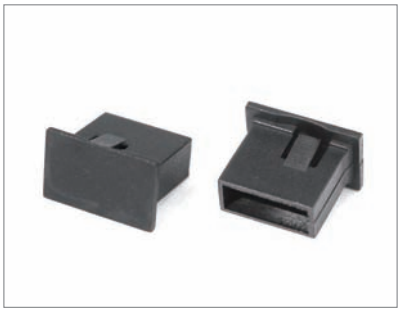


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

用途：用於USB TYPE A DIP接頭，拔卸困難，兼具防塵與保護。

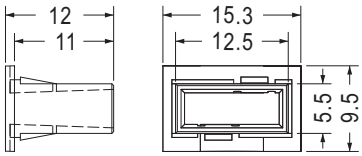


不可重複使用 Not Reusable

Part No.	Package
USBC-7	1000

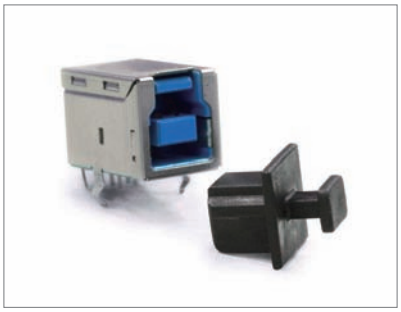


- Material: PP
- Color: Black
- Unit: mm

用途：用於USB接頭防塵與保護。

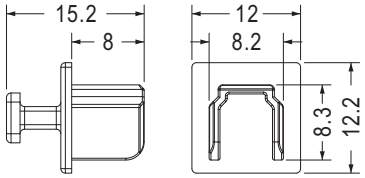


Part No.	Package
USBC-34	1000



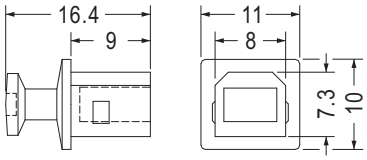

- Material: ABS (UL)
- Flame Class: 94HB

Part No.	Package
USBC-1	1000




- Color: Black/Computer

Part No.	Package
USBC-3	1000




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

用途：用於POWER USB接頭防塵與保護。



Part No.	Package
USBC-42	1000



- Material: TPE (UL)
- Flame Class: 94V-0


Part No.	Package
USBC-42-1	1000

MICRO USB防塵蓋 MICRO USB PORT COVER

用途：用於MICRO USB接頭防塵與保護。




- Material: TPE
- Color: Black
- Unit: mm



Part No.	Package
USBC-15	1000




- Material: PE
- Color: Black
- Unit: mm



Part No.	Package
USBC-31	1000

- Material: TPE (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm




Part No.	Package
USBC-31-1	1000

MINI USB座護蓋 MINI USB PORT COVER

用途：用於MINI USB接頭防塵與保護。




- Material: PP (UL)
- Flame Class: 94HB
- Color: Black
- Unit: mm

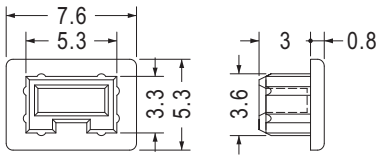


Part No.	Package
USBC-9	1000



- Material: TPE
- Color: Black
- Unit: mm



Part No.	Package
USBC-10	1000




Part No.	Package
USBC-13	1000

MINI USB座護蓋 MINI USB PORT COVER


用途：用於MINI USB接頭防塵與保護。



- Material: TPE
- Color: Black
- Unit: mm

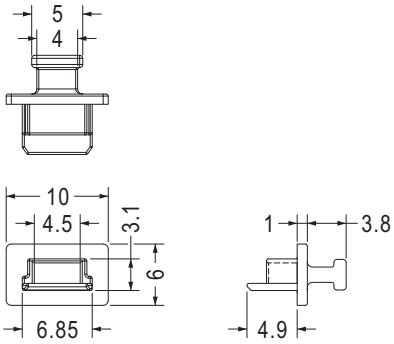


Part No.	Package
USBC-25	1000

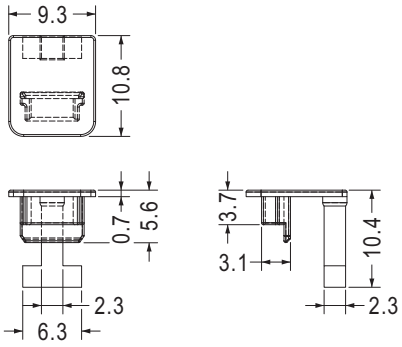


Part No.	Package
USBC-16	1000

MINI SAS HD防塵蓋 MINI SAS HD COVER

用途：用於MINI-SAS HD接頭防塵與保護。

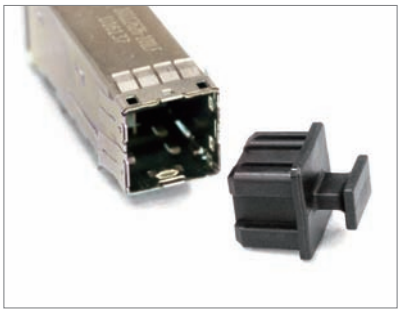


- Material: PE
- Color: Black
- Unit: mm

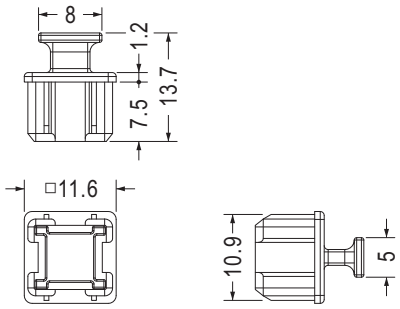

Part No.	Package
KPS-32	1000



- Material: TPE
- Color: Black
- Unit: mm




Part No.	Package
KPS-39	1000

USB座護蓋 USB PORT COVER

用途：用於USB接頭防塵與保護。




- Material: TPE
- Color: Black
- Unit: mm

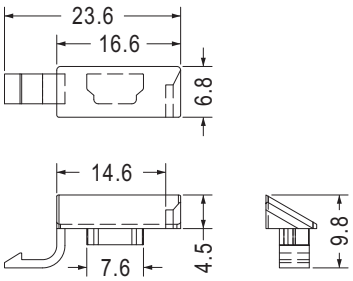

Part No.	Package
USBC-17	1000



- Material: TPU
- Color: Black
- Unit: mm




Part No.	Package
USBC-30	1000

防塵蓋 CONNECTOR COVER

用途：用於汽車點菸器防塵與保護用。



- Material: TPE
- Color: Black
- Unit: mm





Part No.	Package
DCVER-1	500



- Material: TPE
- Color: Black
- Unit: mm

用途：用於USB接頭防塵與保護。





MOUNTING HOLE


Part No.	Package
COVER-1	500


防塵蓋 CONNECTOR COVER

用途：用於USB接頭防塵與保護。



- Material: Silicon Rubber (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm







MOUNTING HOLE
THICKNESS 1.0

Part No.	Package
CJCV-3	1000

- Material: Silicon Rubber
- Color: Black
- Unit: mm







MOUNTING HOLE
THICKNESS 1.5

Part No.	Package
CJCV-7	1000

- Material: TPU
- Color: Black/White
- Unit: mm

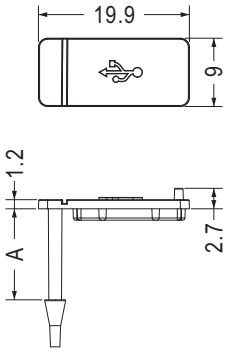



MOUNTING HOLE


Part No.	A	Package
CJCV-1	1.8	500
CJCV-2	12.0	


BBU防塵蓋 CONNECTOR COVER

用途：用於BBU的防塵與保護用。



- Material: TPU
- Color: Black
- Unit: mm







MOUNTING HOLE

Part No.	Package
CJCV-4	1000



- Material: TPE (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm





MOUNTING HOLE
(RECOMMEND FOR REFERENCE ONLY)


Part No.	Package
CJCV-12	1000


連接器蓋 CONNECTOR COVER

用途：用於連接器防塵與保護。



- Material: TPU
- Color: Black/White
- Unit: mm





MOUNTING HOLE


Part No.	Package
EMC-1	500


SIM卡蓋 SIM CARD CAP


用途：用於SIM卡防塵與保護用。



- Material: TPU
- Color: Black/White
- Unit: mm








MOUNTING HOLE

Part No.	Package
EM-303	500



MOUNTING HOLE


Part No.	Package
EM-303-1	500


SD防塵蓋 SD CONNECTOR COVER

用途：用於SD卡防塵與保護用。



- Material: TPE
- Color: Black
- Unit: mm







MOUNTING HOLE

Part No.	Package
CJCV-6	1000







MOUNTING HOLE


Part No.	Package
CJCV-11	1000

USB TYPE-C防塵蓋 USB 3.0 TYPE-C COVER


用途：用於USB 3.0 TYPE-C接頭之防塵與保護。




- Material: PE
- Color: Black
- Unit: mm



Part No.	Package
USB3C-1	1000




Part No.	Package
USB3C-2	1000




Part No.	Package
USB3C-3	1000





Part No.	Package
USB3C-4	1000




- Material: TPE(UL)
- Flame Class: 94V-0


Part No.	Package
USB3C-7	1000


USB座護蓋 USB HOUSING

用途：用於USB防塵與保護。

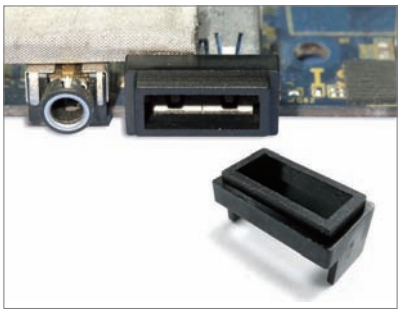

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm






Part No.	Package
USBH-1	1000


USB座護蓋 USB COVER

用途：用於USB 3.0接頭防塵與保護。



- Material: TPE
- Color: Black
- Unit: mm







Part No.	Package
USBC-21	1000


防塵蓋 CONNECTOR COVER


用途：用於KVM連接器之防塵與保護。

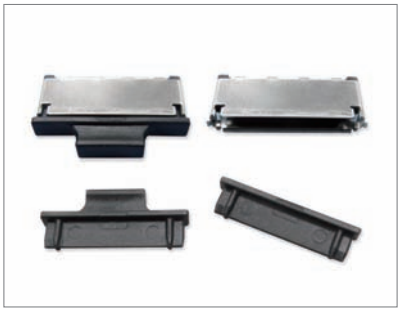

- Material: PE
- Color: Black
- Unit: mm



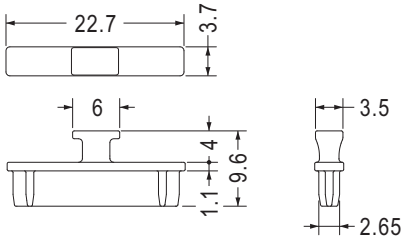

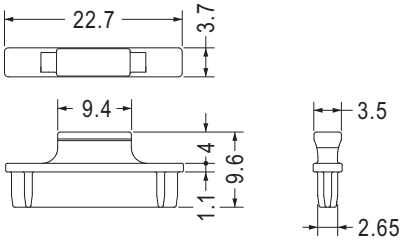


Part No.	Package
KVM-3	1000

Part No.	Package
KVM-1	1000
KVM-2	



- Material: PC+ABS
- Color: Black
- Unit: mm

用途：用於連接器之防塵與保護。

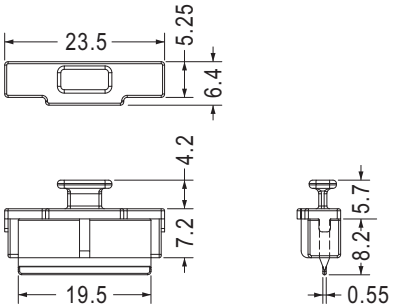


NEW


Part No.	Package
SFPC-23	1000

MCIO防塵蓋 CONNECTOR COVER

用途：用於MCIO連接器之防塵與保護。

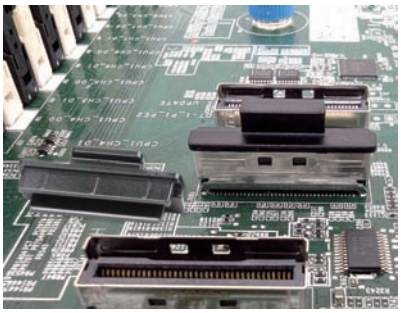

- Material: PC+ABS
- Color: Black
- Unit: mm

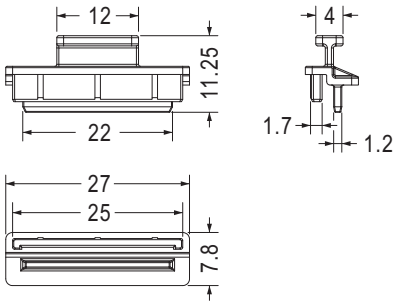

NEW


Part No.	Package
MCIO-1	1000

CF防塵蓋 CONNECTOR COVER

用途：用於CF連接器之防塵與保護。



- Material: TPU
- Color: Black
- Unit: mm

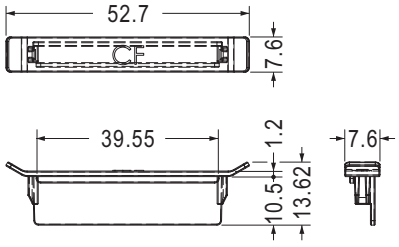


Part No.	Package
CFC-1	500

防塵蓋 CONNECTOR COVER

用途：使用於PCI-E X1連接器的防塵與保護用。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

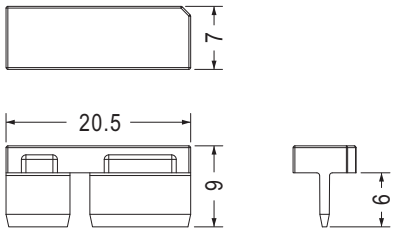


Part No.	Package
PCIEX-1	1000

IPHONE防塵蓋 IPHONE COVER

用途：用於iPhone連接器的防塵與保護用。





- Material: TPU
- Color: Black
- Unit: mm



Part No.	A	For	Package
IPOD-1	1.5	iPhone 3	1000
IPOD-2	1.0	iPhone 4	








Part No.	Package
IPOD-3	1000








Part No.	Package
IPOD-4	1000

IPHONE防塵蓋 IPHONE CONNECTOR COVER


用途：用於iPhone充電器接頭之防塵與保護。



- Material: PE
- Color: Natural
- Unit: mm



Part No.	Package
IPWC-1	1000




Part No.	Package
IPWC-2	2000

MINI USB防塵蓋 MINI USB PLUG COVER

用途：用於Mini USB接頭之防塵與保護。



- Material: PE
- Color: Natural
- Unit: mm




Part No.	Package
KPS-20	2000

MICRO USB防塵蓋 MICRO USB PLUG COVER


用途：用於Micro USB接頭防塵與保護。



- Material: PE
- Color: Natural
- Unit: mm



Part No.	Package
KPS-21	2000



Part No.	Package
KPS-24	1000


防塵蓋 CONNECTOR COVER


用途：用於RJ-11連接器之防塵與保護。







- Material: PE
- Color: Natural
- Unit: mm





Part No.	Package
PJCV-1	1000






Part No.	Package
PJCV-11	1000




- Material: PE
- Color: Natural
- Unit: mm

用途：用於USB接頭防塵與保護。



Part No.	Package
KPS-5	1000




Part No.	Package
KPS-6	1000

防塵蓋 CONNECTOR COVER

用途：用於連接器防塵與保護。



- Material: PE
- Color: Natural/White/Black
- Unit: mm




Part No.	A	B	C	D	E	Package
KPSA-1	5.7	2.85	3.85	7.8	2.0	1000
KPSA-3	4.5	2.3	3.3	3.5	3.2	

光纖連接器護蓋 OPTICAL PORT COVER

用途：用於光纖連接器之防塵與保護。



- Material: PE
- Color: Natural
- Unit: mm




Part No.	Package
KPS-4	1000

連接器蓋 CONNECTOR COVER


用途：用於連接器防塵與保護。



- Material: PE
- Color: Natural
- Unit: mm



Part No.	A	B	C	D	Package
KPS-1	15.8	13.4	11.2	10.0	500
KPS-2	10.7	9.0	9.6	8.6	1000
KPS-3	10.3	8.4	8.0	7.0	




Part No.	Package
KPS-16	1000

用途：用於天線連接器之防塵與保護。



- Material: Silicon Rubber
- Color: Black
- Unit: mm




Part No.	Package
TF-589	1000

用途：用於連接器RCA端子之防塵與保護用。




- Material: PE
- Color: Natural
- Unit: mm




Part No.	Package
KPS-9	1000



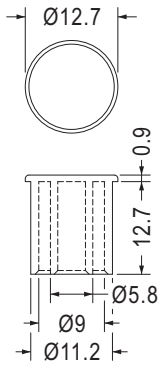


Part No.	Package
CRCAM-1	1000

用途：用於F端子之防塵與保護用。

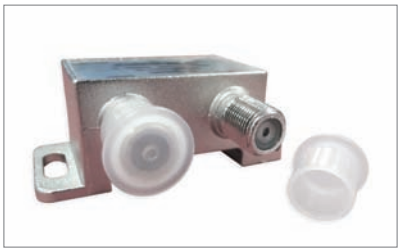




- Material: PE
- Color: Natural/Black
- Unit: mm



Part No.	Package
KPS-12	1000




- Color: Natural

Part No.	Package
KPS-31	1000


用途：用於天線端子之防塵與保護。



- Material: PE
- Color: Natural/Black
- Unit: mm



Part No.	Package
KPS-29	1000




Part No.	Package
KPS-46	1000

防塵蓋 CONNECTOR COVER


用途：用於連接器防塵與保護。



- Material: PE
- Color: Black/Red
- Unit: mm

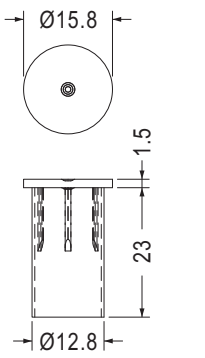


Part No.	Package
KPS-15	1000

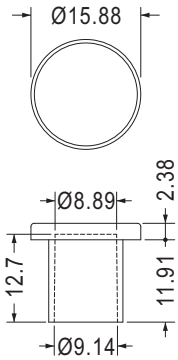


Part No.	Package
KPS-19	1000



- Material: PP (UL)
- Flame Class: 94HB
- Color: Black
- Unit: mm

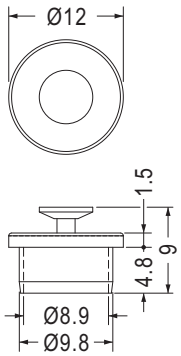


Part No.	Package
KPS-18	1000

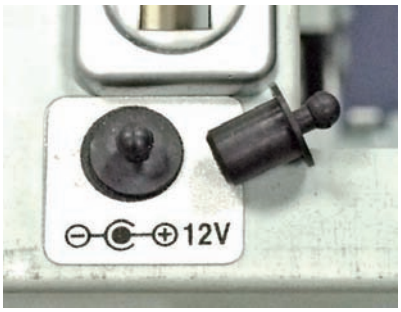

- Material: Rubber
- Color: Black
- Unit: mm

用途：用於電源連接器防塵與保護。

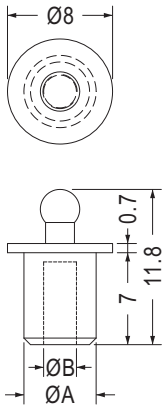


Part No.	A	B	Package
JKCV-1	5.5	2.5	1000
JKCV-4	4.0	2.0	

S端子蓋 S-VIDEO PLUG COVER

用途：S端子之防塵與保護。



- Material: PP
- Color: Natural/Black
- Unit: mm




Part No.	A	B	C	Package
SVDOC-1	9.0	8.0	9.6	1000
SVDOC-3	9.1	8.1	6.0	

S端子蓋 S-VIDEO PORT COVER

用途：S端子之防塵蓋、美觀。




- Material: PP
- Color: Natural
- Unit: mm



Part No.	Package
SVDOC-1S	1000



- Material: PE
- Color: Natural
- Unit: mm




Part No.	Package
SVDOC-2	1000

端子蓋 CONNECTOR COVER

用途：用於端子之防塵與保護。



- Material: PP
- Color: Natural/Black
- Unit: mm

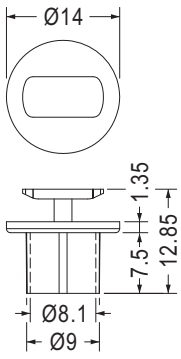


Part No.	Package
MOUC-1	1000

端子蓋 CONNECTOR COVER

用途：用於端子之防塵與保護。



- Material: PP (UL)
- Flame Class: 94HB
- Color: Black
- Unit: mm




Part No.	Package
KPS-13	1000

平衡端子蓋 BALANCED PORT COVER


用途：平衡端子XLR座之防塵蓋、美觀。



- Material: PP/PE
- Color: Computer
- Unit: mm

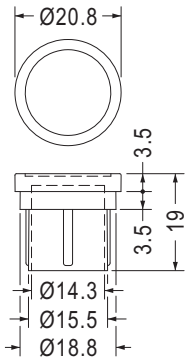


Part No.	Package
XLR-1	250

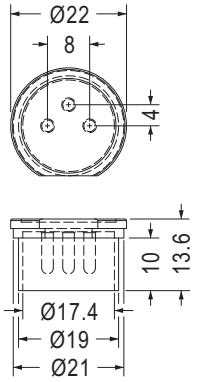


Part No.	Package
XLR-2	250

BNC絕緣座 BNC ROUND HOUSING

用途：用於BNC端子之絕緣。

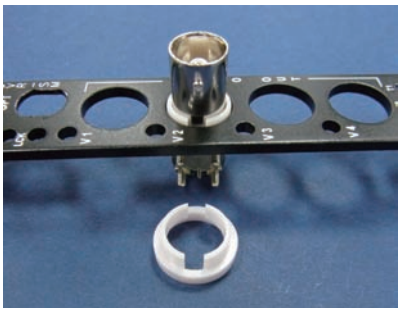


- Material: ABS (UL)
- Flame Class: 94HB
- Color: Natural
- Unit: mm



Part No.	Package
BNCH-1	1000


BNC防塵蓋 BNC CONNECTOR COVER

用途：用於BNC接頭防塵保護用。

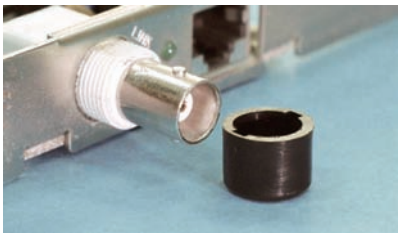




- Material: PE
- Color: Black/Gray
- Unit: mm



Part No.	Package
BNC-2	1000




- Color: Natural


Part No.	Package
BNC-4	1000

端子蓋 CONNECTOR HOUSING

用途：RJ-45轉接RJ-11接頭。

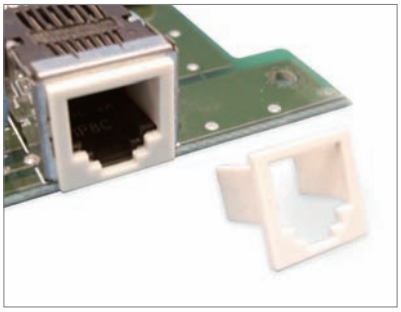

- Material: ABS (UL)
- Flame Class: 94HB
- Color: Natural/White
- Unit: mm




Part No.	A	B	C	D	E	F	H	Package
ASID-1	13.5	12.0	6.8		8.0	1.1	12.9	1000
ASID-2	13.9	11.9	7.1	1.3	7.9	1.1	12.0	
ASID-3	11.8	9.6	7.0	1.5	8.0	1.0	12.5	

RJ防塵蓋 RJ COVER


用途：用於RJ-11連接器之防塵蓋。



- Material: PE
- Color: Black
- Unit: mm




Part No.	Package
CRJ-11	1000

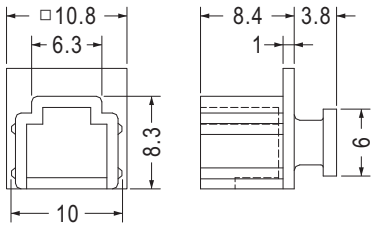


Part No.	Package
CRJ-11S	1000







Part No.	Package
CRJ-11-2	1000

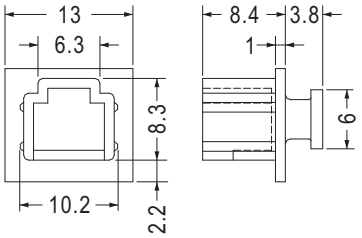


Part No.	Package
CRJ-11-2S	1000

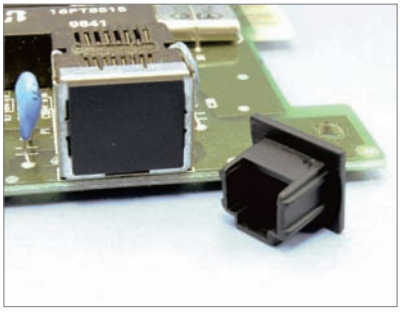

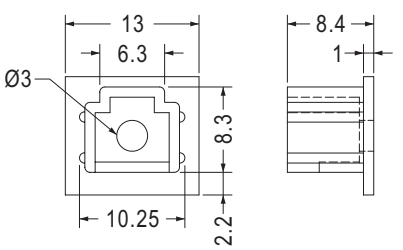


Part No.	Package
CRJ-11-3	1000




Part No.	Package
CRJ-11-6	1000

RJ防塵蓋 RJ COVER

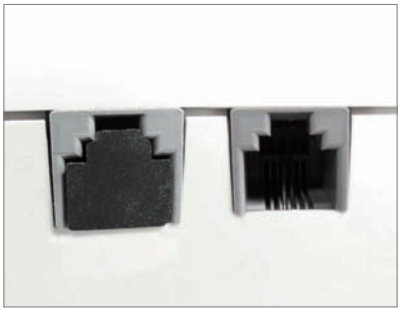

- Material: Silicon Rubber
- Color: Black
- Unit: mm

用途：用於多餘的RJ-11連接器之堵塞，避免誤用。

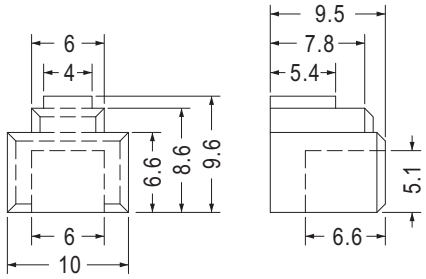


Part No.	Package
CRJ-11-4I	1000




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

用途：用於RJ-11連接器之防塵蓋。



Part No.	Package
CRJ-11-5	1000




- Material: PE
- Color: White

Part No.	Package
CRJ-11-7	1000




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

用途：用於網路接頭RJ-12防塵與保護。

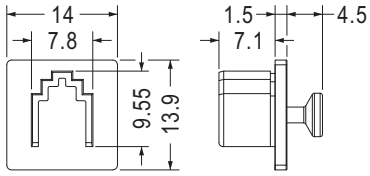

Part No.	Package
CRJ-12	1000




- Color: Black/Gray

Part No.	Package
CRJ-12-1	1000



- Material: PE
- Color: Black
- Unit: mm


用途：用於網路接頭RJ-22防塵與保護。

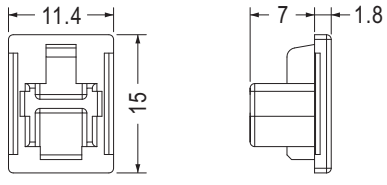


Part No.	Package
RJ-22	1000


RJ-45防塵蓋 RJ45 COVER

用途：用於多餘的RJ-45連接器之堵塞，避免誤用。

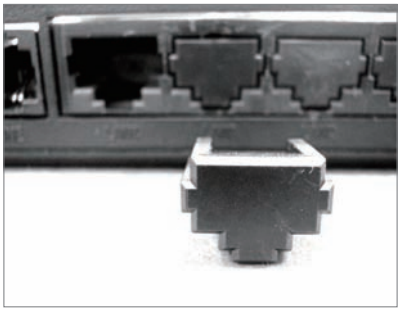


- Material: PE
- Color: Black
- Unit: mm






Part No.	Package
PJT-45	500

Part No.	Package
PJU-45	500

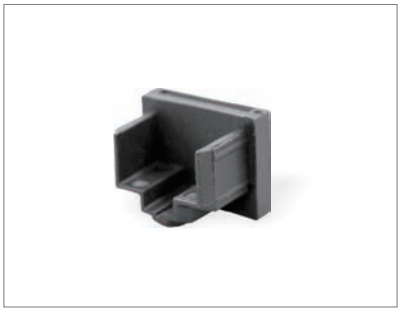


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


用途：用於網路接頭RJ-45防塵與保護。



Part No.	Package
PJB-45	1000

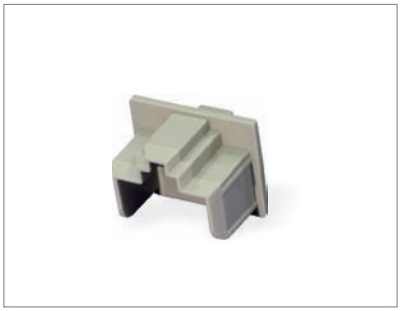


- Material: PE
- Color: Gray
- Unit: mm

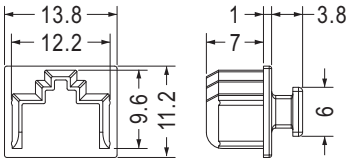


Part No.	Package
PJBA-45	1000



- Material: ABS
- Color: White
- Unit: mm






Part No.	Package
PJSA-45	1000



- Material: PE
- Color: Black
- Unit: mm




Part No.	Package
RJ-45	500

RJ-45防塵蓋 RJ45 COVER


用途：用於網路接頭RJ-45防塵與保護。




- Material: ABS (UL)
- Flame Class: 94HB
- Color: Black
- Unit: mm

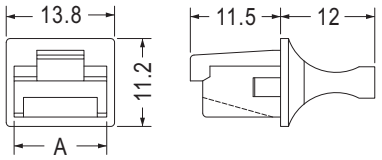


Part No.	A	Package
PJC-45	11.9	500
PJC-45L	12.0	



Part No.	Package
PJS-45	500

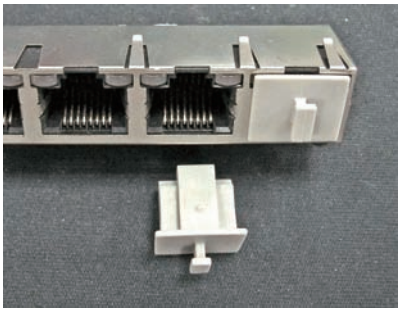


- Material: PE
- Color: Black
- Unit: mm

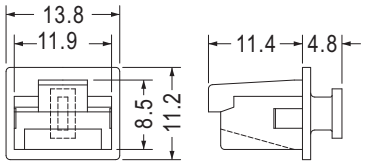


- Color: Black/Gray

Part No.	Package
PJR-45	500




Part No.	Package
PJD-45	1000




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0

Part No.	Package
PJD-45-1	1000




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0

Part No.	Package
PJD-45-2	1000




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black/Gray

Part No.	Package
PJD-45-4	1000



- Material: TPE (UL)
- Flame Class: 94V-0
- Color: Black/Gray

Part No.	Package
PJD-45-5	1000




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0

Part No.	Package
PJV-45	1000


7

RJ-45防塵蓋 RJ45 COVER

用途：用於網路接頭RJ-45防塵與保護。

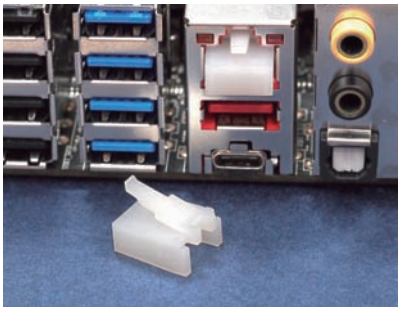

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
PJRA-45	500

防塵蓋 CONNECTOR COVER


用途：用於CD ROM音源線之防塵與保護。



- Material: PE
- Color: Black
- Unit: mm



Part No.	Package
CDMCV-2	1000

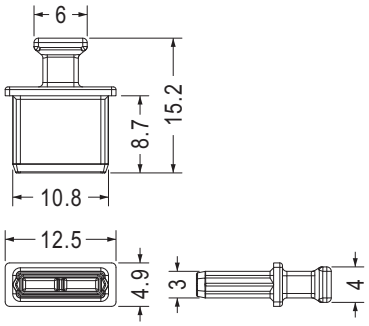


Part No.	Package
CDMCV-1	1000

光纖連接器護套 FIBER OPTIC CONNECTOR COVER


用途：用於光纖接頭PLT130T防塵與保護。




- Material: ABS (UL)
- Flame Class: 94HB
- Color: Black
- Unit: mm



Part No.	Package
OPC-2	1000

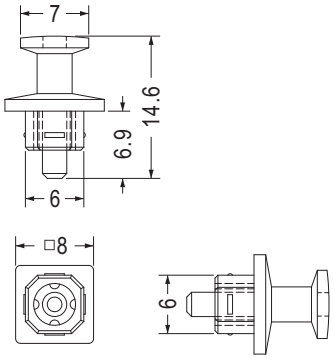


Part No.	Package
OPC-1	1000

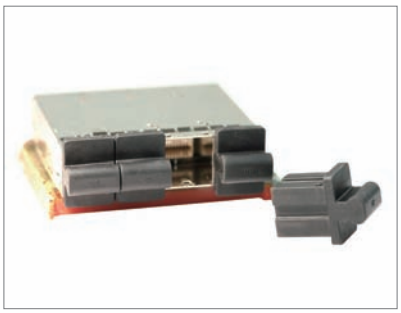


- Material: TPE
- Color: Black
- Unit: mm

用途：用於光纖接頭防塵與保護。

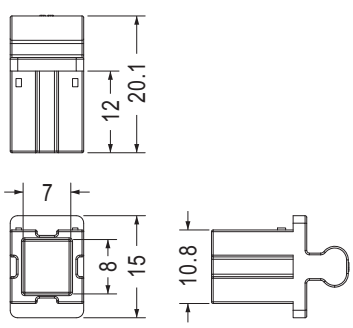


Part No.	Package
SFPC-21	500


用途：用於光纖接頭防塵與保護。

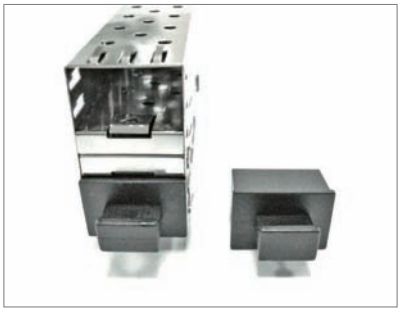


- Material: PE
- Color: Black
- Unit: mm




Part No.	Package	Type
SFPC-3	1000	SFP




Part No.	Package	Type
SFPC-8	1000	SFP




Part No.	Package	Type
SFPC-7	1000	SFP




Part No.	Package	Type
SFPC-13	1000	SFP

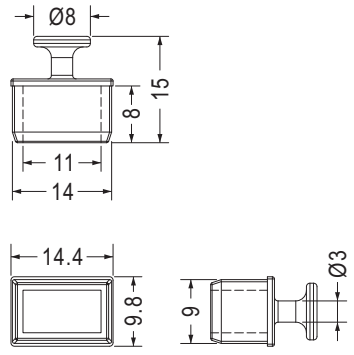

Part No.	Package	Type
SFPC-18	1000	SFP




Part No.	Package	Type
SFPC-2	1000	SFP




Part No.	A	B	Package	Type
SFPC-1	14.6	10.0	1000	SFP
SFPC-10	14.4	9.8		SFP


- Material: Nylon 66 (UL)
- Flame Class: 94V-2

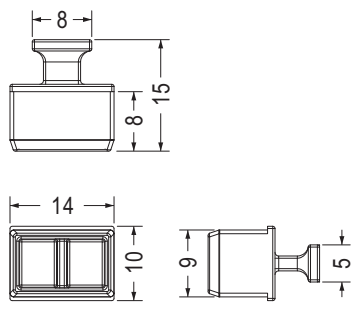

Part No.	Package	Type
SFPC-4	1000	SFP

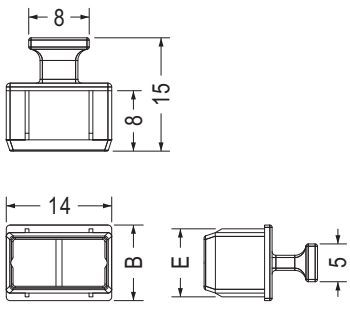

Part No.	B	E	Package	Type
SFPC-11	10.0	9.0	1000	SFP
SFPC-14	11.0	9.25		SFP




Part No.	Package	Type
SFPC-22	1000	SFP

用途：用於光纖接頭防塵與保護。




- Material: Silicon Rubber (UL)
- Flame Class: 94V-0
- Unit: mm

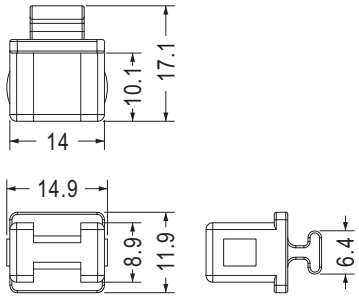


Part No.	Package	Type
SFPC-9	1000	SFP


- Material: NBR
- Color: Black
- Unit: mm




Part No.	Package	Type
TF-246	1000	SFP

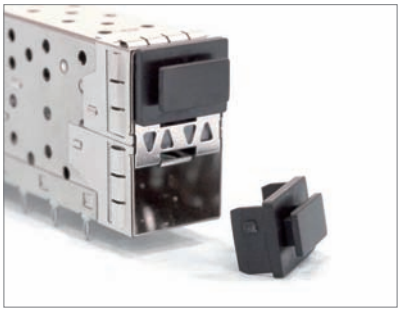


- Material: ABS (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm




Part No.	Package	Type
SFPC-15	1000	SFP

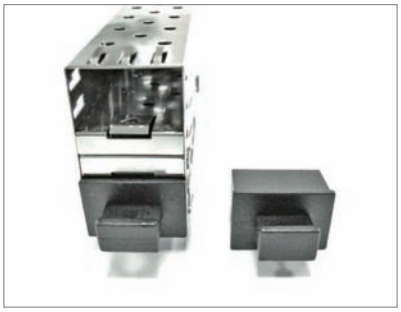


- Material: PE
- Color: Black
- Unit: mm



Part No.	Package	Type
SFPC-17	1000	QSFP

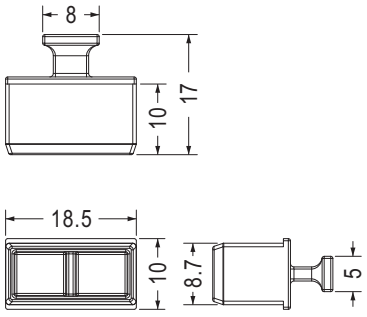


Part No.	Package	Type
SFPC-5	1000	QSFP

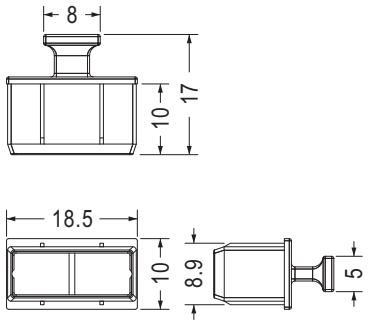

Part No.	Package	Type
SFPC-12	1000	QSFP


- Material: TPE




Part No.	Package	Type
SFPC-19	1000	QSFP


光纖連接器護套 FIBER OPTIC CONNECTOR COVER

用途：用於光纖接頭防塵與保護。

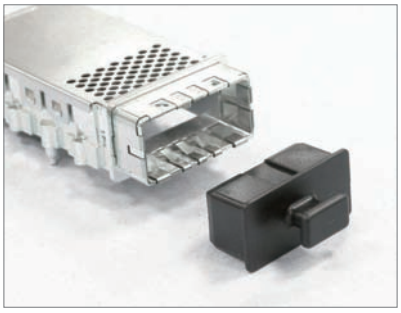

- Material: PE
- Color: Black
- Unit: mm







Part No.	C	E	Package
CXP-1	23.5	12.0	1000
CXP-2	22.0	11.0	


OSFP防塵蓋 OSFP COVER

用途：用於OSFP接頭防塵與保護。

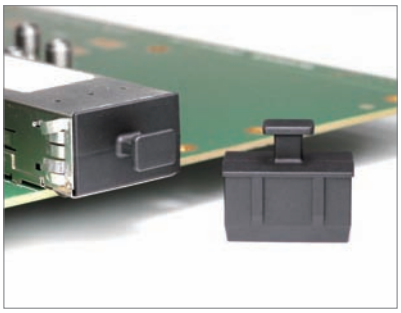

- Material: Nylon 66 (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm





NEW


Part No.	A	B	E	Package
OSFP-1	23.0	14.1	13.8	500
OSFP-2	23.2	16.6	15.5	


光纖防塵蓋 CONNECTOR COVER

用途：用於光纖座之防塵與保護。





- Material: PE
- Color: Natural
- Unit: mm





Part No.	Package
COVER-11	1000







Part No.	Package
COVER-12	1000



- Material: TPE
- Color: Black
- Unit: mm







Part No.	Package
COVER-3	1000

光纖防塵蓋 POWER CONNECTOR COVER

用途：用於光纖座之防塵與保護。

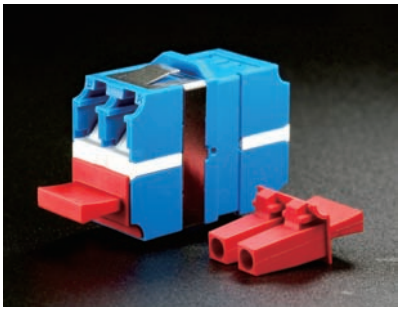

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

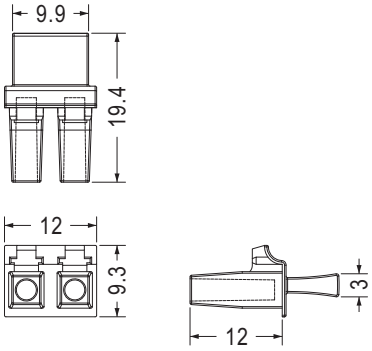


NEW


Part No.	Package
PLC-5	250

SATA防塵蓋 SATA COVER

用途：用於多餘不使用的SATA端子之遮蔽，避免誤用。

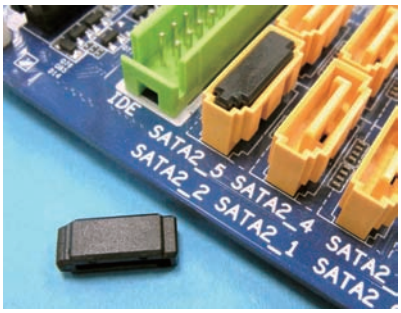

- Material: PE
- Color: Black
- Unit: mm

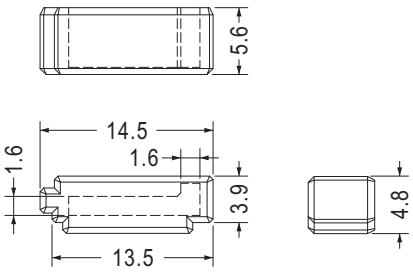


Part No.	Package
CSATA-1	1000



- Material: PE
- Color: Black
- Unit: mm

用途：用於SATA端子之防塵。

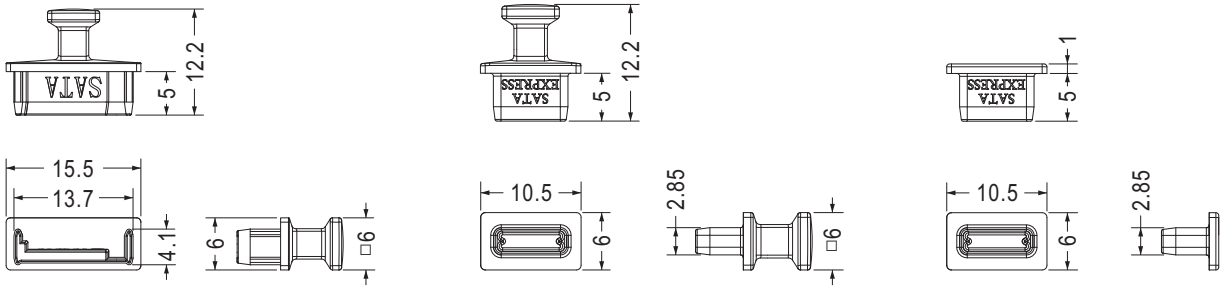

Part No.	Package
SATAC-1	1000

Part No.	Package
SATAC-2	1000


Part No.	Package
SATAC-3	1000

SATA防塵蓋 SATA COVER

用途：用於SATA端子之防塵。



- Material: PE
- Color: Black
- Unit: mm




Part No.	A	B	C	Package
SATAC-7	16.2	14.0	13.0	1000
SATAC-15	26.4	24.2	23.2	

SATA防塵蓋 SATA CABLE PLUG COVER


用途：用於SATA端子之防塵蓋。



- Material: PC+ABS (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm




Part No.	Package
CVSATA-7	1000

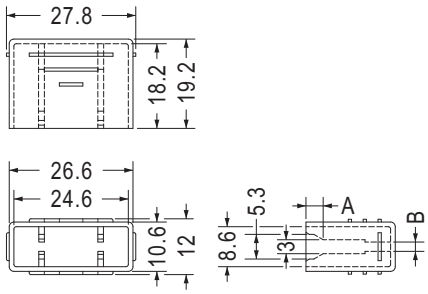

Part No.	A	B	Package
CVSATA-15	3.7	2.0	500
CVSATA-15S	9.7		




- Material: PC+ABS (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm

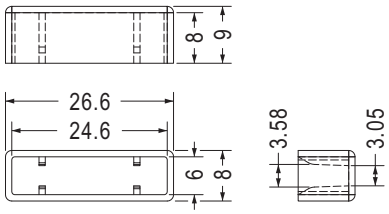


Part No.	Package
CVSATAA-15	500

ESATA護蓋 ESATA COVER


用途：於ESATA上保護插頭，防氧化。

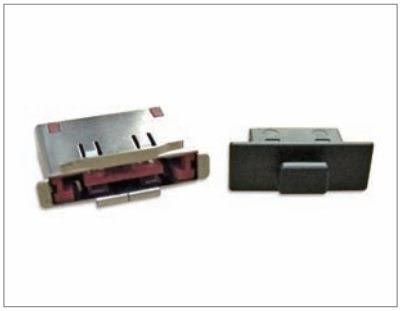

- Material: ABS (UL)
- Flame Class: 94HB
- Color: Black
- Unit: mm

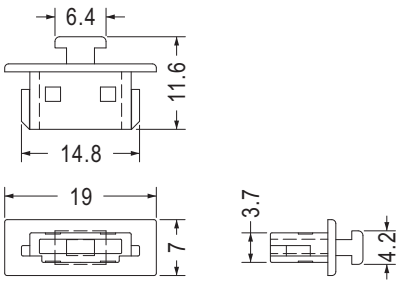


Part No.	Package
ESATA-7	1000




Part No.	Package
ESATA-7-1	1000


用途：用於數位DP端子之防塵蓋、美觀。

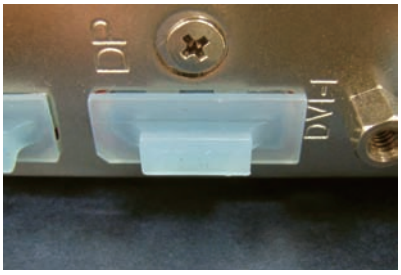




- Material: PE
- Color: Natural/Transparent Blue
- Unit: mm






Part No.	Package
DPC-1	1000

- Material: PE/Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black







Part No.	D	E	Package
DPC-3	4.4	7.2	1000
DPC-3L	4.5	7.4	



- Material: PE
- Color: Black
- Unit: mm

用途：使多餘或無功能的Display Port (DP端子)遮蔽，避免使用者誤插。







Part No.	Package
DPC-2	1000



- Material: PE
- Color: Natural
- Unit: mm

用途：用於Display Port(DP端子)之防塵與保護。







Part No.	Package
KPS-37	1000




- Material: PE
- Color: Natural/Transparent Blue
- Unit: mm


用途：用於Mini DP數位端子之防塵蓋、美觀。





Part No.	Package
MIDP-2	2000





- Color: Black


Part No.	Package
MIDP-4	2000

防塵蓋 CONNECTOR COVER


用途：用於Mini數位端子之防塵蓋、美觀。




- Material: PE
- Color: Natural/Transparent Blue
- Unit: mm




Part No.	Package
MIHDMI-2	2000




Part No.	Package
MIHDMI-3	2000

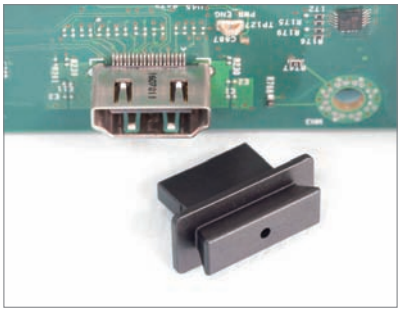


- Material: PE
- Color: Black
- Unit: mm

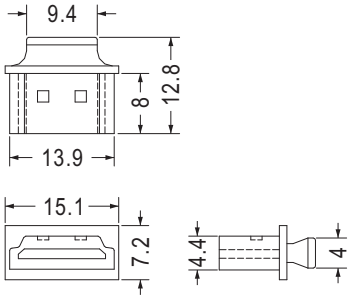


Part No.	Package
HDMIC-1	1000



Part No.	Package
HDMIC-2	1000

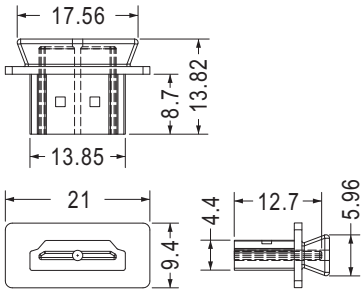

Part No.	Package
HDMIC-10	1000



- Material: Rubber


Part No.	Package
HDMIC-11	1000

MICRO HDMI防塵蓋 CONNECTOR COVER

用途：用於Micro HDMI端子座之防塵蓋、美觀。



- Material: TPE
- Color: Black
- Unit: mm

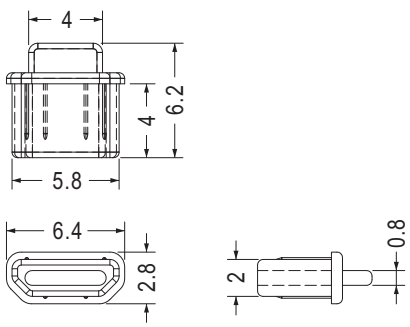


Part No.	Package
HDMIC-8	1000

HDMI防塵蓋 HDMI PORT COVER


用途：用於HDMI端子座之防塵、美觀，具有封孔功能，避免錯誤使用拆拔。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

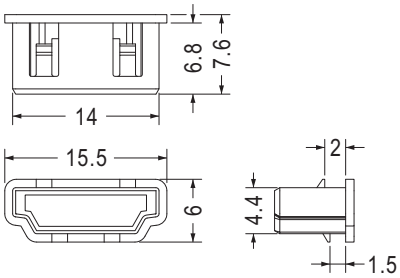

Part No.	Package
HDMIC-3	1000

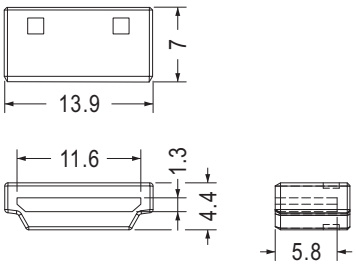

- Material: PE


Part No.	Package
HDMIC-4	1000

HDMI端子蓋 HDMI PLUG COVER

用途：用於HDMI端子上保護插頭，防氧化。



- Material: PE
- Color: Natural
- Unit: mm

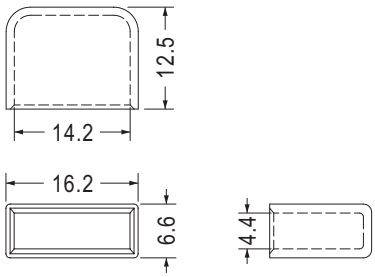


Part No.	Package
HDMIT-1	1000

D.TYPE防塵蓋 D.TYPE CONNECTOR COVER

用途：用於D.Type連接器之防鏽、防塵與保護。




- Material: PP (UL)
- Flame Class: 94HB
- Color: Natural/Black/Gray
- Unit: mm



Part No.	A	B	C	D	Package
DTC-9F	18.5	16.5	7.8	10.2	1000
DTC-15F	26.8	24.8	7.8	10.2	500
DTC-25F	40.6	38.6	7.8	10.2	
DTC-9M	20.0	18.0	9.4	11.8	1000
DTC-15M	28.2	26.4	9.4	11.8	500
DTC-25M	42.0	40.0	9.4	11.8	



- Material: PP (UL)
- Flame Class: 94HB
- Color: Black/Transparent
- Unit: mm




Part No.	Package
DTC-9MS	1000

D.TYPE防塵蓋 D.TYPE CONNECTOR COVER


用途：用於D.TYPE連接器之防鏽、防塵與保護。



- Material: PE
- Color: Natural/Black/Computer
- Unit: mm




Part No.	Package
DTC-37M	250




Part No.	Package
DTC-50S	500






Part No.	A	B	Package
DTC-50M	38.7	36.5	500
DTC-68M	50.2	48.0	

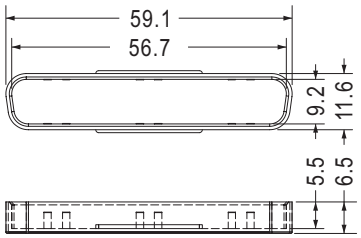


Part No.	Package
DTC-37ML	250



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
DTC-20	1000



Part No.	Package
DTC-26	1000





- Color: Black/Gray


Part No.	Package
DTCB-1	500

GPIB防塵蓋 CONNECTOR COVER

用途：用於GPIB連接器防塵與保護。



- Material: PP
- Color: Natural
- Unit: mm



NEW


Part No.	Package
GPIB-1	500

VGA防塵蓋 CONNECTOR COVER

用途：VGA端子之防塵蓋、美觀。



- Material: PP (UL)
- Flame Class: 94HB
- Color: Natural/Transparent
- Unit: mm




Part No.	Package
VGAC-1	500

DVI防塵蓋 CONNECTOR COVER


用途：用於連接器防塵與保護。



- Material: PP (UL)
- Flame Class: 94HB
- Color: Natural/Black
- Unit: mm



Part No.	Package
DVIC-1	500



- Material: TPE


Part No.	Package
DVIC-2-N	500


DVI防塵蓋 CONNECTOR COVER

用途：用於連接器防塵與保護。



- Material: PE
- Color: Black
- Unit: mm







Part No.	Package
DVI-1	500




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm






MOUNTING HOLE
THICKNESS 2.3

Part No.	A	Package
DVI-2	41.6	1000
DVI-4	38.6	





MOUNTING HOLE
THICKNESS 2.3


Part No.	Package
DVI-3	1000

防塵蓋 CONNECTOR COVER


用途：用於防塵與保護用。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	Package
PCIEC-1	1000

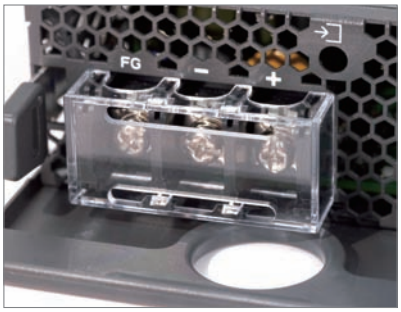

- Material: PC (UL)
- Flame Class: 94V-0
- Color: Transparent
- Unit: mm




Part No.	Package
COVER-25	200

防塵蓋 CONNECTOR COVER


用途：用於連接器防塵與保護。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	Package
VGAB-1	1000

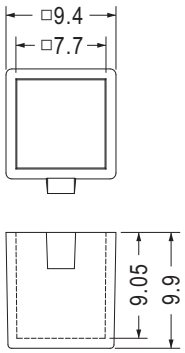



Part No.	Package
VGAB-2	1000



用途：用於汽車連接器防塵與保護。


- Material: PE
- Color: Black
- Unit: mm






MOUNTING HOLE

Part No.	Package
CVA-5	1000

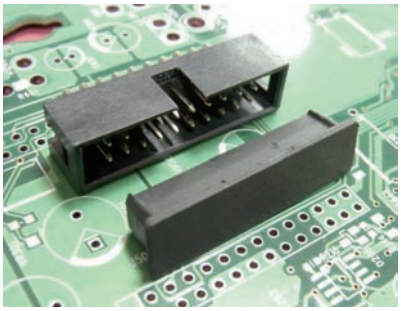


用途：用於IDE Connector防塵與保護。

- Material: PE
- Color: Black
- Unit: mm




Part No.	Package
DKCV-1	500


用途：用於連接器防塵與保護。

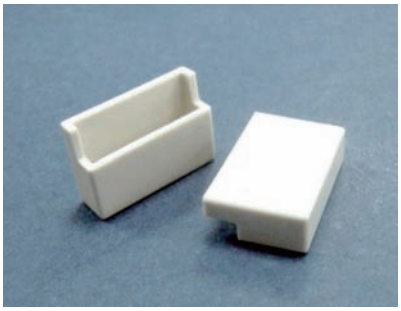

- Material: PBT (UL)
- Flame Class: 94V-0
- Color: Natural
- Unit: mm




Part No.	Package
COVER-4	500




Part No.	Package
COVER-7	500

用途：用於電子零件晶體之防塵與保護。

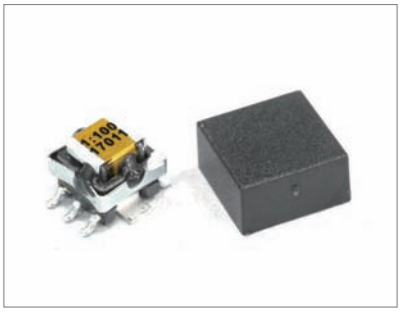

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
COVER-14	1000

用途：用於防塵與保護用。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
COVER-6	1000


用途：用於PC250端子防塵蓋。

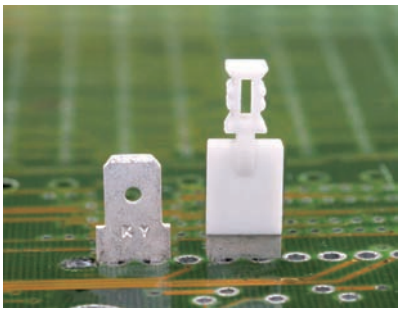

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	Package
CVP-250	1000



- Material: PE


Part No.	Package
KPS-42	1000

1394端子防塵蓋 CONNECTOR COVER


用途：用於1394接頭防塵與保護。



- Material: PE
- Color: Black
- Unit: mm




Part No.	Package
CVR-1394	1000




Part No.	Package
CVR-1394S	1000



- Material: PP (UL)
- Flame Class: 94HB
- Color: Gray
- Unit: mm




Part No.	Package
CVR-1394-1	1000




Part No.	A	Package
CVR-1394-2	10.0	1000
CVR-1394-3	11.5	




- Material: PE
- Color: Black/Computer
- Unit: mm



Part No.	Package
CVRB-1394	1000

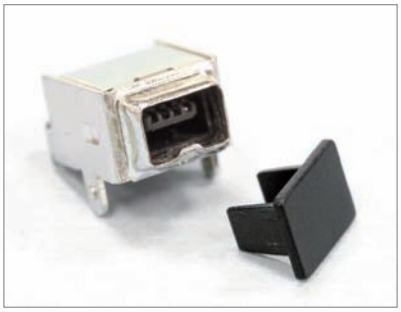

- Material: ABS (UL)
- Flame Class: 94HB
- Color: Black
- Unit: mm




Part No.	Package
CVRD-1394	1000

端子防塵蓋 CONNECTOR COVER


用途：做為端子之防塵與保護。



- Material: TPE
- Color: Black
- Unit: mm




Part No.	Package
SCCVA-3	1000




Part No.	Package
SCCVA-4	1000

用途：保護電源插頭之防塵、防氧化。

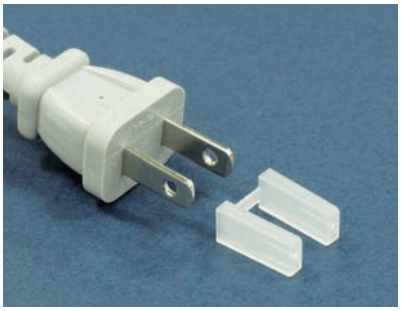


- Material: PP
- Color: Natural
- Unit: mm




Part No.	Package
PLCC-14	250





- Material: PE
- Color: Natural
- Unit: mm







Part No.	Package
PLCC-1	500







Part No.	Package
PLCC-8	1000







Part No.	Package
PLCC-9	1000







Part No.	A	B	Package
PLCC-10	4.9	20.7	1000
PLCC-11	4.1	20.7	
PLCC-20	5.3	18.0	







Part No.	Package
PLCC-13	500







Part No.	Package
PLCC-18	500





Part No.	Package
PLCC-15	1000






Part No.	Package
PLCC-19	1000

插頭保護座 SOCKET COVER


用途：用於電源插座後端，防短路、保護用。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm




Part No.	Package
PLCD-1	500

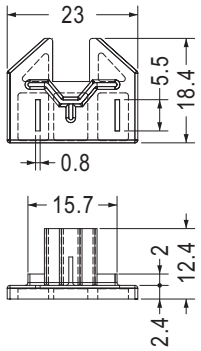


Part No.	Package
PLCD-2	500





Part No.	Package
PLCD-3	500




Part No.	Package
PLCD-4	500

電源插座防塵蓋 POWER CONNECTOR COVER

用途：用於三插電源座防塵與保護。



- Material: ABS (UL)
- Flame Class: 94HB
- Color: Black
- Unit: mm





Part No.	Package
PLCC-2	500



- Material: PP
- Color: White
- Unit: mm

用途：用於兩插電源座防塵與保護。







Part No.	Package
PLCC-3	500

電源插座防塵蓋 POWER CONNECTOR COVER

用途：用於電源座之防塵與保護。

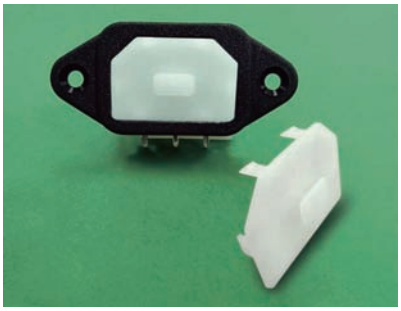


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	Package
PLCC-5	500



- Material: PE
- Color: Black
- Unit: mm

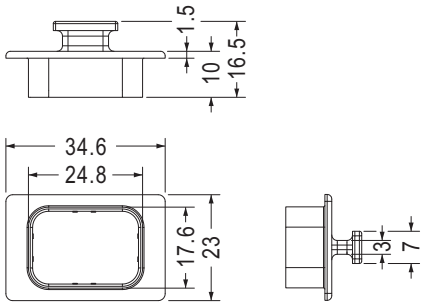


Part No.	Package
PLCC-16	500



用途：用於電源插座接頭防塵與保護。


- Material: PE
- Color: Black/Yellow
- Unit: mm

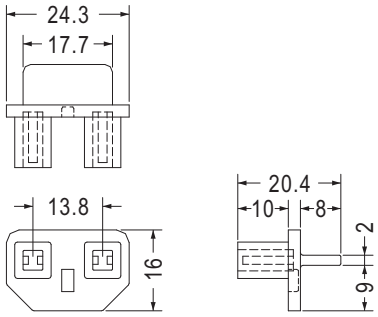

Part No.	Package
PLC-1	250




- Material: TPE (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm

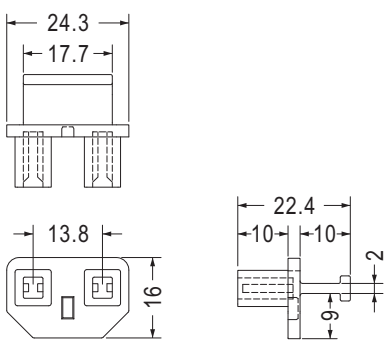


Part No.	Package
PLC-3	250

電源插座防塵蓋 POWER CONNECTOR COVER

用途：用於電源插座接頭防塵與保護。

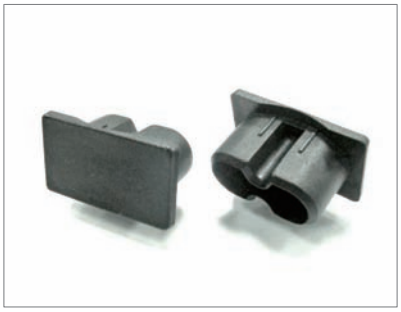

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
PLC-2	500

防塵蓋 IP CONNECTOR HOUSING

用途：用於機板上，保護電源插座避免刮傷。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

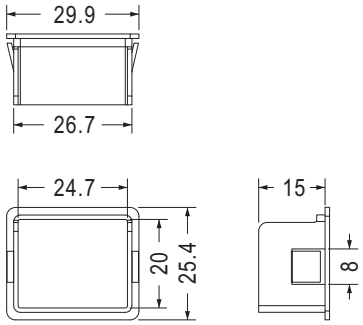


Part No.	Package
PLCC-7	1000

防塵蓋 CONNECTOR COVER


用途：用於連接器防塵與保護。



- Material: ABS (UL)
- Flame Class: 94HB
- Color: Black
- Unit: mm



Part No.	Package
CVR-3413-1	500




Part No.	D	Package
CVR-3213	32.0	1000
CVR-3413	34.0	

零件蓋 CONNECTOR COVER

用途：用於零件之防塵與保護。




- Material: ABS (UL)
- Flame Class: 94HB
- Color: Black
- Unit: mm





Part No.	Package
CVR-2508	1000






Part No.	Package
CVR-3318	1000

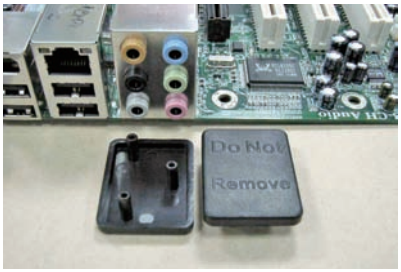




Part No.	Package
CVR-3325	1000






Part No.	A	B	C	Package
CVR-3421	21.5	25.0	5.8	1000
CVR-3423	23.0	24.8	6.0	






Part No.	Package
CVR-4098	500




Part No.	Package
CVR-4415	1000


電源蓋 POWER SUPPLY CAP

用途：用於電源線之固定與保護，避免脫落。

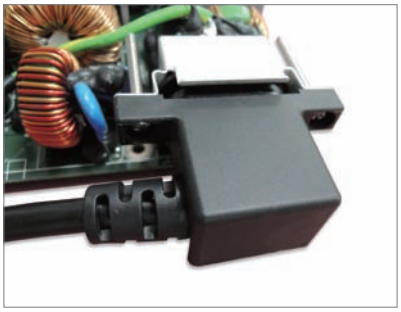

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm






Part No.	Package
CVA-8	500

防塵蓋 CONNECTOR COVER

用途：用於防塵與保護。




- Material: ABS (UL)
- Flame Class: 94HB
- Color: Black
- Unit: mm




Part No.	Package
CVR-6118	500



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

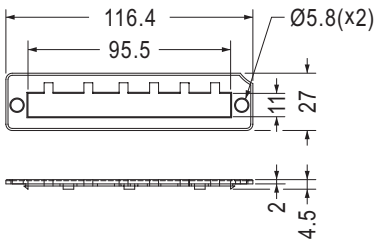


Part No.	Package
PCIE-1	500




Part No.	Package
PCIE-2	500

機板電源保護蓋 POWER CONNECTOR COVER

用途：保護主機板電源端子，防塵與美觀。

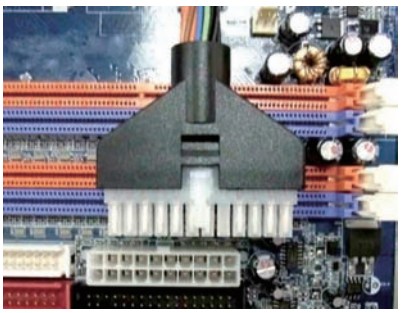


- Material: PE
- Color: Black
- Unit: mm




Part No.	Package
STAT-CV24	250

連接器防塵蓋 CONNECTOR COVER

用途：用於連接器防塵與保護。

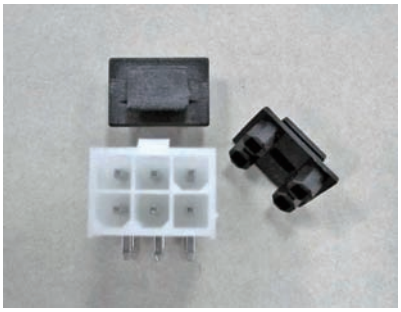


- Material: PP
- Color: Black
- Unit: mm

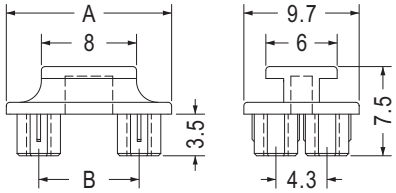


Part No.	A	B	Package
PWIC-6	13.9	8.4	500
PWIC-8	18.0	12.7	


連接器座 CONNECTOR HOUSING

用途：用於連接器之保護。

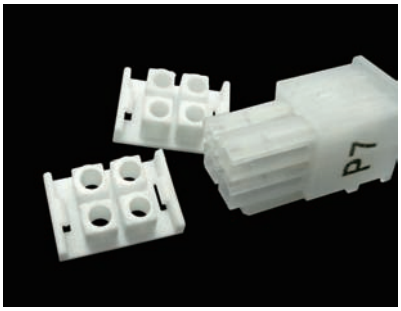

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm






Part No.	Package
012-958	1000

耳機孔護套 HEADPHONE JACK DUST PLUG

用途：用於Ø3.5 mm耳機孔，防塵與保護。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




插入耳機孔會啟動靜音模式
Activates silent mode function, when plug into headphone jack.

Part No.	Package
MHSC-1	2000




- Material: PP
- Color: Black


Part No.	Package
MHSC-2	2000



Part No.	Package
MHSC-3	2000




Part No.	Package
MHSC-4	2000



Part No.	Package
MHSC-4-1	2000



- Material: TPE
- Color: Black
- Unit: mm




Part No.	A	B	C	D	耳機孔	Package
MHSC-5	8.0	0.95	5.0	3.35	Ø3.5	2000
MHSC-6	6.0	1.0	4.2	2.2	Ø2.5	

Ø3.5音源線防塵蓋 Ø3.5 mm AUDIO COVER

用途：用於Ø3.5 mm音源線防塵與保護。




- Material: PP
- Color: Natural
- Unit: mm




Part No.	Package
EARC-3.5	2000


用途：用於PC板金手指防塵與保護。

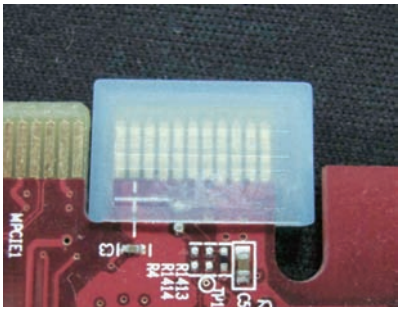


- Material: PE
- Color: Natural/Transparent Blue
- Unit: mm



Part No.	Package
GDFC-13	2000




Part No.	Package
GDFC-17	2000




- Color: Yellow


Part No.	Package
GDFC-20	1000

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Blue




Part No.	Package
GDFC-14	2000

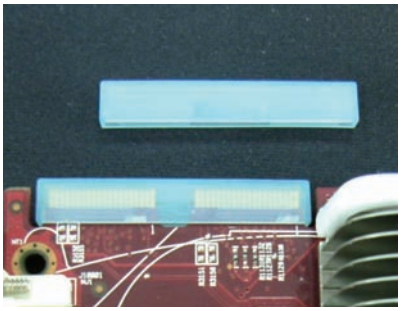


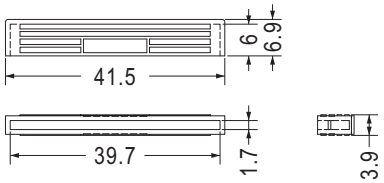

Part No.	Package
GDFC-39	1000

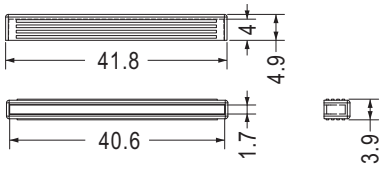


Part No.	Package
GDFC-40	1000

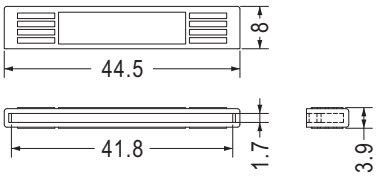


- Color: Black

Part No.	Package
GDFC-42	500

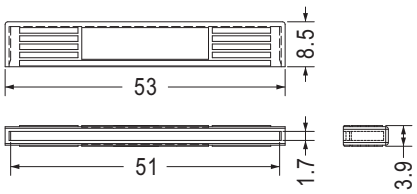



Part No.	Package
GDFC-51	500

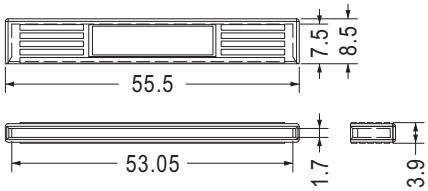

- Color: Black

Part No.	Package
GDFC-53	500

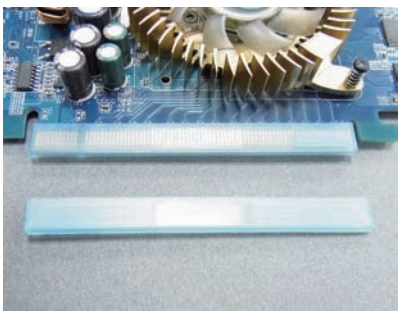


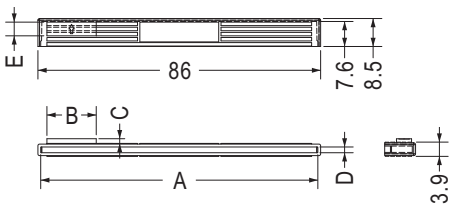


Part No.	A	B	C	D	E	Package
GDFC-83	84.31	15.0	1.43	1.75	4.16	500
GDFC-84	84.8			1.7		

防塵蓋 CONNECTOR COVER

用途：用於PC板金手指防塵與保護。

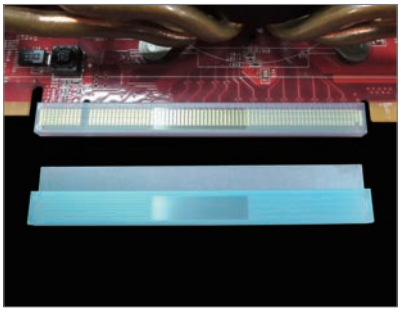


- Material: PE
- Color: Natural/Transparent Blue
- Unit: mm

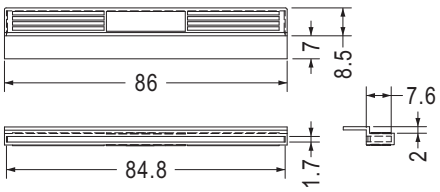

Part No.	Package
GDFC-84-2N	1000




- Material: PC+ABS (UL)
- Flame Class: 94V-0
- Color: Orange
- Unit: mm

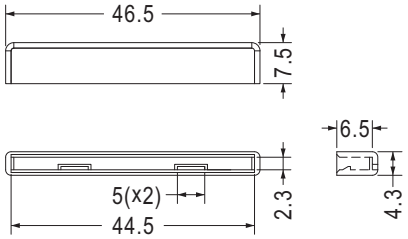

Part No.	Package
HANE-63	1000




- Material: PE
- Color: Bule
- Unit: mm

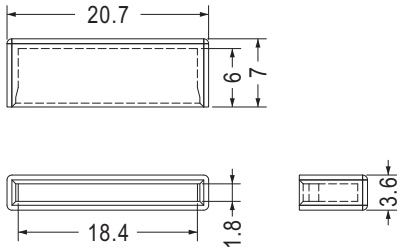


Part No.	Package
GDFC-18N	1000

防塵套 CONNECTOR COVER

用途：用於PC板金手指之絕緣與防塵。

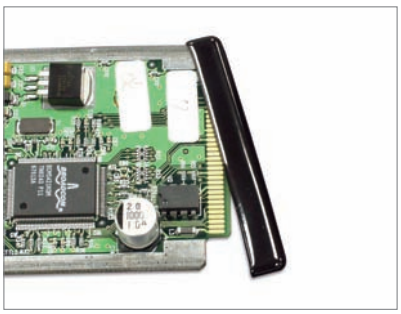

- Material: Soft P.V.C
- Color: Black
- Unit: mm




THICKNESS 1.7~1.8


Part No.	A	B	C	D	Package
FHCV-52	51.8	49.8	11.5	1.0	1000
FUSE-5	65.9	63.5	7.0	1.2	
FUSE-6	91.4	89.0	10.0	1.2	

連接器座 CONNECTOR HOLDER


用途：用於連接器防塵與保護。

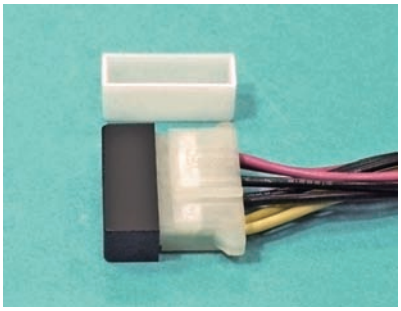


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
FHC-1	500

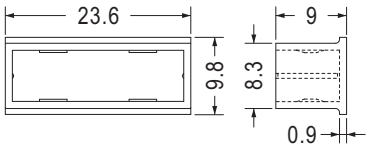


Part No.	Package
FHC-2	500

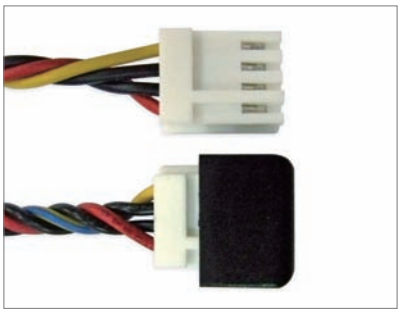





Part No.	Package
FHC-3	1000

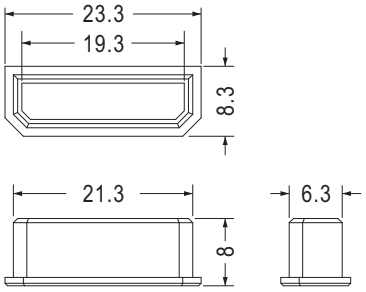


Part No.	Package
FHC-4	500

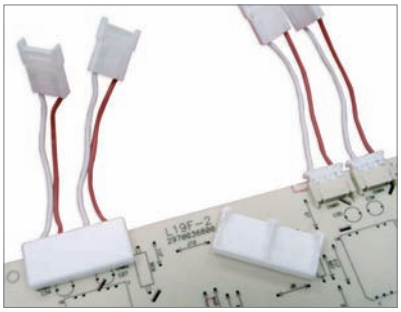

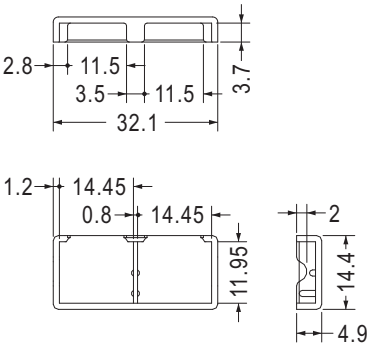


Part No.	Package
CDELT-2	500

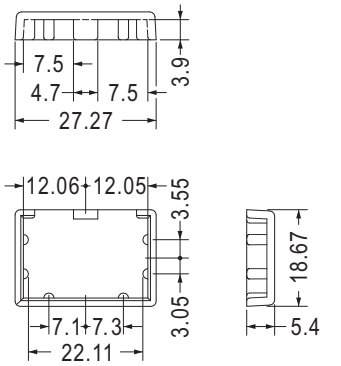


Part No.	Package
CDELT-3	500

防塵蓋 CONNECTOR COVER

用途：用於連接器防塵與保護。

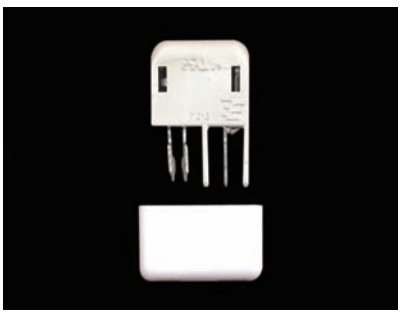

- Material: PBT (UL)
- Flame Class: 94V-0
- Color: Natural
- Unit: mm

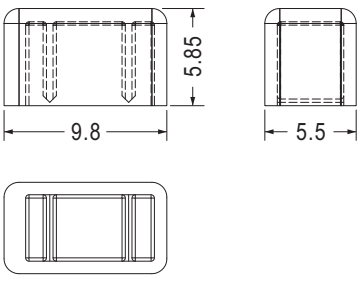


Part No.	Package
FHCA-1	1000

PCMIC卡保護蓋 PCMIC CARD SOCKET COVER


用途：用於PCMIC卡保護用。



- Material: ABS (UL)
- Flame Class: 94HB
- Color: Black/White
- Unit: mm




Part No.	Package
PCMIC-1	100




Part No.	Package
PCMIC-2	100





Part No.	Package
PCMIC-3	100




Part No.	Package
PCMIC-4	100

面板 CARD BEZEL

用途：用於IC卡讀卡機之面板。




- Material: PC+ABS (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm

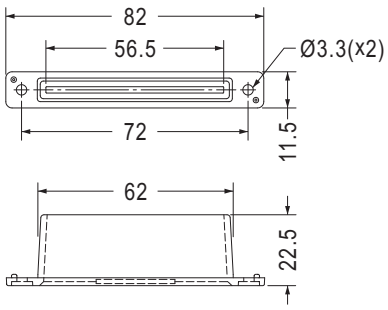


Part No.	Package
CRDCV-56	100

DDR防塵蓋 DDR COVER


用途：用於DDR記憶體之防塵。

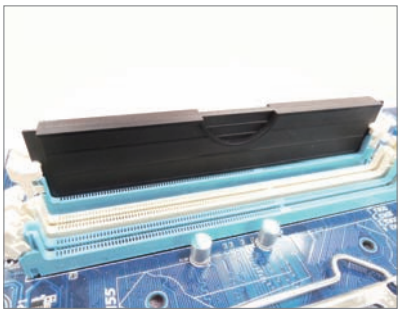

- Material: PC+ABS (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm




【 DRAMCV-5 】

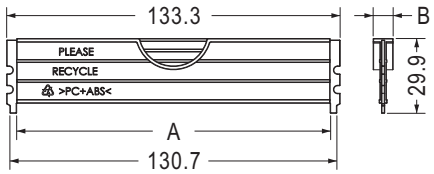


Part No.	A	B	For	Package
DRAMCV-2	125.5	8.0	DDR3	50
DRAMCV-4	125.3	8.0	DDR4	
DRAMCV-4S	125.3	7.5		
DRAMCV-5	125.5	3.65	DDR5	80

DRAM固定帶 DRAM FIXATION STRAP

用途：用於DRAM記憶卡固定，避免因震動導致接觸不良或脫落。

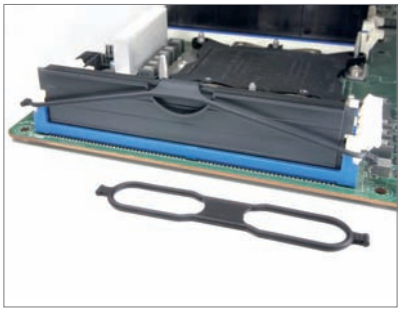



- Material: Silicon Rubber (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm

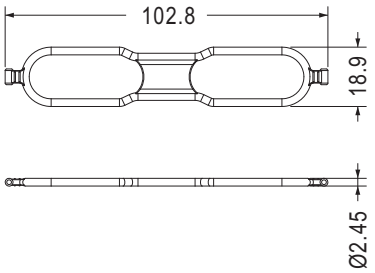

使用說明
Installation Guide

Part No.	Package
DRLC-1I	100

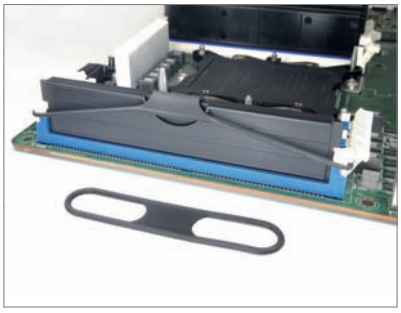

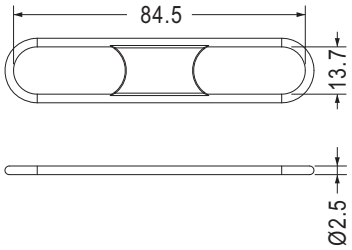


NEW


Part No.	Package
DRLC-3I	100

D-SUB保護蓋 D-SUB COVER

用途：用於D-SUB之保護用。

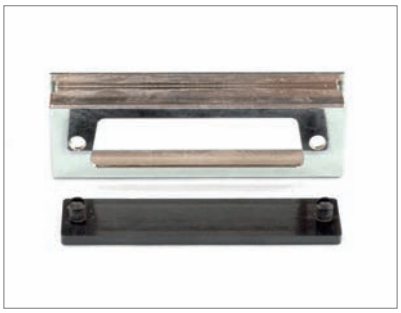


- Material: PC+ABS (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm

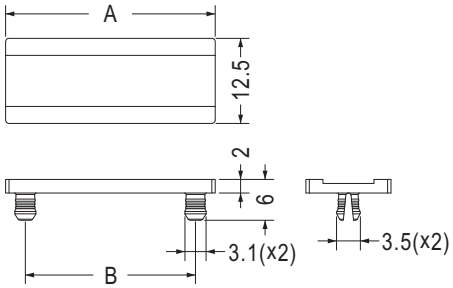

Part No.	A	B	Package
CVR-3012	30.8	25.0	1000
CVR-5312	53.0	47.0	500
CVR-6912	69.3	63.5	



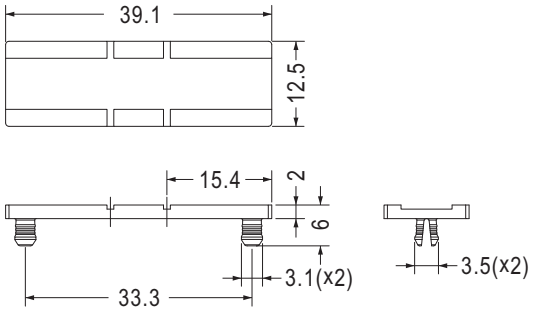


Part No.	Package
CVR-3912	500

高壓防塵蓋 PLASTIC COVER

用途：用於開關電源高壓部分，防止蟑螂入侵，避免造成短路，可做為絕緣及防塵、保護用。
(可依客戶PC板另外客製開模設計)



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

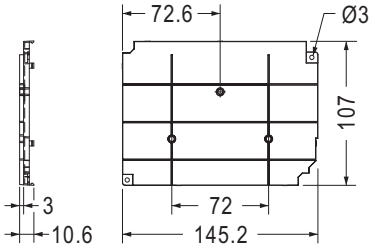


Part No.	Package
CV145107	500


SD卡保護蓋 SD CARD SOCKET COVER

用途：用於SD卡保護用。



- Material: ABS (UL)
- Flame Class: 94HB
- Color: Black
- Unit: mm





Part No.	Package
SD-24	500


Part No.	Package
SD-25	500

SIM卡保護蓋 SIM CARD SOCKET COVER

用途：SIM卡之防塵與保護。



- Material: PC
- Color: Black
- Unit: mm




Part No.	Package
FR2515N	1000

MICRO SD卡保護蓋 CARD SOCKET COVER

用途：用於Micro SD卡保護用。



- Material: PC+ABS (UL)
- Flame Class: 94V-2
- Color: Black
- Unit: mm




Part No.	Package
MIOSD-1	1000

防塵蓋 CONNECTOR COVER

用途：用於塑膠機殼螺絲孔之塞頭。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
CAPX-6	2000

開關蓋 SWITCH COVER

用途：用於開關保護用。

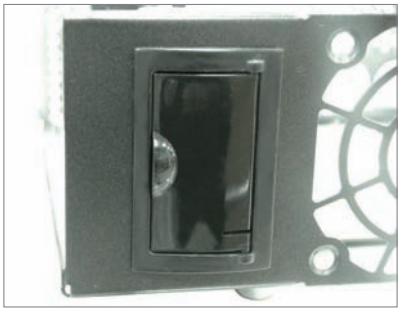

- Body Material: Nylon 66 (UL)
- Cover Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

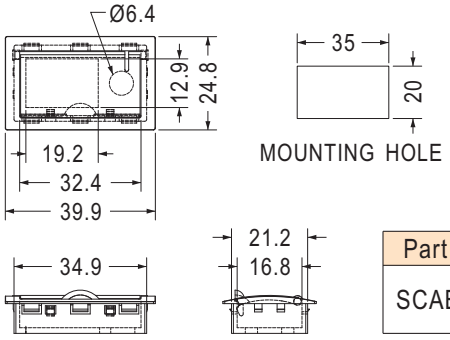


Part No.	Part No.	Package
SCAB-2F	SCAB-2A	21
	SCAB-2B	



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

用途：用於開關之按鍵。




Part No.	Package
TSC-29	1000

開關遮板 SWITCH COVER


用途：用於開關蓋保護用。



- Material: ABS (UL)
- Flame Class: 94HB
- Color: Black
- Unit: mm




Part No.	Package
SCAB-7	500



Part No.	Package
SCAB-12	500



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

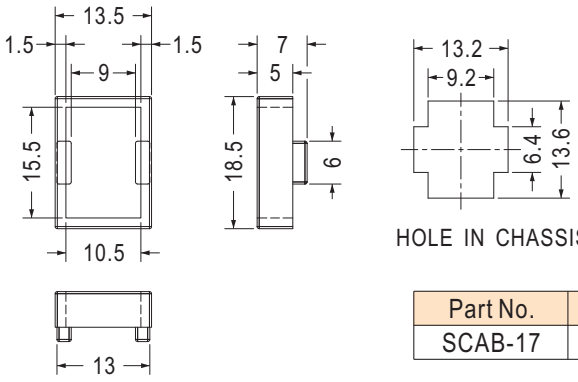


Part No.	Package
SCAB-17	500

尼龍鉚釘 SNAP RIVET


用途：用於PC板、鐵板零件固定，代替螺絲，省時不需工具，結合力強。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




MOUNTING HOLE: ØG
THICKNESS: T




MOUNTING HOLE: ØG
THICKNESS: T

【 SR2-4, SR2-5, SR2-6, SR2-7, SR2-9 】



MOUNTING HOLE: ØG
THICKNESS: T

【 SR2.5-5.8 】



MOUNTING HOLE: ØG
THICKNESS: T

【 SR3.5-11D 】


Part No.	A	C	D	G	T	Package
SR2-2.4	2.4	4.2	1.2	2.0	0.6~1.2	
SR2-3.2	3.2	4.2	1.2	2.0	1.3~2.0	
SR2-3.2S	3.2	4.2	1.2	2.0	1.3~1.9	2000
SR2-4	4.0	3.5	0.5	2.0	2.3~2.5	
★SR2-4L	4.0	4.2	1.2	2.0	2.1~2.8	
SR2-5	5.0	4.8	0.75	2.0	2.5~3.5	
SR2-5.6	5.6	4.2	1.2	2.0	3.7~4.4	
SR2-6	6.0	4.8	0.75	2.0	3.5~4.5	
SR2-6.4	6.4	4.2	1.2	2.0	4.5~5.2	
SR2-7	7.0	4.8	0.75	2.0	4.5~5.5	
SR2-9	8.7	3.5	0.5	2.0	7.2	
SR2.5-5.8	5.0	5.0	1.4	2.4	2.2~3.2	
SR2.6-3.2	3.2	5.0	1.7	2.6~2.7	1.0~2.0	
SR2.6-4.2	4.2	5.0	1.7	2.6~2.7	2.0~3.0	
SR2.6-4.8	4.8	5.0	1.4	2.6~2.7	2.5~3.4	
SR2.6-5.5	5.5	5.0	1.4	2.6~2.7	3.0~4.3	
SR2.6-6.4	6.4	5.0	1.4	2.6~2.7	4.3~5.0	
SR2.6-7.2	7.2	5.0	1.4	2.6~2.7	5.0~5.8	
SR2.8-24	24.0	6.0	1.7	2.8	18.5~19.5	
SR3-3.5	3.6	6.3	1.7	3.0~3.1	1.0~2.0	
SR3-4.5	4.5	6.3	1.7	3.0~3.1	2.0~3.0	
SR3-5	5.0	6.3	1.7	3.0~3.1	2.5~3.5	
SR3-5.5	5.5	6.3	1.7	3.0~3.1	3.0~3.5	
SR3-5.5-2	5.5	6.3	1.7	3.0	3.0~4.0	
SR3-6	6.0	6.3	1.7	3.0~3.1	3.5~4.5	
SR3-6.5	6.5	6.3	1.7	3.0~3.1	4.0~4.5	
SR3-6.5-1	6.5	6.3	1.7	3.0	4.0~5.0	
SR3-7.5	7.5	6.3	1.7	3.0~3.1	5.0~6.0	
SR3-8	8.1	6.3	1.7	3.0~3.1	5.5~6.5	1000
SR3-9	9.1	6.3	1.7	3.0~3.1	6.5~7.5	
SR3-10	10.0	6.3	1.7	3.0~3.1	7.5~8.5	
SR3-12	12.0	6.3	1.7	3.0~3.1	7.0~9.0	
SR3-13	13.2	6.3	1.7	3.0~3.1	10.0~11.0	
SR3-15	15.5	6.2	1.7	3.0~3.1	11.5~13.0	
SR3-17	17.0	3.2	1.7	3.0~3.1	12.0~14.0	
SR3-18.5	18.5	6.3	1.7	3.0~3.1	15.0~16.5	
SR3.2-4.5	4.5	6.3	1.7	3.2	1.5~3.0	
SR3.5-3.5	3.5	6.3	1.7	3.5	1.5~2.0	
SR3.5-4.5	4.5	6.3	1.7	3.5	2.0~3.0	
SR3.5-5	5.0	6.3	1.7	3.5	2.5~3.5	
SR3.5-5.5	5.5	6.3	1.7	3.5	3.0~4.0	
SR3.5-6	6.0	6.3	1.7	3.5	3.0~4.0	
SR3.5-7	7.0	6.3	1.7	3.5	4.5~5.5	
SR3.5-7.5	7.5	6.3	1.7	3.5	5.0~6.0	
SR3.5-8	8.0	6.3	1.7	3.5	5.7~6.6	
SR3.5-9	9.0	6.3	1.7	3.5	6.0~7.0	
SR3.5-11D	11.0	4.9	1.7	3.5~3.6	6.5~7.5	
SR3.5-18.5	18.5	6.3	1.7	3.5	14.5~16.0	
SR3.5-23	23.0	6.3	1.7	3.5	18.5~20.0	
SR3.5-24	24.0	6.3	1.7	3.5	20.5~21.5	
SR3.5-32	32.0	6.3	1.7	3.5	28.0	
SR3.8-6.5	6.5	6.3	2.0	3.8	4.0~4.5	

尼龍鉚釘 SNAP RIVET

用途：用於PC板、鐵板零件固定，代替螺絲，省時不需工具，結合力強。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



MOUNTING HOLE: ØG
THICKNESS: T

Part No.	A	C	D	G	T	Package
SR4-4.6	4.6	7.8	1.9	4.0~4.1	2.5~3.5	1000
SR4-5	5.0	7.8	1.9	4.0	2.5~3.5	
SR4-6	6.1	7.8	1.9	4.0	3.5~4.5	
SR4-7	7.1	8.0	2.0	4.0	4.5~5.5	
SR4-8	8.1	8.0	2.0	4.0	5.5~6.5	
SR4-9	9.0	8.0	2.0	4.0	6.5~7.5	
SR4-10	10.0	8.0	2.0	4.0	7.5~8.5	
SR4-12	12.0	8.0	2.0	4.0	9.5~10.5	
SR4-14	13.7	8.0	2.0	4.0	11.0~12.0	
SR4-15	15.3	8.0	2.0	4.0	11.5~13.0	
SR4-15.5	15.5	8.0	2.0	4.0	11.5~13.0	
SR4-20	20.0	8.0	2.0	4.0	15.0~17.0	500
★SR4-21	21.3	8.0	1.5	4.1~4.2	17.5	
SR4-25	24.5	8.0	2.0	4.0	22.0~23.0	
SR4.3-5	5.0	7.8	1.9	4.3	2.5~3.5	1000
SR4.5-21.3	21.3	8.0	1.7	4.5	17.5	500
SR5-4.5	4.6	8.9	2.2	5.0	1.5~2.5	1000
SR5-5.5	5.5	8.9	2.0	5.0	2.5~3.5	
SR5-6.5	6.5	8.9	2.2	5.0	3.5~4.5	
SR5-7.5	7.5	8.9	2.2	5.0	4.5~5.5	
SR5-8.5	8.4	8.9	2.2	5.0	5.5~6.5	
SR5-9.5	9.5	8.9	2.1	5.0	5.5~7.5	
SR5-10.5	10.5	8.9	2.1	5.0	6.5~8.5	
SR5-10.5L	10.5	10.0	2.1	5.0	6.5~8.5	
SR5-12	12.0	8.9	2.2	5.0	8.0~9.0	
SR5-14	14.0	8.9	2.2	5.0	10.0~11.0	
SR5-16	16.0	8.9	2.2	5.0	12.0~13.0	
SR5-18	18.0	8.9	2.2	5.0	14.0~15.0	
SR6-6	6.0	12.0	2.5	6.0	2.5~4.0	
SR6-8	8.0	12.0	3.0	6.0	4.5~6.0	
SR6-10.5	10.5	12.0	3.0	6.0	7.5~8.5	
SR6-12	12.0	12.0	3.0	6.0	8.0~9.0	
SR6-14	14.0	12.0	3.0	6.0	10.0~11.0	
SR6-16	16.0	12.0	3.0	6.0	12.0~13.0	
SR6-18	18.5	12.0	3.0	6.0	14.0~15.0	
SR6-20	20.0	12.0	3.0	6.0	16.0~17.0	






MOUNTING HOLE: ØG
THICKNESS: T

Part No.	A	C	D	G	T	Package
SR3-4.7F	4.7	5.75	0.8	3.0	1.5~2.0	1000
SR3-13F	14.3	5.3	1.3	3.3	10.0~11.0	
SR4-5.5F	5.5	5.8	0.7	4.0	2.0~3.0	
SR4-6F	6.1	7.5	1.1	4.0	3.0~4.0	
SR4-7F	7.2	7.5	1.1	4.0	3.5~5.0	
SR4-7FS	7.0	6.4	0.8	4.0	3.5~5.0	
SR4-8F	8.2	7.5	1.1	4.0	5.5~6.5	
★SR4-8FS	8.2	4.6	1.1	4.0	5.5~6.5	
SR4-10F	10.0	6.8	1.5	4.0	7.5~8.5	
★SR4-11FS	11.0	4.8	1.5	4.0	8.5~9.5	
SR4-13F	14.5	6.4	1.0	4.0	10.0~11.0	
SR5-4.5F	7.0	8.5	2.5	5.0	3.5~4.5	

用途：用於風扇之固定。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



MOUNTING HOLE Ø3.0
THICKNESS: T


Part No.	A	T	Package
SRFA3-3.5	3.5	1.0~2.0	1000
SRFA3-4	4.0	1.5~2.5	






MOUNTING HOLE Ø2.6~Ø2.7
THICKNESS 2.5~3.4

Part No.	Package
SRE2.6-4.8	1000




MOUNTING HOLE Ø3.1~Ø3.2
THICKNESS: T

Part No.	A	T	Package
SRE3-4.5	4.5	2.0~3.0	1000
SRE3-5.5	5.5	3.0~4.0	




MOUNTING HOLE Ø4.0
THICKNESS: T


Part No.	A	T	Package
SRF4-28	28.0	25.0	500
SRF4-30	30.0	25.0	
SRF4-31	31.0	27.0	



MOUNTING HOLE Ø4.2
THICKNESS 5.5~6.5

Part No.	Package
SRF4-8	1000

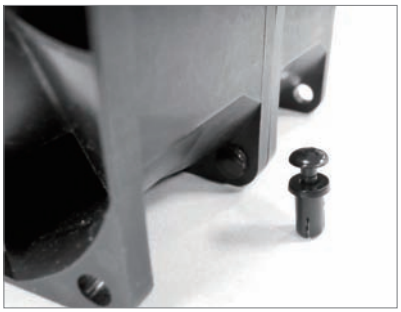




MOUNTING HOLE Ø4.5
THICKNESS: T

Part No.	A	T	Package
SRR4.5-8	8.0	4.2	1000
SRR4.5-9	9.0	5.2	
SRR4.5-10	10.0	6.2	
SRR4.5-12	12.0	8.2	
SRR4.5-14	14.0	10.2	
SRR4.5-16	16.0	12.2	

用途：用於風扇之固定。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



MOUNTING HOLE Ø3.5
THICKNESS 5.0~6.0

Part No.	Package
SRR3.5-7.5	1000







MOUNTING HOLE Ø4.3~Ø4.4
THICKNESS 4.5




Part No.	Package
SRH4.2-8	1000



MOUNTING HOLE Ø4.5
THICKNESS: T




Part No.	A	B	T	Package
★SRRH4.5-11	11.3	6.0	8.0	1000
SRRH4.5-12	12.0	6.3	8.2	

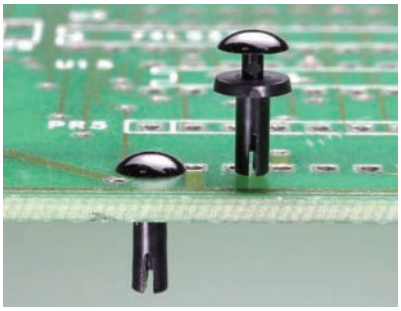

- Pin Material: PC+ABS (UL)
- Body Material: Nylon 66 (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm

用途：用於PC板與機板間固定，省時方便。

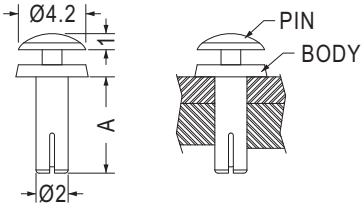


MOUNTING HOLE Ø2.0
THICKNESS: T

NEW

Part No.	A	T	Package
SRR2-5	5.0	2.5~3.5	1000
SRR2-6	6.0	3.5~4.5	






MOUNTING HOLE Ø3.5
THICKNESS: T

Part No.	A	B	C	D	T	Package
SRF3.5-11	11.0	3.5	6.3	0.8	8.0	1000
SRF3.5-29	29.0	3.4	6.3	0.8	25.0	
SRF3.5-37	37.0	3.4	6.3	0.8	34.0	
SRF3.5-61.5	61.5	3.4	5.3	0.5	59.0	500
SRF3.5-62	62.3	3.4	6.3	0.8	58.0	
SRF3.5-65	65.0	3.4	6.3	0.8	62.0	

用途：用於PC板與機板間固定，省時方便。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm



MOUNTING HOLE Ø4.0
THICKNESS 1.8~2.5

Part No.	Package
SRF4-4.6F	1000






MOUNTING HOLE Ø3.0
THICKNESS 1.6


Part No.	Package
ULCZ-1.6	1000





MOUNTING HOLE: ØG
THICKNESS: T

Part No.	A	C	G	T	Package
SRS3.5-4.5P	4.5	6.3	3.5	1.5~3.0	1000
SRS3.5-7P	7.0	5.0	3.5~3.6	4.5~5.5	




MOUNTING HOLE Ø3.0
THICKNESS 10.0~11.0

Part No.	Package
SRS3-13P	1000



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black/Gray
- Unit: mm



MOUNTING HOLE Ø7.0
THICKNESS 10.0


Part No.	Package
SRB-1	1000














固定扣 DOOR LATCH

用途：固定於兩片鐵板，一般用於機器的門扣，拆卸方便。



- Clip Material: Nylon 66 (UL) 94V-2/ PC (UL) 94V-2
- Pin Material: Nylon 66 (UL) 94V-2
- DL-11 Material: POM (UL) 94HB
- Color: Natural/Black
- Unit: mm



Plunger Head Style							
DL-1/DL-6	DL-2	DL-3/DL-4	DL-5	DL-7		DL-17	DL-19
							
DL-9	DL-9S	DL-10	DL-11	DL-14	DL-16		
							


Part No.	L	S	T	Hole		Package
				A Board	B Board	
DL-1	11.1	2.0~4.2	1.6	Ø7.5	Ø8.0	500
DL-2	11.1	2.0~4.2	1.6	Ø7.5	Ø8.0	
DL-3	10.4	2.0~4.2	1.6	Ø6.0~Ø6.1	Ø6.4	
DL-4	11.4	3.0~5.2	2.5	Ø6.0~Ø6.1	Ø6.4	
DL-5	9.5	2.0~3.6	1.6	Ø4.5	Ø4.8	
DL-6	12.0	3.5	2.4	Ø6.6	Ø7.8	
DL-7	12.0	3.5	2.4	Ø6.6	Ø7.8	
DL-9	13.0	6.9	4.3	Ø6.0	Ø6.35	
★DL-9S	12.7	6.6	2.3	Ø5.9	Ø6.2	
DL-10	11.0	5.5	2.0	Ø6.0	Ø6.4~Ø6.5	
DL-11	10.5	2.1~4.35	1.0~1.65	Ø7.5~Ø7.6	Ø8.0~Ø8.2	
DL-14	11.0	5.5	2.0	Ø6.0	Ø6.4~Ø6.5	
DL-16	10.4	2.0~4.2	1.6	Ø6.0~Ø6.1	Ø6.4	
DL-17	12.67	2.0~3.6	1.6	Ø4.5	Ø4.8	
★DL-19	10.4	2.7~3.6	1.6	Ø6.1	Ø6.4	

尼龍鉚釘 SNAP RIVET

用途：用於PC板與機板間固定，省時方便。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm




MOUNTING HOLE Ø3.5
THICKNESS 2.5~3.5

Part No.	Package
SRS3.5-5P	1000



MOUNTING HOLE Ø4.1
THICKNESS 4.5~5.5

Part No.	Package
SRS4-7P	1000




MOUNTING HOLE Ø4.1~Ø4.2
THICKNESS 6.5~7.5


Part No.	Package
SRS4-9K	1000


尼龍鉚釘 SNAP RIVET

用途：用於天線PC板固定，省時方便。

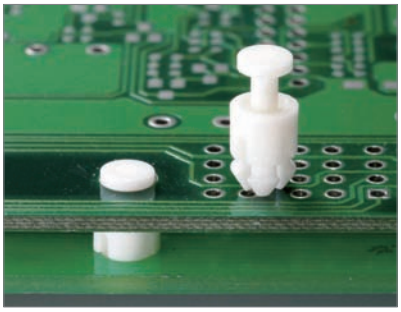



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural
- Unit: mm





RECOMMEND HOLE IN MOUNTING
RECOMMEND MOUNTING PLATE THICKNESS 1.0






RECOMMEND HOLE IN HOST
RECOMMEND HOST PLATE THICKNESS 1.0

Part No.	Package
★MSPW4-4	1000



- Material: Nylon 66 (UL)
- Pin Material: PC
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm


用途：用於風扇之固定。

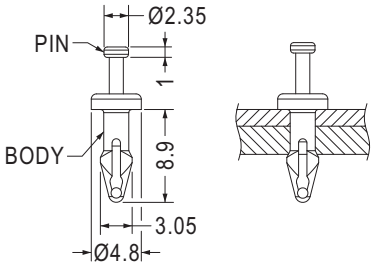

MOUNTING HOLE Ø2.5~Ø2.6
THICKNESS 4.0~4.5


Part No.	Package
SRCC-16F	1000

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm



HOLE IN FAN Ø3.1~Ø3.3
THICKNESS 3.9~4.6

Part No.	Package
SRCC-12F	1000



HOLE IN FAN Ø3.1~Ø3.3
THICKNESS 6.1~6.7

Part No.	Package
★SRCC-12LF	1000

鉚釘 SNAP RIVET


用途：用於風扇之固定。



- Material: TPE
- Pin Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm


HOLE IN FAN Ø3.6
THICKNESS 0.8

HOLE IN FAN Ø3.5
THICKNESS 5.0



Part No.	Package
SRCC-13	1000


- Material: TPV (UL)
- Pin Material: Nylon 66 (UL)
- Flame Class: 94V-0



HOLE IN FAN Ø4.5
THICKNESS 3.5

Part No.	Package
SRCC-11	1000

- Material: TPU
- Pin Material: Nylon 66 (UL)
- Flame Class: 94V-2




HOLE IN FAN Ø4.4
THICKNESS 3.0

Part No.	Package
SRCC-9	1000

- Material: TPE(UL)
- Pin Material: Nylon 66 (UL)
- Flame Class: 94V-0

HOLE IN FAN Ø4.5
THICKNESS 1.0~1.2



HOLE IN FAN Ø4.45
THICKNESS 4.0


Part No.	Package
SRCC-18	1000

尼龍鉚釘 SNAP RIVET

用途：用於CPU座或散熱風扇與主機板之固定。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




MOUNTING HOLE Ø4.6
THICKNESS 4.8

Part No.	Package
SRCC-4F	1000




MOUNTING HOLE Ø4.1
THICKNESS 4.8

Part No.	Package
SRCC-5	1000




MOUNTING HOLE Ø3.0
THICKNESS 4.4

Part No.	Package
SRCC-7	1000



MOUNTING HOLE Ø3.0
THICKNESS 4.4

Part No.	Package
SRCC-7-1F	1000




MOUNTING HOLE Ø8.0~Ø8.3
THICKNESS 3.0~8.0

Part No.	Package
SRCC-14	500

用途：用於PC板與機板間固定，省時方便。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



MOUNTING HOLE Ø4.5~Ø4.7
THICKNESS 8.3~10.0

Part No.	Package
PR-2	1000






MOUNTING HOLE Ø5.0
THICKNESS 2.5~6.0

Part No.	Package
PR-5	1000






MOUNTING HOLE Ø7.0
THICKNESS 6.0

Part No.	Package
PR-6	1000



- Material: POM
- Color: Black
- Unit: mm




MOUNTING HOLE Ø6.3
THICKNESS 7.0

Part No.	Package
PR-7	1000



- Material: PC (UL)
- Flame Class: 94V-0
- Color: White/Black
- Unit: mm



MOUNTING HOLE Ø3.5
THICKNESS 1.6~2.4


Part No.	Package
SRU3.5-4.5	1000

鉚釘 SNAP RIVET

用途：用於PC板、鐵板零件固定，結合力強。



- Material: POM
- Color: Black
- Unit: mm




MOUNTING HOLE Ø7.0
THICKNESS 3.2~3.8

Part No.	Package
DLB-1	1000



- Material: PC (UL)
- Flame Class: 94V-0
- Color: Natural
- Patented (專利品)



RECOMMEND MOUNTING HOLE Ø4.4~Ø4.5
RECOMMEND THICKNESS 1.0~1.2


Part No.	Package
DLB-2	1000

尼龍鉚釘 SNAP RIVET

用途：用於PC板、鐵板零件固定，結合力強。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



MOUNTING HOLE Ø8.0
THICKNESS 3.5~4.2


Part No.	Package
PR-1	500



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

用途：用於車用板件或板件間之固定，使用方便。






MOUNTING HOLE Ø8.0
THICKNESS 0.8~1.6

Part No.	Package
CAPR-10	500

用途：用於裝配的孔或機板間之固定，
敲入後可牢固於物件上。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



MOUNTING HOLE: ØG
THICKNESS: T


Part No.	A	B	G	T	Package
PSR-1	17.62	7.62	4.0	1.57~5.0	1000
PSR-2	16.1	7.4	4.8	1.57~5.53	



MOUNTING HOLE: ØG
THICKNESS: T


- Material: Nylon 66 (UL)/PP
- Flame Class: 94V-2/94V-0
- Color: Natural/Black/Gray

Part No.	A	B	C	D	G	T	Package
PSR-3	26.5	11.6	11.6	1.9	6.3	5.0	1000
PSR-4	17.8	7.9	8.7	2.0	4.8	4.0	




MOUNTING HOLE Ø3.4~Ø3.7
THICKNESS 3.4~4.8

Part No.	Package
PSR-6	1000




MOUNTING HOLE Ø5.0
THICKNESS 1.5~5.0

Part No.	Package
PSR-5	1000



MOUNTING HOLE Ø5.0
THICKNESS 3.0~7.0


Part No.	Package
PSR-7	1000




MOUNTING HOLE Ø5.1
THICKNESS 4.1~5.1

Part No.	Package
PSR5.1-7	1000






MOUNTING HOLE: ØG
THICKNESS: T




MOUNTING HOLE: ØG
THICKNESS: T

【 PSR-8 】




MOUNTING HOLE: ØG
THICKNESS: T

【 PSR5.5-10S 】



MOUNTING HOLE: ØG
THICKNESS: T

【 PSR5.5-11 】



MOUNTING HOLE: ØG
THICKNESS: T


【 PSR5.5-11.5 】

Part No.	A	B	C	D	G	T	Package
PSR-8	18.0	8.2	7.5	1.3	4.0~4.2	4.0~6.5	1000
PSR5-7	18.7	7.3	9.9	2.0	5.2	2.0	
PSR5.5-10S	23.4	9.9	12.0	2.0	5.5	7.0	
PSR5.5-10	26.7	10.0	14.6	3.8	5.7~6.0	7.0	
PSR5.5-11	23.8	11.0	16.0	2.0	5.5~6.4	2.5~6.5	
PSR5.5-11.5	28.8	11.8	11.1	2.6	5.5	2.4~7.9	
PSR5.5-15	36.5	14.9	14.6	3.8	6.0	10.0	

用途：用於裝配的孔或機板間之固定，敲入後可牢固於物件上。




- Material: Nylon 6 (UL)
- Flame Class: 94V-2
- Color: Natural/Black
- Unit: mm



MOUNTING HOLE Ø6.0~Ø6.4
THICKNESS 6.0


Part No.	Package
PSR6-1	1000




MOUNTING HOLE Ø4.0
THICKNESS 5.0

- Color: Blue

Part No.	C	Package
PSR4-12	9.0	1000
PSR4-12L	11.0	

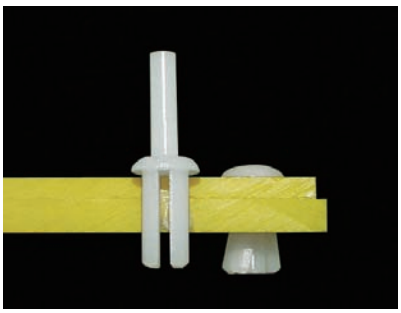


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/White/Black
- Unit: mm




MOUNTING HOLE Ø3.0
THICKNESS 3.0

Part No.	Package
PSR3-5.5	1000




MOUNTING HOLE Ø4.0
THICKNESS 4.0

Part No.	Package
PSR4-8	1000




MOUNTING HOLE Ø4.0
THICKNESS 1.5~6.0

Part No.	Package
PSR4-7.5	1000




MOUNTING HOLE Ø4.6~Ø4.8
THICKNESS 6.5

Part No.	Package
PSR48-10	1000




MOUNTING HOLE Ø6.0
THICKNESS 6.0

Part No.	Package
PSR6-11	1000



MOUNTING HOLE: ØG
THICKNESS: T


Part No.	A	B	D	G	T	Package
PSR6-10	23.0	10.0	2.95	6.0	2.0~7.0	1000
PSR6-15	36.8	15.0	3.8	6.35	6.0	



MOUNTING HOLE Ø6.4
THICKNESS 4.0~9.5

Part No.	Package
★PSR6-12	1000

- Material: PE
- Color: Gray




MOUNTING HOLE Ø7.0
THICKNESS 7.0


Part No.	A	D	Package
PSR6-14	29.3	2.0	1000
PSR6-14L	30.3	3.0	

尼龍鉚釘 SNAP RIVET

用途：用於裝配的孔或機板間之固定，敲入後可牢固於物件上。

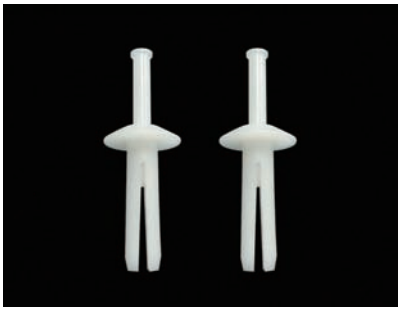


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



MOUNTING HOLE Ø6.35

Part No.	Package
PSRB-1	1000




MOUNTING HOLE Ø6.4


Part No.	Package
PSR64-25	1000

尼龍鉚釘 MOUNTING BUTTON

用途：用於PC板與機板間固定，省時方便。

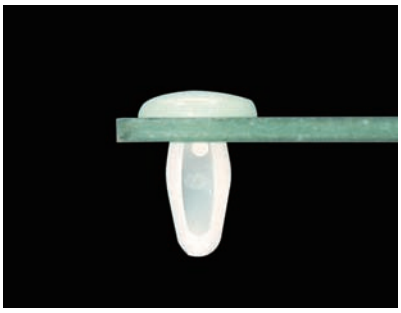

- Material: POM (UL)/Nylon 66 (UL)
- Flame Class: 94HB/94V-2/94V-0
- Color: Natural/Black
- Unit: mm

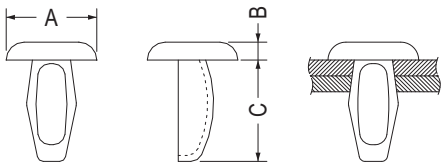


MOUNTING HOLE: G
BOARD THICKNESS: T

Part No.	A	B	C	G	T	Package
MB-1	7.6	1.6	8.6	3.3~3.5	2.0~3.1	2000
MB-2	7.6	1.3	10.8	3.3~3.6	3.0~4.0	1000
MB-3	7.3	1.4	8.4	3.0~3.2	2.0~3.5	2000




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

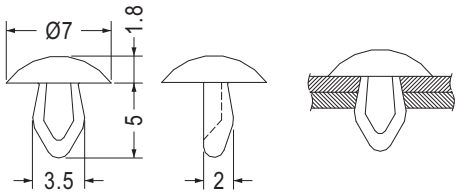

MOUNTING HOLE Ø3.15~Ø3.2
THICKNESS 1.6~1.9

Part No.	Package
MB-4	2000

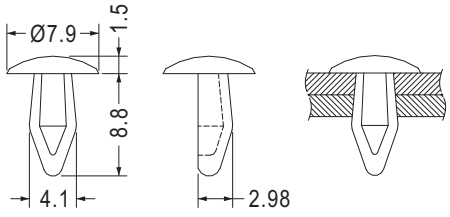


MOUNTING HOLE Ø3.5~Ø3.7
THICKNESS 3.5~4.0


Part No.	Package
MB-5	2000

尼龍鉚釘 MOUNTING BUTTON

用途：用於PC板與機板間固定，省時方便。

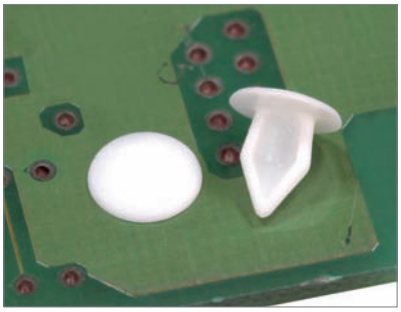


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

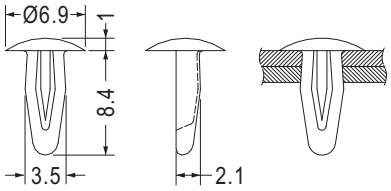


MOUNTING HOLE Ø3.1~Ø3.2
THICKNESS 2.0~2.5

Part No.	Package
MB-6	2000

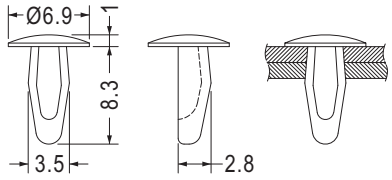


MOUNTING HOLE Ø3.1~Ø3.2
THICKNESS 2.0~2.5

Part No.	Package
MB-7	2000

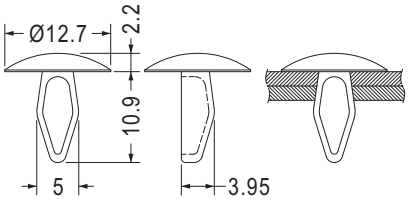


MOUNTING HOLE Ø4.0
THICKNESS 2.5~3.5

Part No.	Package
MB-18	1000

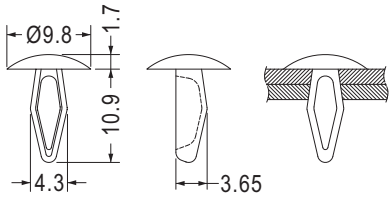


MOUNTING HOLE Ø3.9~Ø4.05
THICKNESS 2.1~3.7

Part No.	Package
MB-19	1000

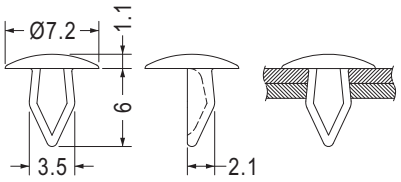


MOUNTING HOLE Ø3.0~Ø3.2
THICKNESS 0.8~2.0

Part No.	Package
MB-27	1000

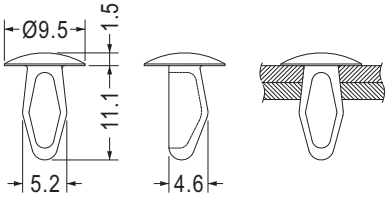


MOUNTING HOLE Ø4.7~Ø4.8
THICKNESS 2.5~4.0

Part No.	Package
MB-36	2000

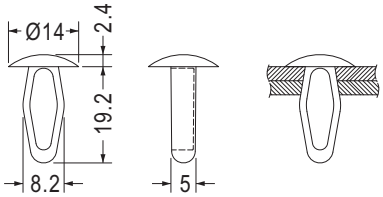


MOUNTING HOLE Ø6.4
THICKNESS 5.0

Part No.	Package
MB-39	1000

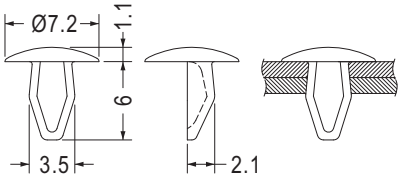


MOUNTING HOLE Ø3.0~Ø3.2
THICKNESS 0.8~2.0

Part No.	Package
MB-43	2000

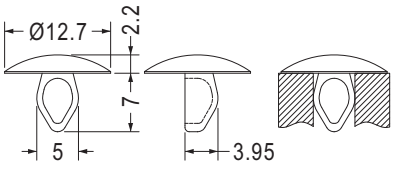

MOUNTING HOLE Ø4.8
THICKNESS 2.5


Part No.	Package
MB-52	2000

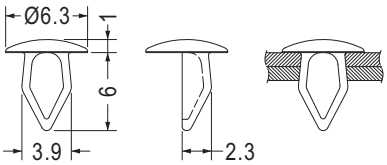

MOUNTING HOLE Ø3.5
THICKNESS 0.8~2.0

- Material: PC+ABS (UL)
- Flame Class: 94V-0

Part No.	Package
MB-55	2000

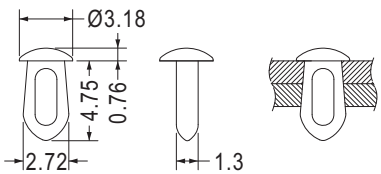


MOUNTING HOLE Ø2.16~Ø2.29
THICKNESS 0.81~2.72


Part No.	Package
MB-56	1000

尼龍鉚釘 MOUNTING BUTTON

用途：用於PC板與機板間固定，省時方便。

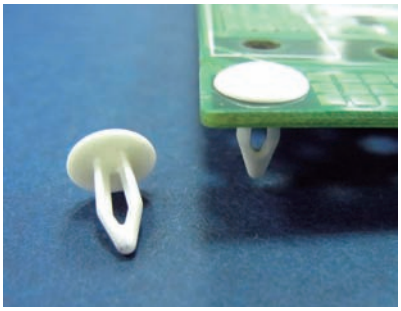


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

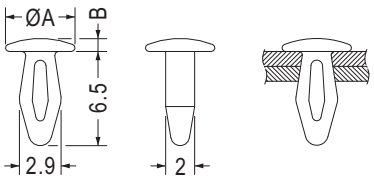

MOUNTING HOLE Ø2.5
THICKNESS 2.0~2.5


Part No.	A	B	Package
MB-16	4.8	0.9	1000
MB-21	4.75	0.95	

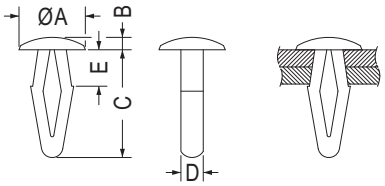

MOUNTING HOLE: ØG
THICKNESS: T

- Material: Nylon 66 (UL)/POM (UL)
- Flame Class: 94HB/94V-2/94V-0


Part No.	A	B	C	D	E	G	T	Package
MB-23	9.0	1.6	14.0	2.9	5.0	4.0~4.5	1.0~5.0	1000
MB-23L	9.0	1.6	14.0	2.9	6.1	4.0~4.5	1.0~6.0	
MB-28	8.0	1.5	13.0	2.7	4.4	3.2	1.0~4.5	2000
MB-58	7.6	1.4	11.5	2.6	6.5	3.2	3.5~6.3	

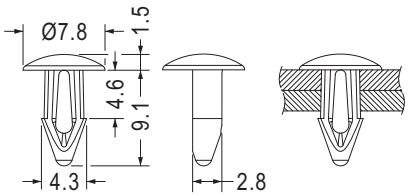

MOUNTING HOLE Ø3.6

- Material: Nylon 66 (UL)/PBT (UL)
- Flame Class: 94V-2/94V-0


Part No.	Package
MB-34	2000

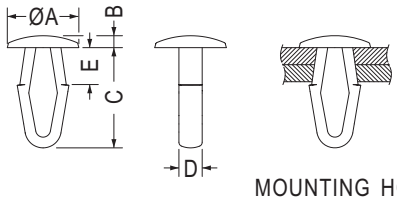

MOUNTING HOLE: ØG
THICKNESS: T

- Material: Nylon 66 (UL)/POM (UL)
- Flame Class: 94HB/94V-2/94V-0


Part No.	A	B	C	D	E	G	T	Package
MB-30	12.0	2.0	16.8	3.9	6.2	6.4	1.5~6.2	2000
MB-48	11.0	2.9	15.0	3.4	5.7	4.7	1.0~5.5	

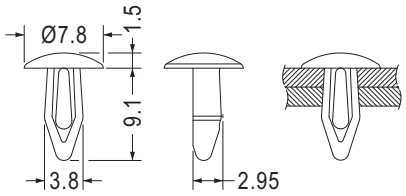

MOUNTING HOLE Ø3.5
THICKNESS 3.5~4.3


- Material: PBT (UL)
- Flame Class: 94V-0
- Color: Natural

Part No.	Package
MB-44	2000

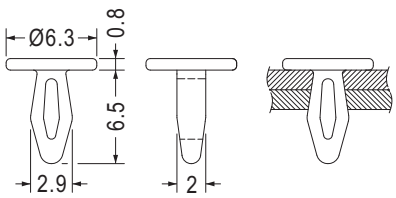

MOUNTING HOLE Ø2.5
THICKNESS 2.0~2.5

Part No.	Package
MB-50	2000

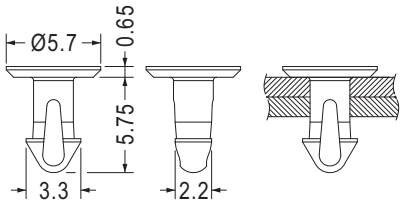


MOUNTING HOLE Ø2.5
THICKNESS 3.5

Part No.	Package
MB-60	2000



【 MB-67 】

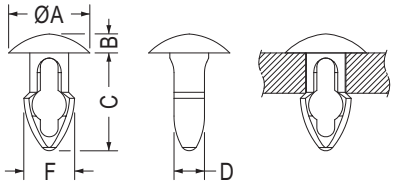

MOUNTING HOLE: ØG
THICKNESS: T


Part No.	A	B	C	D	F	G	T	Package
MB-57	6.4	1.5	7.7	2.4	4.0	3.17	3.17	2000
MB-59	7.93	1.57	9.53	2.6	5.1	4.0	4.0	
MB-61	6.35	1.57	6.95	2.45	4.2	3.17	2.36	
MB-62	6.35	1.57	8.6	2.5	4.2	3.17	4.0	
MB-64	8.0	1.57	10.43	4.4	6.05	4.75	3.18	
MB-65	8.0	1.57	11.63	4.4	6.05	4.75	4.75	
MB-66	8.0	1.57	13.43	4.4	6.05	4.75	6.35	
★MB-67	6.35	1.57	10.9	2.6	4.2	3.17	6.35	

尼龍鉚釘 MOUNTING BUTTON

用途：用於各種零件間之固定，省時方便。



- Material: Nylon 66 (UL)/POM (UL)
- Flame Class: 94HB/94V-2/94V-0
- Color: White/Black
- Unit: mm

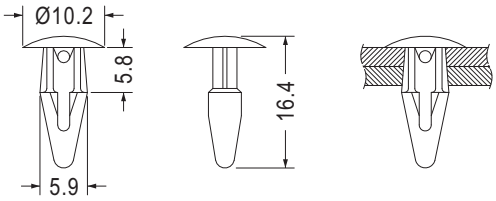


MOUNTING HOLE Ø5.0

Part No.	Package
MBT-1	1000



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


用途：用於PC板與機板間固定，省時方便。

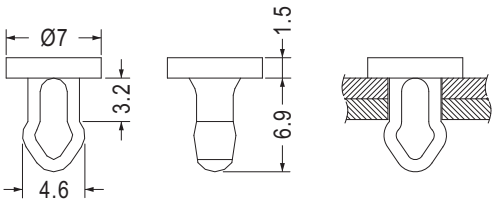

MOUNTING HOLE Ø4.0

Part No.	Package
MBT-2	2000




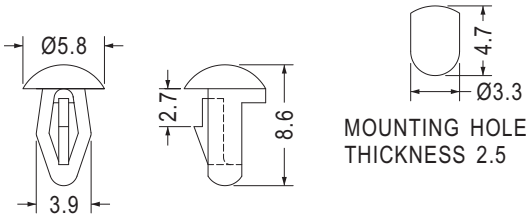

MOUNTING HOLE THICKNESS 2.5


MOUNTING HOLE THICKNESS 1.5

Part No.	Package
MBU3-3	2000



MOUNTING HOLE THICKNESS 3.0

Part No.	Package
MBS3-3	2000

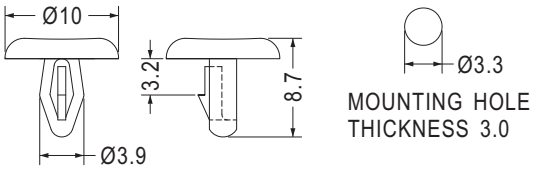

MOUNTING HOLE THICKNESS 3.0


Part No.	Package
MBS3-4	1000

尼龍鉚釘 MOUNTING BUTTON

用途：裝於機殼上，避免使用者不當自行拆機。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

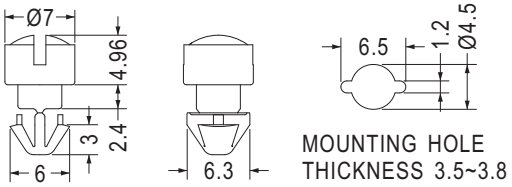


MOUNTING HOLE
THICKNESS 3.5~3.8

Part No.	Package
LEFS-2	1000




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


用途：用於PC板與機板間固定，省時方便。



MOUNTING HOLE Ø3.0
THICKNESS 3.4


Part No.	Package
HSR-8A	1000

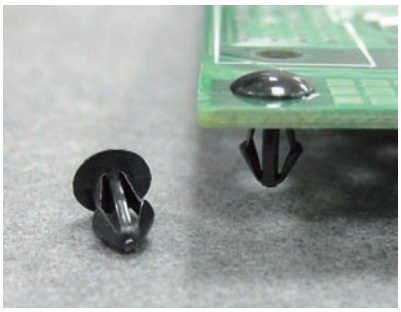



MOUNTING HOLE Ø5.0~Ø5.2
THICKNESS 3.2


Part No.	Package
HSRA-1	1000



MOUNTING HOLE Ø3.5


Part No.	Package
MB-33	1000





MOUNTING HOLE Ø3.0
THICKNESS: T

Part No.	A	E	T	Package
MBL3-2	5.5	2.2	2.0	2000
MBL3-2.5	6.4	2.5	2.4	
MBL3-3	6.4	3.0	2.8	
MBL3-3.5	5.5	3.7	3.5	




MOUNTING HOLE Ø4.0
THICKNESS 2.2


Part No.	A	Package
MB-32	7.0	1000
MB-53	8.0	

尼龍鉚釘 MOUNTING BUTTON

用途：裝於機殼上，避免使用者不當自行拆機。

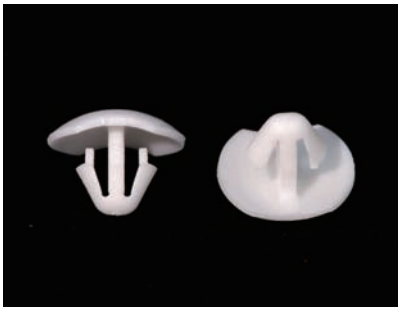

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

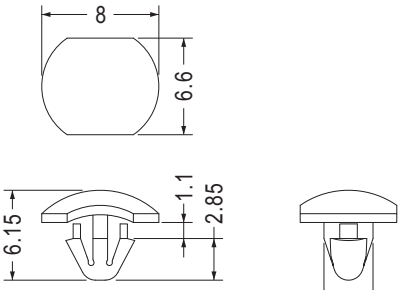


MOUNTING HOLE Ø3.5
THICKNESS 1.2~1.4

Part No.	Package
MB-45	1000




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


用途：用於PC板與機板間固定，省時方便。



MOUNTING HOLE Ø4.8
THICKNESS: T


Part No.	A	B	C	T	Package
MBL4.8-2	10.7	12.0	6.7	2.0	1000
MBL4.8-2-4	11.1	12.0	6.7	2.0	
MBL4.8-2.4	11.2	12.0	6.7	2.4	
MBL4.8-3	11.1	10.0	7.3	2.0	
MBL4.8-4	12.8	12.0	6.7	4.0	

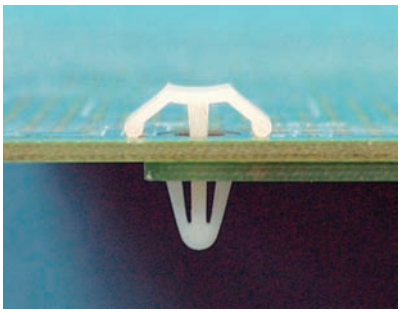




MOUNTING HOLE Ø4.0
THICKNESS 2.5~3.2

Part No.	Package
MB-10	1000




MOUNTING HOLE Ø3.2
THICKNESS 0.8~2.3

Part No.	Package
MB-12	1000




MOUNTING HOLE Ø3.0~Ø3.2
THICKNESS 1.8

Part No.	Package
MB-8	1000



MOUNTING HOLE Ø2.0
THICKNESS 3.2

Part No.	Package
MB-14	2000




MOUNTING HOLE Ø2.0
THICKNESS 1.9


Part No.	Package
MB-63	2000

尼龍鉚釘 MOUNTING BUTTON

用途：用於PC板與機板間固定，省時方便。

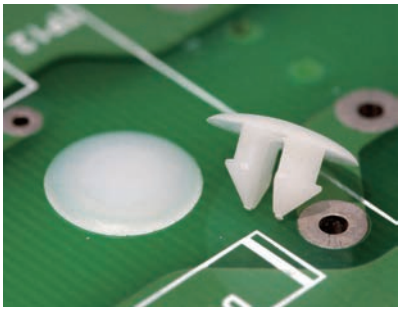


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




MOUNTING HOLE Ø2.3
THICKNESS 1.6

Part No.	Package
MBT2.3-1.6	2000




MOUNTING HOLE Ø2.5
THICKNESS 3.2

Part No.	Package
MBT2.5-3.2	2000




MOUNTING HOLE Ø3.0
THICKNESS 1.6~1.8

Part No.	Package
MBT3-2	2000




MOUNTING HOLE Ø3.0
THICKNESS 2.2

Part No.	Package
MBT-17	2000

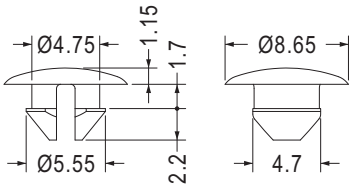


MOUNTING HOLE Ø4.8
THICKNESS 1.6

Part No.	Package
MBT-15	2000



MOUNTING HOLE Ø4.0

Part No.	A	B	Package
MBT-7	4.3	6.0	2000
MBT4-2	2.0	3.7	



MOUNTING HOLE Ø4.5
THICKNESS 3.0


Part No.	Package
MBT-10	1000

鉚釘 MOUNTING BUTTON

用途：用於螺絲孔的塞頭。



- Material: PC+ABS (UL)
- Flame Class: 94V-2/94V-0
- Color: Black/Gray
- Unit: mm

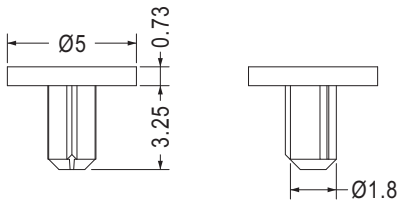


MOUNTING HOLE Ø2.0
THICKNESS Ø1.8~Ø2.0

Part No.	Package
MB-20	2000



- Material: PC
- Color: Black
- Unit: mm

用途：用於PC板與機板間固定，省時方便。

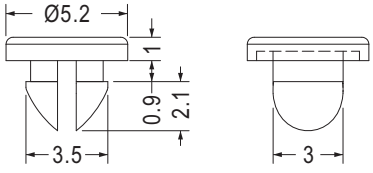

MOUNTING HOLE Ø3.1
THICKNESS 0.8


Part No.	Package
MBT3.1-0.8	2000


尼龍鉚釘 MOUNTING BUTTON

用途：用於PC板與機板間固定，省時方便。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

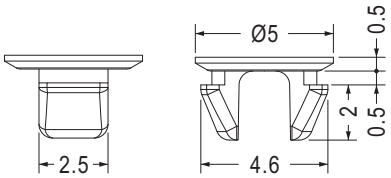




MOUNTING HOLE Ø4.0
CHASSIS THICKNESS 1.0~1.2


Part No.	Package
MBE4-1.2	1000






MOUNTING HOLE Ø6.2
THICKNESS 2.4

Part No.	Package
MBT6.2-3	2000




MOUNTING HOLE Ø6.0
THICKNESS 1.2

Part No.	Package
MBT6-2	2000




MOUNTING HOLE Ø6.35
THICKNESS 0.79~1.58

Part No.	Package
MBT-11	2000




MOUNTING HOLE Ø4.8
THICKNESS 0.8~3.6

Part No.	Package
MBT-12	2000



MOUNTING HOLE Ø3.2
THICKNESS 0.8~2.4

Part No.	Package
MBT-16	2000




MOUNTING HOLE Ø9.5
THICKNESS 0.8~3.6


Part No.	Package
MBT-13	1000

尼龍鉚釘 SNAP RIVET

用途：用於PC板、鐵板、書本間固定，結合力強，搭配BRR1-1使用。

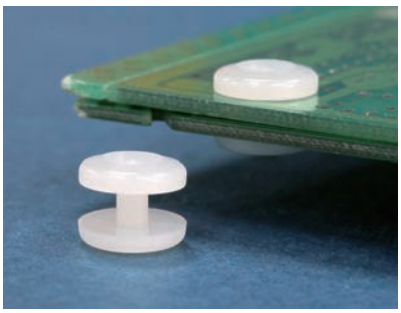


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



TO FIT IN Ø3.2 HOLE

【 BRR1-1 】




THICKNESS: T
組裝示意圖

Part No.	A	T	Package
BRP1-1.6	1.6	0.76	1000
BRP1-2.4	2.4	1.57	
BRP1-3.4	3.3	2.54	
BRP1-4	4.0	3.18	
BRP1-5.6	5.5	4.75	
BRP1-7.2	7.1	6.35	



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

用途：用於PC板與機板間固定，省時方便。

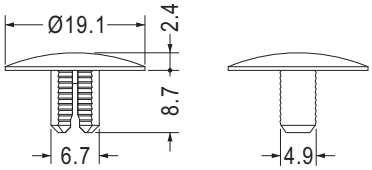

MOUNTING HOLE Ø7.1
ASSEMBLED THICKNESS 8.8~12.8


Part No.	Package
MBG2-8.7	1000

尼龍鉚釘 MOUNTING BUTTON

用途：用於木板、鐵板、PC板...等，板子間的結合固定。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




MOUNTING HOLE: ØG
THICKNESS: T

Part No.	A	B	C	D	G	T	Package
MBW-47	6.5	4.9	3.4	8.4	3.0	1.6~3.0	1000
MBW-60	6.9	5.3	3.7	8.7	3.2	1.6~3.2	2000
★MBW-81	7.0	5.0	6.4	10.0	6.0	3.0	1000



MOUNTING HOLE: ØG
THICKNESS: T

Part No.	A	B	C	D	G	T	Package
MBW-31	9.6	8.0	3.7	8.7	3.2	1.57~6.35	1000
MBW-32	12.5	10.0	7.0	17.8	6.35	1.57~6.35	
MBW-59	12.0	9.5	5.8	15.9	5.25	1.57~6.35	
MBW-62	9.2	7.6	3.4	8.4	3.0	1.6~6.0	
MBW-63	10.8	8.8	5.2	12.7	4.8	1.6~6.4	
MBW-65	13.8	11.3	10.3	25.4	9.5	1.6~6.4	
MBW-66	10.3	8.3	4.6	11.2	4.0	1.6~6.0	
MBW-68	11.3	9.3	6.4	16.8	6.0	1.6~6.0	




MOUNTING HOLE: ØG
THICKNESS: T

Part No.	A	B	C	D	G	T	Package
MBW-33	22.4	19.9	8.5	12.5	7.9	1.6~15.9	1000
MBW-43	22.4	19.7	8.5	22.4	7.9	1.6~15.9	
MBW-49	13.2	11.6	3.7	8.7	3.2	1.6~9.5	
MBW-50	17.2	15.2	5.2	12.7	4.8	1.6~12.7	
MBW-56	21.0	19.0	5.25	8.0	4.8	2.1~15.9	
MBW-58	20.0	17.5	10.2	25.4	9.5	1.6~12.7	
MBW-64	13.3	11.7	3.45	8.4	3.0	1.6~10.0	2000
MBW-67	14.3	12.3	5.3	14.0	5.0	1.6~10.0	1000
MBW-69	15.9	13.4	8.5	22.2	7.9	1.6~9.5	
MBW-70	15.6	13.1	7.8	20.0	7.1	1.6~9.5	
MBW-75	28.4	25.9	7.8	20.0	7.15	1.6~22.3	
MBW-77	16.5	14.5	10.5	15.0	10.0	1.6~9.5	
★MBW-79	44.0	41.5	7.0	17.8	6.4	1.6~38.1	



- Material: Nylon 6 (UL)/Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



MOUNTING HOLE: ØG
THICKNESS: T


Part No.	A	B	C	D	G	T	Package
MBW-17	18.5	17.5	5.6	11.7	4.8	2.54~15.2	1000
MBW-23	21.5	20.5	5.6	11.7	4.8	4.0~25.0	
MBW-42S	12.3	11.0	3.3	6.0	2.7~3.3	1.5~8.0	
MBW-42	12.3	11.0	3.4	6.0	3.0~3.3	1.5~8.0	
MBW-73	19.2	18.0	3.3	6.0	2.7~3.3	1.5~15.0	
MBW-74	21.8	20.0	6.5	13.0	5.6~6.4	1.5~15.0	

尼龍鉚釘 MOUNTING BUTTON

用途：用於木板、鐵板、PC板...等，板子間的結合固定。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




MOUNTING HOLE Ø2.7~3.3
THICNKESS 1.5~4.0

Part No.	Package
MBW-7S	2000




MOUNTING HOLE Ø3.0

Part No.	Package
MBW-9	1000




MOUNTING HOLE Ø3.5

Part No.	Package
MBW-7	1000




MOUNTING HOLE Ø4.0
THICKNESS 5.7~10.7

Part No.	D	Package
MBW-28	8.0	1000
MBW-28L	10.0	




MOUNTING HOLE Ø4.0
THICNKESS 2.1~15.9

Part No.	Package
MBW-55	1000




MOUNTING HOLE Ø4.5~Ø4.8

Part No.	Package
MBW-14	1000




MOUNTING HOLE Ø5.0
THICKNESS 1.5~11.0

Part No.	Package
MBW-52	1000




MOUNTING HOLE Ø5.0
THICKNESS 2.5~4.5

Part No.	Package
MBW-29	1000




MOUNTING HOLE Ø5.5
THICKNESS 0.7~6.4

Part No.	Package
MBW5-12	1000




MOUNTING HOLE Ø6.35
THICKNESS 2.41~8.13

Part No.	Package
★MBW-80	1000




MOUNTING HOLE: ØG
THICKNESS: T

Part No.	A	B	C	D	G	T	Package
MBW-24	29.4	27.0	7.7	17.7	6.4~7.0	2.5~30.0	1000
MBW-51	22.9	20.4	7.7	17.8	6.0~6.3	2.5~12.0	
MBW-61	32.5	30.0	8.3	19.0	7.1	1.5~25.4	



MOUNTING HOLE Ø7.0
THICKNESS 3.2~6.0

Part No.	Package
MBW-27	1000



MOUNTING HOLE Ø7.0~Ø7.1
THICKNESS 3.0~7.0


Part No.	Package
MBW-71	1000

尼龍鉚釘 MOUNTING BUTTON

用途：用於木板、鐵板、PC板...等，板子間的結合固定。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




MOUNTING HOLE: ØG
THICKNESS: T

Part No.	A	B	C	D	G	T	Package
MBW6-11	13.0	11.0	7.4	18.5	6.35	0.8~7.4	1000
MBW7-20	23.0	20.0	7.86	25.4	7.0	2.54~20.0	









MOUNTING HOLE
THICKNESS 60.0


Part No.	Package
MBW-34	500

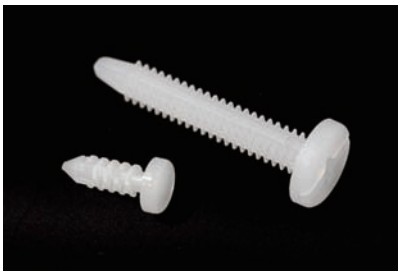



MOUNTING HOLE Ø3.0

Part No.	Package
MBW-18	1000




MOUNTING HOLE Ø3.0

Part No.	Package
MBW-21	1000



用途：用於PC板與機板間固定，省時方便。


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



MOUNTING HOLE Ø2.2


Part No.	Package
MBW-36	2000





MOUNTING HOLE Ø3.0

Part No.	Package
MBW-38	2000



MOUNTING HOLE Ø3.0


Part No.	Package
MBW-40	2000

尼龍鉚釘 MOUNTING BUTTON

用途：用於木板、鐵板、PC板...等，板子間的結合固定。



- Material: POM
- Color: White
- Unit: mm



MOUNTING HOLE Ø3.96
THICKNESS 0.8~7.92


Part No.	Package
MBW-48	500

螺絲鉚釘 SCREW RIVET

用途：螺絲孔之保護。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




FOR NUT: F
THICKNESS: T


Part No.	B	C	F	T	Package
MBWC-1	12.0	3.5	M6	5.0	1000
MBWC-1-1	12.0	3.45	M6	5.0	
MBWC-4	18.0	3.45	M6	10.0	
MBWC-5	14.0	4.5	M8	5.0	


尼龍鉚釘 SNAP RIVET

用途：用於PC板、鐵板、書本間固定，可調式，結合力強，可搭配BRR1-1使用。

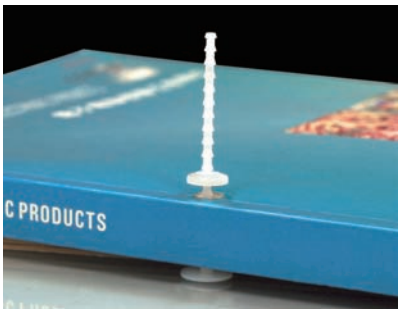


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm





使用示意圖



【 BRR1-1 】

- Can be used with BRR1-1


Part No.	Package
MBW-41	500

散熱片鉚釘 SNAP RIVET

用途：將散熱片固定。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



MOUNTING HOLE Ø3.0


Part No.	Package
MBW3-8	1000

鉚釘 SNAP RIVET

用途：用於PC板與機板間固定，省時方便。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




MOUNTING HOLE Ø3.2
THICKNESS 3.0


Part No.	Package
MBW-22	1000



MOUNTING HOLE Ø3.0

Part No.	Package
MBWB-1	1000

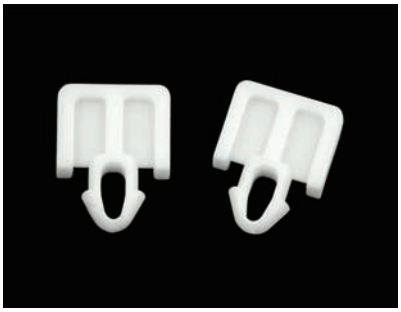




MOUNTING HOLE
THICKNESS 1.0


Part No.	Package
MBWB-2	1000

尼龍鉚釘 MOUNTING BUTTON

用途：用於電線固定。

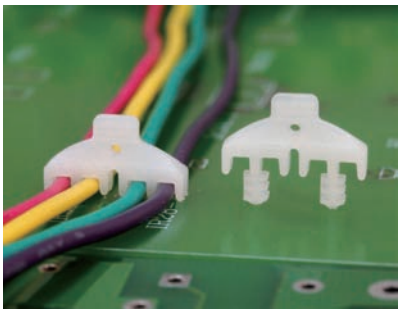

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

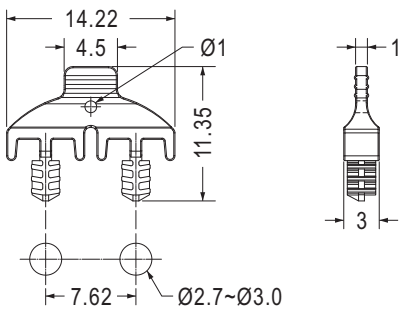


MOUNTING HOLE

Part No.	Package
MBW-46	1000

用途：用於機板間之固定，使用方便。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




MOUNTING HOLE Ø2.5

Part No.	Package
PNLA-5.2	1000




MOUNTING HOLE Ø2.5

Part No.	Package
PNL-7.8	1000




MOUNTING HOLE Ø2.5

Part No.	Package
PNL-17.8	1000




MOUNTING HOLE Ø2.5

Part No.	Package
PNLA-11.4	1000




MOUNTING HOLE Ø3.0

Part No.	Package
PNL-18	1000




MOUNTING HOLE Ø3.0

Part No.	Package
PNL-8	1000



MOUNTING HOLE Ø3.0


Part No.	Package
★PNL-4.75	1000



MOUNTING HOLE Ø3.3
THICKNESS 7.7


Part No.	Package
PNL-1	1000





MOUNTING HOLE: ØG

Part No.	A	B	C	D	E	G	Package
PNLS-8	8.0	2.4	3.3	2.0	11.3	2.5	1000
PNLS-15	8.1	2.0	2.7	1.8	11.4	2.3	
PNLS-16	14.5	2.0	2.7	1.8	17.8	2.3	




MOUNTING HOLE Ø2.4

- Material: LCP (UL)
- Flame Class: 94V-0
- Color: Natural


Part No.	Package
PNLSA-8	1000

塑膠鉚釘 MOUNTING BUTTON

用途：用於機板與機板間之固定，使用方便。

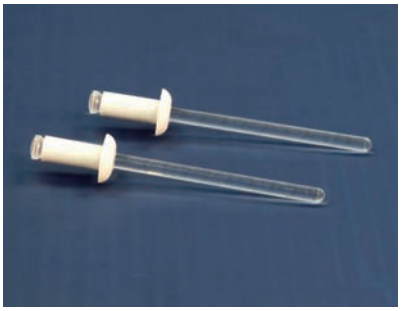

- Material: Nylon 66 (UL)/PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



MOUNTING HOLE: ØG
THICKNESS: T
SHEAR FORCE: F (剪斷力) (kg)


Part No.	A	B	C	D	E	F	G	T	Package
CR32-1	3.2	6.4	6.4	1.4	2.1	20.0	Ø3.3	1.0~4.0	500
CR32-2	3.2	9.6	6.4	1.4	2.1	20.0	Ø3.3	4.0~7.0	
CR32-3	3.2	12.7	6.4	1.4	2.1	20.0	Ø3.3	7.0~10.0	
CR40-1	4.0	6.4	8.0	1.8	2.4	25.0	Ø4.1	1.0~4.0	
CR40-2	4.0	9.6	8.0	1.8	2.4	25.0	Ø4.1	4.0~7.0	
CR40-3	4.0	12.7	8.0	1.8	2.4	25.0	Ø4.1	7.0~10.0	
CR48-1	4.8	8.0	9.6	2.0	2.8	40.0	Ø4.9	1.5~5.0	
CR48-2	4.8	11.2	9.6	2.0	2.8	40.0	Ø4.9	5.0~8.0	
CR48-3	4.8	14.4	9.6	2.0	2.8	40.0	Ø4.9	8.0~11.0	
CR56-1	5.6	9.6	12.0	2.2	3.4	65.0	Ø5.7	2.0~5.5	
CR56-2	5.6	12.7	12.0	2.2	3.4	65.0	Ø5.7	5.5~8.5	
CR56-3	5.6	15.9	12.0	2.2	3.4	65.0	Ø5.7	8.5~12.0	

尼龍鉚釘 SNAP RIVET


用途：用於兩片機板間之固定，配合拉釘工具使用。



- Clip Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Pin Material: POM
- Color: Black
- Unit: mm



【 CRK5-15A 】



【 CRK5-15B 】


Part No.	組合件(ASSY)	Package
CRK5-15	CRK5-15A+CRK5-15B	500

插銷 PIN

用途：PC板與機板間固定，省時方便。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	Package
CNPS8000	1000






Part No.	A	Package
PIC-10	8.5	1000
PIC-14	12.7	


用途：配合超音波熱熔，可當螺絲固定。



- Material: ABS (UL)
- Flame Class: 94HB
- Color: Black
- Unit: mm




Part No.	Package
ACSR-7	2000

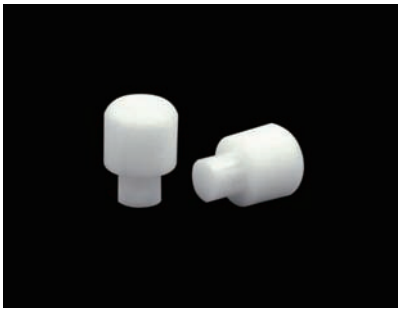

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/White/Black
- Unit: mm


用途：做為塑膠插銷PIN使用。



Part No.	Package
BPLTA-3	2000




- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm



Part No.	Package
EM-579	1000




- Material: POM
- Color: Natural
- Unit: mm



Part No.	Package
PIN3.3-7.5	2000




- Material: PC+ABS (UL)
- Flame Class: 94V-0
- Color: Natural
- Unit: mm




Part No.	Package
PIN4.4-3	2000

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural
- Unit: mm




Part No.	A	Package
PIN2-3.3	3.3	2000
PIN2-3.6	3.6	




Part No.	Package
PIN5-2.3N	2000

風扇鉚釘 FAN MOUNT RIVET

用途：用於電腦電源風扇之固定，降低噪音、牢固。
G:為45度硬度，H:為55度硬度

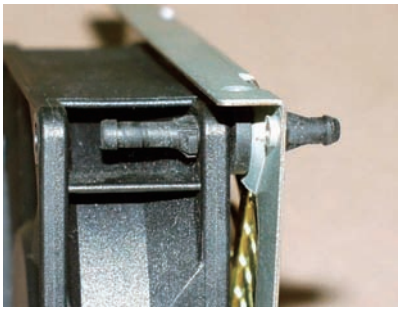


- Material: TPE/TPE (UL)
  G:Hardness is Shore A45
  H:Hardness is Shore A55
- Flame Class: 94V-0
- Color: Black
- Unit: mm




① Fan mounting hole Ø4.3~Ø4.5 and thickness 3.0~5.5
② Support mounting hole Ø6.0 and thickness 1.0 ~2.0

Part No.	Package
BUB-30	1000



① Fan mounting hole Ø4.5 and thickness 3.5~4.0
② Support mounting hole Ø4.5~4.8 and thickness 0.8~2.0


Part No.	Package
BUB-29	1000




① Fan mounting hole Ø4.6 and thickness 3.0 ~5.5
② Support mounting hole Ø6.5 and thickness 1.0~2.0

Part No.	Package
BUB-30L	1000







Part No.	Package
BUC-2	1000



Part No.	Package
BUB-189	1000

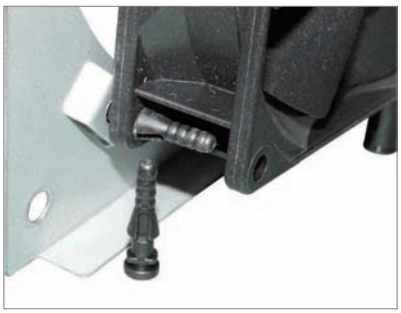



MOUNTING HOLE: ØG


Part No.	A	B	C	D	E	F	G	Package
BUB-1	7.8	4.4	22.6	2.0	0.8	3.6	4.3	1000
BUB-5	10.25	4.4	23.0	1.6	1.3	3.0	4.4	
BUB-20	5.8	3.5	20.0	1.5	0.8	3.8	3.5	
BUB-22	7.8	4.4	23.1	2.5	0.8	3.6	4.4	
BUB-23	8.8	4.4	23.0	1.5	0.8	4.5	4.4	
BUB-25	7.8	4.4	23.7	2.5	1.4	3.6	4.4	
BUB-25.4	7.5	4.4	25.4	2.0	4.0	3.0	4.2	
BUB-70	5.8	3.5	70.0	1.5	0.8	27.0	3.5	
BUB-88	8.8	3.5	21.85	1.5	1.0	4.0	3.5	
BUB-88S	7.8	3.5	21.85	1.5	1.0	4.0	3.5	
BUB-151	7.0	4.0	22.85	2.0	1.6	3.8	4.0	
BUB-158	7.8	4.4	23.1	2.5	0.8	3.6	4.4	
BUB-174	8.8	4.4	23.3	1.5	1.1	4.5	4.3	
BUB-199	8.0	4.3	27.0	1.5	1.2	3.8	4.5	

風扇鉚釘 FAN MOUNT RIVET

用途：用於電腦電源風扇之固定，降低噪音、牢固。
G:為45度硬度，H:為55度硬度




- Material: TPE/TPE (UL)
  G:Hardness is Shore A45
  H:Hardness is Shore A55
- Flame Class: 94V-0
- Color: Black
- Unit: mm




MOUNTING HOLE Ø3.5
THICKNESS 1.0~1.2

Part No.	Package
BUB-234	1000




MOUNTING HOLE Ø3.5
THICKNESS 1.1~1.2

Part No.	C	F	H	Package
BUB-194	24.3	4.0	5.2	1000
BUB-205	24.3	4.0	5.0	
BUB-218	25.3	5.0	5.0	




MOUNTING HOLE Ø3.5
THICKNESS 2.0~2.2

Part No.	Package
BUB-231	1000




MOUNTING HOLE Ø4.0
THICKNESS 1.5~1.6

Part No.	Package
BUB-180	1000




MOUNTING HOLE: ØG
THICKNESS 1.5~1.6

Part No.	B	C	F	G	Package
BUB-96	3.4	25.4	5.4	3.5	1000
BUB-96-1	4.0	25.4	5.4	4.0	
BUB-97	3.4	26.4	6.4	3.5	




MOUNTING HOLE Ø4.4
THICKNESS 1.2~1.6

Part No.	Package
BUB-32	1000




MOUNTING HOLE Ø4.4
THICKNESS 1.2~1.6

Part No.	Package
BUB-32S	1000




MOUNTING HOLE Ø4.4~Ø4.5
THICKNESS 0.8~1.0

Part No.	Package
BUB-182	1000




MOUNTING HOLE Ø4.4
THICKNESS 0.8~1.0

Part No.	Package
BUB-152	1000




MOUNTING HOLE Ø4.5
THICKNESS 0.8~1.0

Part No.	Package
BUB-202	1000




MOUNTING HOLE Ø7.5
THICKNESS 1.5~1.6

Part No.	Package
★BUB-251	1000




FANS MOUNTING HOLE Ø4.5




MOUNTING HOLE
THICKNESS 1.0~1.2

Part No.	Package
BUB-243	1000



FAN MOUNTING HOLE Ø4.5



MOUNTING HOLE
THICKNESS 1.5~1.6


Part No.	Package
BUB-126	1000

風扇鉚釘 FAN MOUNT RIVET

用途：用於電腦電源風扇之固定，降低噪音、牢固。




- Material: TPE/TPE (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm




MOUNTING HOLE Ø3.5
THICKNESS 2.5

Part No.	Package
BUB-209	1000



MOUNTING HOLE Ø3.5
THICKNESS 1.4~1.6

Part No.	Package
BUB-213	1000




MOUNTING HOLE Ø3.4
THICKNESS 0.8~1.0

Part No.	Package
BUB-245	1000




- Material: Silicon Rubber
- Color: Black
- Unit: mm



MOUNTING HOLE: ØG
THICKNESS: E


Part No.	A	B	C	D	E	F	G	Package
BUB-23I	8.8	4.4	23.0	1.5	0.8	4.5	4.4	1000
BUB-130I	7.6	4.3	22.2	1.2	0.9	3.9	4.3	






MOUNTING HOLE Ø4.0
THICKNESS 1.0~1.4

Part No.	Package
BUB-25.5I	1000




MOUNTING HOLE Ø5.5
THICKNESS 0.8~1.0

Part No.	Package
BUB-7I	1000

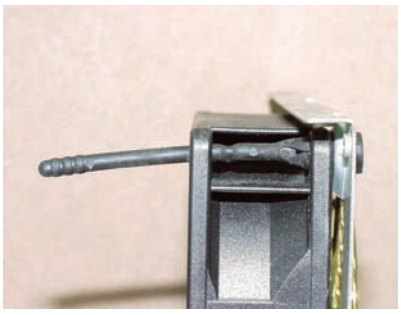

- Material: TPE/TPE (UL)
  G:Hardness is Shore A45
  H:Hardness is Shore A55
- Flame Class: 94V-0
- Color: Black
- Unit: mm


G:為45度硬度，H:為55度硬度

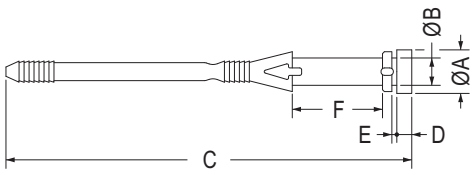


MOUNTING HOLE: ØG
THICKNESS: E

Part No.	A	B	C	D	E	F	G	Package
BUB-9	6.0	3.3	30.9	1.2	1.0	8.0	3.3	1000
BUB-10	6.3	3.5	46.7	1.6	0.8	3.5	3.5	
BUB-35	7.5	4.4	35.0	2.0	1.2	3.0	4.4	
BUB-49	6.3	3.5	48.5	1.6	1.4	3.5	3.5	
BUB-53	7.5	4.4	53.3	2.0	1.2	3.0	4.4	
BUB-54	7.0	4.4	54.1	2.0	2.0	3.0	4.4	
BUB-57	5.2	3.5	57.3	1.5	0.8	19.0	3.5	
BUB-65	7.0	4.4	65.2	2.4	0.8	14.5	4.4	
BUB-65-1	7.0	4.4	62.0	1.7	0.8	14.5	4.4	
BUB-69	7.0	4.4	68.8	1.5	0.8	19.0	4.2	
BUB-71	7.0	4.4	71.0	2.4	1.6	19.5	4.4	
BUB-73	7.0	3.5	73.0	1.4	0.8	26.0	3.5	
BUB-74	7.5	4.4	70.0	2.0	0.8	3.0	4.4	
BUB-85	7.5	4.4	70.0	2.0	0.8	5.0	4.4	
BUB-100	6.0	3.1	55.33	1.7	1.0	18.0	3.3	
BUB-201	7.0	4.0	60.4	1.5	1.5	14.5	4.3	

用途：用於電腦電源風扇之固定，降低噪音、牢固。
G:為45度硬度，H:為55度硬度

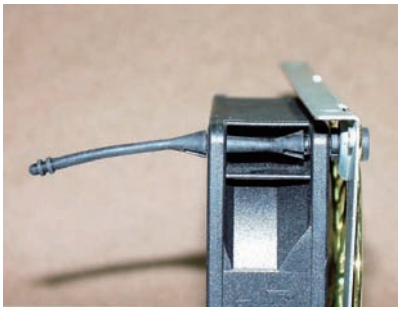


- Material: TPE/TPE (UL)
  G:Hardness is Shore A45
  H:Hardness is Shore A55
- Flame Class: 94V-0
- Color: Black
- Unit: mm

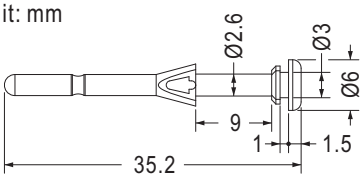


MOUNTING HOLE Ø3.2
THICKNESS 1.0~1.2

Part No.	Package
BUB-127	1000

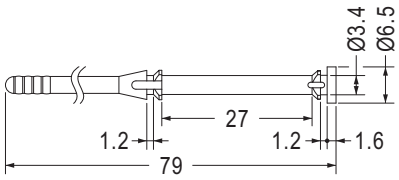


MOUNTING HOLE Ø3.7
THICKNESS 1.0~1.2

Part No.	Package
BUB-79	500

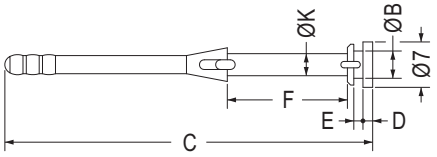


MOUNTING HOLE: ØG
THICKNESS: E

Part No.	B	C	D	E	F	G	K	Package
BUB-48	4.2	48.0	1.4	0.8	3.5	4.4	3.5	1000
BUB-56	4.2	56.7	1.5	1.4	18.5	4.4	3.4	
BUB-76	4.2	75.1	1.4	2.9	26.0	4.4	3.4	
BUB-83	4.4	69.2	1.4	0.8	19.5	4.6	4.0	
BUB-150	3.5	57.3	2.5	0.8	19.0	3.7	3.5	
BUB-150S	3.5	57.2	1.4	0.8	19.0	3.7	3.5	
BUB-153	3.5	74.8	1.4	2.6	26.0	3.7	3.4	
BUB-184	3.96	73.94	0.98	0.91	27.0	4.2	3.4	

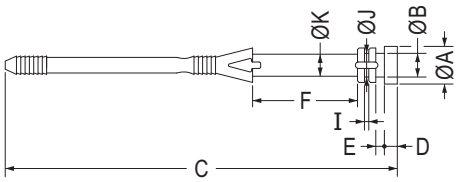


MOUNTING HOLE: ØG
THICKNESS: E

Part No.	A	B	C	D	E	F	G	I	J	K	Package
BUB-4	9.0	4.5	24.7	1.5	1.5	3.5	4.7	1.0	4.0	4.0	1000
BUB-26	8.8	4.4	25.2	1.6	1.6	4.5	4.6	0.8	4.4	4.4	
BUB-68	8.0	4.0	68.0	1.5	1.5	4.0	4.2	1.0	4.0	4.0	
BUB-72	7.0	4.4	72.0	2.4	1.6	19.5	4.7	0.8	4.4	4.1	

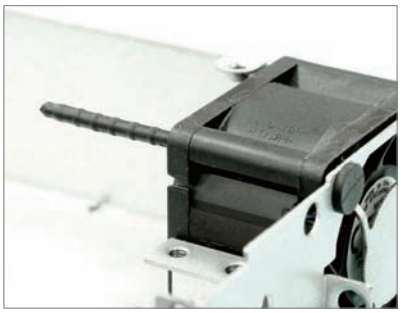


HOLE IN FAN Ø3.5
THICKNESS 10.0

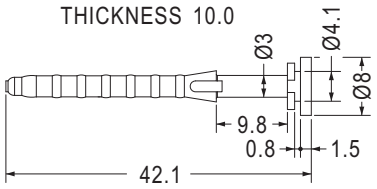

MOUNTING HOLE Ø4.4
THICKNESS 0.8~1.0


Part No.	Package
BUB-179	1000

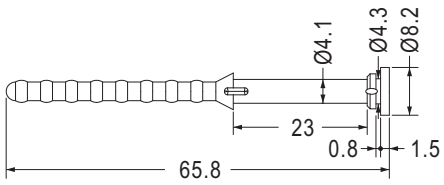

MOUNTING HOLE Ø4.4
THICKNESS 0.8~1.0


Part No.	Package
BUB-66	1000





MOUNTING HOLE Ø5.5
THICKNESS 0.8~1.0

Part No.	Package
BUB-175L	1000



MOUNTING HOLE Ø5.1
THICKNESS 0.8~1.0


Part No.	Package
BUB-45	1000

風扇鉚釘 FAN MOUNT RIVET

用途：用於電腦電源風扇之固定，降低噪音、牢固。
G:為45度硬度，H:為55度硬度




- Material: TPE/TPE (UL)
  G:Hardness is Shore A45
  H:Hardness is Shore A55
- Flame Class: 94V-0
- Color: Black
- Unit: mm

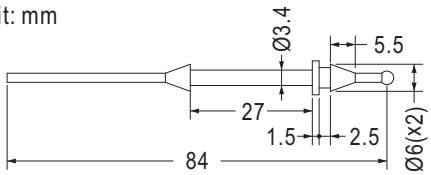


MOUNTING HOLE Ø4.3
THICKNESS 1.4~1.6

Part No.	Package
BUB-159	1000




MOUNTING HOLE Ø4.3
THICKNESS 2.2~2.4

Part No.	Package
BUB-225	1000

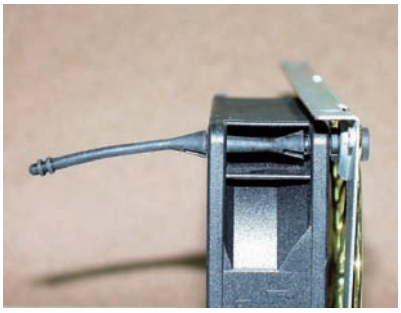


- Material: Silicon Rubber
- Color: Black
- Unit: mm

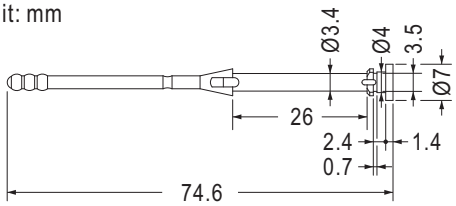


MOUNTING HOLE Ø3.5
THICKNESS 0.8~1.0

Part No.	Package
BUB-211I	1000

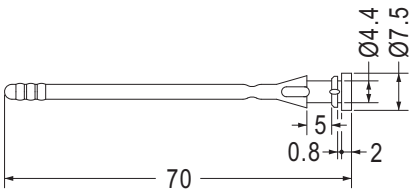


MOUNTING HOLE Ø4.5
THICKNESS 0.8

Part No.	Package
BUB-85I	1000

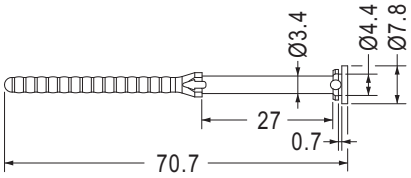

MOUNTING HOLE Ø4.5
THICKNESS 0.8~1.0

Part No.	Package
BUB-161I	1000




MOUNTING HOLE Ø5.1
THICKNESS 0.8~1.0

Part No.	Package
BUB-45I	1000



HOLE IN FAN Ø4.4
THICKNESS 15.0

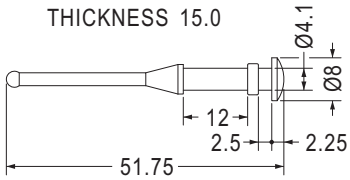


MOUNTING HOLE Ø4.4
THICKNESS 2.4~2.6

Part No.	Package
TF-268I	1000



- Material: Silicon Rubber (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm

HOLE IN FAN Ø3.5
THICKNESS 28.0

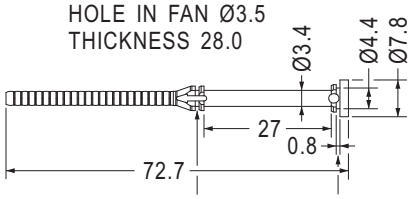

MOUNTING HOLE Ø3.5
THICKNESS 0.8

MOUNTING HOLE Ø4.5
THICKNESS 0.8~1.0


Part No.	Package
BUB-235I	1000

風扇鉚釘 FAN MOUNT RIVET

用途：用於電腦電源風扇之固定，降低噪音、牢固。
G:為45度硬度，H:為55度硬度




- Material: TPE/TPE (UL)
  G:Hardness is Shore A45
  H:Hardness is Shore A55
- Flame Class: 94V-0
- Color: Black
- Unit: mm




MOUNTING HOLE Ø2.0

Part No.	Package
BUB-138	1000





MOUNTING HOLE : ØG




MOUNTING HOLE Ø3.6

Part No.	A	B	C	F	G	Package
BUB-136	8.8	3.4	21.9	5.4	3.5	1000
BUB-172	8.5	4.1	22.0	4.5	4.5	

- Material: Silicon Rubber


Part No.	Package
BUB-219I	1000





MOUNTING HOLE Ø4.3
THICKNESS 4.0


Part No.	Package
BUB-155	1000



MOUNTING HOLE Ø4.4~Ø4.5

Part No.	Package
BUB-196	1000






MOUNTING HOLE Ø4.6

Part No.	C	Package
BUB-90	20.5	1000
BUB-124	40.5	



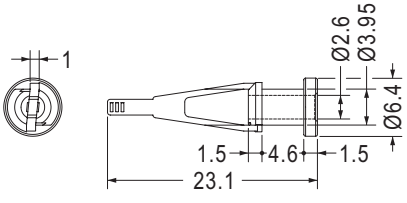

MOUNTING HOLE Ø4.2


Part No.	Package
BUB-95	1000


風扇鉚釘 FAN MOUNT RIVET

用途：用於電腦電源風扇之固定，降低噪音、牢固。
G:為45度硬度，H:為55度硬度



- Material: TPE/TPE (UL)
  G:Hardness is Shore A45
  H:Hardness is Shore A55
- Flame Class: 94V-0
- Color: Black
- Unit: mm






MOUNTING HOLE
THICKNESS 0.8

Part No.	Package
BUB-139	1000






MOUNTING HOLE Ø3.2


Part No.	Package
BUB-16.7	1000





MOUNTING HOLE Ø4.3


Part No.	Package
BUB-171	1000



MOUNTING HOLE Ø3.5


Part No.	Package
BUB-177	1000





MOUNTING HOLE Ø3.7

Part No.	Package
BUB-132	1000




MOUNTING HOLE Ø3.7

Part No.	Package
BUB-133	1000




- Material: TPE (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm



MOUNTING HOLE Ø3.5

Part No.	Package
BUB-217	1000

- Material: TPR
- Color: Black
- Unit: mm




MOUNTING HOLE Ø4.3

Part No.	Package
BUB-233	1000

用途：用於電腦電源風扇之固定，降低噪音、牢固。




- Material: Silicon Rubber
- Color: Black
- Unit: mm




MOUNTING HOLE Ø4.5

Part No.	Package
BUB-86I	1000

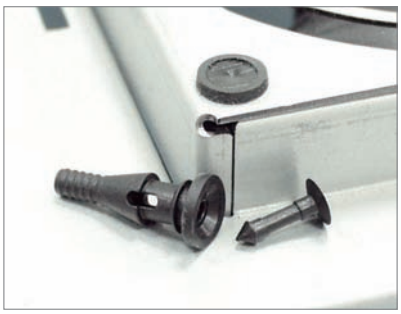


- Body Material: TPE
- Pin Material: Nylon 66 (UL)
- Flame Class: 94V-2
- Color: Black
- Unit: mm




MOUNTING HOLE Ø4.8~Ø5.0

Part No.	Package
FSP-1	1000

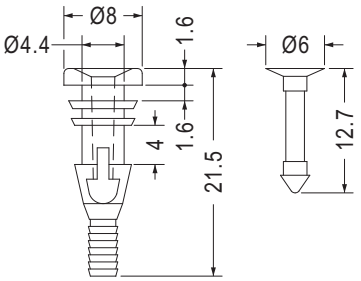


MOUNTING HOLE Ø4.8~Ø5.0

Part No.	Package
FSP-2	1000

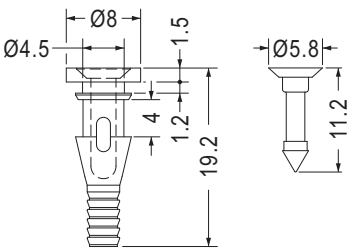


MOUNTING HOLE Ø4.5

Part No.	Package
FSP-3	1000



MOUNTING HOLE Ø3.5


Part No.	Package
FSP-10	1000



MOUNTING HOLE: ØG

Part No.	A	B	C	D	G	Package
FSP-4	1.05	3.9	18.55	10.8	4.5~4.7	1000
FSP-5	0.9	3.9	14.3	10.8	4.5~4.7	
FSP-6	1.6	5.0	20.1	12.1	4.5	



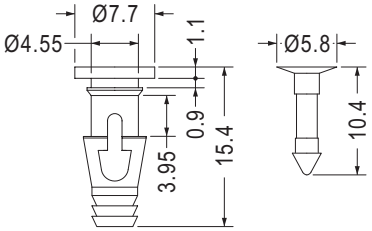


MOUNTING HOLE Ø4.5~Ø4.7


Part No.	Package
FSP-9	1000

塑膠鉚釘 MOUNTING BUTTON

用途：用於風扇鉚釘之固定。

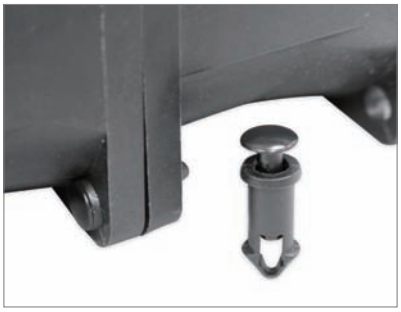

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm
- Patented (專利品)




MOUNTING HOLE Ø4.4~Ø4.5
THICKNESS 8.0


Part No.	Package
SRMKA-8	1000

散熱片扣件 HEAT SINK RIVET

用途：用於兩片零件間之固定。

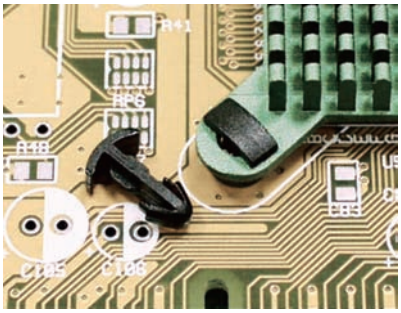


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




MOUNTING HOLE Ø3.0

Part No.	A	Package
MBB-6	6.0	2000
MBB-7	7.0	
MBB-8	8.0	




MOUNTING HOLE Ø3.0

Part No.	Package
MBB-6A	2000

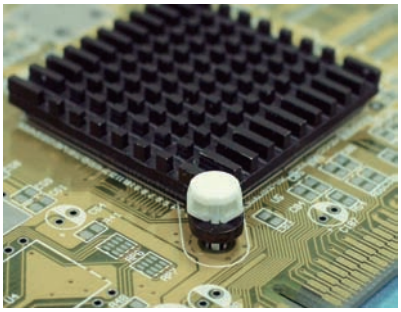


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


用途：用於PC板上與IC散熱片間固定，方便、牢固。



MOUNTING HOLE Ø3.0

Part No.	A	B	C	Package
MCC-1	12.5	4.4	5.3	2000
MCC-2	12.7	5.3	4.7	
MCC-3	10.3	5.0	2.5	

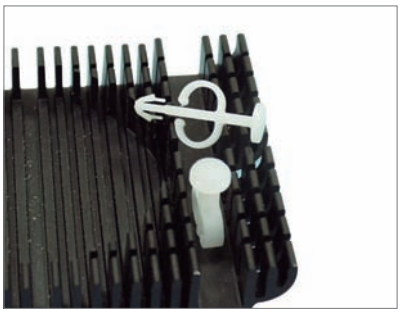



MOUNTING HOLE Ø3.0

Part No.	A	B	C	D	Package
MEE-1	20.3	5.1	4.0	10.1	1000
MEE-2	17.0	2.5	3.4	10.3	


散熱片扣件 HEAT SINK RIVET

用途：用於PC板上與IC散熱片間固定，方便、牢固。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

・PC板Ø2.3散熱片孔徑建議開Ø2.5
・PC板Ø2.7散熱片孔徑建議開Ø2.9
・PC板Ø2.85散熱片孔徑建議開Ø3.0
・PC板Ø3.0散熱片孔徑建議開Ø3.2
・PC板Ø3.2散熱片孔徑建議開Ø3.4
・PC板Ø3.5散熱片孔徑建議開Ø3.7
・PC板Ø3.8散熱片孔徑建議開Ø4.1
・PC板Ø4.0散熱片孔徑建議開Ø4.2~Ø4.3
・彈簧尺寸可依客戶訂製



MOUNTING HOLE: ØG

Applications: Use on PC Boards and affix Heat Sinks, stable and easy to use.


- PC Boards Ø 2.3, suggests for a Heat Sink of Ø 2.5 in diameter.
- PC Boards Ø 2.7, suggests for a Heat Sink of Ø 2.9 in diameter.
- PC Boards Ø 2.85, suggests for a Heat Sink of Ø 3.0 in diameter.
- PC Boards Ø 3.0, suggests for a Heat Sink of Ø 3.2 in diameter.
- PC Boards Ø 3.2, suggests for a Heat Sink of Ø 3.4 in diameter.
- PC Boards Ø 3.5, suggests for a Heat Sink of Ø 3.7 in diameter.
- PC Boards Ø 3.8, suggests for a Heat Sink of Ø 4.1 in diameter.
- PC Boards Ø 4.0, suggests for a Heat Sink of Ø 4.2 - 4.3 in diameter.
- Custom spring sizes are available upon request.

Part No.	A	B	C	D	E	G	Package
HSR-4	4.3	1.5	11.5	2.5	4.3	3.0	1000
HSR-6	6.4	1.5	8.7	2.5	4.3	3.0	
HSR-6S	6.35	1.5	8.7	2.5	4.0	3.0	
HSR-7	6.4	1.5	10.6	2.5	4.3	3.0	
HSR-9	6.4	1.5	11.5	2.5	4.4	3.0	
HSR-10	5.0	1.75	8.3	2.5	4.3	3.0	
HSR-11	6.4	2.75	21.0	2.5	4.3	3.0	
HSR-12	5.5	1.5	8.7	3.6	4.0	3.0	
HSR-13	6.2	1.0	7.8	2.5	4.2	3.0	
HSR-16	6.3	1.5	11.5	2.1	4.2	3.0	
HSR-23	6.4	1.5	11.4	2.6	4.3	3.0	
HSR-24	5.5	1.5	14.0	2.8	4.1	3.0	
HSR-25	5.5	1.6	11.4	3.0	4.0	3.0	
HSR-26	6.4	1.5	11.5	2.5	4.8	3.5	
HSR-30	5.0	1.75	12.32	2.5	4.3	3.0	
HSR-31	6.4	1.5	11.4	2.5	4.5	3.0	
HSR-32	5.5	1.5	9.0	1.9	3.6	3.0	
HSR-33	6.4	1.5	11.4	2.5	4.8	3.5	
HSR-34	6.0	1.9	17.6	2.5	4.2	3.0	
HSR-35	6.2	1.0	9.0	2.5	4.3	3.0	
HSR-41	5.5	1.5	10.0	2.5	4.3	3.0	
HSR-42	5.5	1.5	12.0	2.5	4.3	3.0	
HSR-44	5.5	1.5	9.0	3.5	4.3	3.0	
HSR-45	6.5	1.5	11.1	3.5	5.4	4.0	
HSR-49	6.3	0.8	5.7	2.1	4.2	3.0	
HSR-50	6.2	1.0	7.0	2.5	4.3	3.0	

Part No.	A	B	C	D	E	G	Package
HSR-51	8.0	1.6	16.5	3.3	5.5	4.0	1000
HSR-53	5.5	1.0	7.4	2.1	4.2	3.0	
HSR-56	6.5	1.5	11.1	3.5	5.15	4.0	
HSR-57	5.5	0.8	6.6	2.1	4.2	3.0	
HSR-61	4.7	1.2	12.7	2.0	3.6	2.7	
HSR-62	6.3	1.5	25.5	2.7	4.0	3.0	
HSR-64	6.4	1.5	10.6	2.5	4.3	3.0	
HSR-65	5.5	1.5	9.0	1.9	3.8	3.2	
HSR-66	6.5	1.5	22.7	3.85	5.35	4.0	
HSR-68	6.2	1.2	11.0	1.5	4.3	3.0	
HSR-72	5.5	1.5	11.0	1.9	3.6	3.0	
HSR-73	8.0	1.5	15.85	2.7	5.5	4.0	
HSR-83	5.8	1.5	17.0	1.7	4.3	3.0	
HSR-85	8.0	1.5	15.8	4.0	5.5	4.0	
HSR-93	6.4	1.6	12.7	2.8	4.3	3.0	
HSR-95	8.0	1.6	15.5	3.3	5.3	3.8	
HSR-96	6.4	1.8	14.0	3.3	4.0	3.0	
HSR-97	6.2	1.2	13.5	1.3	4.3	3.0	
HSR-98	5.5	0.8	8.4	2.1	4.2	3.0	
HSR-110	6.2	1.0	7.4	2.5	4.3	3.05	
HSR-112	6.2	1.2	11.0	2.5	4.3	3.05	
HSR-118	6.4	1.5	12.8	2.5	4.3	3.05	
HSR-120	4.3	1.5	11.5	3.5	4.3	3.05	
HSR-121	6.4	1.5	9.9	2.5	4.0	2.85	
★HSR-128	4.7	1.2	12.4	1.5	3.1	2.3	

散熱片扣件 HEAT SINK RIVET


用途：用於PC板上與IC散熱片間固定，方便、牢固。

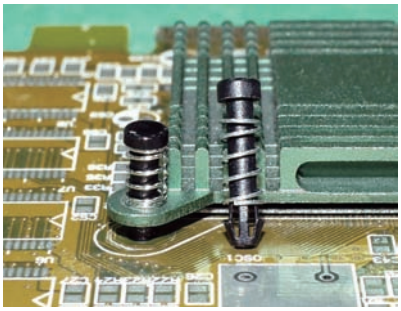

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

・PC板Ø2.7散熱片孔徑建議開Ø2.9
・PC板Ø3.0散熱片孔徑建議開Ø3.2
・彈簧尺寸可依客戶訂製

Applications: Use on PC Boards and affix Heat Sinks, stable and easy to use.
・PC Boards Ø 2.7, suggests for a Heat Sink Of Ø 2.9 in diameter
・PC Boards Ø 3.0, suggests for a Heat Sink Of Ø 3.2 in diameter
・Custom spring sizes are available upon request




MOUNTING HOLE: ØG

Part No.	A	B	C	D	E	G	Package
HSR-14	4.6	5.9	13.0	3.5	4.2	3.0	1000
HSR-29	6.4	0.9	9.5	3.3	4.0	3.0	
HSR-55	6.0	1.8	9.6	2.5	4.0	3.0	
HSR-91	4.7	1.2	11.8	2.0	3.6	2.7	



・PC板Ø3.0散熱片孔徑建議開Ø3.2
・PC板Ø3.5散熱片孔徑建議開Ø3.7
・PC板Ø4.0散熱片孔徑建議開Ø4.2~Ø4.3
・彈簧尺寸可依客戶訂製


Applications: Use on PC Boards and affix Heat Sinks, stable and easy to use.
・PC Boards Ø 3.0, suggests for a Heat Sink of Ø 3.2 in diameter
・PC Boards Ø 3.5, suggests for a Heat Sink of Ø 3.7 in diameter
・PC Boards Ø 4.0, suggests for a Heat Sink of Ø 4.2 - 4.3 In diameter
・Custom spring sizes are available upon request



MOUNTING HOLE: ØG

Part No.	A	B	C	D	E	G	Package
HSR-12.7	6.4	1.6	12.7	3.2	4.2	3.0	1000
HSR-38	6.0	1.5	9.0	2.4	4.1	3.2	
HSR-60	6.3	0.8	5.7	2.7	4.2	3.0	






MOUNTING HOLE: ØG

Part No.	A	B	C	D	E	G	Package
HSR-37	5.0	1.0	10.0	2.0	2.0	1.5	1000
HSR-39	5.6	1.2	12.7	2.0	3.1	2.3	
HSR-40	4.7	1.2	12.4	2.0	3.1	2.3	
HSR-48	5.6	0.9	7.6	2.1	3.3	2.2	
HSR-54	5.6	0.9	11.6	2.0	3.3	2.2	
HSR-67	5.0	1.0	10.0	2.0	2.2	1.7	
HSR-71	4.7	1.2	12.4	1.5	3.1	2.3	
HSR-89	4.5	0.9	7.7	2.0	3.3	2.2	





MOUNTING HOLE Ø3.0
HOLE HEAT SINK Ø3.2~Ø3.4

Part No.	Package
HSR-103	1000

散熱片扣件 HEAT SINK RIVET

用途：用於PC板上與IC散熱片間固定，方便、牢固。






- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


・PC板Ø3.0散熱片孔徑建議開Ø3.2

Applications: Use on PC Boards and affix Heat Sinks, stable and easy to use.
・PC Boards Ø 3.0, suggests for a Heat Sink of Ø 3.2 in diameter




MOUNTING HOLE Ø3.0
HOLE IN HEAT SINK Ø3.2

Part No.	Package
HSR-1	1000




MOUNTING HOLE Ø3.0
THICKNESS 1.2~1.7

Part No.	Package
HSR-2	1000




MOUNTING HOLE Ø2.5
HOLE IN HEAT SINK Ø2.7

Part No.	Package
HSR-36	1000




MOUNTING HOLE Ø3.05
HOLE IN HEAT SINK Ø3.2


Part No.	Package
HSR-109	1000



MOUNTING HOLE Ø3.0


Part No.	Package
HSR-74-201	1000

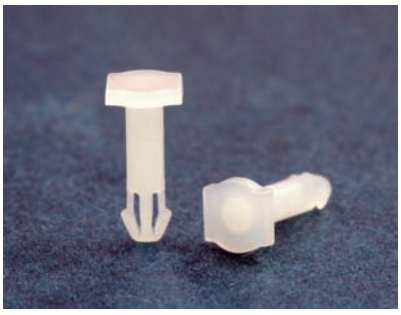




MOUNTING HOLE Ø3.0
HOLE IN HEAT SINK Ø3.2

Part No.	Package
HSR-90	1000

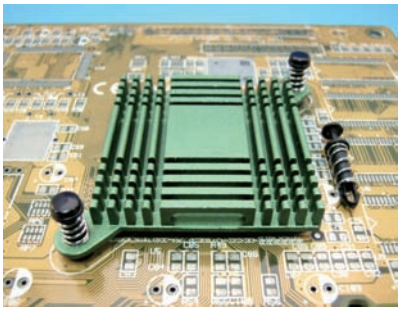


MOUNTING HOLE Ø3.5
THICKNESS 1.6



MOUNTING HOLE Ø3.5


Part No.	Package
HSR-58	1000

MOUNTING HOLE Ø3.3
THICKNESS 1.6



MOUNTING HOLE Ø4.0
THICKNESS 0.8~1.0

Part No.	Package
HSRD-2	1000



MOUNTING HOLE Ø3.0


Part No.	C	E	Package
SRMK-8.5	8.5	3.7	1000
SRMK-11.5	11.5	3.5	


插銷 PIN

用途：加強散熱片銅插銷之固定，避免震動脫落。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/White/Black
- Unit: mm
- Patented (專利品)






RECOMMEND MOUNTION HOLE
RECOMMEND THICKNESS 2.0


Part No.	Package
MBTA-1	2000

喇叭座 SPEAKER HOLDER


用途：將Ø50喇叭固定於機板上。

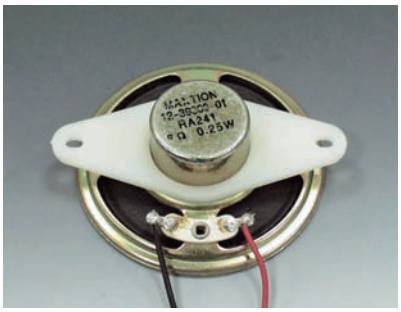

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
SPK-1	250

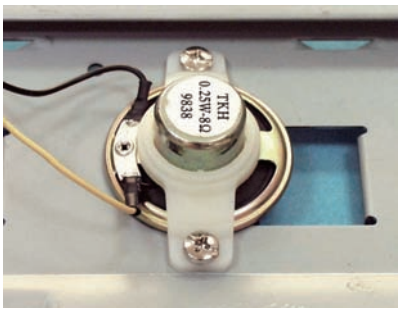

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

用途：將Ø38喇叭固定於機板上。




Part No.	Package
SPK-2	250

喇叭箱扣 SPEAKER BOX BUCKLE

用途：固定音箱外蓋用。




- Body Material: TPE
- Pin Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm



BODY

MOUNTING HOLE Ø10.5
THICKNESS 2.5

Part No.	Package
SPLK-1FA	500



PIN

MOUNTING HOLE Ø6.1
THICKNESS 6.4


Part No.	Package
SPLK-1FB	500

喇叭箱扣 SPEAKER BOX BUCKLE

用途：固定音箱外蓋用。




- Body Material: TPU
- Pin Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm



MOUNTING HOLE Ø10.5
THICKNESS 2.5

Part No.	Package
SPLK-2FA	500



PIN


Part No.	Package
SPLK-2FB	500

門扣擋銷 DOOR LOCK TIP

用途：用於面板固定用。




- Body Material: POM
- Pin Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm



MOUNTING HOLE
THICKNESS 1.6~1.8

門扣本體
DOOR LOCK BODY

Part No.	Package
DTTL-1A	500

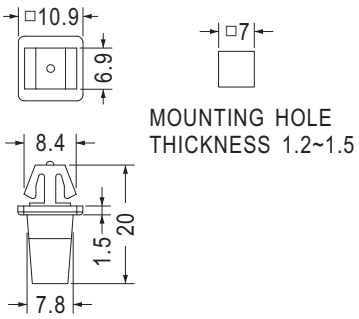


MOUNTING HOLE
THICKNESS 1.2~1.5

PIN

Part No.	Package
DTTL-1B	500






MOUNTING HOLE
THICKNESS 0.8~1.2

門扣本體
DOOR LOCK BODY

Part No.	Package
DTTL-3A	500

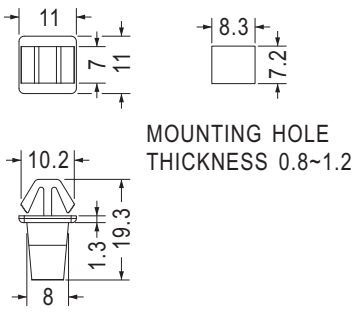

MOUNTING HOLE
THICKNESS 0.8~1.2

PIN


Part No.	Package
DTTL-3B	500

門扣擋銷 DOOR LOCK TIP

用途：用於面板固定用。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural
- Unit: mm

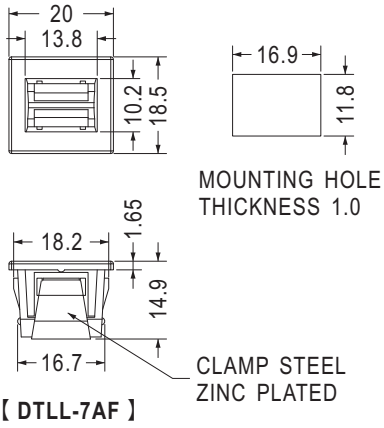


【 DTLL-7AF 】

- Material: POM

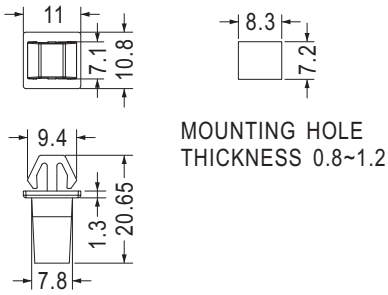


【 DTLL-7B 】

Part No.	Part No.	Package
DTTL-7	DTTL-7AF	250
	DTTL-7B	
	此為子母包:內容物包含右方零件	

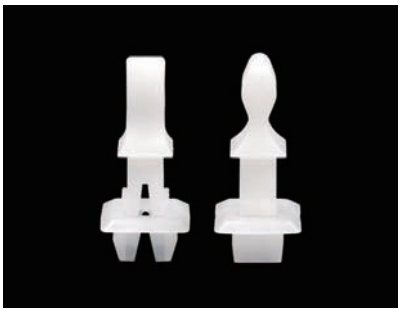


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

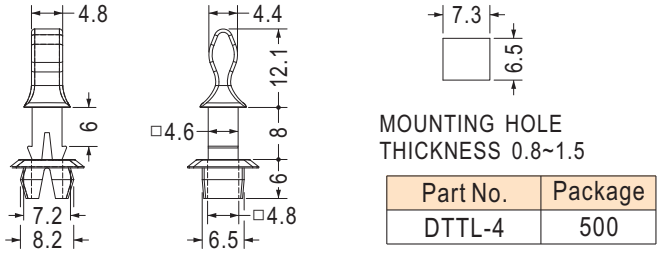

Part No.	Package
DTTL-4	500



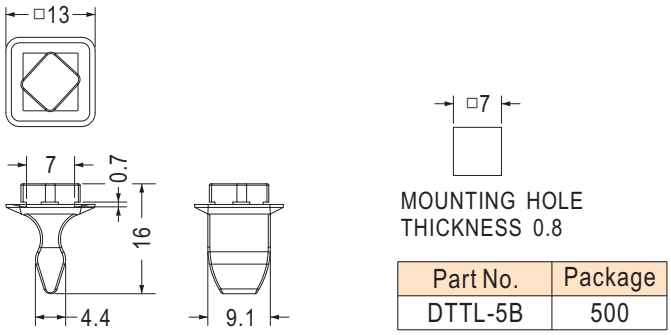


Part No.	Package
DTTL-5B	500

固定扣 SNAP LATCH


用途：固定於機器上，牢固結合不脫落。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	Package
LO-6052A	1000



Part No.	Package
LO-6052B	1000




Part No.	Package
LO-6053A	1000

固定扣 SNAP LATCH


用途：固定於機器上，牢固結合不脫落。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

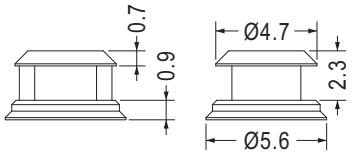

Part No.	Package
LO-6056A	1000




Part No.	Package
LO-6055B	1000




Part No.	Package
LO-6055A	1000



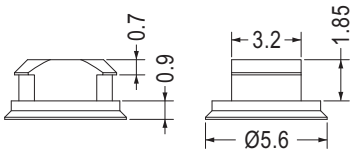

Part No.	Package
LO-6057A	1000




Part No.	Package
LO-6057B	1000


7

零件座 PARTS HOUSING

用途：用於零件座。

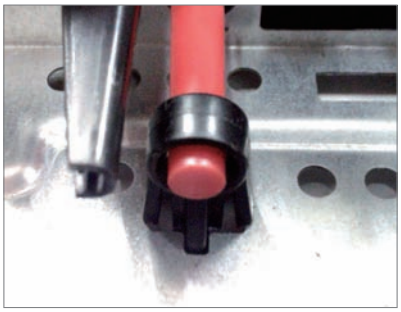

- Material: PS
- Color: Black
- Unit: mm




Part No.	Package
EMU-5	1000

用途：用於機器之開關門扣，方便機器門之開與關。




- Catcher Material: Nylon 66 (UL)/94V-2
- Case Material: POM (UL)/94HB
- Color: Black
- Unit: mm

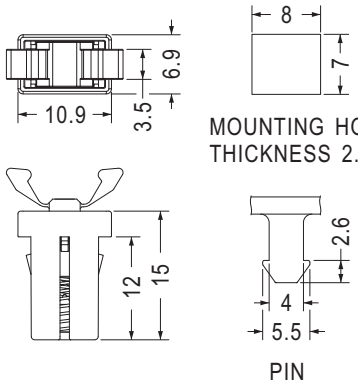

Part No.	Package
DT-1	500




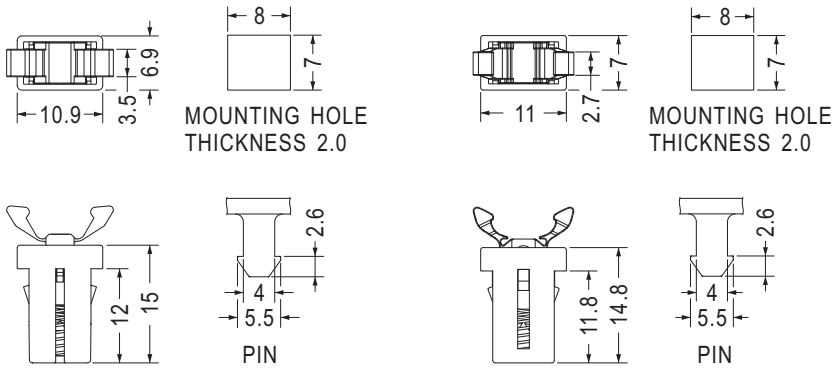

Part No.	Package
DT-18	500

Part No.	Package
DT-51	500



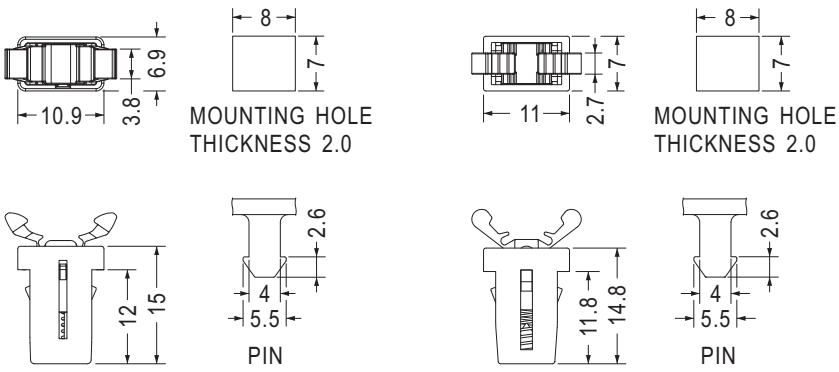


Part No.	Package
DT-16	500


Part No.	Package
DT-4	500

用途：用於機器之開關門扣，方便機器門之開與關。





- Catcher Material: Nylon 66 (UL)/94V-2
- Case Material: POM (UL)/94HB
- Color: Black
- Unit: mm






Part No.	Package
DT-19	500

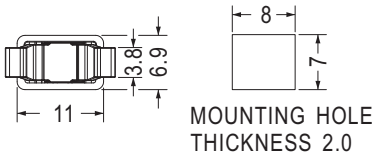

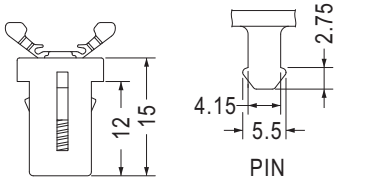


Part No.	Package
DT-21	500




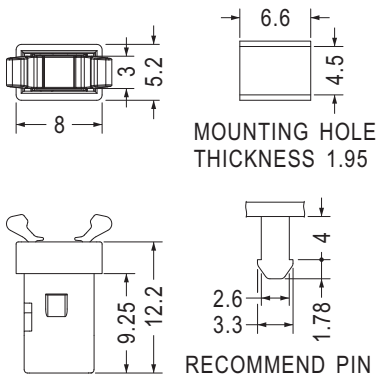

Part No.	Package
DT-22	500



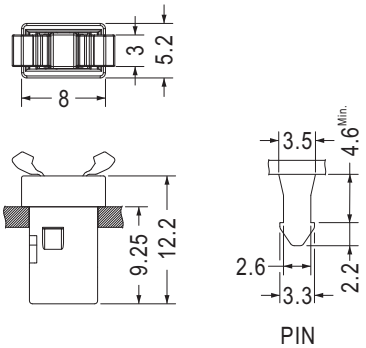

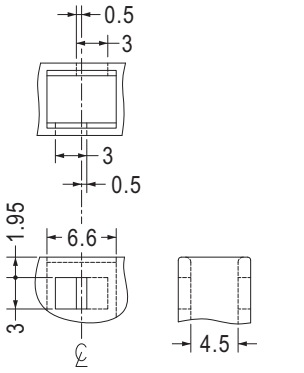


Part No.	Package
★DT-25	500



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

用途：可配合DT-22之門扣，方便機器門之開與關。




Part No.	Package
DTA-4	500




- Material: ABS (UL)
- Flame Class: 94HB
- Color: Black
- Unit: mm

用途：可配合DT-1之門扣，方便機器門之開與關。



Part No.	Package
DTA-1	500




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0

Part No.	Package
DTA-3	500



- Catcher Material: Nylon 66 (UL)/94V-2
- Case Material: POM (UL)/94HB
- Color: Black
- Unit: mm

用途：用於機器之開關門扣，方便機器門之開與關。

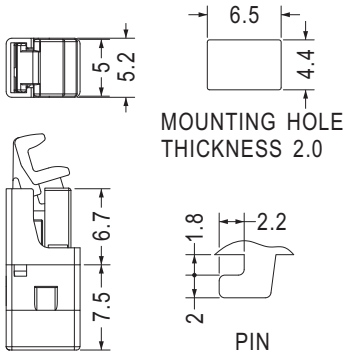



Part No.	Package
DT-12	500

用途：用於機器之開關門扣，方便機器門之開與關。



- Catcher Material: Nylon 66 (UL)/94V-2
- Case Material: POM (UL)/94HB
- Color: Black
- Unit: mm






MOUNTING HOLE
THICKNESS 2.0

Part No.	Package
DT-14	500




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

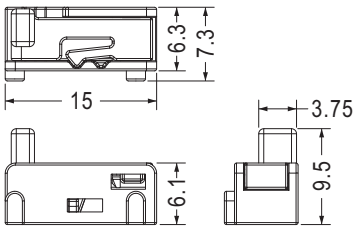


Part No.	Package
DT-50	500



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm






MOUNTING HOLE


Part No.	Package
DT-10	2000



用途：用於機器之合鈕，方便機器門之開與關。

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm






MOUNTING HOLE

Part No.	Package
DT-11	500




用途：用於機器之開關門扣，方便機器門之開與關。


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm



MOUNTING HOLE Ø9.0
THICKNESS 1.2~1.6

Part No.	Package
DT-48A	1000

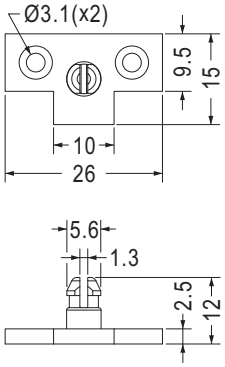



MOUNTING HOLE


Part No.	Package
DT-48B	1000

門扣擋銷 DOOR LOCK TIP

用途：用於機器之開關門扣，方便機器門之開與關。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



MOUNTING HOLE


Part No.	Package
DTA-42	500



MOUNTING HOLE

- Material: POM
- Color: Natural

Part No.	Package
DT-49	500



MOUNTING HOLE


- Material: POM (UL)
- Flame Class: 94HB
- Color: Natural

Part No.	Package
DT-42	500




- Material: ABS (UL)
- Flame Class: 94HB
- Color: Natural
- Unit: mm

用途：用於面板固定用。



門扣擋梢
DOOR LOCK PIN

Part No.	Package
DT-45A	500




門扣本體
DOOR LOCK BODY

Part No.	A	Package
DT-45B	1.0	500
DT-45BL	1.1	






- Material: POM (UL)
- Flame Class: 94HB
- Color: Natural
- Unit: mm




Part No.	Package
DT-46A	500




Part No.	Package
DT-46B	500


門扣擋銷 DOOR LOCK TIP

用途：用於面板固定用。

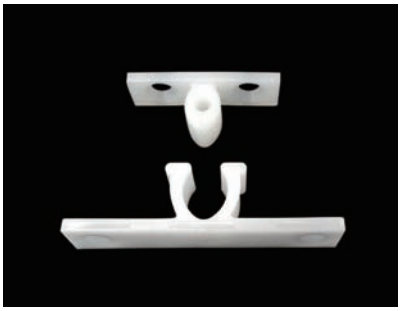

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm







MOUNTING HOLE

Part No.	Package
DT-43A	500

- Material: POM
- Color: Natural
- Unit: mm





MOUNTING HOLE


Part No.	Package
DT-43B	500


門扣 DOOR LOCK

用途：用於機器之開關門扣，方便機器門之開與關，可配合DTA-1使用。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

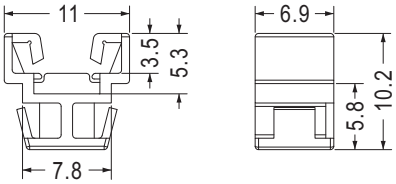




MOUNTING HOLE
THICKNESS 2.0


Part No.	Package
DT-47B	1000


彈簧固定座 SPRING POSITION MOUNT

用途：用於旋轉機構角度定位。

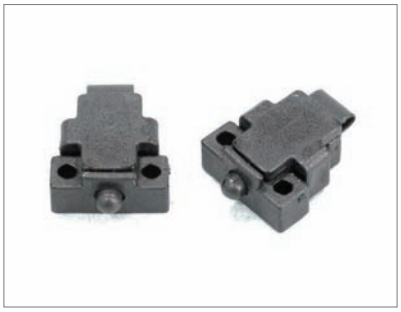

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Position Pin Material: POM
- Color: Black
- Unit: mm
- Patented (專利品)






Part No.	Part No.	Package
DTB-1F	DTB-1A	1000
	DTB-1B	
	SPG-504	


磁鐵門扣 MAGNET DOOR LOCK


用途：用於機器之開關門扣磁性強，方便機器門之開與關。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Clip Material: SPCC
- Color: Black
- Unit: mm





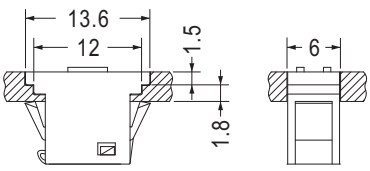

MOUNTING HOLE


Part No.	Package
DTM-1	500

磁鐵門扣 MAGNET DOOR LOCK

用途：用於機器之開關門扣磁性強，方便機器門之開與關。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Clip Material: SPCC
- Color: Black
- Unit: mm

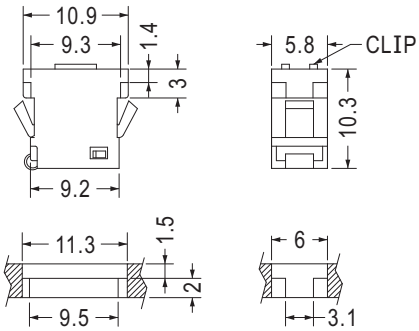

MOUNTING HOLE


Part No.	Package
DTM-2	500

旋轉型門扣 DOOR LOCK

用途：固定於兩片鐵板，一般用於機器的門扣，拆卸方便。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

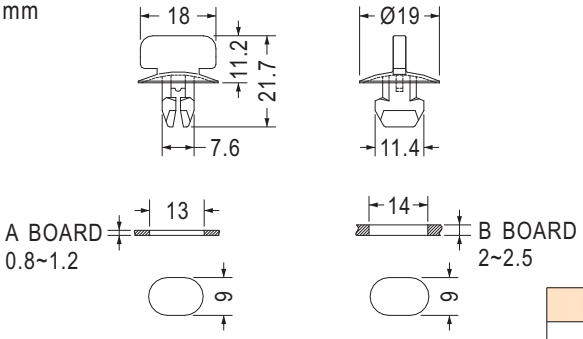

MOUNTING HOLE


Part No.	Package
TF-1	200

十字型插件式固定器 PLUG-IN SWITCH CROSS TYPE

用途：用於零件的扣件。



- Material: POM
- Color: Black
- Unit: mm

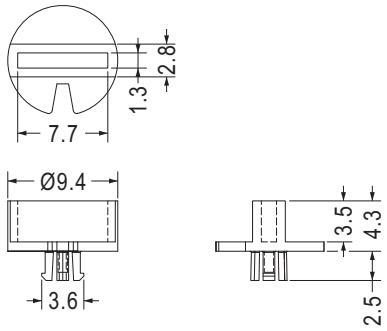


Part No.	Package
EM-349	1000

軌道固定器 RAIL MOUNT

用途：用於軌道的固定。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
EM-710	100


固定扣 SNAP LATCH


用途：固定於兩片鐵板，一般用於機器的門扣，拆卸方便。



- Material: PC (UL)
- Flame Class: 94V-2
- Color: Black
- Unit: mm







Part No.	Package
TFA-2	500


A Board	MOUNTING HOLE (LxH): 9x9
	THICKNESS: 1.2~1.5
B Board	MOUNTING HOLE (LxH): 9.5x9
	THICKNESS: 1.2~2.5

螺絲固定座 PLASTIC CONICAL ANCHORS


用途：用於螺絲與牆壁固定，結合力強。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm
- Drill Size: 3/16(Ø4.8)




Part No.	Color	Package
PCA-1	Natural	1000
PCA-1(R)	Red	




- Material: Steel
- Finish: Nickel Plated

Part No.	Package
STP-3.5	1000




- Drill Size: Ø6.3

Part No.	Package
PCA-4	1000




Part No.	Package
PCA-6	1000




Part No.	Package
PCA-8	1000






- Material: PP
- Color: Black/Gray
- Drill Size: Ø6.3

Part No.	Package
PCA-2	1000



- Drill Size: Ø4.8

Part No.	Package
PCA-5	1000




- Color: Natural/Black/Gray
- Drill Size: Ø6.3

Part No.	Package
PCA-7	1000

用途：用於螺絲與牆壁固定，結合力強。




- Material: PP
- Color: Natural/Yellow
- Unit: mm
- Drill Size: Ø6.35



Part No.	Package
PCA-9	1000




- Material: PP
- Color: Natural
- Unit: mm
- Drill Size: Ø6.3



Part No.	Package
PEB3-25	1000


- Material: Nylon 66 (UL)/PP
- Flame Class: 94V-2/94V-0
- Color: Natural/White/Black
- Unit: mm



Part No.	A	B	Package
PEC5-28	28.1	2.5	1000
PEC5-30	30.0	3.1	




- Material: PP/PE
- Color: Natural/White
- Unit: mm



Part No.	Package
PEBR-1	1000




- Material: Nylon 66 (UL)/PP (UL)
- Flame Class: 94HB/94V-2/94V-0
- Color: Natural/White/Black/Gray
- Unit: mm



Part No.	A	B	C	D	E	Package
PEB4-20	20.1	2.8	4.0	2.9	4.0	1000
PEB6-25	24.7	3.5	4.8	4.0	5.0	
PEB6-30	29.6	4.0	6.0	4.8	6.0	
PEB6-31	29.6	3.5	6.0	4.0	6.0	


- Material: PP
- Color: Gray
- Unit: mm



可與STP5-32自攻螺絲配合使用

Part No.	Package
PEB5-40.5	1000


- Material: PP (UL)
- Flame Class: 94HB
- Color: Gray
- Unit: mm




Part No.	Package
★PEB6-38	1000

螺絲固定座 PLASTIC CONICAL ANCHORS

用途：用於螺絲與牆壁固定，結合力強。

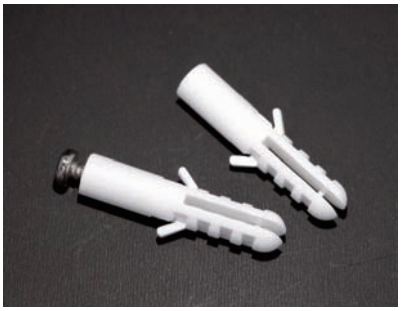

- Material: PP
- Color: Natural
- Unit: mm




MOUNTING HOLE Ø6.35

Part No.	Package
PEB4-29	1000




- Material: PP/Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural
- Unit: mm

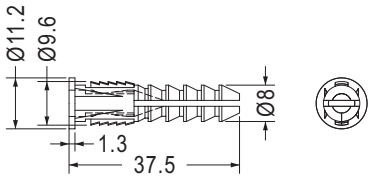

可與STP5-32自攻螺絲配合使用

Part No.	Package
PEB8-38	1000

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

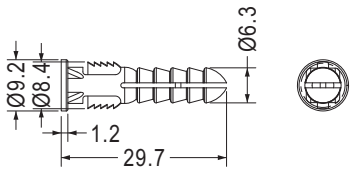


Part No.	Package
PEB4-30	1000

石膏板固定座 PLASTIC CONICAL ANCHORS


用途：用於螺絲與石膏牆壁固定，結合力強。




- Material: PBT (UL)
- Flame Class: 94V-0
- Color: White
- Unit: mm

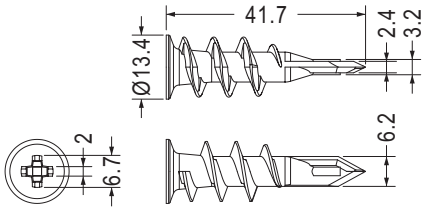


Part No.	Package
WMEZ-1	1000

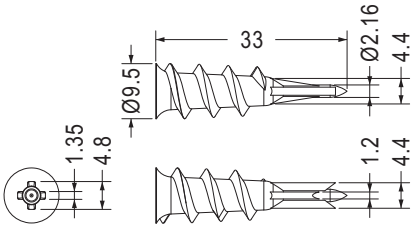

Part No.	Package
WMEZ-2	1000



Part No.	A	B	C	D	Package
WMEZ-3	25.0	11.8	1.2	6.35	1000
WMEZ-4	37.6	14.9	2.1	7.0	

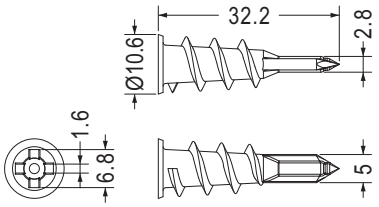


- Material: Nylon 66 (UL)
- Flame Class: 94V-2

Part No.	Package
WMEZ-5	1000



- Material: PP
- Color: Natural
- Unit: mm



MOUNTING HOLE Ø9.5


Part No.	Package
WMEA-1	1000

防水帽蓋 WATERPROOF CAP

用途：用於零件之防水蓋。



- Material: TPV
- Color: Black
- Unit: mm

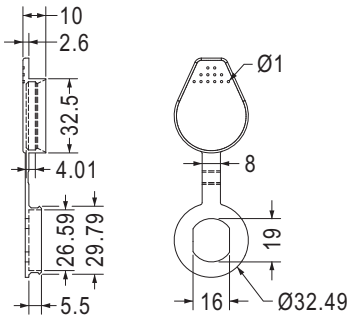


Part No.	Package
EMS-1	100

帽蓋連接帶 CAP WITH CONNECTING TIE

用途：用於零件接頭之防水，中間有連接，避免防塵蓋遺失。



- Material: Nylon 66 (UL)/PE
- Flame Class: 94HB
- Color: Black
- Unit: mm

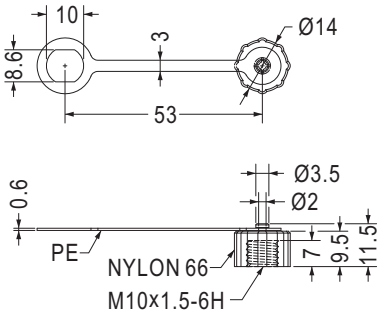


Part No.	Package
CAV-1	500

防水圈 WATERPROOF RING

用途：用於零件之連接，避免配件遺失。




- Material: EPDM
- Color: Black
- Unit: mm




Part No.	Package
TF-568	100

線圈固定座 COIL HOLDER

用途：將鐵粉芯線圈固定於PC板上。

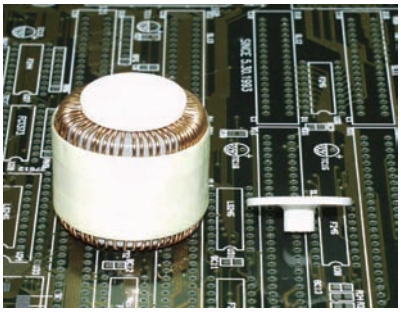

- Material: PBT (UL)
- Flame Class: 94V-0
- Color: Natural
- Unit: mm

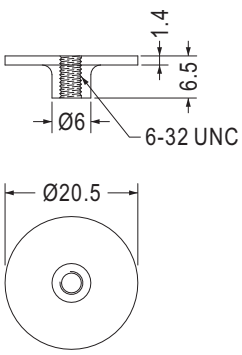


Part No.	Package
TRMH-20	500


風扇支架 FAN FRAME

用途：風扇固定支架。



- Material: TPE (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm



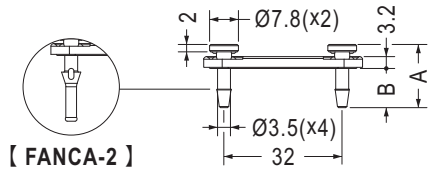

【 FANCA-2 】


CHASSIS MOUNTING HOLE Ø4.1
CHASSIS THICKNESS 1.0


FANS MOUNTING HOLE Ø3.5
FANS THICKNESS: T

Part No.	A	B	T	Package
FANCA-1	17.1	10.6	6.0	500
FANCA-2	24.3	17.8	5.2	250



- Material: PC+ABS (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm



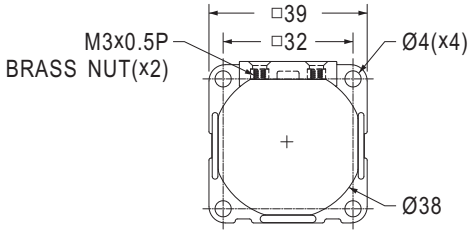

NEW


Part No.	Package
FANCD-2	500

風扇護蓋 REAR FAN PROTECTIVE COVER


用途：用於電腦風扇外框。




- Material: PBT (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm



Part No.	Package
FANCS-3	500

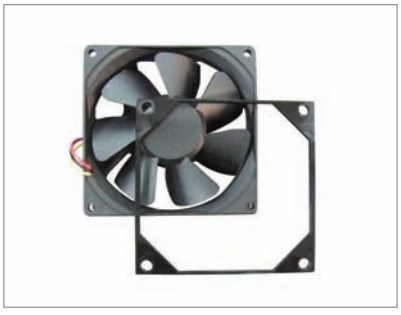

- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm




Part No.	Package
FANCV-1	500

用途：用於電腦風扇外框。




- Material: PBT (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm

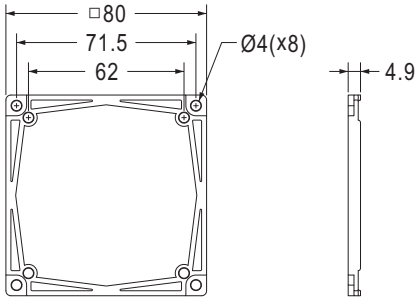

Part No.	Package
FANCV-3	500




- Material: ABS (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm

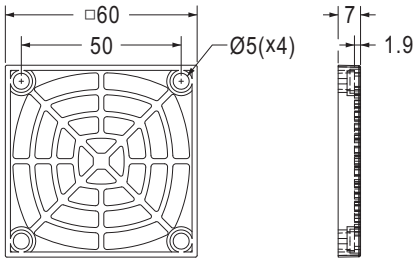

Part No.	Package
FANCV-9	100




- Material: PC (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm

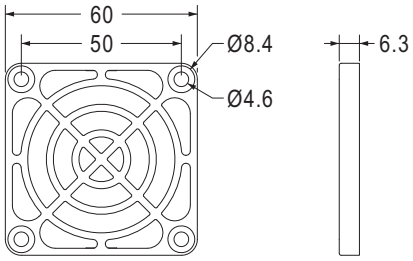

NEW

Part No.	Package
FANCV-10	100



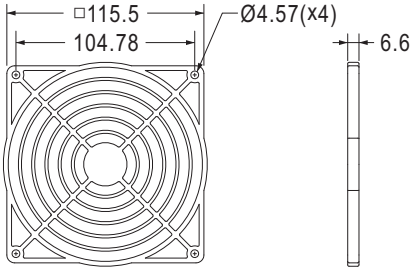


NEW


Part No.	Package
FANCV-11	100

風扇防塵座 ANTI-DUST FAN GUARD


用途：用於電腦或儀器風扇之防塵，避免灰塵進入機器內。

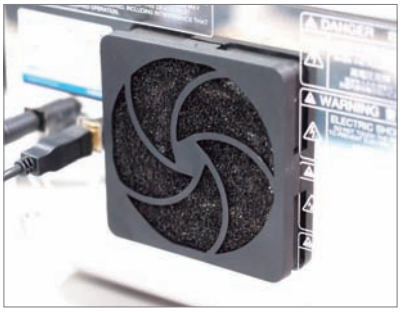


- Material: PC+ABS (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm



【 FANCV-5A 】



【 FANCV-5B 】




【 FANCV-5C 】


Part No.	Part No.	Package
FANCV-5	FANCV-5A	50
	FANCV-5B	
	FANCV-5C	
	此為子母包:內容物包含右方零件	

風扇框護墊 FRAME PAD

用途：用於電腦風扇外框之防震，降低噪音。

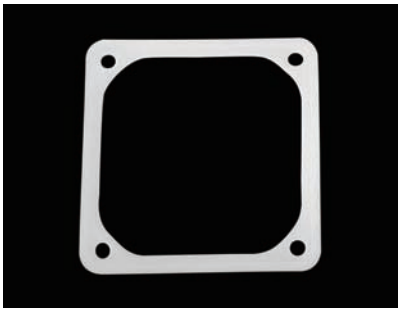


- Material: Silicon Rubber
- Color: Black/Transparent
- Unit: mm

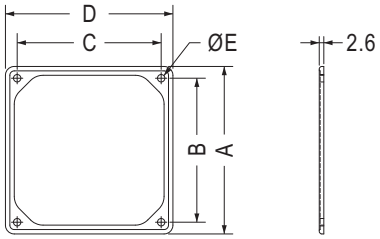

Part No.	A	B	C	D	E	Package
TF-143	94.8	81.5	81.5	94.8	4.2	50
TF-144	122.7	104.8	104.8	122.7	4.0	
TF-147	61.4	49.4	49.4	61.4	4.0	100



- Material: Silicon Rubber
- Color: Black
- Unit: mm



3M or T4000
DOUBLE ADHESIVE TAPE

Part No.	Package
TF-018	200




8


- 塑膠螺絲
  Plastic Screws
- 螺絲帽蓋
  Screw Caps & Bonnets
- 塑膠螺帽
  Plastic Nuts
- 止付螺絲
  Set Screws
- 手轉螺絲
  Thumb Screws
- 螺絲墊片
  Screw Washer
- 墊片/華司
  Washer


螺絲帽蓋 SCREW CAP

用途：用於螺絲凸出之保護，美觀不刮手，避免不當之拆卸。

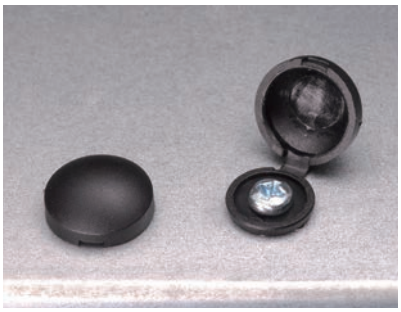

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm






Part No.	A	B	C	D	Package
SCW-1	9.8	8.0	3.3	1.3	1000
SCW-2	13.3	11.6	4.3	1.4	


Part No.	Package
SCW-3	1000






Part No.	Package
SCW-5	1000








Part No.	Package
SCWA-6	1000

螺絲帽蓋 SCREW BONNET


用途：配合一般螺絲，作為螺絲蓋使用。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	Package
MP-2.5	1000




Part No.	A	B	C	Thread	Package
MP-3	6.0	3.0	5.5	M3X0.5P	1000
MP-4	8.0	4.0	7.7	M4X0.7P	
MP-6	11.9	8.5	10.0	M6X1.0P	


用途：配合一般螺絲，作為螺絲蓋使用。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
MP-5	1000

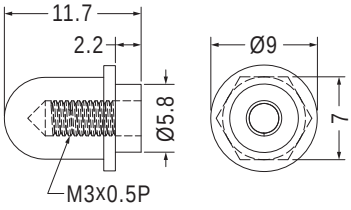


Part No.	Package
MP-26	1000






Part No.	Package
MP5-1	1000




Part No.	Package
MP-632	1000







Part No.	Package
MP-4-1	1000




- Material: PBT
- Color: Black

Part No.	Package
MP6-1	1000

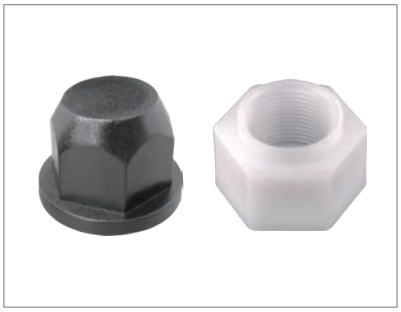

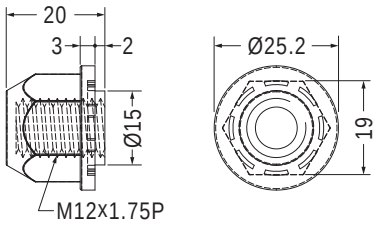


Part No.	Package
MP-12	250



- Material: POM
- Color: Natural

Part No.	Package
MP16-1	250



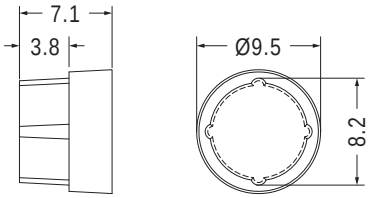


Part No.	Package
SWVB-1	1000

螺絲帽蓋 SCREW BONNET

用途：配合一般螺絲，作為螺絲蓋使用。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

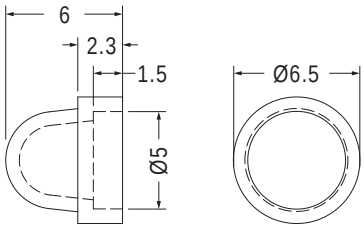


Part No.	Package
SWV-4	1000




- Material: Silicon Rubber
- Color: Black
- Unit: mm

用途：配合M8螺絲，作為螺絲蓋使用。




Part No.	Package
TF-250	1000

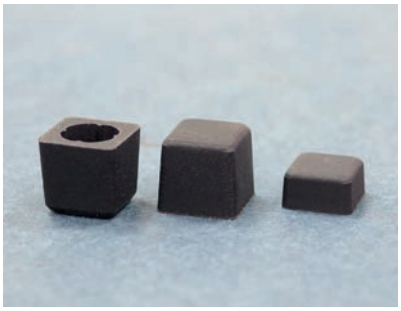


- Material: Silicon Rubber
- Color: Black
- Unit: mm

用途：配合一般螺絲，作為螺絲蓋使用。



Part No.	Package
EMC-40	1000

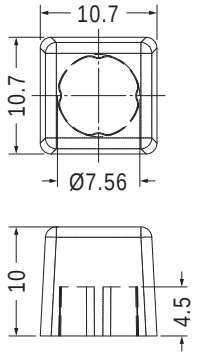


Part No.	Package
EMC-41	1000

塑膠螺帽 NUT

用途：配合一般螺絲或塑膠螺絲使用。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
MOA3	1000

塑膠螺帽 NUT

用途：配合一般螺絲或塑膠螺絲使用。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
CAM-12	100






Part No.	A	B	C	D	Thread	Package
MO-3	8.5	5.4	3.2	0.8	M3x0.5P	1000
MO-3-3.7	8.5	5.4	3.7	0.8	M3x0.5P	
MO-4	9.7	6.9	4.5	0.9	M4x0.7P	
MO-632	10.6	7.8	4.2	1.0	6-32 UNC	



Part No.	A	B	C	D	Thread	Package
MO-6G-68	13.0	10.0	6.8	1.65	M6x1.0P	2000
MO-8G-85	17.0	13.0	8.5	1.9	M8x1.25P	1000



- Material: Nylon 66 (UL)/PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural
- Unit: mm




Part No.	A	B	Thread	Package
M-2	3.95	1.4	M2x0.4P	2000
M-2L	3.95	3.0	M2x0.4P	
M-2.5	5.0	2.0	M2.5x0.45P	
M-2.6	5.0	2.0	M2.6x0.45P	
M-3	5.5	2.7	M3x0.5P	
M-3S	5.4	2.4	M3x0.5P	
M-3.5	5.9	2.8	M3.5x0.6P	
M-4	6.9	3.3	M4x0.7P	1000
M-4F	7.0	2.5	M4x0.7P	
M-5	8.0	4.4	M5x0.8P	
M-6	10.0	5.0	M6x1.0P	
S4-40	6.4	2.5	4-40 UNC	
S6-32	7.9	3.2	6-32 UNC	



用途：配合鏡頭調整或塑膠螺絲使用。

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
M12-2	2000

塑膠螺帽 NUT

用途：配合鏡頭調整或塑膠螺絲使用。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
MOC-12	1000




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


用途：配合一般螺絲或塑膠螺絲使用。



Part No.	Thread	Package
MOB-2.5	M2.5x0.45P	1000
MOB-2.6	M2.6x0.45P	




Part No.	A	B	Thread	Package
MOPG-7	17.1	5.0	PG7	1000
MOPG-9	22.0	5.1	PG9	
MOPG-11	24.0	6.1	PG11	
MOPG-13.5	27.2	6.1	PG13.5	



Part No.	A	Thread	Package
M-10	17.0	M10x1.5P	500
MO-12	17.9	M12x1.5P	1000




- Material: Nylon 66 (UL)/PP
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	A	B	C	Thread	Package
MO-8-1	12.0	5.0	13.0	M8x1.0P	1000
MO-13	14.0	4.1	16.0	M13x1.0P	
MO-25.4	38.2	11.7	42.2	PF1-11	100
MO-32L	36.6	8.2	41.15	M32x1.5P	500



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	A	B	C	Thread	Package
MO-16	22.0	6.6	24.7	M16x1.5P	1000
MO-20	27.0	6.6	29.8	M20x1.5P	500
MO-25	33.0	8.5	36.2	M25x1.5P	
MO-25-1	33.0	6.6	35.4	M25x1.5P	
MO-32	41.0	7.6	46.4	M32x1.5P	100

翼型螺帽 WING NUT

用途：配合一般螺絲或塑膠螺絲使用。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	A	B	C	D	Thread	Package
SMO-3	15.96	5.0	8.0	6.4	M3x0.5P	1000
SMO-4	21.5	8.0	10.1	10.0	M4x0.7P	
SMO-632	22.0	8.0	10.5	10.0	6-32 UNC	
SMO-832	21.0	8.0	10.0	10.0	8-32 UNC	

翼型螺絲 WING BOLT


用途：用於固定需絕緣之零件，重量輕，耐腐蝕。

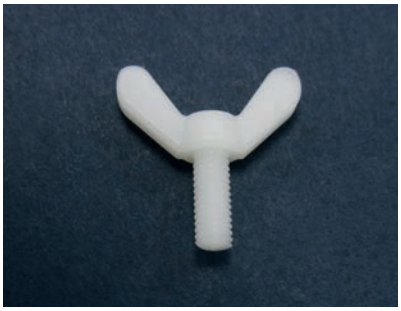

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	A	Package
SM3-6	6.0	1000
SM3-8	8.0	
SM3-10	10.0	
SM3-12	12.0	




Part No.	A	Thread	Package
SM4-6	6.0	M4x0.7P	1000
SM4-8	8.0	M4x0.7P	
SM4-10	10.0	M4x0.7P	
SM4-12	12.0	M4x0.7P	
SM632-6	6.35	6-32 UNC	
SM632-8	8.0	6-32 UNC	
SM632-9	9.5	6-32 UNC	
SM632-12	12.7	6-32 UNC	

塑膠螺絲 SCREW

用途：用於固定需絕緣之零件，重量輕，耐腐蝕。




- Material: Nylon 66 (UL)+GF
- Flame Class: 94HB
- Color: Black
- Unit: mm



Part No.	A	Package
MI1.2-2.5NGF	2.5	1000
MI1.2-3NGF	3.0	
MI1.2-4NGF	4.0	
MI1.2-5NGF	5.0	
MI1.2-6NGF	6.0	






Part No.	A	Package
M1.6-3	3.0	1000
M1.6-4	4.0	
M1.6-4.5	4.5	
M1.6-5	5.0	
M1.6-6	6.0	
M1.6-7	7.0	
M1.6-8	8.0	
M1.6-9	9.0	
M1.6-10	10.0	2000


用途：用於固定需絕緣之零件，重量輕，耐腐蝕。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	A	Package
MI2-6	6.0	1000
MI2-8	8.0	
MI2-10	10.0	
MI2-12	12.0	




【 MI2-14.8F 】




Part No.	A	Package
MI2-3.8F	3.8	1000
MI2-4.8F	4.8	
MI2-5.8F	5.8	
MI2-6.8F	6.8	
MI2-7.8F	7.8	
MI2-8.8F	8.8	
MI2-9.8F	9.8	
MI2-14.8F	14.8	

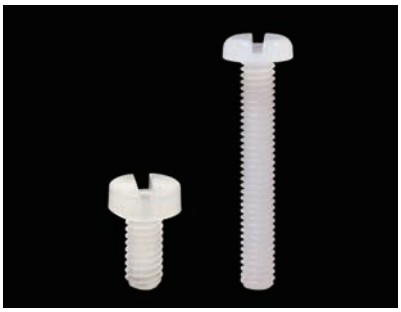





Part No.	A	Package
MI2.5-5	5.0	2000
MI2.5-12	12.0	




Part No.	A	Package
MI2.5-4	4.0	2000
MI2.5-12S	12.0	
MI2.5-16	16.0	



Part No.	Package
MI3-6R	1000




【 MI3-12S 】



Part No.	A	B	C	Thread	Package
MI3-3	3.0	2.0	5.5	M3x0.5P	1000
MI3-5	5.0	2.0	5.5	M3x0.5P	
MI3-6	6.0	2.0	5.5	M3x0.5P	
MI3-8	8.0	2.0	5.5	M3x0.5P	
MI3-10	10.0	2.0	5.5	M3x0.5P	
MI3-12	12.0	2.0	5.5	M3x0.5P	
MI3-12S	12.0	1.7	5.4	M3x0.5P	
MI4-7	7.0	2.7	7.0	M4x0.7P	
MI4-10	10.0	2.7	7.0	M4x0.7P	



- Material: PEEK (UL)
- Flame Class: 94V-0
- Color: Natural
- Unit: mm




Part No.	A	Package
MI3-4PK	4.0	1000
MI3-5PK	5.0	
MI3-6PK	6.0	


Part No.	A	Package
MI3-8PK	8.0	1000
MI3-10PK	10.0	
MI3-12PK	12.0	
MI3-14PK	14.0	
MI3-15PK	15.0	
MI3-17PK	17.0	
MI3-18PK	18.0	
MI3-20PK	20.0	
MI3-25PK	25.0	
MI3-30PK	30.0	

用途：用於固定需絕緣之零件，重量輕，耐腐蝕。



- Material: Nylon 66 (UL)/PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural
- Unit: mm






【 S632-25, S632-28 】

Part No.	A	B	C	Thread	Package
M3.5-10	6.9	2.2	10.0	M3.5x0.6P	1000
M3.5-15	6.9	2.2	15.0	M3.5x0.6P	
M3.5-20	6.9	2.2	20.0	M3.5x0.6P	
M3.5-25	6.9	2.2	25.0	M3.5x0.6P	
M3.5-30	6.9	2.2	30.0	M3.5x0.6P	
S440-6	5.2	2.1	6.4	4-40 UNC	2000
S440-8	5.2	2.1	8.0	4-40 UNC	
S440-9	5.2	2.1	9.5	4-40 UNC	
S440-12	5.2	2.1	12.7	4-40 UNC	1000
S440-15	5.2	2.1	15.5	4-40 UNC	
S632-6	6.7	2.5	6.35	6-32 UNC	2000
S632-8	6.7	2.5	8.0	6-32 UNC	
S632-9	6.7	2.5	9.5	6-32 UNC	1000
S632-12	6.7	2.5	12.7	6-32 UNC	
S632-15	6.7	2.5	15.9	6-32 UNC	
S632-19	6.7	2.5	19.1	6-32 UNC	
S632-25	6.7	2.5	25.4	6-32 UNC	
S632-28	6.7	2.5	28.0	6-32 UNC	



- Material: PEEK (UL)
- Flame Class: 94V-0
- Color: Natural
- Unit: mm




Part No.	A	Package
M3-4PK	4.0	2000
M3-5PK	5.0	
M3-6PK	6.0	

Part No.	A	Package
M3-8PK	8.0	1000
M3-10PK	10.0	
M3-12PK	12.0	
M3-14PK	14.0	
M3-15PK	15.0	
M3-17PK	17.0	
M3-18PK	18.0	
M3-20PK	20.0	
M3-25PK	25.0	
M3-30PK	30.0	



- Material: Nylon 66 (UL)/PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural
- Unit: mm



Part No.	A	B	C	PH	Thread	Package
M2-3	3.0	1.4	3.3	#0	M2x0.4P	2000
M2-4	4.0	1.4	3.3	#0	M2x0.4P	
M2-5	5.0	1.4	3.3	#0	M2x0.4P	
M2-6	6.0	1.4	3.3	#0	M2x0.4P	
M2-6.5	6.5	1.4	3.3	#0	M2x0.4P	
M2-8	8.0	1.4	3.3	#0	M2x0.4P	
M2-10	10.0	1.4	3.3	#0	M2x0.4P	
M2-12	12.0	1.4	3.3	#0	M2x0.4P	
M2-15	15.0	1.4	3.3	#0	M2x0.4P	
M2.5-4	4.0	1.5	4.3	#1	M2.5x0.45P	
M2.5-5	5.0	1.5	4.3	#1	M2.5x0.45P	


Part No.	A	B	C	PH	Thread	Package
M2.5-6	6.0	1.5	4.3	#1	M2.5x0.45P	2000
M2.5-8	8.0	1.5	4.3	#1	M2.5x0.45P	
M2.5-10	10.0	1.5	4.3	#1	M2.5x0.45P	
M2.5L-13	13.0	1.5	6.3	#1	M2.5x0.45P	
M2.6-4	4.0	1.5	4.3	#1	M2.6x0.45P	
M2.6-5	5.0	1.5	4.3	#1	M2.6x0.45P	
M2.6-6	6.0	1.5	4.3	#1	M2.6x0.45P	
M2.6-8	8.0	1.5	4.3	#1	M2.6x0.45P	
M2.6-10	10.0	1.5	4.3	#1	M2.6x0.45P	
M3-4	4.0	2.1	5.5	#1	M3x0.5P	
★M3-5-1	5.0	1.4	5.5	#1	M3x0.5P	

塑膠螺絲 SCREW

用途：用於固定需絕緣之零件，重量輕，耐腐蝕。



- Material: Nylon 66 (UL)/PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural
- Unit: mm

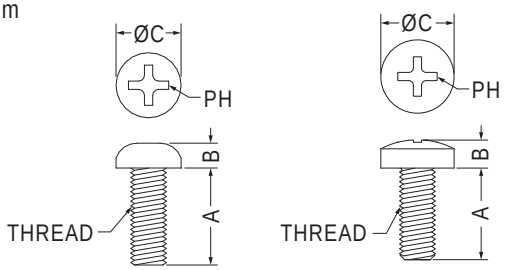


【 M4-8L, M4-10L 】 【 M5-10, M5-16, M5-20 】

Part No.	A	B	C	PH	Thread	Package
M3-5	5.0	2.1	5.5	#1	M3X0.5P	2000
M3-6	6.0	2.1	5.5	#1	M3X0.5P	
M3-8	8.0	2.1	5.5	#1	M3X0.5P	1000
M3-10	10.0	2.1	5.5	#1	M3X0.5P	
M3-12	12.0	2.1	5.5	#1	M3X0.5P	
M3-14	14.0	2.1	5.5	#1	M3X0.5P	
M3-15	15.0	2.1	5.5	#1	M3X0.5P	
M3-17	17.0	2.1	5.5	#1	M3X0.5P	
M3-18	18.0	2.1	5.5	#1	M3X0.5P	
M3-20	20.0	2.1	5.5	#1	M3X0.5P	
M3-25	25.0	2.1	5.5	#1	M3X0.5P	
M3-30	30.0	2.1	5.5	#1	M3X0.5P	
M4-5	5.0	2.5	7.0	#2	M4X0.7P	
M4-6	6.0	2.5	7.0	#2	M4X0.7P	
M4-8	8.0	2.5	7.0	#2	M4X0.7P	
M4-8L	8.0	3.0	8.0	#1	M4X0.7P	
M4-10	10.0	2.5	7.0	#2	M4X0.7P	
M4-10L	10.0	3.1	8.0	#2	M4X0.7P	
M4-12	12.0	2.5	7.0	#2	M4X0.7P	
M4-14	14.0	2.5	7.0	#2	M4X0.7P	
M4-16	16.0	2.5	7.0	#2	M4X0.7P	

Part No.	A	B	C	PH	Thread	Package
M4-20	20.0	2.5	7.0	#2	M4X0.7P	1000
M4-25	25.0	2.5	7.0	#2	M4X0.7P	
M4-30	30.0	2.5	7.0	#2	M4X0.7P	
M4-35	35.0	2.5	7.0	#2	M4X0.7P	
★M5-10	10.0	3.6	9.1	#1	M5X0.8P	
M5-16	16.0	3.6	9.1	#1	M5X0.8P	
M5-20	20.0	3.6	9.1	#1	M5X0.8P	
R440-4S	4.75	1.8	5.8	#1	4-40 UNC	2000
R440-6	6.4	2.4	5.2	#1	4-40 UNC	
R440-7	7.0	2.4	5.2	#1	4-40 UNC	
R440-8	8.0	2.4	5.2	#1	4-40 UNC	
R440-9	9.5	2.4	5.2	#1	4-40 UNC	1000
R440-12	12.7	2.4	5.2	#1	4-40 UNC	
R440-15	15.5	2.4	5.2	#1	4-40 UNC	
★R440-19	19.0	2.4	5.2	#1	4-40 UNC	
R632-6	6.35	2.5	6.7	#2	6-32 UNC	2000
R632-8	8.0	2.5	6.7	#2	6-32 UNC	
R632-9	9.5	2.5	6.7	#2	6-32 UNC	
R632-12	12.7	2.5	6.7	#2	6-32 UNC	1000
R632-15	15.9	2.5	6.7	#2	6-32 UNC	
R632-19	19.1	2.5	6.7	#2	6-32 UNC	



- Material: Nylon 66 (UL)/PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	A	B	C	PH	Thread	Package
M2-4.5F	4.5	1.2	3.6	#0	M2X0.4P	2000
M2-5.5F	5.5	1.2	3.6	#0	M2X0.4P	
M2-6.5F	6.5	1.2	3.6	#0	M2X0.4P	
M2-7.5F	7.5	1.2	3.6	#0	M2X0.4P	
M2-8.5F	8.5	1.2	3.6	#0	M2X0.4P	
M2.5-6F	6.0	1.5	4.6	#1	M2.5X0.45P	
M2.5-8F	8.0	1.5	4.6	#1	M2.5X0.45P	
M3-4.2F	4.2	1.7	6.0	#1	M3X0.5P	
M3-5F	4.8	1.2	5.3	#2	M3X0.5P	1000
M3-5.3F	5.0	1.6	5.3	#1	M3X0.5P	
M3-6F	6.0	1.6	5.6	#1	M3X0.5P	
M3-8F	8.0	1.6	5.6	#1	M3X0.5P	


Part No.	A	B	C	PH	Thread	Package
M3-10F	10.0	1.6	5.6	#1	M3X0.5P	1000
M3-12F	12.0	1.6	5.6	#1	M3X0.5P	
M3-14F	14.0	1.6	5.6	#1	M3X0.5P	
M4-8F	8.0	2.0	7.6	#1	M4X0.7P	
M4-10F	10.0	2.0	7.6	#1	M4X0.7P	
M4-12F	12.0	2.0	7.6	#1	M4X0.7P	
M4-14F	14.0	2.0	7.6	#1	M4X0.7P	
M4-16F	16.0	2.0	7.6	#1	M4X0.7P	
M4-18F	18.0	2.7	7.65	#1	M4X0.7P	
★M5-10F	10.0	2.5	9.1	#2	M5X0.8P	
M5-15F	14.8	2.5	9.1	#2	M5X0.8P	
★M6-25F	25.0	2.0	8.4	#2	M6X1.0P	

塑膠螺絲 SCREW

用途：用於固定需絕緣之零件，重量輕，耐腐蝕。



- Material: PEEK (UL)
- Flame Class: 94V-0
- Color: Natural
- Unit: mm




Part No.	A	Package
M3-4FPK	4.0	1000
M3-5FPK	5.0	
M3-6FPK	6.0	

Part No.	A	Package
M3-8FPK	8.0	1000
M3-10FPK	10.0	
M3-12FPK	12.0	
M3-14FPK	14.0	
M3-15FPK	15.0	
M3-17FPK	17.0	
M3-18FPK	18.0	
M3-20FPK	20.0	
M3-25FPK	25.0	
M3-30FPK	30.0	




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm





Part No.	Package
MIL4-20	1000






Part No.	Package
MI420-25.4	1000

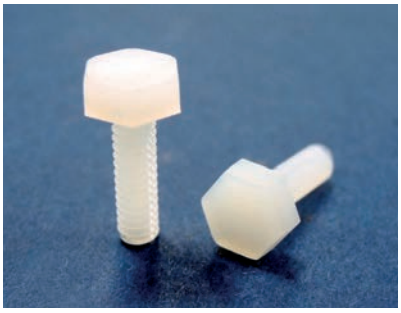





Part No.	A	Package
STM3-4	4.0	2000
STM3-6	6.0	
STM3-8	8.0	
STM3-10	10.0	
STM3-12	12.0	




Part No.	A	Package
STM4-6	6.0	2000
STM4-8	8.0	
STM4-10	10.0	
STM4-12	12.0	



Part No.	A	Package
STM5-16	16.0	1000
STM5-25	25.0	



Part No.	Package
STM6-12	2000




Part No.	A	Package
STM632-6	6.35	2000
STM632-8	8.0	
STM632-9	9.5	
STM632-12	12.7	


用途：用於固定需絕緣之零件，重量輕，耐腐蝕。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
M4-9NBD	1000

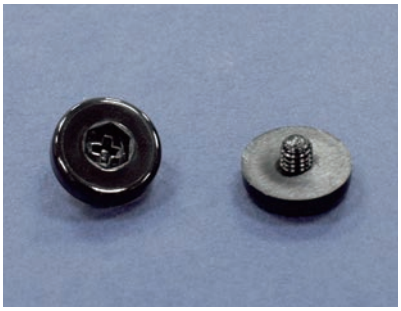



Part No.	Package
MRL4-3	1000




- Material: PC (UL)
- Flame Class: 94V-2
- Color: Transparent

Part No.	Package
MRT-8	1000




- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm




Part No.	A	Package
MR4-9.5	9.5	1000
MR4-12	12.0	
MR4-20	20.0	




- Head Material: Nylon 66 (UL)+GF
- Head Flame Class: 94V-0
- Color: Black
- Unit: mm




Part No.	Package
M5A-65	250

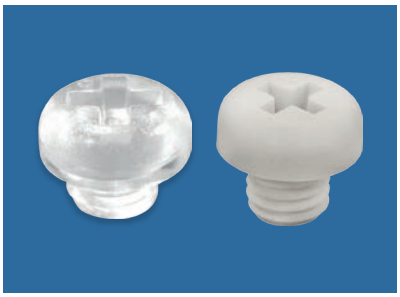

- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm



Part No.	Package
M6-4	1000




- Material: Nylon 66 (UL)
- Color: Natural/Black

Part No.	Package
M8-7	1000




- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm



Part No.	Package
M6-8F	500

用途：用於固定需絕緣之零件，重量輕，耐腐蝕。




- Material: POM
- Color: Black

Part No.	Package
RU1420-8	500



- Material: PE
- Color: Black
- Unit: mm




Part No.	Package
EM-528	500



- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

用途：用於汽車點煙器插座之固定。




Part No.	Package
ATFF-1	1000




- Material: PP (UL)
- Flame Class: 94HB
- Color: Black/White
- Unit: mm


用途：用於零件、紙張及PC板之固定。



Part No.	Package
KSM-1A	1000




Part No.	Package
KSM-1B	1000




- Material: PE
- Color: Black/White

Part No.	Package
KSM4-5M	1000



- Material: PE
- Color: Black/White

Part No.	Package
KSM4-6F	1000



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black


Part No.	Package
KSC256-8.4F	2000

塑膠螺絲 SCREW

用途：用於固定需絕緣之零件，重量輕，耐腐蝕。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	A	B	C	Thread	Package
MIA6-16	16.0	3.5	15.0	M6x1.0P	1000
MIA8-20	20.0	5.0	18.5	M8x1.25P	500



- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm




Part No.	Package
MUS2-10	2000

螺絲 SCREW

用途：螺絲式，固定於機殼。



- Head Material: PC+ABS (UL)
- Head Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm




Part No.	A	Package
GPEA3-6BN	6.0	500
GPEA3-8BN	8.0	

止付螺絲 SET SCREW


用途：做為螺絲之固定，絕緣，重量輕，耐腐蝕。



- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm




Part No.	Package
THRI3-6	2000



Part No.	Package
THRI4-7	2000




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
THRIA3-2.4	2000

止付螺絲 SET SCREW

用途：做為螺絲之固定，絕緣，重量輕，耐腐蝕。

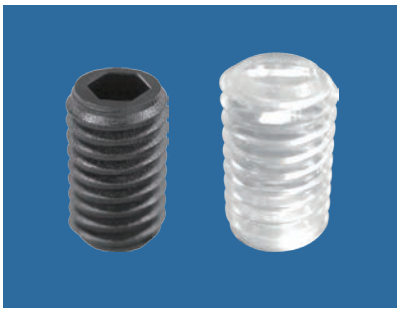


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	Package
THR5-8	2000

- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm




Part No.	A	Package
THRI6-6	6.0	2000
THRI6-8	8.0	
THRI6-10	10.0	

手轉螺母 HAND SPIN NUT

用途：用於外殼及零組件之固定，可手轉，不需工具，方便不脫落。



- Material: PC+ABS (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm




Part No.	F	Thread	Package
GPM3-20	Zinc Plated	M3X0.5P	1000
GPM4-20	Nickel Plated	M4X0.7P	
GPM632-20	Zinc Plated	6-32 UNC	
	Nickel Plated		

手轉螺絲 THUMB SCREW


用途：用於外殼及零組件之固定，可手轉，不需工具，方便不脫落。




- Cap Material: Nylon 66 (UL)
- Body Material: PC+ABS (UL)
- Screw Material: Steel
- Cap Flame Class: 94V-2
- Body Flame Class: 94V-0
- Screw Finish: Zinc Plated
- Color: Black
- Unit: mm



Part No.	A	Package
HASW3-8	5.0	1000
HASW3-9	6.0	
HASW3-13	10.0	
HASW3-18	15.0	
HASW3-23	20.0	
HASW3-28	25.0	
HASW3-33	30.0	



Part No.	A	Package
HASW4-8	5.0	500
HASW4-13	10.0	
HASW4-18	15.0	
HASW4-23	20.0	
HASW4-28	25.0	
HASW4-33	30.0	




Part No.	A	Package
HASW5-10	7.0	250
HASW5-15	12.0	
HASW5-20	17.0	
HASW5-25	22.0	
HASW5-30	27.0	
HASW5-35	32.0	
HASW5-40	37.0	
HASW5-45	42.0	
HASW5-50	47.0	

手轉螺絲 THUMB SCREW


用途：螺絲式，固定於機殼。



- Head Material: PC+ABS (UL)
- Head Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm



Part No.	Package
GPE2-24	1000




Part No.	Package
GPE2-30	1000



- Plastic Material: PP (UL)
- Flame Class: 94HB
- Color: Black
- Unit: mm

用途：做為螺絲之固定，絕緣，重量輕，耐腐蝕。

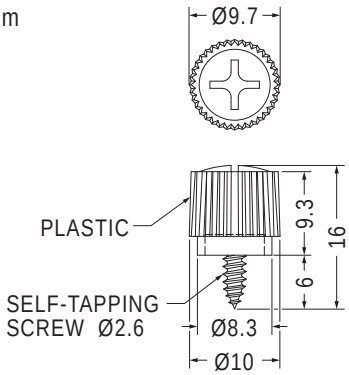


Part No.	Package
GPE2.6-6	1000




- Material: PC+ABS (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

用途：螺絲式，固定於機殼。



Part No.	A	B	Package
GPE3-5.5	5.5	11.8	1000
GPE3-8	8.0	14.3	
GPE3-15	15.0	21.3	
GPE3-23	23.0	29.3	






Part No.	Package
GPEE3-3.5	1000

手轉螺絲 THUMB SCREW

用途：用於外殼及零組件之固定，可手轉，不需工具，方便不脫落。



- Head Material: PC (UL)
- Head Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm




Part No.	Package
GPED3-6	500



- Head Material: PC+ABS (UL)
- Head Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


用途：螺絲式，固定於機殼。



Part No.	Package
GPE4-8	500



- Head Material: ABS (UL)
- Head Flame Class: 94HB
- Color: Natural/Black
- Unit: mm




Part No.	A	Package
GPE4-8L	8.0	500
GPE4-12L	12.0	




- Head Material: PP (UL)
- Head Flame Class: 94HB
- Color: Black
- Unit: mm

用途：用於外殼及零組件之固定，可手轉，不需工具，方便不脫落。



Part No.	Package
GPE4-12-1	200




Part No.	A	Package
GPE8-21	13.0	100
GPE8-32	24.7	

用途：螺絲式，固定於機殼。




- Head Material: ABS (UL)
- Head Flame Class: 94HB
- Color: Black
- Unit: mm




Part No.	Package
GPE4-13.5	250



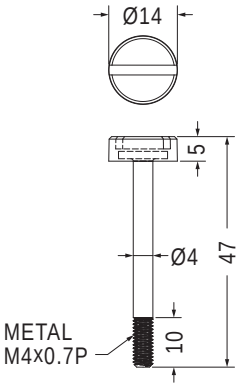

Part No.	Package
GPE4-42	250






Part No.	Package
GPE5-20	500




- Head Material: PC (UL)
- Head Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm



Part No.	Package
GPE44-1	500



- Head Material: PP (UL)
- Head Flame Class: 94HB
- Color: Black
- Unit: mm



Part No.	Package
GPE632-6	500


手轉螺絲 THUMB SCREW

用途：螺絲式，固定於機殼。







- Head Material: ABS (UL)
- Head Flame Class: 94HB
- Color: Natural/Black
- Unit: mm

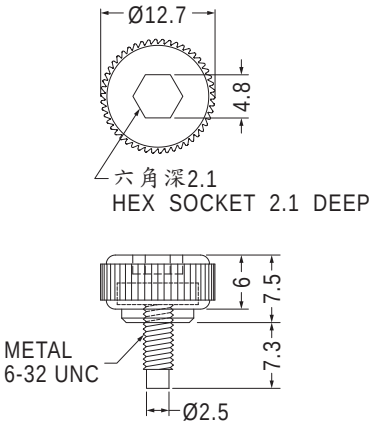

Part No.	Package
GPE632-5	500

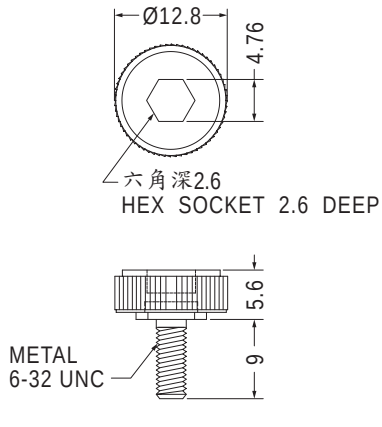


Part No.	Package
GPE632-9	500

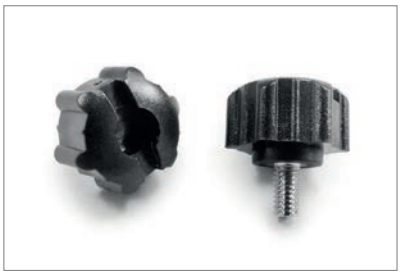




- Head Material: PC+ABS (UL)
- Head Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm



Part No.	Package
GPR3-5.5	1000


- Head Material: ABS (UL)
- Head Flame Class: 94HB
- Color: Black




Part No.	Package
GPR632-6	500

旋鈕螺絲 SCREW


用途：用於固定需絕緣之零件，重量輕，耐腐蝕，可用手旋轉，一般用於電腦外殼之固定。

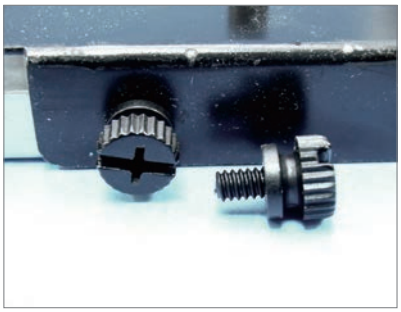

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	A	B	C	Thread	Package
SUS632	9.0	6.9	9.8	6-32 UNC	1000
SUS832	10.6	7.2	9.6	8-32 UNC	




Part No.	C	Package
RSUS632	5.0	1000
RSUS632-6	6.0	

螺絲墊片 SCREW WASHER

用途：可配合螺絲使用之墊片。

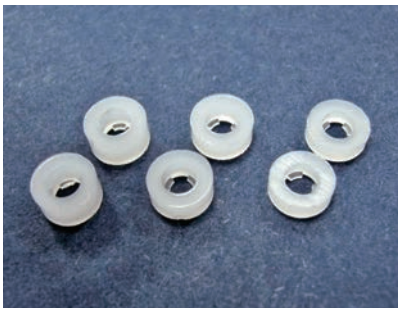



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




RECOMMENDED
MATING SCREW: M2

Part No.	C	Package
KWS2-05	0.5	2000
KWS2-08	0.8	
KWS2-10	1.0	
KWS2-15	1.5	
KWS2-20	2.0	
KWS2-25	2.5	

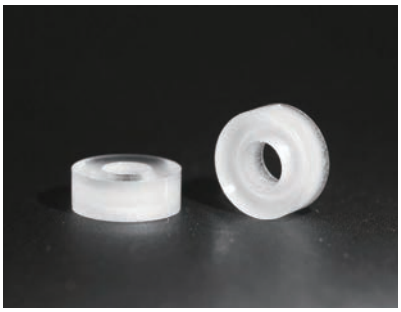




Part No.	Package
KWSB2.5-2.2	2000

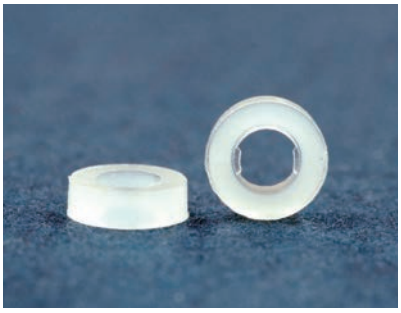


- Material: Nylon 66 (UL)/PE/LDPE
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




RECOMMENDED
MATING SCREW: S

Part No.	A	B	C	D	S	Package
KWSP2-1	5.0	2.7	1.0	2.2	M2.6	2000
KWSP2-1.1	6.5	2.7	1.1	2.2		
KWSP2-1.5	5.0	2.7	1.5	2.2		
KWSP-2.5	5.0	2.7	1.0	2.0		
KWSP-2.6	6.0	3.2	1.0	2.4	M3	
KWSP-9	18.0	10.5	1.5	8.7	M9	1000

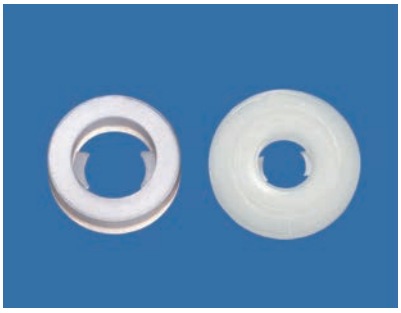

- Material: Nylon 66 (UL)/Nylon 6 (UL)/PE
- Natural: 94HB/94V-2/94V-0
- Color: Natural/Black
- Unit: mm



RECOMMENDED
MATING SCREW: S


Part No.	A	B	C	D	S	Package
KWSP3-1.5	9.0	3.2	1.5	2.6	M3	1000
KWSP4-1.4	12.0	4.3	1.4	3.3	M4	2000
KWSP4-2.3	7.0	4.3	2.3	3.3		
KWSP5-1	10.0	5.3	1.0	4.1	M5	
KWSP5-15	15.0	5.3	1.5	4.3		
KWSP6-1.6	12.0	6.4	1.6	5.0	M6	
KWSP6-2	18.0	6.4	2.0	5.15		
KWSP10-2.5	21.0	10.5	2.5	8.9	M10	1000

螺絲墊片 SCREW WASHER


用途：可配合螺絲使用之墊片。




- Material: PP (UL)
- Flame Class: 94HB
- Color: Black
- Unit: mm




Part No.	Package
KWS5-1.6	2000

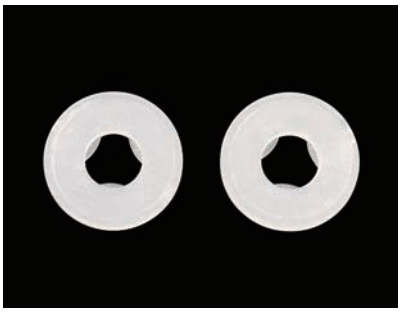

- Material: PE
- Color: Natural
- Unit: mm




Part No.	A	B	C	D	S	Package
KWS3-0.8	8.0	3.2	0.8	2.5	M3	2000
KWS5-1	20.0	5.3	1.0	4.2	M5	
KWS6-1.6	12.0	6.4	1.6	5.2	M6	
KWS8-1.6	12.0	8.4	1.6	6.6	M8	
KWS12-2.5	27.0	12.8	2.5	10.4	M12	500

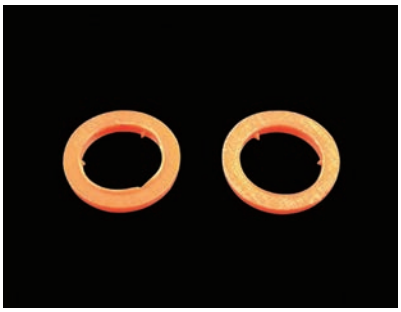

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Orange
- Unit: mm

用途：可配合M3螺絲使用之墊片。




Part No.	Package
KWA3-0.7	1000



- Material: Nylon 6 (UL)
- Flame Class: 94HB
- Color: Natural
- Unit: mm


用途：可配合螺絲使用之墊片。




Part No.	A	C	D	Package
★KYWS2-0.3	4.8	0.3	1.8	2000
KWS-2.6	4.8	0.5	2.2	
KWS-2.6-08	4.8	0.8	2.2	
KWS-2.6-1	4.8	1.0	2.2	
KYWS-3	8.0	0.5	2.5	

螺絲墊片 SCREW WASHER

用途：可配合螺絲使用之墊片。

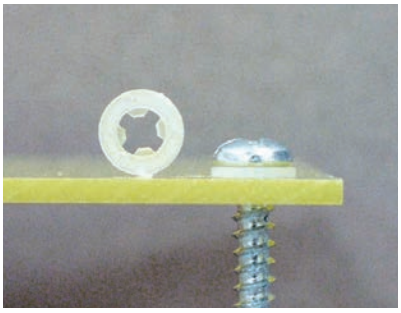


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




RECOMMENDED
MATING SCREW: S

Part No.	A	B	C	D	S	Package
KWS-3S	5.0	4.0	0.6	2.5	M3	2000
KWS-3	6.7	4.0	0.8	2.5		
KWS-3-1.2	6.7	3.5	1.2	2.5		
KWS-4	8.0	5.0	1.0	3.3	M4	
KWS-4.6	15.0	9.5	0.9	4.6	M5	
KWS-5	15.0	9.5	0.9	5.0		
KWS-6	15.0	9.5	0.9	5.8	M6	
KWS-632	8.3	5.0	0.8	3.2	6-32 UNC	
KWS-632-1.6	8.35	4.96	1.64	3.15		

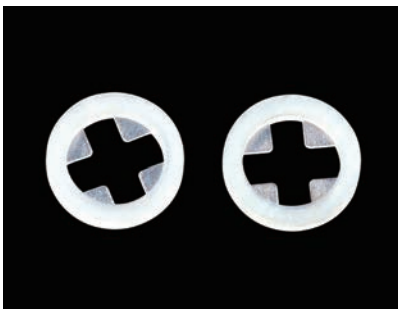


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


用途：可配合螺絲使用，墊片不脫落。



RECOMMENDED
MATING SCREW: M2


Part No.	Package
KWS-2	2000

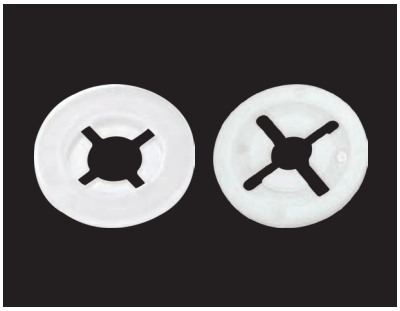



RECOMMENDED
MATING SCREW: M4

Part No.	Package
KWS-3.6	2000



RECOMMENDED
MATING SCREW: S


Part No.	A	B	C	D	S	Package
KWS832-0.8	9.91	5.97	0.81	3.43	8-32 NUC	2000
KWS-3.8	9.92	5.97	0.81	3.86	M4	
KWS-5S	11.45	7.1	0.85	4.6	M5	
KWS-5L	16.0	7.03	1.6	4.5		
KWS-8	8.5	5.8	0.9	4.4		

螺絲墊片 SCREW WASHER

用途：可配合螺絲使用，墊片不脫落。





- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



RECOMMENDED
MATING SCREW: M5


Part No.	Package
KWS-4.2-0.6	2000

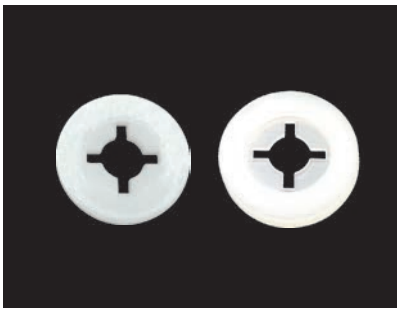



RECOMMENDED
MATING SCREW: M5

Part No.	Package
KWS-6L	2000




RECOMMENDED
MATING SCREW: M5


Part No.	Package
KWS-6-1	2000

華司 WASHER


用途：做為零件之墊片。

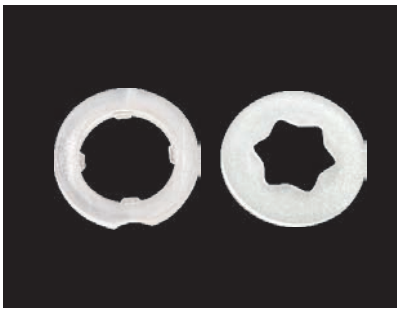


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
KWSA-5	1000



Part No.	Package
WSW8-3.4-0.5	1000

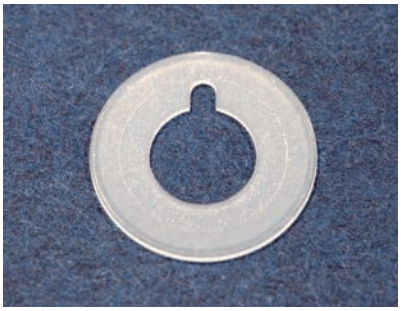




Part No.	Package
COCF-1	1000


華司 WASHER

用途：可配合螺絲使用之墊片。




- Material: POM (UL)
- Flame Class: 94HB
- Color: Natural/Black
- Unit: mm






Part No.	Package
WSUA-1	2000

- Material: PE
- Color: Black






Part No.	Package
WSUA-2	2000


墊片 WASHER

用途：做為零件之墊片。



- Material: PE
- Color: Black
- Unit: mm







Part No.	Package
WSUC-1	1000



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm






Part No.	A	B	C	D	E	Package
WSUC-2	14.0	12.5	6.5	3.2	2.0	2000
WSUC-3	12.45	9.8	4.45	3.55	2.3	

華司 WASHER

用途：可配合螺絲使用之墊片。



- Material: ABS (UL)
- Flame Class: 94HB
- Color: Natural
- Unit: mm




Part No.	Package
WSU-1	1000

零件墊片 WASHER

用途：做為零件之墊片。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
TWC-17	2000

螺絲墊片 SCREW WASHER

用途：可配合M3.5螺絲使用之墊片。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
KWS4-4	1000

零件墊片 WASHER

用途：做為零件之墊片。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
TWC-14	1000


滾輪 ROLLER

用途：用於機櫃當滾輪使用。





- Material: PC (UL)/PBT (UL)/POM/ Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm







【 UPC-1, UPC-3 】





【 UPC-4 】





【 UPC-5 】


Part No.	A	B	C	D	E	F	Material	Package
UPC-1	25.4	17.67	4.3	11.07	9.36	1.79	PC	1000
UPC-3	25.4	17.7	4.3	11.0	9.4	1.95		
UPC-4	25.0	15.0	4.3	11.8	6.9	2.4	PBT	
	24.2	14.7	4.1	11.4	6.6	2.4	POM	
UPC-5	25.0	15.0	4.2	11.8	6.45	2.45	NYLON 66	


零件墊片 WASHER

用途：做為零件之墊片。



- Material: PC+ABS (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm






Part No.	Package
TWC-4	2000


墊片 WASHER

用途：做為零件之墊片。



- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm






Part No.	Package
WSG-1	2000

零件墊片 WASHER

用途：螺絲墊片，耐熱性良好。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	B	C	E	Package
TWU-1	5.0	4.2	5.0	2000
TWU-3	6.0	5.0	6.0	

- Material: POM (UL)
- Flame Class: 94HB



・可配合M4螺絲


Part No.	Package
TWU-2	2000

絕緣柱 ROUND SPACER

用途：用於零件之絕緣使用。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
GLIN-10	1000

墊片 WASHER

用途：螺絲墊片耐熱性良好。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
WSC-1	2000

華司 WASHER

用途：做為螺絲之墊片。

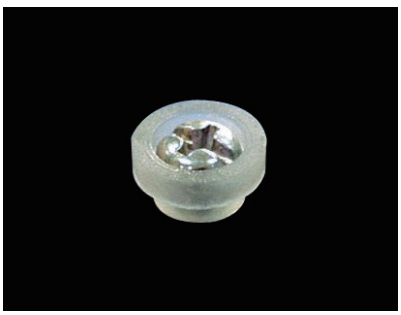

- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural
- Unit: mm




Part No.	Package
WSF-3	2000

華司 WASHER

用途：可配合螺絲使用之墊片。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
WSU-515	2000

螺絲墊片 SCREW WASHER

用途：可配合螺絲使用之墊片。




- Material: Nylon 6 (UL)/Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm



RECOMMENDED
MATING SCREW: M4

Part No.	Package
WSUB-1	1000



RECOMMENDED
MATING SCREW: M6


Part No.	Package
WSUB-4	500

零件墊片 WASHER


用途：做為零件之墊片。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
TWC-1	2000



Part No.	Package
TWC-19	1000



- Material: PPS (UL)
- Flame Class: 94V-0
- Color: Natural(Brown)/Black
- Unit: mm




Part No.	Package
TWC-15	2000

零件墊片 WASHER

用途：做為零件之墊片。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
TWC-8	1000

絕緣柱 ROUND SPACER

用途：用於零件之絕緣使用。




- Material: PC (UL)
- Flame Class: 94V-2
- Color: Natural
- Unit: mm



Part No.	Package
UPD-1	1000


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
TWC-2	2000

墊片 WASHER

用途：做為零件之墊片。

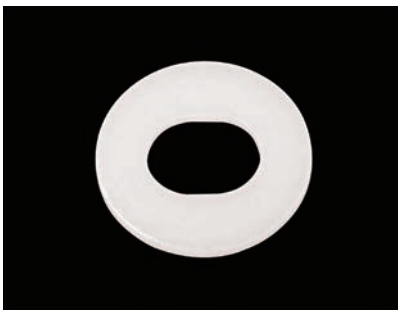


- Material: POM(UL)
- Flame Class: 94HB
- Color: Natural
- Unit: mm




Part No.	Package
WSH-1	1000


- Material: Nylon 6 (UL)
- Flame Class: 94HB
- Color: Natural
- Unit: mm



Part No.	Package
WSR9.1-8.6-1	1000

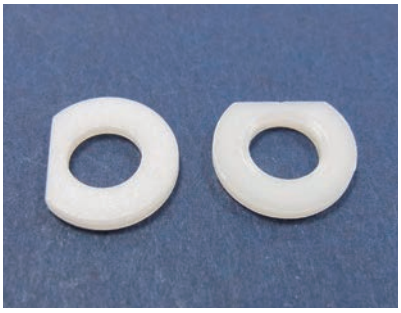

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	C	Package
WSA6-1.5	1.58	1000
WSA6-6.3	6.35	


尼龍華司 WASHER

用途：做為零件之墊片。

可依客戶需求訂製不同材質。
Different materials available per request.



- Material: Nylon 66/Nylon 6 (UL)/PE/ PBT (UL)/PP(UL)/POM (UL)
- Color: Natural/Black
- Unit: mm

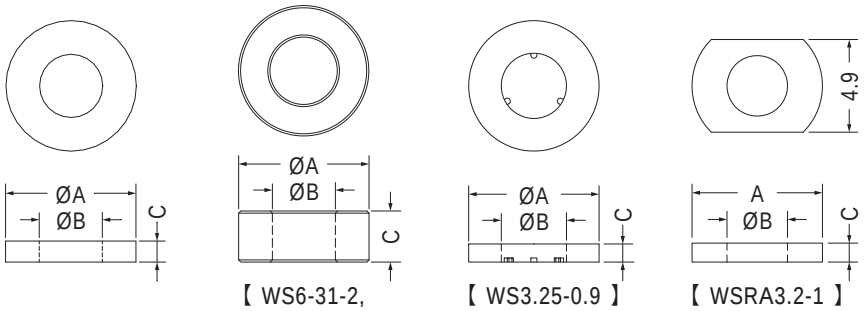

【 WS6-31-2, WS063614 】 【 WS3.25-0.9 】 【 WSRA3.2-1 】

Part No.	A	B	C
WS1.7-0.5	3.5	1.7	0.5
WS3.5-1810	3.5	1.8	1.0
WS3-2-1	3.7	2.2	1.0
WS2.2-12	3.7	2.2	1.2
WS2.5-0.5S	4.0	2.5	0.5
WS2.6-2	4.0	2.6	2.0
WS4-3.1-1	4.0	3.1	1.0
WS4-3-12	4.1	3.1	1.2
WS42-19-05	4.2	1.9	0.5
WS45-2-08	4.5	2.0	0.8
WS2.1-0.8	4.5	2.1	0.8
WS4.5-2.1-09	4.5	2.1	0.9
WS4.5-2.1-1.1	4.5	2.1	1.1
WS4.5-2.1-1.15	4.5	2.1	1.1
WS4.5-2.1-1.2	4.5	2.1	1.2
WS4.5-2.1-1.3	4.5	2.1	1.3
WS452117	4.5	2.1	1.7
WS4.5-2.1-1.8	4.5	2.1	1.8
WS2.5-0.5	4.5	2.5	0.5
WS-4529	4.5	2.9	1.2
WS4.9-3715	4.9	3.7	1.5
WS2.1-2	5.0	2.1	2.0
WS5-2.1-1	5.0	2.1	1.0
WS2.5-10	5.0	2.5	1.1
WS2.5-13	5.0	2.5	1.3
WS5-3-2.5	5.0	3.0	2.5
WS5-3.1-1	5.0	3.1	1.0
WS3.1-1.8	5.0	3.1	1.8
WS3.1-2	5.0	3.1	2.0
WS53205	5.0	3.2	0.5
WS5-2-0.5	5.5	2.3	0.5
WS3.2-2.8	5.5	3.2	2.8
WS3-5-1.5	5.6	3.1	1.5
WS3.7-0.3	5.6	3.73	0.3
WS6-23-08	6.0	2.3	0.8
WS2-0.5	6.0	2.5	0.5
WS6-2.7-3	6.0	2.7	3.0
WS6-31-2	6.0	2.9	2.35
WS6-3008	6.0	3.0	0.8
WS6-31-05	6.0	3.1	0.5
WS3-1.5	6.0	3.1	1.5

Part No.	A	B	C
WS3-2	6.0	3.1	2.0
WS3-3.4	6.0	3.1	3.4
WS6-3.2-0.5	6.0	3.2	0.5
WS6-3.2-1	6.0	3.2	1.0
WS063214	6.0	3.2	1.4
WS063614	6.0	3.6	1.4
WS6-3.8-1	6.0	3.8	1.0
WS6-38-15	6.0	3.8	1.5
WS4-0.6	6.0	4.0	0.6
WS-6451	6.0	4.5	1.0
WS6.1-1.2	6.1	3.7	1.2
WS63-42-15	6.3	4.2	1.55
WS6352125	6.35	2.3	2.5
WS63530512	6.35	3.05	1.27
WS6.3-3.1-1.5	6.35	3.18	1.58
WS6.5-3.1-20	6.5	3.1	2.0
WS3.25-0.9	6.5	3.25	0.9
WS3.8-0.5	6.5	3.8	0.5
WS4-1.6	6.5	4.0	1.65
WS4-2.2	6.5	4.0	2.2
WS4-2.5	6.5	4.0	2.5
WS4-1	6.8	4.2	1.0
WSRA3.2-1	6.9	3.2	1.0
WS2.2-0.5	7.0	2.2	0.5
WS3-1	7.0	3.0	1.0
WS7-3-0.8	7.0	3.0	0.8
WS7-3.1-0.5N	7.0	3.1	0.5
WS7-3.2-0.5	7.0	3.2	0.5
WS7-3.3-2	7.0	3.3	2.0
WS7-3.6-3.2	7.0	3.6	3.2
★WS4.2-1.5	7.0	4.2	1.5
WS4.3-2	7.0	4.3	2.0
WS4.3-2.3	7.0	4.3	2.3
WS4.6-0.6	7.0	4.6	0.6
WS7-5-1.6	7.0	5.0	1.6
WS3.7-0.5	7.1	3.7	0.5
WS71316	7.11	3.05	1.57
WS7.1-55158	7.13	5.53	1.58
WS7.4-4.5-0.5	7.4	4.5	0.5
WS4.7-0.8	7.5	4.7	0.8
WS3.5-0.5	7.5	3.5	0.5

Part No.	A	B	C
WS-7543	7.5	4.3	0.65
WS5.3-0.7	7.7	5.3	0.7
WS8-2-2	8.0	2.0	2.0
WS3-5	8.0	3.1	0.5
WS3-8	8.0	3.1	0.8
WS3-10	8.0	3.1	1.0
WS3-15	8.0	3.1	1.5
WS3-20	8.0	3.1	2.0
WS8-3.6-08	8.0	3.6	0.8
WS8-3.6-25	8.0	3.6	2.5
WS8-4-2	8.0	4.0	2.0
WS4-5	8.0	4.1	0.5
WS4-8	8.0	4.1	0.8
WS4-10	8.0	4.1	1.0
WS4-15	8.0	4.1	1.5
WS4-20	8.0	4.1	2.0
WS8-4.2-2.8	8.0	4.2	2.85
★WS8-4.3-0.5	8.0	4.3	0.5
WS4-3	8.0	4.6	0.3
WS8-5-1	8.0	5.0	1.0
WS5-5	8.0	5.0	5.0
WS8-5.1-2	8.0	5.1	2.0
WS5-0.5	8.0	5.2	0.5
WS5.2-0.5	8.0	5.2	0.5
WS855075	8.0	5.5	0.75
WS-855	8.0	5.5	1.5
WS8-55-18	8.0	5.5	1.8
WS5.6-1	8.3	5.65	1.0
WS6.1-1	8.3	6.1	1.0
WS8.6-4.1-1	8.65	4.1	1.0
WS2-1.5	8.8	2.0	1.5
WS2.5-1	9.0	2.5	1.0
WS3.2-0.5	9.0	3.2	0.5
WS9-4.3-1	9.0	4.3	1.0
WS4.5-0.5	9.0	4.5	0.5
WS9-55-075	9.0	5.5	0.75
WS9-6.2-1.2	9.0	6.2	1.2
WS9-6.7-2	9.0	6.7	2.0
WS96-44-08	9.6	4.4	0.8
WS5.6-0.7	9.6	5.6	0.7
WS5.6-2.3	9.6	5.6	2.3


尼龍華司 WASHER


用途：做為零件之墊片。

可依客戶需求訂製不同材質。
Different materials available per request.




- Material: Nylon 66/Nylon 6 (UL)/PE/ PBT (UL)/PP(UL)/POM (UL)
- Color: Natural/Black
- Unit: mm





【 WS5.3-0.7 】




【 WS8-55-18 】

Part No.	A	B	C
WS3.1-10-1	10.0	3.1	1.0
WS10-4.3-4	10.0	4.3	4.0
WS4.5-1.5	10.0	4.5	1.5
WS10-5124	10.0	5.1	2.4
WS10-5.2-0.8	10.0	5.2	0.8
WS5-1	10.0	5.2	1.0
WS5-2	10.0	5.2	2.0
WS5.5-0.8	10.0	5.5	0.8
WS10-5710	10.0	5.7	1.0
WS10-5720	10.0	5.7	2.0
WS6.1-1.6	10.0	6.1	1.6
WS-1064	10.0	6.4	0.8
WS106428	10.0	6.4	2.8
WS8-1.6	10.0	8.0	1.6
WS6.35-1.6	10.15	6.35	1.6
WS1015	10.2	5.2	1.5
WS11-4.4-0.8	10.9	4.4	0.8
WS5.2111.5	11.0	5.2	1.5
WS11785	11.0	7.0	0.8
WS7.2-1.2	11.0	7.2	1.2
WS7.2-2.5	11.0	7.2	2.5
WS11-5-1.3	11.3	5.4	1.3
WS7.6-0.5	11.3	7.6	0.5
WS115-35-4	11.5	3.5	4.0
WS3.2-1	11.6	3.2	1.0
WS7.6-1	11.6	7.6	1.0
WS4.3-1	12.0	4.3	1.0
WS12-5-2	12.0	5.0	2.0
WS5.2-0.8	12.0	5.2	0.8
WS5.3-2	12.0	5.3	2.0
WS12-64-1.4	12.0	6.4	1.4
WS1276415	12.7	6.48	1.52
WS1276420	12.7	6.48	2.0
WS1276565	12.7	6.5	6.5
WS12779215	12.7	7.9	1.57
WS6-0.8	12.8	6.4	0.8
WS6-2	12.8	6.4	2.0
WS6.48-3	12.8	6.48	3.0
WS8.1-1.6	13.0	8.1	1.6
WS12.5-1	13.4	12.5	1.0
WS-148	14.0	8.0	1.2


Part No.	A	B	C
WS-1482	14.0	8.0	2.0
WS8.1-0.8	14.0	8.1	0.8
WS14263515	14.2	6.35	1.5
WS14-11-1	14.7	11.5	1.0
WS4.3-1.5	15.0	4.3	1.5
WS7-1	15.0	7.1	1.0
WS10-5	15.0	10.3	5.0
WS6.7-0.65	15.5	6.7	0.65
WS7.1-1.5	15.8	7.1	1.5
WS15.8-9.1-1.7	15.8	9.1	1.65
WS6-1.6	16.0	6.0	1.6
WS8.4-1.6	16.0	8.4	1.6
WS16-96-15	16.0	9.6	1.5
WS10-0.8	16.0	10.0	0.8
WS10-1.5	16.0	10.0	1.5
WS16-11-32	16.0	11.4	3.2
WS10.3-1	16.2	10.3	1.0
WS10.3-1.5	16.2	10.3	1.5
WS10.1-2	17.0	10.1	2.0
WS18-6.4-1.6	18.0	6.4	1.6
WS8-1	18.0	8.2	1.0
WS8.4-1	18.0	8.4	1.0
WS8.4-1.5	18.0	8.4	1.5
WS19-11-1.6	19.0	11.0	1.6
WS12.1-2.5	19.0	12.1	2.5
WS19-14-3.2	19.05	14.35	3.18
WS5-1.2	19.5	5.0	1.2
WS20-6.5-2	20.0	6.5	2.0
WS17-1.3	20.2	17.8	1.3
WS14-3.6	20.3	14.5	3.65
WS14-4	20.3	14.5	4.0
WS10-3	20.7	10.0	3.0
WS21-10-2	21.0	10.5	2.0
WS19.1-0.5	21.8	19.1	0.5
WS221350	22.0	13.0	5.0
WS13-2	23.0	13.0	2.0
WS8-3	24.0	8.05	3.0
WS16.1-2.5	24.0	16.1	2.5
WS16.1-3	24.0	16.1	3.0
WS25-10	25.0	14.5	10.0
WS29-17-3	29.5	17.2	3.0

Part No.	A	B	C
WS30-6-1.5	30.0	6.0	1.5
WS6.3-2	30.0	6.3	2.0
WS20.1-3.5	30.0	20.1	3.5
WS33-28-15	33.5	28.5	1.5
WS22.1-4	34.75	22.1	4.0
WS34-26-1	34.8	26.2	1.0
WS24.1-4	36.0	24.1	4.0
WS2905U	38.0	29.0	0.5
WS27.1-4.5	39.0	27.1	4.5
WS421905	42.0	19.0	0.5
WS40-1.5	45.5	40.0	1.5

用途：做為零件之墊片。

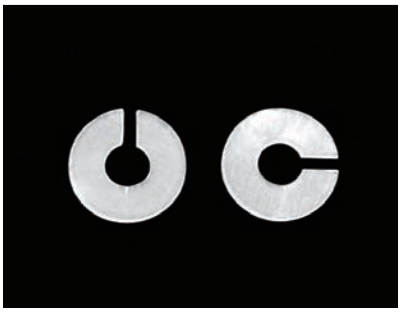


- Material: Nylon 66 (UL)/Nylon 6 (UL)/PC (UL)
- Flame Class: 94HB/94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	A	B	C	E	Package
COC2-0.5	4.0	2.3	0.5	1.0	2000
COC3-1	6.0	3.0	1.0	1.0	
COC5-4	8.0	5.0	4.0	2.5	




- Material: Nylon 66(UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
COCA3.5-2.3	2000




Part No.	Package
COCA2.2-3	2000

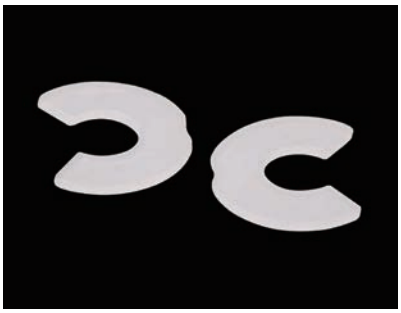

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
COCA3-0.6	1000



Part No.	Package
COCA4-0.6	1000



- Material: POM (UL)
- Flame Class: 94HB
- Color: Black
- Unit: mm



Part No.	Package
COCE-1	1000




9


- 腳墊
  Plastic Foot
- 橡膠腳墊
  Rubber Foot
- 金框腳墊
  Gold Covering Foot
- 銀框腳墊
  Silver Covering Foot
- 矽橡膠墊圈/華司
  Rubber O-rings & Washers
- 泡棉
  Foam
- 功率晶體導熱矽膠片
  Transistor Thermal Conductive Pads


腳墊 PLASTIC FOOT

用途：插銷式，可快速將腳墊固定於機殼，不脫落。

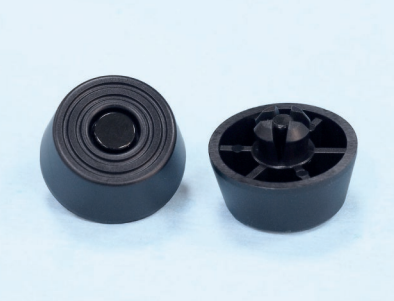

- Material: PE/TPR/TPV (UL)
- Flame Class: 94HB
- Pin Material: PP
- Color: Black/Gray/Computer
- Unit: mm






MOUNTING HOLE
THICKNESS: T

Part No.	A	B	C	D	G	T	Package
FF-1	20.8	11.8	19.8	6.4	8.0	1.0~2.5	500
FF-2	20.0	15.4	18.0	10.0	8.0	1.0~2.5	
FF-3	23.7	19.2	19.5	13.7	8.0	1.0~2.5	250
FF-4	25.0	12.5	23.5	6.5	8.0	1.0~2.5	500
FF-5	30.0	18.8	27.7	12.8	8.0	1.0~2.5	200
FF-6	28.5	14.0	26.5	8.2	10.0	1.0~3.5	250
FF-7	12.7	8.5	12.0	4.4	5.0	1.0~2.0	1000
FF-8	15.7	8.5	15.0	4.4	5.0	1.0~2.0	
FF-9	20.0	7.0	18.6	4.0	8.0	1.0~2.0	500
FF-10	23.8	10.0	22.0	5.0	8.0	1.0~2.5	
FF-11	31.5	13.6	28.5	7.8	10.0	1.0~3.5	250
FF-12	20.0	20.8	18.0	15.0	8.0	1.0~3.0	
FF-13	20.0	24.3	18.0	18.0	8.0	0.8~1.0	
FF-14	19.5	10.5	18.7	5.0	8.0	0.8~2.0	500
FF-16	29.4	23.0	26.5	15.0	10.0	1.0~3.5	100
FF-19	20.0	9.1	18.0	6.0	4.0	0.8	1000
FF-20	20.0	8.4	18.0	5.2	5.0	0.8	
FF-21	20.0	25.6	19.3	20.5	8.0	0.8~2.0	250
FF-22	19.2	12.1	17.2	7.9	8.0	0.8~1.2	500
FF-24	23.0	13.3	21.0	8.0	8.0	0.8~2.0	
FF-25	24.0	15.8	20.0	10.5	8.0	0.8~2.0	250
FF-26	22.0	10.5	21.0	3.5	8.0	1.0~3.0	500
FF-27	26.7	21.0	24.8	16.0	8.0	1.0~3.0	200
FF-28	20.0	13.5	18.0	10.0	8.0	0.8~2.0	250
FF-31	27.0	12.0	26.0	6.9	10.0	0.8~2.0	
FF-34	41.2	21.6	40.0	14.0	10.0	0.8~2.0	100
FF-35	14.0	10.6	12.7	5.8	6.0	1.0~2.5	1000
FF-36	22.0	10.5	20.0	3.5	8.0	1.0~3.0	500
FF-41	20.8	12.6	19.8	7.2	8.0	1.0~2.5	
FF-43	12.0	10.0	10.5	5.8	5.0	1.0~2.5	1000
FF-44	20.8	11.8	19.8	6.9	8.0	1.0~2.5	500
FF-51	20.0	17.8	18.0	14.0	5.0	1.6	
FF-58	25.0	10.5	23.0	5.0	8.0	0.8~1.5	250




- Body Material: TPV
- Pin Material: PP
- Color: Black
- Unit: mm



BODY PIN

MOUNTING HOLE Ø8.0~Ø8.1
THICKNESS 0.8~1.5


Part No.	Part No.	Package
FF-56	FF-56A	1000
	FF-56B	



BODY PIN


MOUNTING HOLE Ø8.0~Ø8.1
THICKNESS 0.5~1.2

Part No.	Part No.	Package
FF-57	FF-57A	1000
	FF-57B	

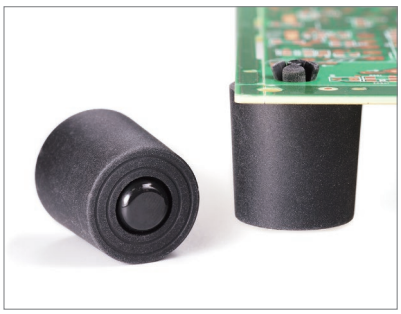

- Foot Material: TPE (UL)
- Pin Material: Nylon 66 (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm

用途：插銷式，可快速將腳墊固定於機殼，不脫落。

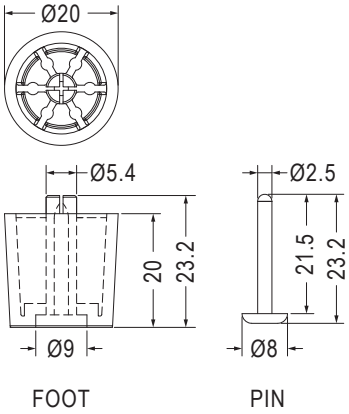

MOUNTING HOLE Ø5.3
THICKNESS 0.8


NEW

Part No.	Part No.	Package
FF-63	FF-63A	1000
	SR4.5-21B	



- Foot Material: TPE
- Pin Material: Nylon 66 (UL) 94V-2
- Color: Black
- Unit: mm

用途：插銷式，可快速將腳墊固定於機殼，不脫落，耐重壓。

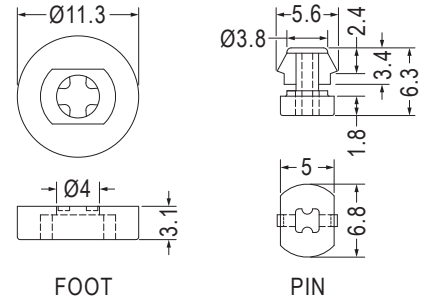


MOUNTING HOLE Ø4.0
THICKNESS 0.8~1.0

Part No.	Part No.	Package
FF-15	FF-15A	1000
	FF-15B	




- Foot Material: TPE
- Rivet Material: Nylon 66 (UL) 94V-2
- Color: Black
- Unit: mm

用途：插銷式，可快速將腳墊固定於機殼，不脫落。




MOUNTING HOLE Ø4.0
THICKNESS 2.5

Part No.	Part No.	Package
FF-40F	FF-40A	1000
	SR4-7	

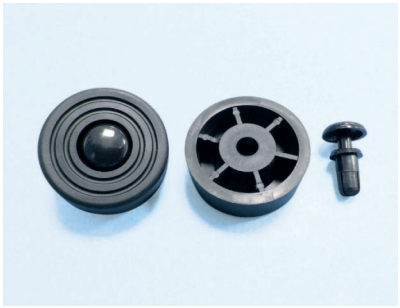

- Foot Material: TPR
- Rivet Material: Nylon 66 (UL) 94V-2
- Color: Black
- Unit: mm

用途：插銷式，可快速將腳墊固定於機殼，不脫落，可更換鉚釘配合不同板厚。

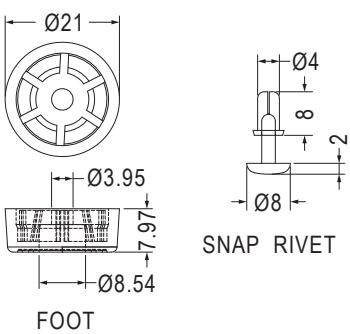

MOUNTING HOLE Ø4.1~Ø4.2
THICKNESS 0.8~2.0


Part No.	Part No.	Package
FF-46F	FF-46A	1000
	SR4-71	

腳墊 PLASTIC FOOT

用途：插銷式，可快速將腳墊固定於機殼，不脫落，可更換鉚釘配合不同板厚。




- Foot Material: TPV
- Rivet Material: Nylon 66 (UL) 94V-2
- Color: Black
- Unit: mm



FOOT　　SNAP RIVET　　MOUNTING HOLE Ø4.0

Part No.	Part No.	Package
FF-47F	FF-47A	1000
	SR4-7	


- Foot Material: TPE
- Rivet Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

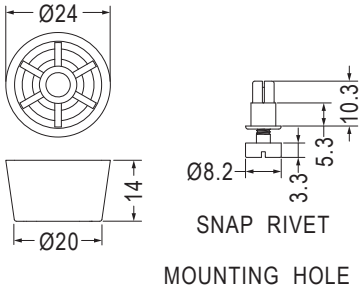

FOOT　　SNAP RIVET

MOUNTING HOLE Ø5.0
THICKNESS 1.0~2.3

Part No.	Part No.	Package
FF-52F	FF-52A	1000
	SRMB-1	

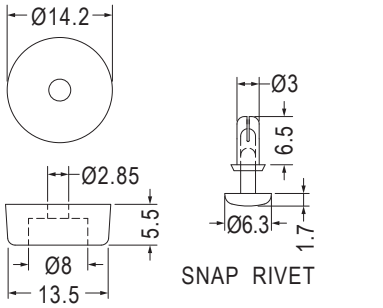


FOOT　　SNAP RIVET

MOUNTING HOLE Ø3.0

Part No.	Part No.	Package
FF-55F	FF-55A	1000
	SR3-5.5	




- Foot Material: TPV (UL)
- Rivet Material: Nylon 66 (UL)
- Flame Class: 94HB/94V-2/94V-0
- Color: Black
- Unit: mm

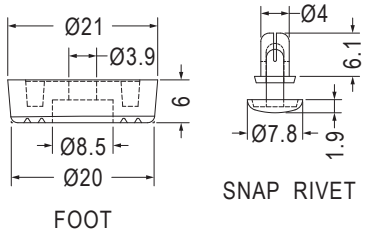

FOOT　　SNAP RIVET

MOUNTING HOLE Ø4.1~Ø4.2
THICKNESS 0.8~1.8


Part No.	Part No.	Package
FF-59F	FF-59A	1000
	SR4-6	

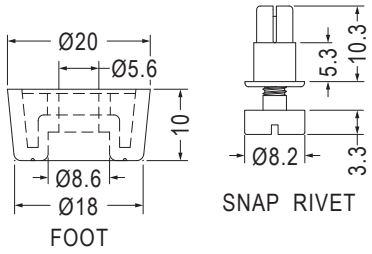

FOOT　　SNAP RIVET


MOUNTING HOLE Ø5.0
THICKNESS 1.0~2.3

Part No.	Part No.	Package
FF-60F	FF-60A	1000
	SRMB-1	

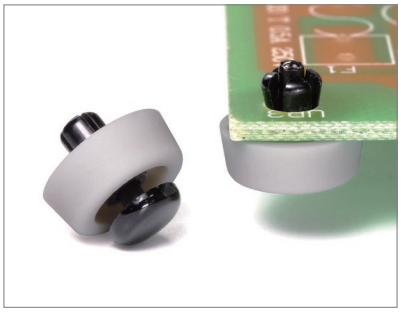

- Foot Material: TPE (UL)
- Rivet Material: Nylon 66 (UL)
- Flame Class: 94HB/94V-2
- Foot Color: Gray
- Rivet Color: Black
- Unit: mm

用途：插銷式，可快速將腳墊固定於機殼，不脫落。




MOUNTING HOLE Ø3.6

Part No.	Part No.	Package
FF-62F	FF-62A	1000
	SR3.5-6	



- Material: TPE
- Color: Black
- Unit: mm

用途：可快速將腳墊固定於機殼，不脫落。




Part No.	Package
FF-37	1000




- Material: ABS/PP/TPE/TPR
- Color: Black
- Unit: mm


用途：機械外殼之座墊，使用螺絲固定，安全不脫落，耐重壓。



Part No.	A	B	C	D	E	Material	Package
FFT-1	15.0	8.0	7.5	3.7	3.5	ABS	1000
FFT-2	20.0	12.1	8.2	4.1	5.5	ABS	500
FFT-3	25.1	16.2	10.4	4.3	8.1	ABS	100
FFT-4	24.4	22.4	8.9	4.6	6.0	ABS/PP	
FFT-5	26.0	12.7	10.9	5.1	5.7	ABS	
FFT-6	22.5	22.4	8.6	4.6	6.0	ABS	
FFT-7	17.0	17.0	7.5	3.2	6.0	ABS/TPE	
FFT-8	19.8	20.0	9.5	4.2	5.7	PP	500
FFT-9	20.0	12.8	9.5	3.6	5.7	EVA	
FFT-10	20.0	10.5	9.2	4.4	4.0	PP	
FFT-11	28.5	8.2	11.29	7.1	6.0	TPR	100

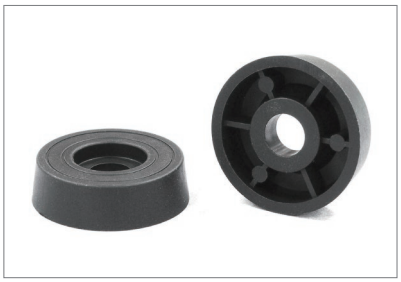

- Material: TPR
- Color: Black
- Unit: mm





Part No.	Package
FFT-15	200



- Material: PE/PP/Rubber/ Silicon Rubber
- Color: Black
- Unit: mm

用途：機械外殼之座墊，使用螺絲固定，安全不脫落。






【 NF-001, NF-006, NF-007, NF-008, NF-008A, NF-014 】


Part No.	A	B	C	D	E	Material	Package
NF-001	14.8	7.0	6.0	3.0	3.1	PE	1000
NF-002	11.5	7.4	5.6	3.2	3.3	Rubber	
NF-004	16.0	7.8	6.0	3.0	3.5	Rubber	
NF-005	17.2	7.0	9.0	4.0	3.0	Rubber	
NF-006	20.2	8.0	10.0	3.0	4.0	PE	500
NF-007	25.0	5.8	8.5	3.3	2.8	PE	
NF-007I	25.0	5.8	8.5	3.3	3.0	Silicon Rubber	
NF-008	20.0	10.5	9.8	3.0	5.0	PE	
NF-008A	20.0	10.5	9.8	4.0	5.0	PE	1000
NF-009	11.0	5.7	6.0	3.5	2.5	PE/PP	
NF-013	18.0	9.8	7.8	3.5	2.7	PP	
NF-014	28.0	20.0	9.7	3.8	6.0	PE/PP	100
NF-018	28.0	25.0	9.7	4.2	6.0	Rubber	
NF-020	20.2	15.0	9.4	3.5	4.0	Rubber	
NF-046	22.0	14.0	9.5	4.0	6.5	Rubber	

腳墊 PLASTIC FOOT


用途：螺絲式，將腳墊固定於機殼，下有泡棉或矽膠，抗滑性佳。

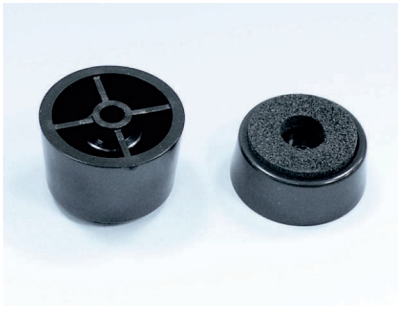


- Material: ABS
- Color: Black
- Unit: mm



Part No.	A	B	Package
FFS-1	10.0	8.5	500
FFS-2	15.0	13.5	

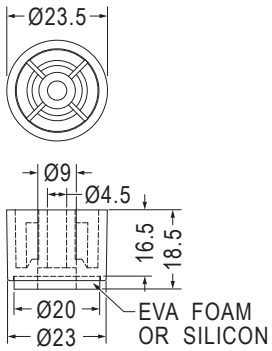


Part No.	Package
FFS-5	500

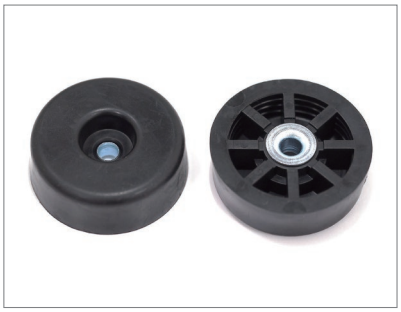

- Housing Material: TPR
- Color: Black
- Unit: mm


用途：機械外殼之座墊，使用螺絲固定，安全不脫落，耐重壓。

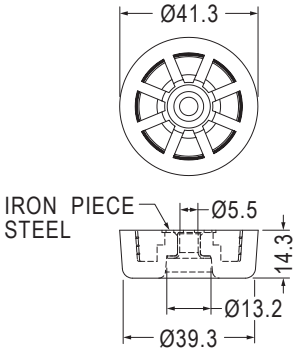


Part No.	Package
FFR-1	50



- Material: TPE
- Color: Black
- Unit: mm



Part No.	Package
FFP-30	250




Part No.	Package
FFP-40	50

橡膠腳墊 RUBBER FOOT

用途：用於機器、電子儀器之腳墊，可自黏或螺絲固定兩用。



- Material: Rubber
- Color: Black
- Unit: mm




3M or T4000
DOUBLE ADHESIVE TAPE
高度尺寸不含背膠


Part No.	Package
TF-605	1000

抗震腳墊 ANTI-VIBRATION FOOT

用途：特殊吸震材料，用於需抗震之重低音音響、影碟機等之防震腳墊，裝配容易、美觀防震性佳。

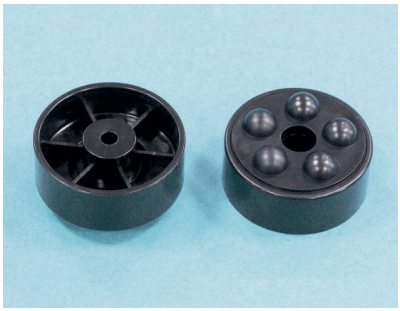


- Housing Material: ABS
- Pad Material: TPE
- Color: Black
- Unit: mm

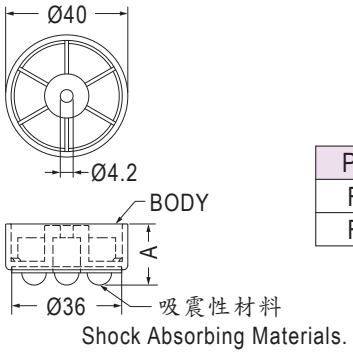


Part No.	A	Package
FFQ-1	20.0	500
FFQ-2	12.0	

腳墊 PLASTIC FOOT

用途：用於音響、影碟機等之腳墊，裝配容易、美觀。

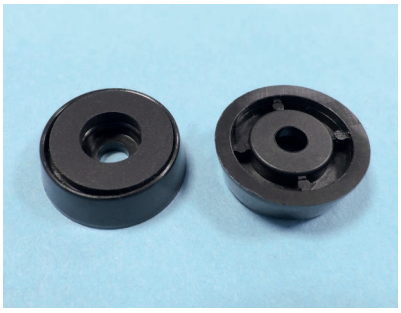


- Housing Material: ABS
- Color: Black
- Unit: mm



Part No.
FFK-6I




- Housing Material: ABS (UL)
- Housing Flame Class: 94HB
- Color: Black
- Unit: mm

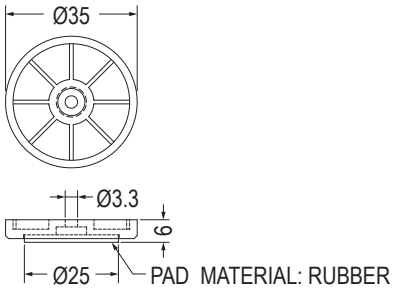


Part No.
FFK-5(RU)




- Housing Material: ABS
- Color: Black
- Unit: mm
- FFK Series: Without Silver/Gold Covering



Part No.	W
FFK-1	EVA
FFK-1P	Poron
FFK-1(RU)	Rubber



Part No.	W
FFK-3	EVA
FFK-3P	Poron
FFK-3(RU)	Rubber




・FFK-4P: 外部霧面處理
・FFK-4P: Matte finished surface


Part No.	W
FFK-2	EVA
FFK-2P	Poron
FFK-2(RU)	Rubber
FFK-4P	Poron

磁鐵腳墊 MAGNET PLASTIC FOOT


用途：磁鐵腳墊，可將HUB吸著於鐵板上。

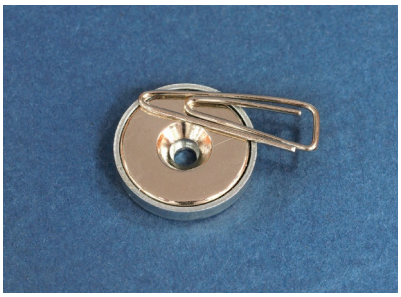

- Foot Material: Nylon 66 (UL)
- Magnet Material: NdFeB
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	Package
MGFA-2	1000




- Foot Material: Steel


Part No.	Package
MGFF-4	1000

銀框腳墊 SILVER COVERING FOOT


用途：用於音響、影碟機等之腳墊，裝配容易、美觀。

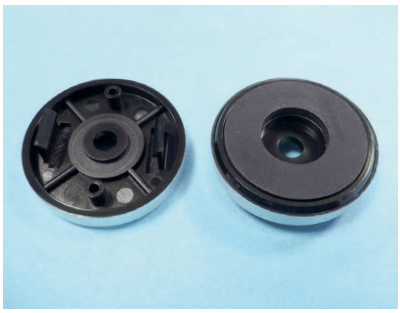


- Housing Material: ABS
- Color: Black
- Unit: mm

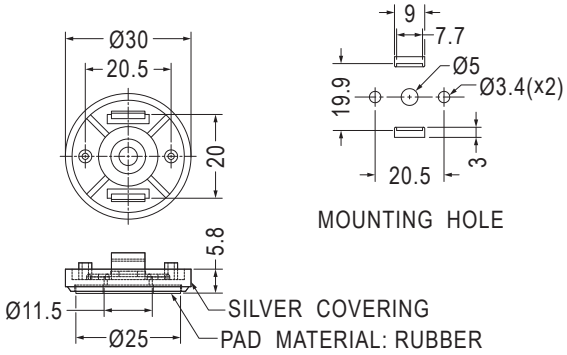


Part No.
FFH-30S(RU)

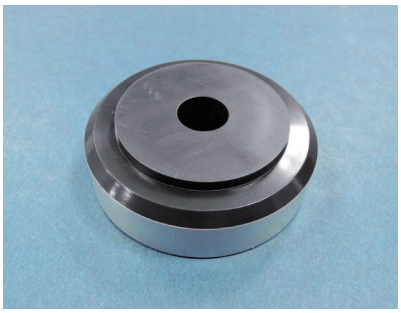




Part No.	F
RS-61N	
RS-61S	Silver Covering

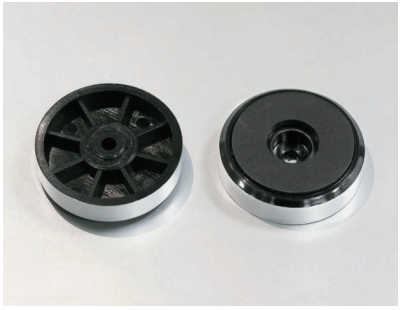


- Housing Material: ABS (UL)
- Flame Class: 94HB
- Color: Black
- Unit: mm

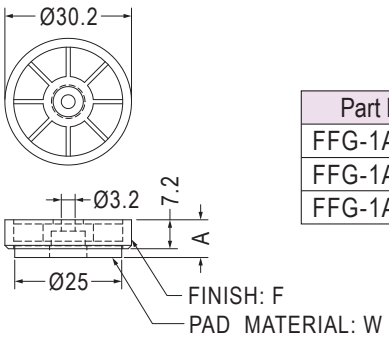


Part No.	A	F	W
FFG-1A	9.1	Silver Covering	EVA
FFG-1A(N)	9.1		EVA
FFG-1A(RU)	8.2	Silver Covering	Rubber

金框腳墊 GOLD COVERING FOOT


用途：用於音響、影碟機等之腳墊，裝配容易、美觀。

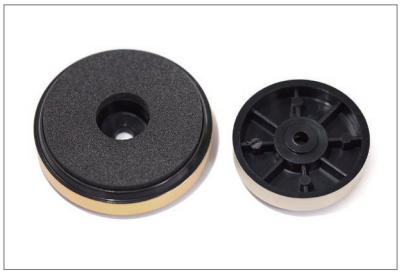


- Housing Material: ABS
- Color: Black
- Unit: mm




Part No.	A	F	W
FFG-1	9.0	Silver Covering	EVA
FFG-1(RU)	8.0	Silver Covering	Rubber
FFG-1G(RU)	8.0	Gold Covering	Rubber
FFG-1N		Silver Covering	




Part No.	A	B	F	W
FFG-2A	10.8	35.5	Gold Covering	EVA
FFG-2A(RU)	10.2	35.5	Gold Covering	Rubber
FFG-2A(S)	11.0	35.0	Silver Covering	EVA
FFG-2AS(RU	10.2	35.5	Silver Covering	Rubber




Part No.	F
FFG-2	Gold Covering
FFG-2(S)	Silver Covering




Part No.
FFG-3

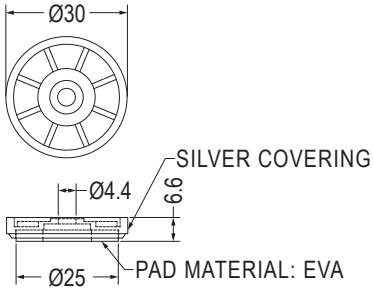


Part No.
FFG-30(S)



Part No.	A	F	W
FFG-3A	16.2	Gold Covering	EVA
FFG-3A(RU)	15.4	Gold Covering	Rubber
FFG-3A(S)	16.0	Silver Covering	EVA
FFG-3A(G)N		Gold Covering	
FFG-3AN	16.2		EVA
FFG-3AN(RU)	15.4		Rubber




Part No.	A	F	W
RS-28	11.7	Golden Alum. Covering	EVA
RS-28(S)	11.7	Silver Alum. Covering	EVA
RS-28S(RU)	10.7	Silver Alum. Covering	Rubber
RS-28N(RU)	10.7		Rubber
RS-28(N)N	10.0		




Part No.	A	F	W
RS-40	10.7	Golden Alum. Covering	EVA
RS-40(S)	10.7	Silver Alum. Covering	EVA
RS-40S(RU)	9.8	Silver Alum. Covering	Rubber

金框腳墊 GOLD COVERING FOOT


用途：用於音響、影碟機等之腳墊，裝配容易、美觀。

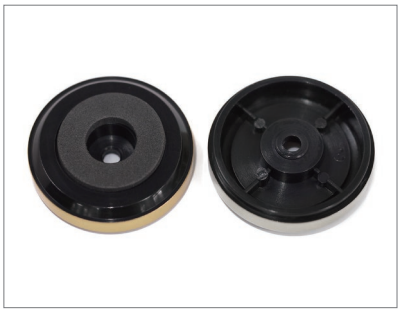


- Housing Material: ABS
- Color: Black
- Unit: mm




Part No.	A	F	W
RS-45	10.7	Golden Alum. Covering	EVA
RS-45(S)	10.7	Silver Alum. Covering	EVA
RS-45(RU)	9.7	Golden Alum. Covering	Rubber
RS-45S(RU)	9.7	Silver Alum. Covering	Rubber
RS-45(S)I	9.7	Silver Alum. Covering	Silicon Rubber




Part No.	A	F	W
RS-50	14.8	Gold Covering	EVA
RS-50(RU)	14.0	Gold Covering	Rubber
RS-50N	14.8		EVA
RS-50N(RU)	14.0		Rubber
RS-50(S)	14.8	Silver Covering	EVA
RS-50S(RU)	14.0	Silver Covering	Rubber

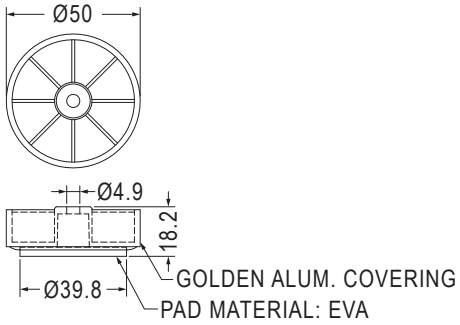


Part No.
RS-50-2



Part No.	A	F	W
RS-55	10.7	Golden Alum. Covering	EVA
RS-55(S)	10.7	Silver Alum. Covering	EVA
RS-55S(RU)	9.7	Silver Alum. Covering	Rubber




Part No.	A	F	W
RS-60N	20.0		EVA
RS-60	20.0	Golden Alum. Covering	EVA
RS-60(BK)	20.0	鍍黑灰色 Dark Gray Covering	EVA
RS-60(S)	20.0	Silver Alum. Covering	EVA
RS-60(S)RU	19.3	Silver Alum. Covering	Rubber




Part No.	A	F	W
RA-35	11.5	Golden Alum. Covering	EVA
RA-35(S)	11.5	Silver Alum. Covering	EVA
RA-35(S)RU	10.5	Silver Alum. Covering	Rubber

金框腳墊 GOLD COVERING FOOT


用途：用於音響、錄影機等之腳墊，裝配容易、美觀。

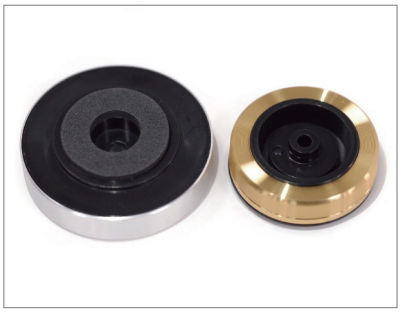


- Housing Material: ABS
- Metal Material: AL
- Color: Black
- Unit: mm

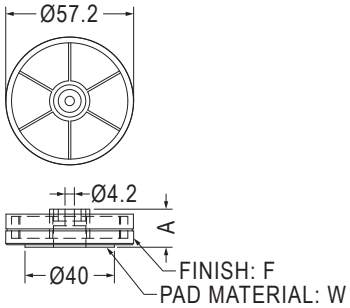


Part No.	A	F	W
RA-57	17.0	Golden Alum. Covering	EVA
RA-57(RU)	17.1	Golden Alum. Covering	Rubber
RA-57(S)	17.0	Silver Alum. Covering	EVA
RA-57S(RU)	17.1	Silver Alum. Covering	Rubber




Part No.	A	F	W
RA-40	12.0	Golden Alum. Covering	EVA
RA-40(RU)	11.0	Golden Alum. Covering	Rubber
RA-40(S)	12.0	Silver Alum. Covering	EVA
RA-40S(RU)	11.0	Silver Alum. Covering	Rubber
RA-40(K)	12.0	Champagne Color	EVA




Part No.	A	F	W
RA-45	15.0	Golden Alum. Covering	EVA
RA-45(S)	15.0	Silver Alum. Covering	EVA
RA-45(RUS)	14.0	Silver Alum. Covering	Rubber
RA-45S(RU)	14.1	Silver Alum. Covering	Rubber
RA-45S(I)	14.1	Silver Alum. Covering	Silicon Rubber



Part No.	A	F	W
RA-45S-1	12.5	Silver Alum. Covering	EVA
RA-45-1(RU)	11.5	Golden Alum. Covering	Rubber
RA-45S-1(RU)	11.5	Silver Alum. Covering	Rubber

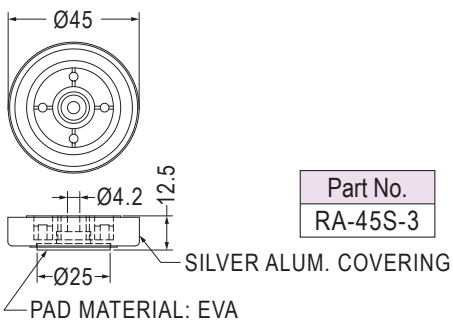

Part No.
RA-45S-3



MOUNTING HOLE Ø8.0

- Foot Material: PE
- Pin Material: PP


Part No.	F
RAFF-40	Golden Alum. Covering
RAFF-40(S)	Silver Alum. Covering
RAFF-40(B)	Black Alum. Covering

橡膠腳墊 RUBBER FOOT

用途：可快速將腳墊固定於機殼，裝配容易，不脫落。



- Material: Rubber
- Color: Black
- Unit: mm




MOUNTING HOLE Ø7.0

Part No.	Package
TF-017	1000



- Material: Rubber
- Color: Black
- Unit: mm



用途：用於機殼之座墊，裝配容易安全不脫落。


Part No.	Package
TF-448	500

矽膠腳墊 SILICON RUBBER FOOT

用途：可快速將腳墊固定於機殼，裝配容易，不脫落。



- Material: Silicon Rubber
- Color: Black
- Unit: mm




Part No.	Package
TF-561	1000


腳墊 PLASTIC FOOT

用途：固定於機殼，保護用。



- Material: TPR
- Color: Black
- Unit: mm







MOUNTING HOLE

Part No.	A	B	C	D	E	G	Package
TFF-1	9.0	3.0	16.3	10.0	20.0	16.0	1000
TFF-2	8.5	2.5	16.3	10.0	20.0	16.0	
TFF-3	9.0	2.4	20.2	13.5	22.8	19.8	
TFF-5	7.5	2.5	16.3	10.0	20.0	16.0	



- Material: TPE
- Color: Black
- Unit: mm





用途：可快速將腳墊固定於機殼，裝配容易，不脫落。


Part No.	Package
DELT-21	1000

矽膠腳墊 SILICON RUBBER FOOT

用途：做為腳墊止滑用。



- Material: Silicon Rubber
- Body Material: Nylon 66 (UL) 94V-2
- Color: Gray
- Body Color: Black
- Unit: mm

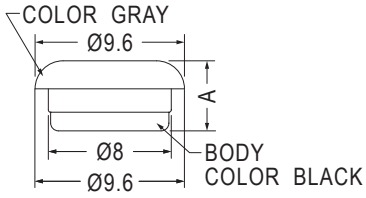


Part No.	A	Package
FFDA-9AY	4.5	2000
FFDA-10AY	4.55	

腳墊 PLASTIC FOOT

用途：用於機殼之座墊，裝配容易、安全不脫落。




- Material: PE
- Color: Black
- Unit: mm




MOUNTING HOLE Ø8.0


Part No.	Package
GL-4	500

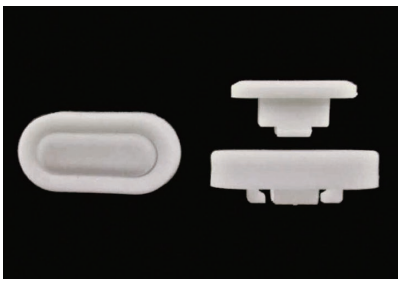

- Body Material: TPR
- Pin Material: ABS (UL) 94HB
- Color: Black/White
- Unit: mm

用途：電腦外殼之座墊，使用插銷固定，安全不脫落。

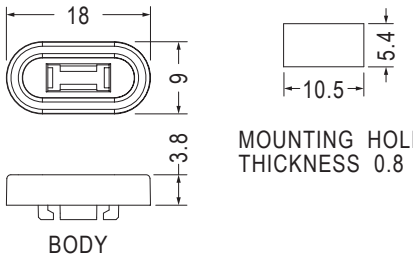




Part No.	Package
ASFF-1A	1000

Part No.	Package
ASFF-1B	1000



- Material: TPR
- Metal Ring Material: SPCC
- Color: Gray
- Unit: mm

用途：機械外殼之座墊，內含有鐵件，使用螺絲固定，安全不脫落，耐重壓。

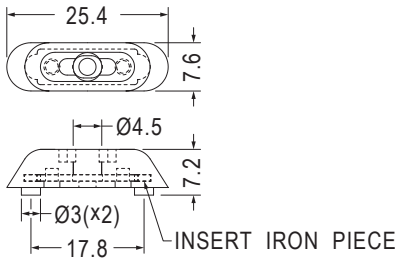


Part No.	Package
TF-356	1000

用途：可快速將腳墊固定於機殼，裝配容易，不脫落。





- Material: TPR
- Color: Black
- Unit: mm



MOUNTING HOLE Ø5.6
THICKNESS 2.0


Part No.	Package
TNFF-1	1000






MOUNTING HOLE Ø5.6
THICKNESS 1.0~1.2

Part No.	Package
TNFF-2	1000



MOUNTING HOLE Ø5.0

Part No.	Package
TNFF-3	1000




MOUNTING HOLE Ø5.0

Part No.	Package
TNFF-4	1000




- Material: Silicon Rubber/Rubber
- Color: Black
- Unit: mm




MOUNTING HOLE Ø4.5~Ø5.0

Part No.	Package
TNF-7	2000




MOUNTING HOLE Ø6.3

Part No.	Package
TNF-44	2000




MOUNTING HOLE Ø6.5

Part No.	Package
TNF-6	2000



MOUNTING HOLE Ø4.2


Part No.	Package
TNF-5	1000



MOUNTING HOLE Ø4.0

- Material: Neoprene

Part No.	Package
TNF-41	1000





MOUNTING HOLE Ø8.2

Part No.	Package
TNF-2	1000



- Material: TPE
- Color: White
- Unit: mm

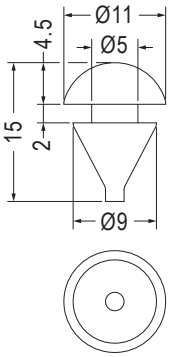



MOUNTING HOLE


Part No.	Package
TNF-40	1000

腳墊 PLASTIC FOOT

用途：可快速將腳墊固定於機殼，裝配容易，不脫落。




- Material: Rubber
- Color: Black
- Unit: mm



MOUNTING HOLE Ø6.35


Part No.	Package
TNF-3	1000



MOUNTING HOLE Ø3.5

- Material: EPDM


Part No.	Package
TF-546	1000



MOUNTING HOLE Ø5.2

Part No.	Package
TNF-1	1000






MOUNTING HOLE Ø4.2

- Material: Silicon Rubber


Part No.	Package
TF-041	1000



MOUNTING HOLE Ø8.0
THICKNESS 2.0


- Material: Rubber/ Neoprene

Part No.	Package
TNF-15	500




MOUNTING HOLE Ø7.0

Part No.	Package
TNF-47	1000




MOUNTING HOLE Ø5.0

Part No.	Package
TNF-46	1000



MOUNTING HOLE Ø8.3~Ø8.5

Part No.	A	Package
TNF-9	9.0	2000
TNF-19	6.5	



MOUNTING HOLE Ø3.5


Part No.	Package
TF-283	1000

橡膠腳墊 RUBBER FOOT

用途：機械外殼之座墊，內含有鐵華司，使用螺絲固定，安全不脫落，耐重壓。




- Material: Rubber
- Color: Black
- Unit: mm




METAL WASHER

Part No.	Package
NF-002ST	1000



METAL WASHER

Part No.	Package
NF-004ST	1000




METAL WASHER

Part No.	Package
NF-039ST	1000


用途：機械外殼之座墊，內含有鐵華司，使用螺絲固定，安全不脫落，耐重壓。




- Material: Rubber
- Color: Black
- Unit: mm




Part No.	Package
NF-011ST	1000



Part No.	Package
NF-012	1000




Part No.	Package
NF-012ST	1000




Part No.	Package
NF-051ST	1000



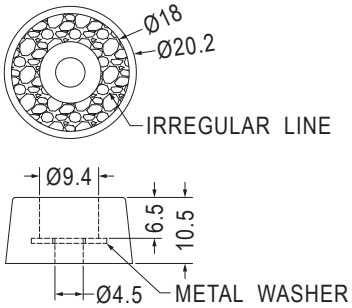

Part No.	Package
NF-015ST	1000




- Metal Ring Material: Bronze


Part No.	Package
NF-016ST	1000




- Material: Silicon Rubber (UL)/Rubber
- Flame Class: 94HB
- Color: Black
- Unit: mm




Part No.	Package
NF-005ST	1000




Part No.	Package
NF-030IST	1000



Part No.	Package
NF-047ST	1000



Part No.	Package
NF-035IST	1000




- Material: Rubber


Part No.	Package
NF-050ST	250

腳墊 PLASTIC FOOT


用途：機械外殼之座墊，使用螺絲固定，安全不脫落，耐重壓。

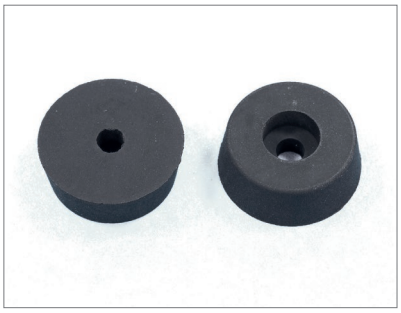

- Material: TPE
- Color: Black
- Unit: mm



Part No.	Package
NF-031	1000



- Material: Rubber


Part No.	Package
NF-045	1000

橡膠腳墊 RUBBER FOOT

用途：背膠式，可快速將腳墊固定於機殼，黏性佳、不脫落。




- Material: Rubber
- Color: Black
- Unit: mm




3M or T4000
DOUBLE ADHESIVE TAPE

Part No.
RF-031




3M or T4000
DOUBLE ADHESIVE TAPE

Part No.	A	B	C
RF-016	29.6	6.6	4.1
RF-017	29.0	8.8	4.9




3M or T4000
DOUBLE ADHESIVE TAPE

Part No.
RF-018



3M or T4000
DOUBLE ADHESIVE TAPE

Part No.
RF20-10




3M or T4000
DOUBLE ADHESIVE TAPE

Part No.
RF-029



- Material: Rubber/Silicon Rubber
- Color: Black
- Unit: mm



3M or T4000
DOUBLE ADHESIVE TAPE


Part No.	A	B	C
RF5.8-4A	5.8	5.5	4.0
RF8-3.5	8.0	7.7	3.5
RF8.2-5	8.2	7.6	5.0
RF9-3.5	9.0	8.2	3.5
RF9.7-4.2A	9.7	9.3	4.2
RF15.5-5A	15.4	14.8	5.1
RF19-4A7	19.05	18.05	4.06
RF22.8-5	22.8	22.4	5.0
RF22-8.8	22.0	21.0	8.8
RF22-5	22.0	21.0	5.0

橡膠腳墊 RUBBER FOOT


用途：背膠式，可快速將腳墊固定於機殼，黏性佳、不脫落。



- Material: Rubber/Silicon Rubber
- Color: Black
- Unit: mm
- Other Materials Available: EPDM



3M or T4000
DOUBLE ADHESIVE TAPE



3M or T4000
DOUBLE ADHESIVE TAPE

【 RF6-8.4A, RF7-4.2A, RF8-5.5A, RF8-6.5A, RF10-6.2A, RF12-8.5A, RF12.7-6.2A, RF15-13.5A, RF17-11A 】


Part No.	A	B	C
★RF3.8-2.5A	3.8	3.5	2.5
RF6-5	6.0	5.0	5.0
★RF6-8.4A	6.0	5.0	8.4
RF7-4.2A	7.0	6.5	4.2
RF7-3.2A	7.0	6.6	3.2
★RF8-5.5A	8.0	6.0	5.5
RF8-6.5A	8.0	7.2	6.5
RF10-6.2A	10.0	7.5	6.2
RF-1094A	10.0	9.0	9.4
RF-003	10.0	9.5	4.2
RF-030	10.0	9.5	8.0

Part No.	A	B	C
RF-1055	10.0	9.7	5.5
RF-009	10.8	10.2	3.0
RF11-5	11.0	9.6	5.0
RF-011	11.0	10.5	5.0
RF11-3.2A	11.3	10.7	3.2
RF-039	11.9	11.2	6.4
★RF12-8.5A	12.0	11.0	8.5
RF12-27A	12.0	11.6	2.7
RF-015	12.0	11.2	5.1
RF-019	12.0	9.5	4.0
RF-019A	12.7	10.0	3.8


Part No.	A	B	C
RF12.7-6.2A	12.7	10.0	6.2
RF-032	12.7	11.5	4.0
RF-005	13.0	11.4	5.0
RF-012	13.0	12.2	4.5
RF15-11A	15.0	13.5	11.0
RF15-13.5A	15.0	13.5	13.5
RF17-11A	17.0	13.25	11.0
RF-007	19.0	17.0	7.2
RF-020	19.0	15.8	4.2
RF20-5	19.8	18.0	5.0
RF-008	20.0	19.0	6.0
RF24-8	24.0	20.0	8.0



- Material: Rubber/Silicon Rubber
- Color: Black
- Unit: mm
- Other Materials Available: EPDM



3M or T4000
DOUBLE ADHESIVE TAPE




3M or T4000
DOUBLE ADHESIVE TAPE

Part No.	A	B
RF-002	10.0	2.8
RF8-2A	8.0	2.0
RF8-2.6A	8.0	2.6
RF8-3A	8.0	3.0
RF8.8-2.9A	8.8	2.89
RF21.6-11A	21.6	11.0


Part No.	A	B
RF-021	6.7	4.2
RF7.8-2.9A	7.8	2.9
RF9.5-3.9A	9.5	3.9
RF-1106	11.0	6.0
RF-022	11.3	5.6
RF14-8A	14.0	8.0
RF-006	15.9	8.0
RF21-8.5	21.6	8.52
RF21-10	21.6	10.0



- Material: Rubber
- Color: Black
- Unit: mm



3M or T4000
DOUBLE ADHESIVE TAPE




3M or T4000
DOUBLE ADHESIVE TAPE

Part No.	A	B
RF-004	9.9	3.8
RF14-5A	14.0	5.0
RF27-7AC-1	27.8	7.4

Part No.
RF18-5A

橡膠腳墊 RUBBER FOOT

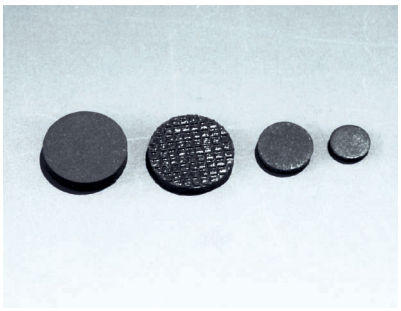


- Material: Rubber/Silicon Rubber
- Color: Black
- Unit: mm
- Other Materials Available: EPDM, Poron
- Optional Thickness: 0.5~3.2mm

用途：背膠式，可快速將腳墊固定於機殼，黏性佳、不脫落。

可依客戶指定長、寬、高裁切成各種形狀，如方形、圓形。表面可分為平面、斜紋等。

Different size available per request.




3M or T4000
DOUBLE ADHESIVE TAPE

Part No.	A	B
RF3.8-2	3.8	2.0
RF0415	4.0	1.5
RF4-0.5	4.0	0.5
RF4-0.6	4.0	0.6
RF4-3	4.0	3.0
RF4.5-1.5	4.5	1.5
RF4.5-2.7	4.5	2.7
RF4.8-1	4.8	1.0
RF5-1.5	5.0	1.5
RF5-2	5.0	2.0
RF5-2.5	5.0	2.5
RF5-3.5	5.0	3.5
RF5.3-0.7	5.3	0.7
RF5.5-1.6	5.5	1.6
RF5.6-2	5.6	2.0
RF6-0.5	6.0	0.5
RF6-0.8	6.0	0.8
RF6-0.9	6.0	0.9
RF6-1	6.0	1.0
RF6-1.3	6.0	1.3
RF6-1.5	6.0	1.5
RF6-2	6.0	2.0
RF6-2.5	6.0	2.5
RF6-3	6.0	3.0
RF6-3.5	6.0	3.5
RF6.4-2.6	6.4	2.6
RF6.5-1	6.5	1.0
RF6.5-2.5	6.5	2.5
RF6.6-1.5	6.6	1.5
RF6.6-1.8	6.6	1.8
RF6.6-2	6.6	2.0
RF7-0.5	7.0	0.5
RF7-0.9	7.0	0.9
RF7-1	7.0	1.0
RF7-1.5	7.0	1.5
RF7-2	7.0	2.0
RF7-2.5	7.0	2.5
RF7-2.7	7.0	2.7
RF7-3	7.0	3.0
RF7.2-1.5	7.2	1.5
RF7.5-2	7.5	2.0

Part No.	A	B
RF-001	8.0	1.8
RF8-0.5	8.0	0.5
RF8-1	8.0	1.0
RF8-1.4	8.0	1.4
RF8-1.5	8.0	1.5
RF8-2	8.0	2.0
RF8-2.5	8.0	2.5
RF8-3	8.0	3.0
RF8.5-1.5	8.5	1.5
RF8.5-2	8.5	2.0
RF9-1	9.0	1.0
RF9-1.2	9.0	1.2
RF9-1.5	9.0	1.5
RF9-2	9.0	2.0
RF9-2.5	9.0	2.5
RF9-3	9.0	3.0
RF9.5-0.8	9.5	0.8
RF9.5-1.5	9.5	1.5
RF9.5-1.8	9.5	1.8
RF9.5-2	9.5	2.0
RF9.5-3	9.5	3.0
RF10-0.8	10.0	0.8
RF10-1	10.0	1.0
RF10-1.3	10.0	1.3
RF-1016	10.0	1.6
RF-1018	10.0	1.8
RF10-2	10.0	2.0
RF10-3	10.0	3.0
RF10.5-1	10.5	1.0
RF10.5-15	10.5	1.5
RF10.5-2	10.5	2.0
RF-11632	11.6	3.2
RF12-1.5	12.0	1.5
RF-1210	12.0	1.0
RF12-2.7	12.0	2.7
RF-1220	12.0	2.0
RF12-3	12.0	3.0
RF12-3.6	12.0	3.6
RF-1232	12.0	3.2
RF-12520	12.5	2.0
RF12.5-1	12.5	1.0

Part No.	A	B
RF12732	12.7	3.2
RF13-1	13.0	1.0
RF13-3	13.0	3.0
RF14-4	14.0	4.0
RF14530	14.5	3.0
RF14.5-4	14.5	4.0
RF-1463	14.6	3.0
RF-1510	15.0	1.0
RF-1520	15.0	2.0
RF-1530	15.0	3.0
RF16.5-3	16.5	3.0
RF18-1.3	18.0	1.3
RF18-1.5	18.0	1.5
RF18-2.5	18.0	2.5
RF19-1	19.0	1.0
RF19-2	19.0	2.0
RF19-3	19.0	3.0
RF19-4	19.0	4.0
RF-19823	19.8	2.3
RF20-1	20.0	1.0
RF20-1.5	20.0	1.5
RF20-1.8	20.0	1.8
RF-2023	20.0	2.3
RF-2025	20.0	2.5
RF-2030	20.0	3.0
RF22-2	22.0	2.0
RF22-2.5	22.0	2.5
RF22.1-10.4	21.7	10.4
RF24.6-3	24.6	3.0
RF25-2.3	25.0	2.3
RF27-3	27.0	3.0
RF28-3.2	28.0	3.2
RF30-2	30.0	2.0
RF40-1	40.0	1.0
RF58-1.5	58.0	1.5
RF58-2	58.0	2.0
RF64.7-2.5S	64.7	2.5

橡膠腳墊 RUBBER FOOT

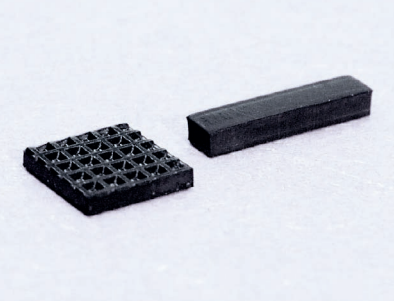


- Material: Rubber/Silicon Rubber
- Color: Black
- Unit: mm
- Other Materials Available: EPDM, Poron
- Optional Thickness: 0.5~10mm

用途：背膠式，可快速將腳墊固定於機殼，黏性佳、不脫落。

可依客戶指定長、寬、高裁切成各種形狀，如方形、圓形。表面可分為平面、斜紋等。

Different size available per request.

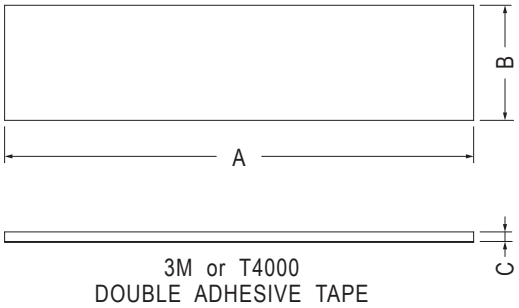


Part No.	A	B	C
SF050435	5.0	4.5	3.5
SF062313	6.0	2.3	1.3
SF060425	6.0	4.0	2.5
SF652840	6.5	2.8	4.0
SF652850	6.5	2.8	5.0
SF070215	7.0	2.0	1.5
SF070216	7.0	2.0	1.6
SF070304	7.0	3.0	0.4
SF073512	7.0	3.5	1.2
SF070420	7.0	4.0	2.0
SF070620	7.0	6.0	2.0
SF080625	8.0	6.0	2.5
SF852530	8.5	2.5	3.0
SF853520	8.5	3.5	2.0
SF853525	8.5	3.5	2.5
SF80452	8.0	4.5	2.0
SF090855	9.6	8.0	5.5
SF100616	9.9	6.0	1.6
SF100119	10.0	1.9	1.9
SF103512	10.0	3.5	1.2
SF100409	10.0	4.0	0.9
SF100510	10.0	5.0	1.0
SF100520	10.0	5.0	2.0
SF100712	10.0	7.0	1.2
SF100825	10.0	8.0	2.5
SF100850	10.0	8.0	5.0
SF100730	10.5	7.2	3.0
SF110830	11.5	8.0	3.0
SF118781	11.8	7.8	1.0
SF120565	12.0	5.0	6.5
SF120810	12.0	8.5	1.0
SF129515	12.0	9.5	1.5
SF121530	12.0	15.0	3.0
SF1256535	12.5	6.5	3.5
SF1251008	12.5	10.0	0.8
SF-1251015	12.5	10.0	1.5
SF130620	13.0	6.0	2.0
SF130630	13.0	6.0	3.0
SF130735	13.0	7.0	3.5
SF130740	13.0	7.0	4.0
SF130855	13.5	8.0	5.5
SF132525	13.0	2.5	2.5

Part No.	A	B	C
SF140430	14.0	4.0	3.0
SF140440	14.0	4.0	4.0
SF150320	15.0	3.2	2.0
SF150610	15.0	6.0	1.0
SF151016	15.0	10.0	1.6
SF151930	15.0	1.9	3.0
SF152530	15.0	25.0	3.0
SF155030	15.0	50.0	3.0
SF1585601	15.8	5.6	1.0
SF151025	15.8	10.0	2.5
SF-163530	16.0	3.5	3.0
SF160536	16.0	5.0	3.6
SF170525	17.0	5.0	2.5
SF1724330	17.2	4.3	3.0
SF180930	18.0	9.0	3.0
SF181010	18.0	10.0	1.0
SF181020	18.0	10.0	2.0
SF195640	19.0	5.6	4.0
SF195720	19.0	5.7	2.0
SF-197774	19.7	7.7	4.0
SF197760	19.7	7.7	6.0
SF190814	19.7	8.0	1.4
SF190815	19.7	8.0	1.5
SF-1979723	19.7	9.7	2.3
SF1979725	19.7	9.7	2.5
SF-1979730	19.7	9.7	3.0
SF-1972015	19.7	20.0	1.5
SF202515	20.0	2.5	1.5
SF200410	20.0	4.0	1.0
SF200420	20.0	4.0	2.0
SF200510	20.0	5.0	1.0
SF200515	20.0	5.0	1.5
SF200563	20.0	5.0	6.3
SF200568	20.0	5.0	6.8
SF200725	20.0	7.0	2.5
SF201010	20.0	10.0	1.0
SF201015	20.0	10.0	1.5
SF201020	20.0	10.0	2.0
SF201035	20.0	10.0	3.5
SF201056	20.0	10.0	5.6
SF201465	20.0	14.0	6.5
SF201515	20.0	15.0	1.5

Part No.	A	B	C
SF200612	20.5	6.0	1.2
SF210804	21.5	8.6	0.4
SF-221615	22.0	16.0	1.5
SF227640	22.6	7.6	4.0
SF237640	23.0	7.6	4.0
SF230610	23.7	6.5	1.0
SF246011	24.8	6.0	1.1
SF250535	25.0	5.0	3.5
SF250550	25.0	5.0	5.0
SF250760	25.0	7.0	6.0
SF250810	25.0	8.0	1.0
SF250815	25.0	8.0	1.5
SF250820	25.0	8.0	2.0
SF251235	25.0	12.0	3.5
SF251224	25.4	12.7	2.4
SF251232	25.4	12.7	3.2
SF260510	26.8	5.5	1.0
SF270830	27.0	8.0	3.0
SF271810	27.0	18.0	1.0
SF271820	27.0	18.0	2.0
SF27183	27.0	18.0	3.0
SF279032	27.5	9.0	3.2
SF-3064	30.0	6.0	4.0
SF303555	30.0	3.5	5.5
SF-30709	30.0	7.0	0.9
SF3038	30.0	8.0	3.8
SF-301120	30.0	11.0	2.0
SF-301140	30.0	11.0	4.0
SF301230	30.0	12.0	3.0
SF301250	30.0	12.0	5.0
SF301525	30.0	15.0	2.5
SF302055	30.0	20.0	5.5
SF302501	30.0	25.0	1.0
SF30511	30.5	11.0	7.0
SF311510	31.5	15.5	1.0
SF311515	31.5	15.5	1.5
SF3267225	32.0	6.7	2.25
SF321720	32.0	17.0	2.0
SF321725	32.0	17.0	2.5
SF332055	33.0	20.0	5.5
SF332385	33.3	23.3	8.5
SF331125	33.5	11.5	2.5

橡膠腳墊 RUBBER FOOT

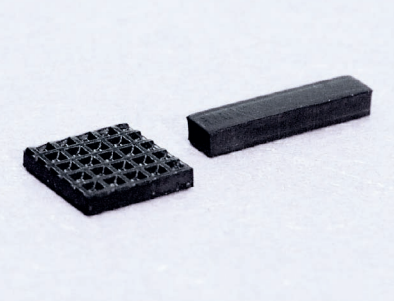


- Material: Rubber/Silicon Rubber
- Color: Black
- Unit: mm
- Other Materials Available: EPDM, Poron
- Optional Thickness: 0.5~10mm

用途：背膠式，可快速將腳墊固定於機殼，黏性佳、不脫落。

可依客戶指定長、寬、高裁切成各種形狀，如方形、圓形。表面可分為平面、斜紋等。

Different size available per request.

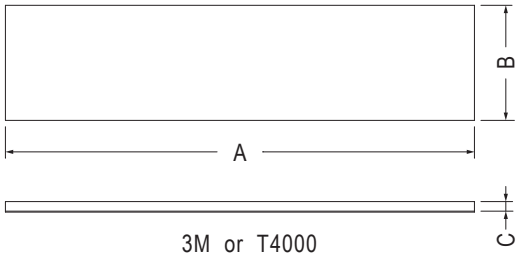

3M or T4000
DOUBLE ADHESIVE TAPE

Part No.	A	B	C
SF340220	34.0	2.0	2.0
SF340904	34.6	9.5	0.4
SF-340901	34.7	9.7	1.0
SF351001	35.0	10.0	1.0
SF351580	35.0	15.0	8.0
SF352508	35.0	25.0	0.8
SF361810	36.0	18.0	1.0
SF361820	36.0	18.0	2.0
SF400509	39.5	5.0	0.9
SF-4009	40.0	9.0	1.5
SF400924	40.0	9.0	2.4
SF400930	40.0	9.0	3.0
SF401040	40.0	10.5	4.0
SF401235	40.0	12.0	3.5
SF401240	40.0	12.0	4.0
SF401250	40.0	12.0	5.0
SF401715	40.0	17.5	1.5
SF442010	44.5	20.0	10.0
SF451020	45.0	10.0	2.0
SF473530	47.5	3.5	3.0
SF481040	48.0	10.0	4.0
SF484410	48.0	44.0	1.0
SF491210	49.0	12.0	1.0
SF500620	50.0	6.0	2.0
SF501038	50.0	10.0	3.8
SF541010	54.0	10.0	1.0
SF550515	55.0	5.0	1.5


Part No.	A	B	C
SF582508	58.0	25.0	0.8
SF582514	58.0	25.0	1.4
SF582516	58.0	25.0	1.6
SF600610	60.0	6.0	1.0
SF600613	60.0	6.0	1.3
SF600625	60.0	6.0	2.5
SF-6064	60.0	6.0	4.0
SF600907	60.0	9.0	0.7
SF601010	60.0	10.0	1.0
SF601025	60.0	10.0	2.5
SF6017530	60.0	17.5	3.0
SF602010	60.0	20.0	10.0
SF606767	60.0	6.7	6.7
SF652020	65.0	20.0	2.0
SF654030	65.0	40.0	3.0
SF700525	70.0	5.0	2.5
SF701820	70.0	18.0	2.0
SF702010	70.0	20.0	1.0
SF764005	76.0	40.0	0.5
SF-801004	80.0	10.0	0.5
SF845208	84.6	52.6	0.8
SF880810	88.0	8.0	1.0
SF951232	95.0	12.0	3.2
SF980830	98.0	8.0	3.0
SF993555	99.0	3.5	5.5
SF990915	99.0	9.9	1.5
LSF-002	100.0	12.0	3.5

Part No.	A	B	C
SF107581	107.0	58.0	1.5
SF1100540	110.0	5.6	4.0
SF1101010	110.0	10.0	1.0
SF1111009	111.0	10.0	0.9
SF1200310	120.0	3.0	1.0
SF1254620	125.0	46.0	2.0
SF1302030	130.0	20.0	3.0
SF1302020	130.0	20.0	2.0
SF1340220	134.0	2.0	2.0
SF1400520	140.0	5.0	2.0
SF140101	140.0	10.0	1.0
SF140251	140.0	25.0	1.0
SF14510520	145.0	105.0	2.0
SF1461010	146.0	10.0	1.0
SF1500712	150.0	7.0	1.2
SF-1501004	150.0	10.0	0.5
SF1501515	150.0	15.0	1.5
SF1600610	160.0	6.0	1.0
SF1664930	166.5	49.0	3.0
SF2500515	250.0	5.0	1.5
SF2506520	250.0	65.0	2.0
SF2701655	270.0	165.0	0.5
SF2581420	258.0	14.5	2.0
SF3101150	310.0	11.6	5.0
SF3101250	310.0	12.0	5.0
SF5400208	540.0	2.9	0.8



- Material: Rubber
- Color: Black
- Unit: mm

用途：背膠式，可快速將腳墊固定於機殼，黏性佳、不脫落。




3M or T4000
DOUBLE ADHESIVE TAPE


Part No.	A	B	C	D
P004	14.0	13.5	2.1	2.6
P005	15.0	14.5	2.6	3.1

橡膠腳墊 RUBBER FOOT

用途：背膠式，可快速將腳墊固定於機殼，黏性佳、不脫落。

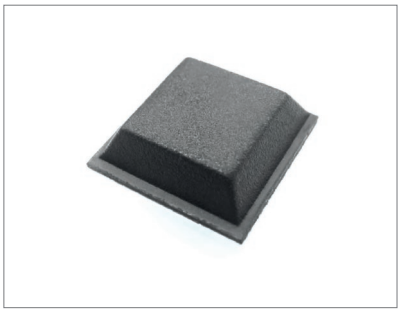


- Material: Rubber/Silicon Rubber/PU
- Color: Black
- Unit: mm




3M or T4000
DOUBLE ADHESIVE TAPE

Part No.	A	B	C
SF-004	12.7	9.0	3.5
SF-005	12.7	7.0	6.0
SF-006	20.0	14.0	7.6
SF-007	10.5	8.6	2.5
SF-009	12.5	9.5	4.0
SF-016	12.7	9.8	3.0
SF-017	12.5	9.7	3.5

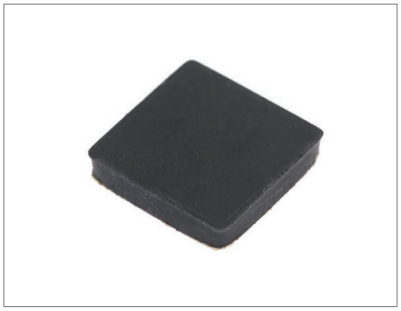


- Material: Rubber/Silicon Rubber
- Color: Black
- Unit: mm




3M or T4000
DOUBLE ADHESIVE TAPE

Part No.	Package
SF202013	1000



3M 9448
DOUBLE ADHESIVE TAPE

Part No.	Package
TF-1698	1000

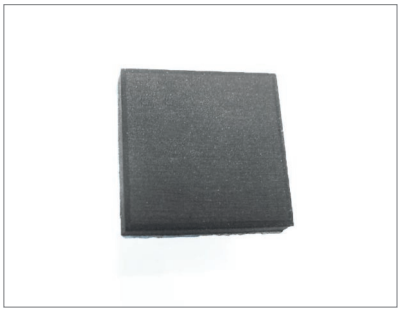


- Material: Rubber/Silicon Rubber
- Color: Black
- Unit: mm
- Other Materials Available: EPDM, Poron...
- Optional Thickness: 0.7~5.0mm

用途：背膠式，可快速將腳墊固定於機殼，黏性佳、不脫落。

可依客戶指定長、寬、高裁切成各種形狀，如方形、圓形。表面可分為平面、斜紋等。

Different size available per request.



3M or T4000
DOUBLE ADHESIVE TAPE

Part No.	A	B
SF050510	5.0	1.0
SF050512	5.0	1.2
SF-6610	6.0	1.0
SF-6615	6.0	1.5
SF060625	6.0	2.5
SF-664	6.0	4.0
SF-665	6.0	5.0
SF060660	6.0	6.0
SF-001	6.4	3.0
SF070715	7.0	1.5
SF070720	7.0	2.0
SF070740	7.0	4.0
SF070755	7.0	5.5
SF070780	7.0	8.0
SF73732	7.3	2.0
SF-080801	8.0	1.0
SF-080802	8.0	2.0
SF080823	8.0	2.3
SF-0808025	8.0	2.5
SF090945	9.0	4.5
SF-002	9.7	2.0

Part No.	A	B
SF-979735	9.7	3.5
SF101007	10.0	0.7
SF101009	10.0	0.9
SF101010	10.0	1.0
SF101016	10.0	1.6
SF101020	10.0	2.0
SF101023	10.0	2.3
SF101025	10.0	2.5
SF101030	10.0	3.0
SF101035	10.0	3.5
SF101040	10.0	4.0
SF101050	10.0	5.0
SF101060	10.0	6.0
SF111160	11.0	6.0
SF11511550	11.5	5.0
SF11511565	11.5	6.5
SF-121212	12.0	1.2
SF121225	12.0	2.5
SF-003	12.0	5.0
SF121255	12.0	5.5

Part No.	A	B
SF121270	12.0	7.0
SF-1272	12.7	2.3
SF-131320	13.0	2.0
SF14142	14.0	2.0
SF141480	14.0	8.0
SF151512	15.0	1.2
SF-151515	15.0	1.5
SF151535	15.0	3.5
SF151550	15.0	5.0
SF161610	16.0	1.0
SF171725	17.0	2.5
SF181810	18.0	1.0
SF181820	18.0	2.0
SF181840	18.0	4.0
SF181850	18.0	5.0
SF202030	20.0	3.0
SF25425450	25.4	5.0
SF404010	40.0	1.0
SF404050	40.0	5.0
SF505050	50.0	5.0


橡膠腳墊 RUBBER FOOT

用途：背膠式，可快速將腳墊固定於機殼，黏性佳、不脫落。

尺寸可依客戶要求。
Different size available per request.




- Material: Rubber/Silicon Rubber
- Color: Black
- Unit: mm
- Other Materials Available: EPDM



3M or T4000
DOUBLE ADHESIVE TAPE

Part No.	A
SF14722	14.0
SF28722	27.8






3M or T4000
DOUBLE ADHESIVE TAPE

Part No.	A	B	C
PT080210	8.0	2.0	1.0
PT100612	10.5	6.0	1.2
PT100614	10.5	6.0	1.4

Part No.	A	B	C
TF-1627	15.2	9.2	3.0
PT158932S	15.8	9.3	2.0
PT160915	16.0	9.5	1.5
PT-1762	17.5	6.5	2.0
PT200612	20.5	6.2	1.2
PT200617	20.5	6.2	1.7
PT2492	24.0	9.0	2.0
PT270720	26.8	7.2	2.0
PT005	26.8	7.2	3.8
PT360712	36.0	7.0	1.2
PT690920	69.6	9.8	2.0





- Material: Rubber
- Color: Black
- Unit: mm



3M or T4000
DOUBLE ADHESIVE TAPE

Part No.	Package
TF201113	1000

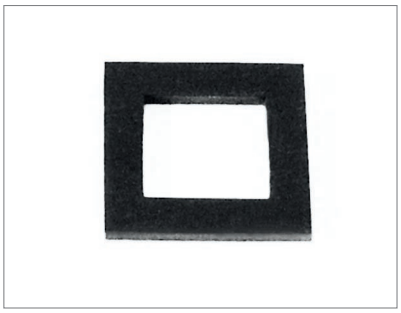




3M or T4000
DOUBLE ADHESIVE TAPE


Part No.
SF141410

遮板 PANEL PAD

用途：背膠式，可貼於D-SUB連接器之外觀或裡面保護或絕緣。

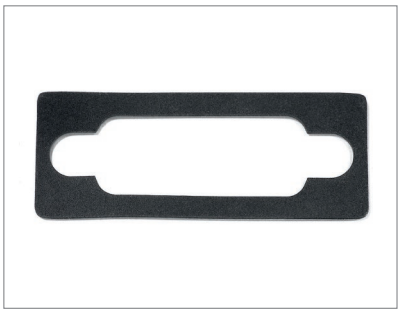

- Material: Silicon Rubber
- Color: Black
- Unit: mm




DOUBLE ADHESIVE TAPE


Part No.	Package
TF-1596	1000

橡膠華司 RUBBER WASHER


用途：做為零件之墊片。

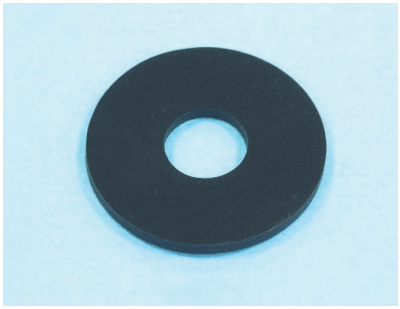

- Material: Rubber/Silicon Rubber
- Color: Black
- Unit: mm



3M or T4000
DOUBLE ADHESIVE TAPE



(無背膠)
WITHOUT ADHESIVE TAPE


【 **RWF7.6-1.7N, RWF7.2-2.8N** 】

Part No.	A	B	C
RWF3.5-0.5	8.0	3.5	0.5
RWF3.5-1	8.0	3.5	1.0
RWF4.5-2	8.0	4.5	2.0
★RWF5.1-2.1	8.5	5.1	2.1
RWF7.6-1.7N	10.9	7.6	1.7
RWF3.5-1.5	11.0	3.5	1.5
RWF7.2-2.8N	11.0	7.2	2.8

Part No.	A	B	C
RWF4.5-3	15.0	4.5	3.0
RWF18-8.5-15	18.0	8.5	1.5
RWF20-1.5	20.0	6.0	1.5
RWF25-2	25.0	11.0	2.0
RWF10.2-2	29.6	10.2	2.0
RWF40-2	40.0	12.0	2.0
RWF43-2	43.0	30.1	2.0



- Material: Rubber
- Color: Black
- Unit: mm




Part No.
RWF8.5-3N

矽橡膠墊圈 O-RING

用途：做為零件之油封或墊片。



- Material: NBR/EPDM/Silicon Rubber
- Color: Black
- Unit: mm




Part No.	A	B	Package
OR-1.7	1.7	0.6	2000
OR-2	2.0	1.0	
OR-2.7	2.75	0.6	
OR-2.8	2.8	0.5	
OR-2.9	2.9	1.78	
OR-3.6	3.6	1.78	
OR-4	4.0	2.0	
OR-4.6	4.6	1.78	
OR-5	5.0	1.0	
OR5.5-11.8	5.5	3.15	
OR-5.8	5.8	1.9	

Part No.	A	B	Package
OR-6	6.02	2.6	2000
OR6.07-1.63	6.07	1.63	
OR7-2	7.0	2.0	
OR-7.6	7.65	1.78	
OR-7.9	7.9	1.0	
OR-11	11.0	2.0	
OR-88	20.0	1.0	
OR-21.3	21.3	3.0	
OR-25.2	25.2	3.5	
OR-84.4	84.4	3.1	500




- Material: Silicon Rubber
- Color: Black
- Unit: mm



Part No.	A	B	Package
OR2.4-1.9	2.4	1.9	2000
OR2.6-1.1	2.6	1.1	
OR8-1.5	8.0	1.5	
OR10.5-1	10.5	1.0	
OR10.6-1.25	10.6	1.25	
OR15-1.5	15.0	1.5	
OR-31-1.8	31.47	1.78	


功率晶體導熱矽膠片 TRANSISTOR THERMAL CONDUCTIVE PAD

用途：用於功率晶體之導熱和絕緣。

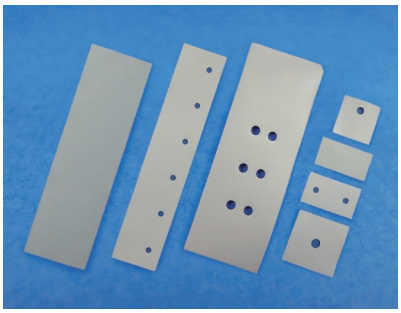


- Material: Silicon (UL)
- Flame Class: 94V-0
- Color: Gray
- Unit: mm


可依客戶指定長、寬、高裁切成各種形狀，如方形、圓形。
Different size available per request.




Part No.	A	B	C	Package
SI1913	19.0	13.0	0.3	1000
SI21125	21.0	12.5	0.3	
SI2519	25.0	19.0	0.3	
SI3012	30.0	12.0	0.3	
SI3030-1	30.0	30.0	0.3	
SI4520	45.0	20.5	0.3	
SI304802	48.0	30.0	0.23	
SI300200	300.0	200.0	0.3	100




Part No.	A	B	C	D	E	F	Package
SI3023	30.0	23.0	0.3	15.0	12.6	3.0	1000
SI3030	30.0	30.0	0.45	15.0	15.0	4.5	
SI2535	35.0	25.0	0.3	9.0	12.5	3.0	




Part No.	A	B	C	D	E	F	H	Package
SI30172H	30.5	17.8	0.3	6.4	8.9	3.1	17.7	1000
SI335125H2	33.5	12.5	0.3	5.75	7.0	3.0	22.0	
SI34132H	34.0	13.0	0.3	5.0	6.5	5.8	24.0	
SI5230	52.0	30.0	0.3	10.0	9.0	3.0	32.0	
SI752845	75.0	28.0	0.45	27.0	7.5	3.2	21.0	

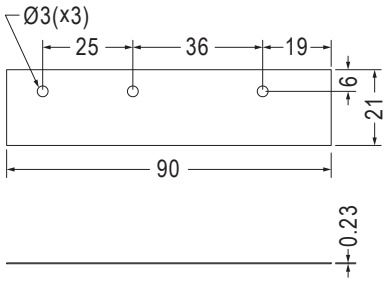

Part No.	Package
SI9021	500

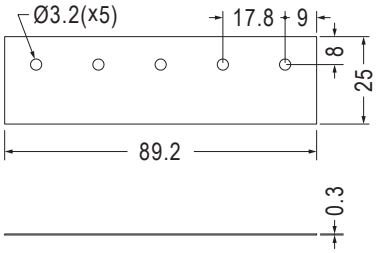


Part No.	Package
SI8925H5	500

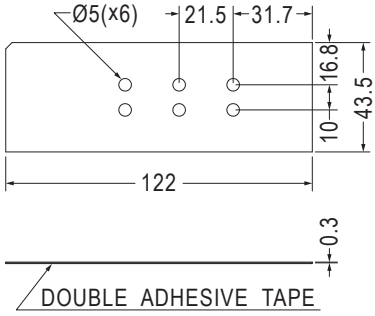

Part No.	Package
SI12243H6A	1000


EVA泡棉 EVA FOAM

用途：腳墊，零件之絕緣，可用背膠(單面或雙面)。

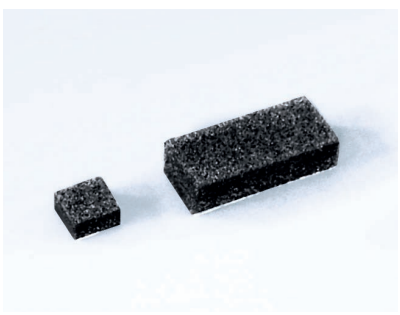

- Material: EVA
- Color: Black
- Unit: mm

尺寸可依客戶要求。
Different size available per request.




3M or T4000
DOUBLE ADHESIVE TAPE

Part No.	A	B	C
EVA862	8.0	6.0	2.0
EVA120430	12.0	4.0	3.0

導電泡棉 CONDUCTIVE FOAM

- Material: EMI Conductive Fabric
- Unit: mm


用途：EMI屏蔽導電，可用背膠(單面或雙面)，尺寸可依客戶要求。
Different size available per request.



Part No.	Package
CRGI01	1000




Part No.	Package
CRGH06	1000



Part No.	Package
CRGP11	1000



Part No.	Package
CRGF02	1000



Part No.	Package
CRGR-G07	1000



Part No.	Package
CRGI12	1000



Part No.	Package
CRGS03	1000



Part No.	Package
CRGR08	1000



Part No.	Package
CRGT13	1000




Part No.	Package
CRGR04	1000




Part No.	Package
CRGC09	1000



Part No.	Package
CRGD14	1000




Part No.	Package
CRGI-E05	1000



Part No.	Package
CRGL10	1000



Part No.	Package
CRGI-W15	1000

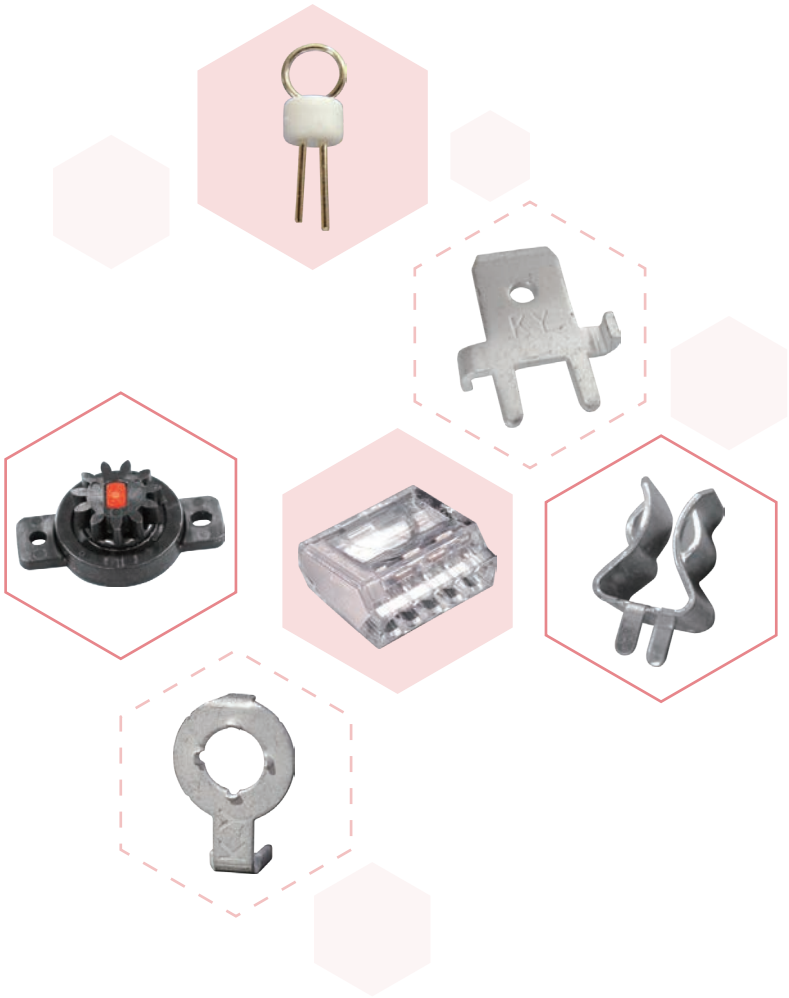


10

- 阻尼齒輪
  Damper Gears
- PC板焊接端子
  PCB Terminals
- 測試針/測試點
  Test Pins
- 保險絲座/測試座
  Fuse & Test Holders
- 接地片
  Ground Terminals
- 端子台
  Terminal Blocks
- 接線夾/跳線
  Quick Splices &
  Jumper Wires


插式電線連接頭 PUSH-IN WIRE CONNECTOR

用途：用於單芯電源線之連接，插入式，免用膠帶，方便，省時。

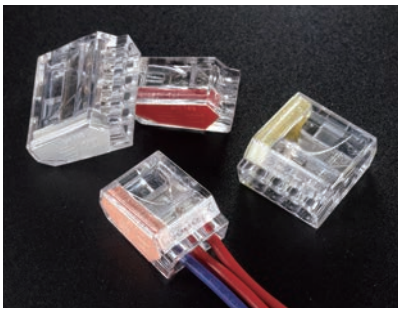


- Material: PC (UL) 94V-0
- Unit: mm


NOTE:
安培(Current): 24A(VDE)
伏特(Voltage): 600V
使用溫度(Working temp): 110˚C
使用線徑範圍(Wire Range): #12-22 AWG Solid conductor
撥線長度(Stripping Length): 11mm(0.43 inch)
顏色(Color): 以顏色區分,易於辨別使用電線數目
(The colors are used to define the numbers of connector poles.)
安全認證通過(Safety Certification):
美國USA(UL),德國Germany(VDE),芬蘭Finland(Finko),歐洲Europe(CE)




【 PC252 】

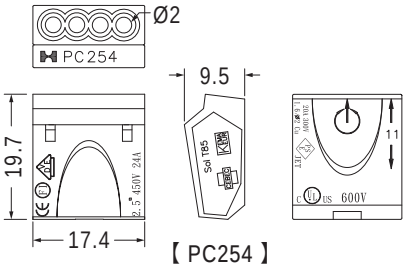

【 PC254 】

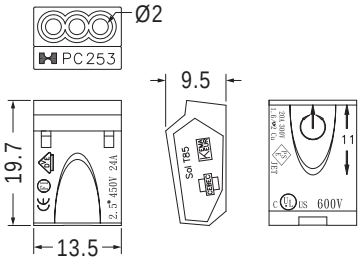

【 PC253 】

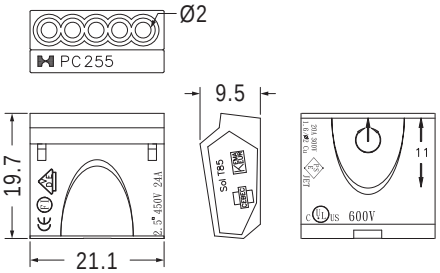


【 PC255 】


Part No.	Color	Poles	Package
PC252	Red	2	500
PC253	Orange	3	
PC254	Yellow	4	
PC255	Gray	5	

快速接線夾 QUICK SPLICE


用途：用於中途輔助接線，且使用時不需剝線，將電線放好位置壓入銅片即可，省時美觀。

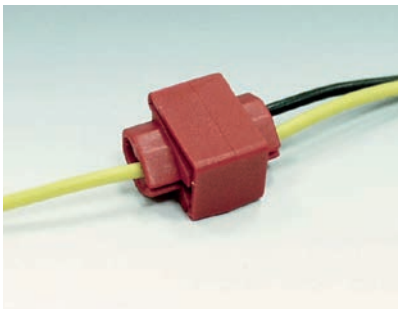


- Housing Material: PP
- Metal Material: Copper
- Finish: Tin Plated
- Unit: mm

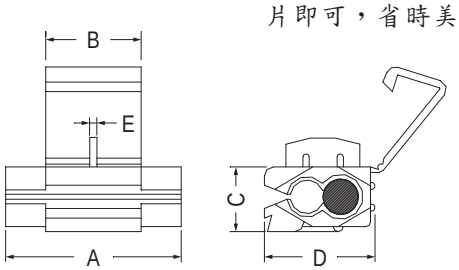

Part No.	Wire Range AWG	A	B	C	D	E	Color	Package
3MR	22-18	19.5	10.6	8.2	13.5	0.8	Red	500
3MB	18-14	19.5	10.6	8.2	13.5	0.8	Blue	
3MY	12-10	20.0	20.0	11.1	15.0	0.9	Yellow	200

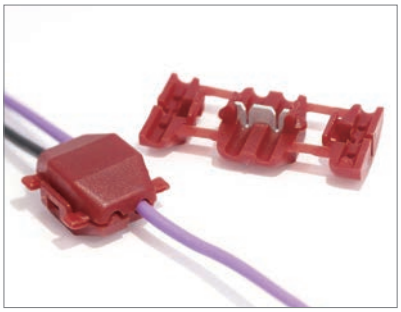


- Insulation Material: Nylon
- Insulation Color: Red
- Terminal Material: Brass
- Wire Range: #20-18 AWG(0.5-0.75mm)
- Terminal Thickness: 0.8mm
- Plating: Tin Plated
- Unit: mm




Part No.	Package
878008	250

端子台 TERMINAL BLOCK

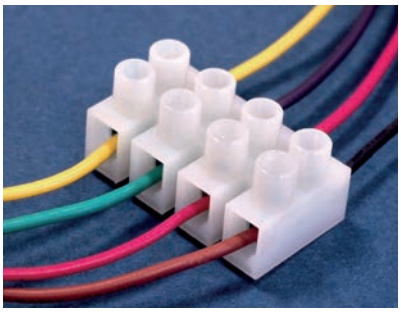


- Housing Material: Nylon 66 UL94V-2
- Pole: 1~12 Poles
- Working Temperature: 105˚C
- PA7DS, PA9DS: With Wire Protector
- Safety Certification: UL、CSA、VDE、F、D、N、S...。
- Color: Natural


- H=底部加高(Raised Base)
- DS=加彈片(Wire Protector)
- F=平底型(Flat Base Type)



WIRE PROTECTOR
(加彈片)




RAISED BASE TYPE
(底座加高)

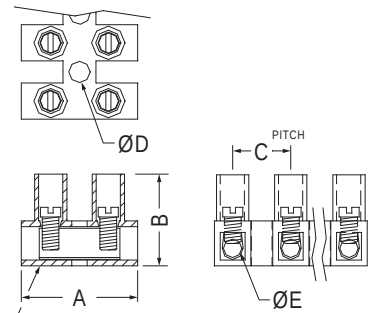


FLAT BASE TYPE
(平底)

Part No.	線徑 mm²	安培 Amp	電壓 Volt	螺絲 Screw	A	B	C	D	E	Poles
PA7-12	1.5	17.5	450V	M2.6x5P	17.0	14.5	8.2	2.9	2.8	12
PA7-12DS	1.5	17.5	450V	M2.6x5P	17.0	14.5	8.2	2.9	2.8	
PA7F-12	1.5	17.5	450V	M2.6x5P	17.0	13.5	8.2	2.9	2.8	
PA7F-12DS	1.5	17.5	450V	M2.6x5P	17.0	13.5	8.2	2.9	2.8	
PA9-12	2.5	24.0	450V	M3.0x6P	20.2	16.7	10.0	3.6	3.2	
PA9-12DS	2.5	24.0	450V	M3.0x6P	20.2	16.7	10.0	3.6	3.2	
PA9F-12	2.5	24.0	450V	M3.0x6P	20.2	16.2	10.0	3.6	3.2	

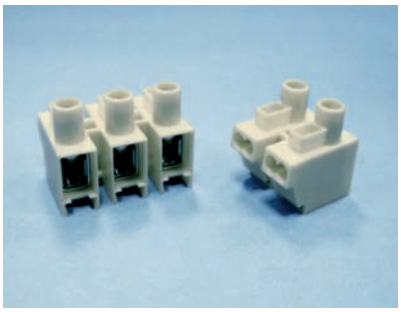


- Housing Material: Nylon 66 (UL) 94V-2
- Working Temperature: 105˚C
- Color: Natural
- Unit: mm

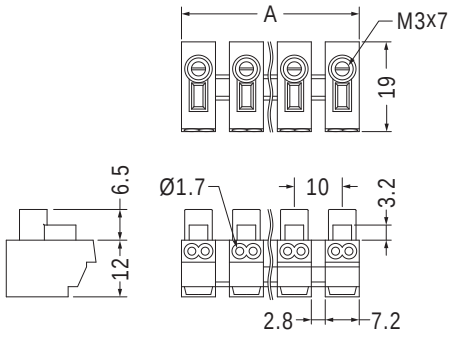


Part No.	A
PA11-2P	17.3
PA11-3P	27.5

按壓式端子台 PUSH-BUTTON TERMINAL BLOCK

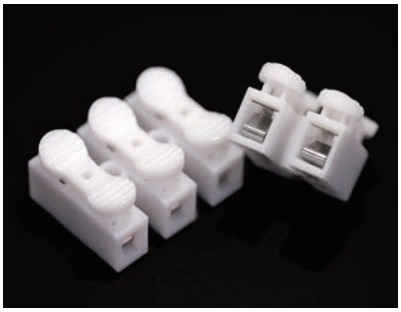

- Material: PP
- Working Temperature: 85˚C
- Color: White
- Unit: mm

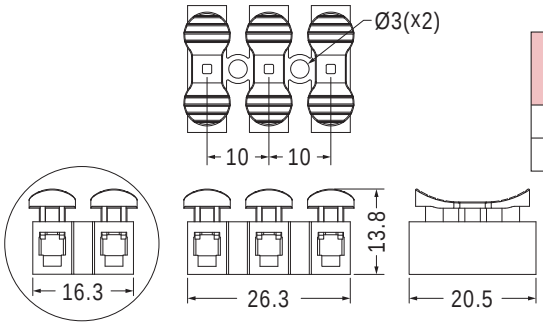


【 PA92 】 【 PA93 】


Part No.	線徑 mm²	安培 Amp	電壓 Volt
PA92	0.5~2.5	10.0	250V
PA93	0.5~2.5	10.0	250V

端子座 TERMINAL BLOCK


用途：用於大電流機器接線。

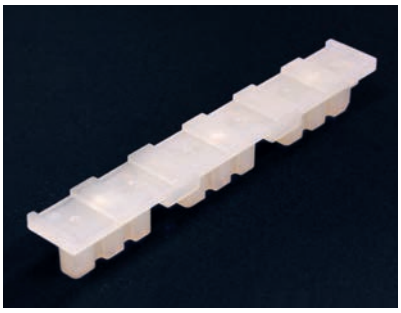


- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural
- Unit: mm

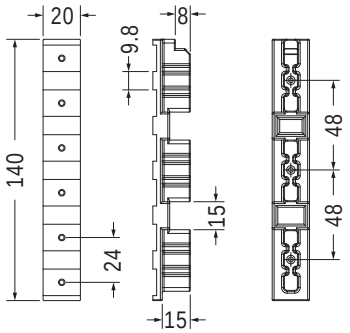

Part No.	Package
TERBL-6	50

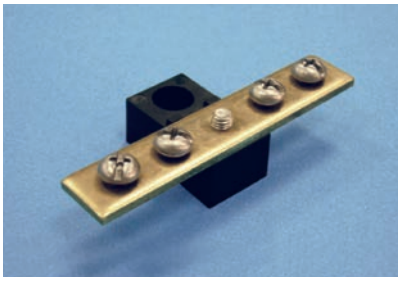

- Material: PBT (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm

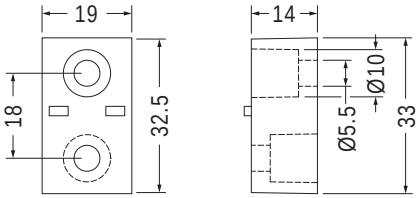


Part No.	Package
TERBL-33	200

彈簧螺紋端子 SCREW-ON CONNECTOR

用途：連接電線，內附彈簧，旋轉時彈簧則夾緊電線不易脫落。




- Material: PP
- Color: Orange
- Unit: mm
- Wire Spring Insert

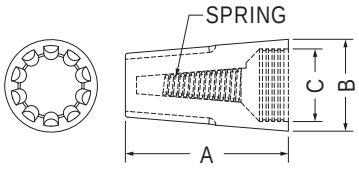

Part No.	Wire Size Range		A	B	C	Package
	Max.	Min.				
P1	#18x2	#24x2	15.2	8.6	6.5	1000
P2	#16x3	#20x3	17.7	9.9	7.1	
P3	#14x3	#18x3	22.0	12.4	9.8	500
P4	#14x3	#16x3	24.6	14.0	11.0	

- Material: PBT (UL) 94V-0
- Color: Black
- Unit: mm
- Wire Spring Insert

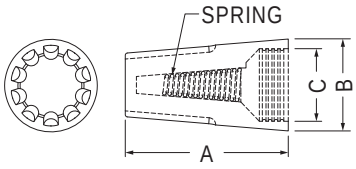


Part No.	A	B	螺紋內徑 C	適用電線範圍 Suitable Wires AWG	Package
P1B	15.2	8.6	6.5	22-18	1000
P3B	21.8	12.7	9.6	22-14	500

閉端端子 CLOSE END CONNECTOR


用途：電線剝去外皮插入端子內，用工具壓著即可，接觸良好不脫落。



- Housing Material: Nylon 66 (UL) 94V-2
- Metal Material: Aluminum
- Color: Natural
- Unit: mm




Part No.	Wire Range	A	B	C	Package
CE1	#22-18	2.6	7.8	18.0	1000
CE2	#22-14	3.1	9.5	20.0	
CE5	#22-10	4.4	12.5	25.2	

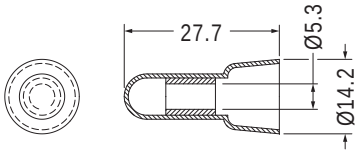

- Metal Material: Tin Plated Copper

Part No.	Wire Range	Package
CE8	#16-10	500



- Metal Material: Copper


Part No.	Wire Range	A	B	C	D	E	Package
C3	#22-16 1.25 mm²	2.7	6.5	18.0	7.7	5.1	1000
C4	#16-14 2 mm²	3.3	7.9	20.2	8.5	5.6	
C5	#12-10 5.5 mm²	4.3	10.5	24.7	11.6	7.2	
C8	#8 8 mm²	5.3	12.2	27.3	13.0	9.2	500

防水接線帽 WATERPROOF WIRE CONNECTORS

用途：通過UL486D認證，防水標準IP55等級適用於潮濕掩埋，可防水、防塵、防腐。可快速接線，剝線13-16mm線芯插入接線帽底部後，鎖緊即可。0.82-21mm²單芯、絞線、花線皆可使用。



- Material: Tough thermoplastic (PP)
- Spring Insert: Steel
- Color: Blue/Red/Black
- Unit: mm
- 耐壓(Voltage): 600V
- 使用溫度(Working temp): 105℃

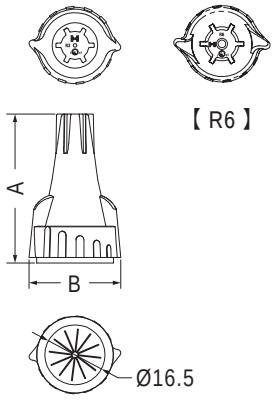


Part No.	Wire Range		A	B	Package
	Max.	Min.			
R3	3#12	2#20	40.9	25.2	100
R6	4#10	3#16	47.2	26.5	

電線固定夾片 WIRE CLAMP

用途：使用於電子、電腦產品內部電線之固定，可彎曲打開重覆使用，維修方便。



- Metal Material: Steel
- Plastic Material: PVC Tube (UL)
- Color: Black
- Unit: mm




Part No.	A	B	C	Package
WL3-32T	7.5	3.3	32.0	1000
WL3-52T	7.5	3.3	52.0	
WL3-60T	8.0	3.6	62.0	
WL4-35T	8.5	4.2	35.0	
WL4-50T	8.0	4.1	52.0	
WL4-70T	7.5	4.2	74.5	
WL4-78T	8.0	4.1	78.5	500
WL5-70T	8.4	5.1	60.0	
WL6-78T	10.0	6.0	78.0	

電線固定夾片 WIRE CLAMP


用途：使用於電子、電腦產品內部電線之固定，可彎曲打開重覆使用，維修方便。




- Metal Material: Steel
- Plastic Material: Polyolefin (UL)
- Color: Black
- Unit: mm



Part No.	A	B	C	Package
WL3-12H	7.5	3.3	12.0	1000
WL3-32H	7.5	3.3	32.0	
WL3-35H	5.6	3.5	29.9	
WL3-52H	7.5	3.2	52.0	
WL3-60H	8.0	3.6	62.0	
WL4-35H	8.5	4.2	35.0	
WL4-50H	8.0	4.1	52.0	
WL4-56H	8.0	4.1	48.2	
WL4-70H	7.5	4.2	74.5	
WL4-78H	8.0	4.1	78.5	500
WL4-90H	7.5	4.2	94.5	
WL5-70H	8.4	5.1	60.0	
WL6-78H	10.0	6.0	78.0	

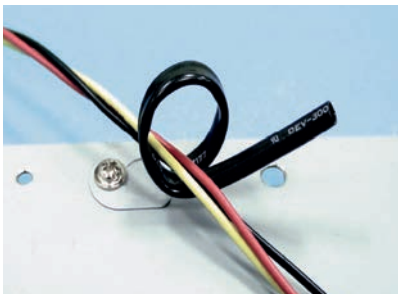


- Metal Material: Steel
- Plastic Material: PVC Tube (UL)
- Color: Black
- Unit: mm




Part No.	Package
WLC-1	500




- Metal Material: Tin Plated Steel
- Plated Material: Polyolefin (UL)/PVC Tube (UL)
- Color: Black
- Unit: mm






MOUNTING HOLE




Part No.	A	B	L	Package
WLD-30H	24.0	1.5 Heat Shrinking	30.0	1000
WLD-50H	47.0	1.5 Heat Shrinking	50.0	
WLD-30T	25.0	1.93 PVC Tube	30.0	
WLD-50T	45.0	1.93 PVC Tube	50.0	

測試點 TEST PIN

用途：焊於電子，電腦PC板上重要測試端點，可勾掛探棒，不短路，鍍金接觸良好，不氧化。

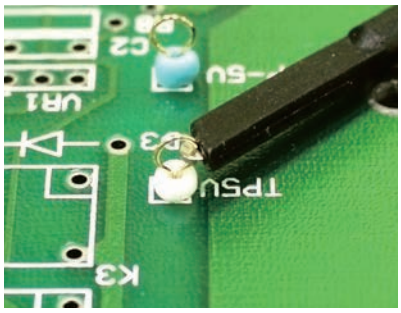

- Material: PBT (UL)
- Flame Class: 94V-0
- Pin Material: Phosphor Bronze
- Pin Finish: Gold Plated
- Unit: mm



MOUNTING HOLE Ø0.8~Ø1.0


Part No.	Color	Package
TEST-1(R)	Red	1000
TEST-1(GR)	Green	
TEST-1(BU)	Blue	
TEST-1(BK)	Black	
TEST-1(Y)	Yellow	
TEST-1(W)	White	

測試點 TEST PIN

用途：焊於電子，電腦PC板上重要測試端點，可勾掛探棒，不短路，鍍金接觸良好，不氧化。




- Material: PBT (UL)
- Flame Class: 94V-0
- Pin Material: Phosphor Bronze
- Pin Finish: Gold Plated
- Unit: mm



MOUNTING HOLE Ø0.8~Ø1.0


- Color: Black

Part No.	Package
TEST-3S	500




MOUNTING HOLE Ø0.8~Ø1.0

Part No.	Color	Package
TEST-3(R)	Red	1000
TEST-3(GR)	Green	
TEST-3(BU)	Blue	
TEST-3(BK)	Black	
TEST-3(Y)	Yellow	
TEST-3(W)	White	



MOUNTING HOLE Ø0.8~Ø1.0


Part No.	Color	Package
TEST-7(R)	Red	1000
TEST-7(G)	Green	
TEST-7(BU)	Blue	
TEST-7(BK)	Black	
TEST-7(Y)	Yellow	
TEST-7(W)	White	



MOUNTING HOLE Ø0.8~Ø1.0


- Washer Material: Ceramic
- Color: Milk White

Part No.	Package
TEST-7CN	1000

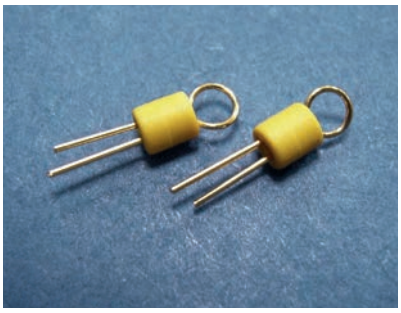


用途：焊於電子，電腦PC板上重要測試端點，可勾掛探棒，不短路，鍍金鍍錫接觸良好，不氧化。

- Material: PBT (UL)
- Flame Class: 94V-0
- Pin Material: Phosphor Bronze
- Pin Finish: Gold Plated
- Unit: mm



MOUNTING HOLE Ø0.9~Ø1.0


Part No.	Color	Package
TEST-55R	Red	1000
TEST-55GR	Green	
TEST-55BU	Blue	
TEST-55(B)	Black	
TEST-55Y	Yellow	
TEST-55W	White	



MOUNTING HOLE Ø1.5

- Pin Finish: Tin Plated


Part No.	Color	Package
TEST-87(R)	Red	1000
TEST-87(GR)	Green	
TEST-87(BU)	Blue	
TEST-87(B)	Black	
TEST-87(Y)	Yellow	
TEST-87	White	



MOUNTING HOLE Ø1.0

- Color: White


Part No.	Package
TEST-129	1000




MOUNTING HOLE Ø0.8~Ø1.0

Part No.	Package
TEST-2	1000

用途：焊於電子，電腦PC板上重要測試端點，接觸良好，不氧化。

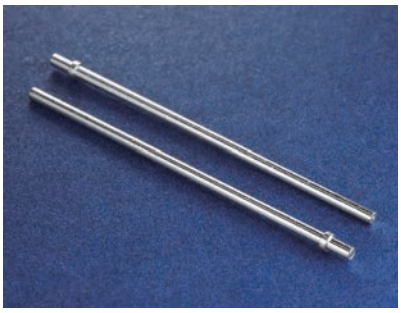


- Material: Tin Plated Brass
- Unit: mm




NEW

Part No.	Package
TEST-159	1000

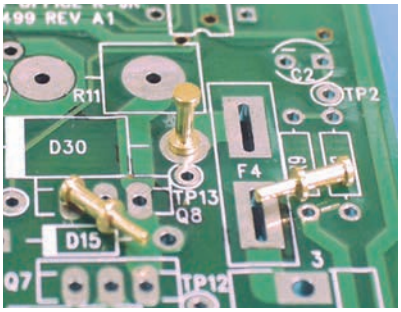


用途：焊於電子，電腦PC板上重要測試端點，鍍金接觸良好，不氧化。

- Material: Gold Plated Brass
- Unit: mm




MOUNTING HOLE Ø0.9~Ø1.0

Part No.	A	B	Package
TEST-4	14.0	10.0	1000
TEST-5	10.0	6.0	2000




MOUNTING HOLE Ø1.0

Part No.	A	B	C	D	E	Package
TEST-22	7.9	3.5	2.2	1.0	2.5	2000
TEST-34	8.0	3.8	1.6	0.8	1.6	



MOUNTING HOLE Ø1.0

Part No.	Package
TEST-8	2000




Part No.	Package
TEST-31	2000



用途：焊於電子，電腦PC板上重要測試端點，鍍鎳接觸良好，不氧化。

- Material: Nickel Plated Brass
- Unit: mm




MOUNTING HOLE Ø2.0

Part No.	Package
TEST-6	2000



用途：焊於電子，電腦PC板上重要測試端點，接觸良好，不氧化。

- Material: Tin Plated Copper
- Unit: mm

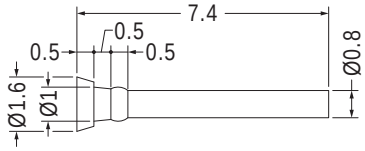

MOUNTING HOLE Ø0.8~Ø0.9


Part No.	Package
TEST-10	2000

測試針 TEST PIN

用途：焊於電子，電腦PC板上重要測試端點，接觸良好，不氧化。




- Material: Tin Plated Brass
- Unit: mm




MOUNTING HOLE Ø0.9

Part No.	A	Package
TEST-24	15.0	2000
TEST-25	6.0	
TEST-26	8.5	
TEST-28	10.0	




Part No.	Package
TEST-140	1000






MOUNTING HOLE: ØG

Part No.	A	B	C	D	G	Package
TEST-9	16.0	10.0	1.5	1.0	1.0	2000
TEST-23	18.0	10.0	2.5	1.6	1.7	
TEST-136	19.5	16.5	2.5	1.6	1.7	

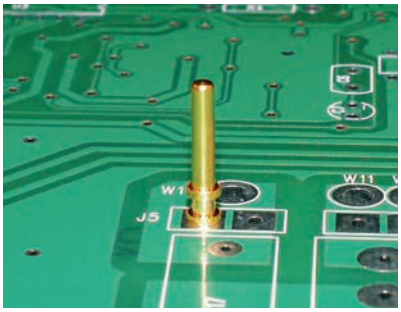

- Material: Gold Plated Brass
- Unit: mm

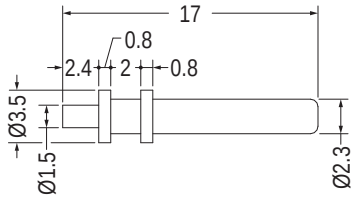


Part No.	Package
TEST-27	2000




- Material: Tin Plated Brass
- Unit: mm

用途：焊於電子，電腦PC板上重要測試端點，可勾掛探棒，不短路，接觸良好，不氧化。




MOUNTING HOLE Ø0.8


Part No.	Package
TEST-12	2000

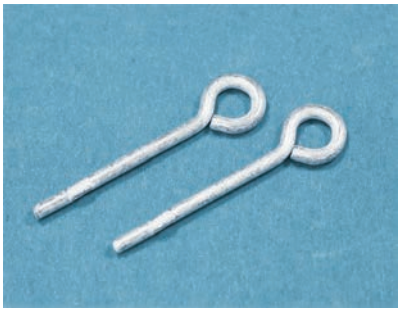

- Material: Tin Plated Copper
- Unit: mm




Part No.	A	Package
JUMP-21	18.7	1000
JUMP-34	15.0	




Part No.	Package
JUMP-26	2000

測試點 TEST PIN

用途：配合焊接，做為PC板與PC板之導電與間隔之用或測試端點。

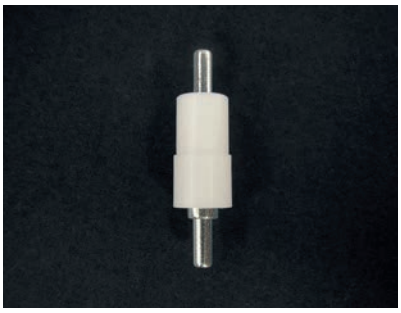


- Material: Nylon 66 (UL)/94V-0
- Pin Material: Brass
- Color: Natural
- Unit: mm




Part No.	Package
ROFF-10F	1000

測試座 TEST HOLDER

用途：做為電路板電氣連接或測試端點。

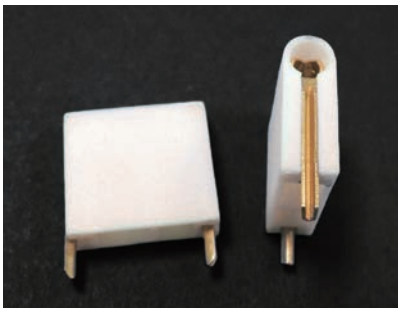



- Material: Nylon 66 (UL)
- Material: Gold Plated Brass
- Flame Class: 94V-0
- Color: Natural
- Unit: mm

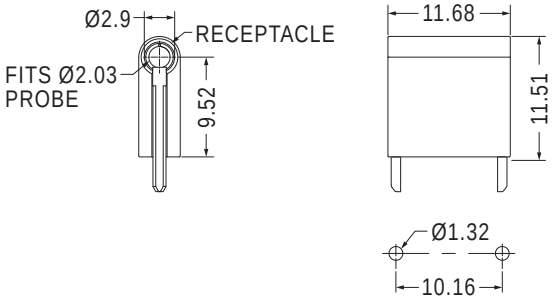

RECOMMENDED
MOUNTING HOLE PARTERN

Part No.	Package
TEST-114	1000

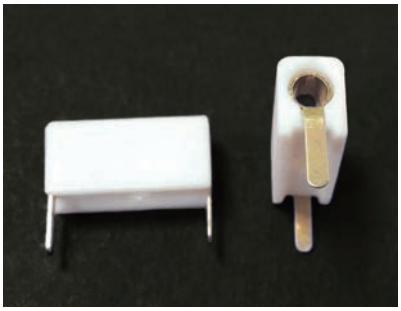

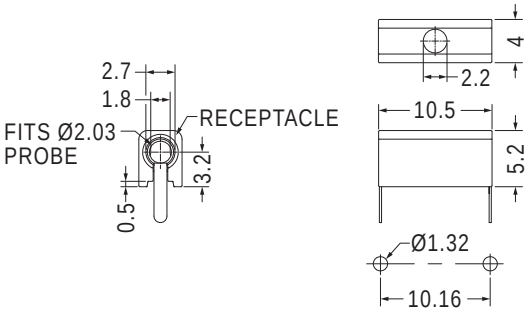

RECOMMENDED
MOUNTING HOLE PARTERN


Part No.	Package
TEST-115	1000

跳線 JUMPER WIRE

用途：做為跳線使用。




- Material: Tin Plated Copper
- Plastic Material: Polyolefin (UL)
- Color: Black
- Unit: mm

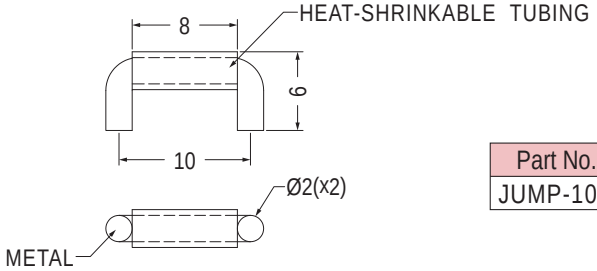


Part No.	Package
JUMP-10H	1000

保險絲座 FUSE HOLDER


用途：用於保險絲之絕緣與間隔。

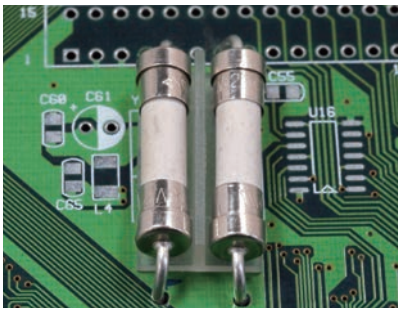

- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural
- Unit: mm




Part No.	Package
FHBBU-22	1000

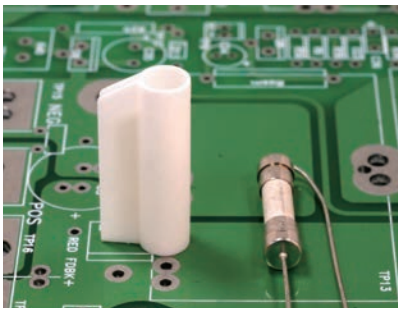


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

用途：將保險絲固定於PCB板座上，拆卸方便。




Part No.	Package
FUSCV-1	500




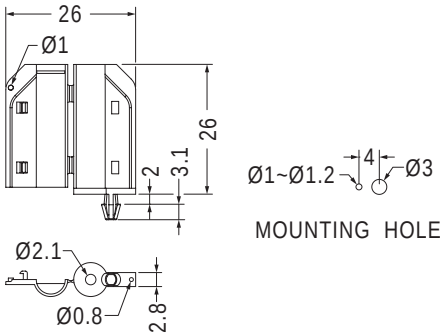


Part No.	Package
FUSCV-3	500




Part No.	Package
FUSCV-10	500

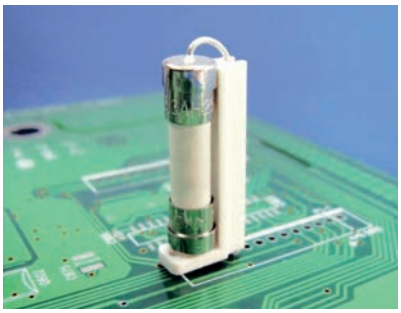

- Material: PBT (UL)
- Flame Class: 94V-0
- Color: Natural
- Unit: mm




Part No.	Package
FUSCV-2	500




Part No.	Package
FUSCV-4	500

保險絲座 FUSE HOLDER

用途：將保險絲固定於PC板上，拆裝方便。

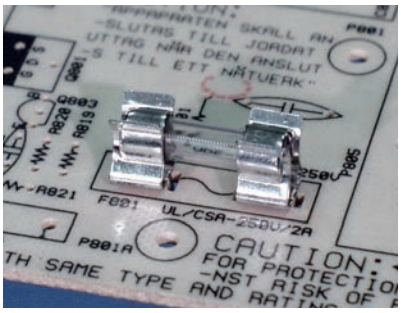



- Material: Bright Tin Plated Phosphor Bronze
- Unit: mm

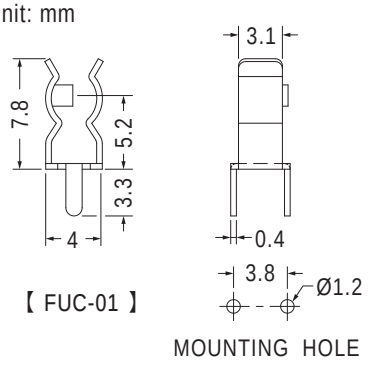


Part No.	適用保險絲 Cartridge Fuse	Package
FUC-01	Ø3.6	1000
FUC-02	Ø5.2	
FUC-17A	Ø5.2	


- Material: Bright Tin Plated Brass
- Unit: mm

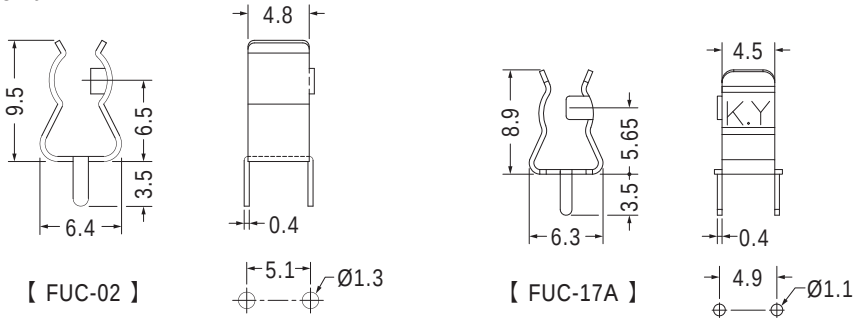

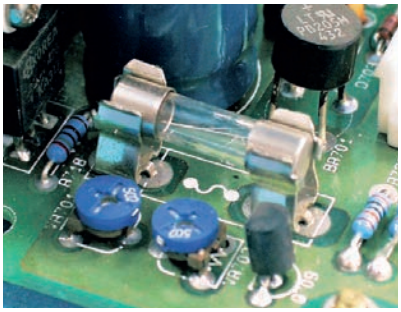


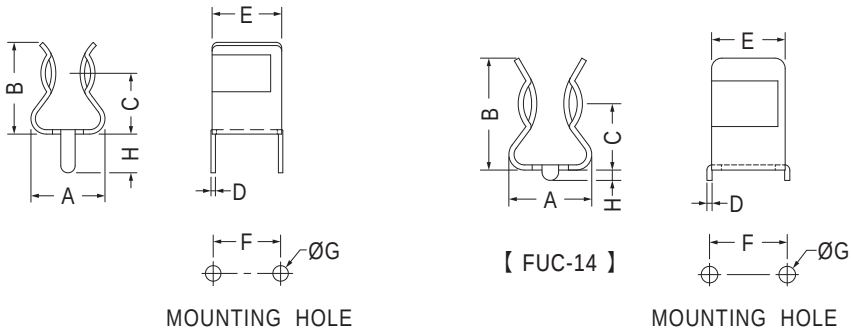

Part No.	A	B	C	D	E	F	G	H	適用保險絲 Cartridge Fuse	Package
FUC-03	6.8	8.3	5.5	0.4	6.3	6.0	1.4	3.6	Ø5.2	1000
FUC-03A	6.4	8.8	5.5	0.5	6.3	6.7	1.7	3.6	Ø5.2	
FUC-04	8.1	10.9	6.8	0.5	7.0	7.5	1.7	3.5	Ø6.3	
FUC-14	8.1	10.9	6.8	0.5	7.0	7.5	1.7	1.0	Ø6.3	

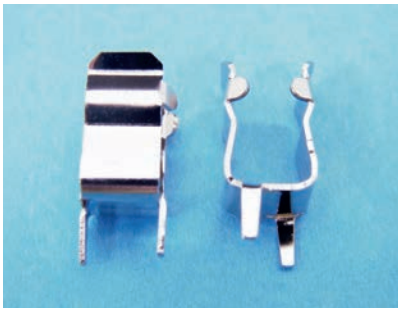


- Material: Nickel Plated Phosphor Bronze
- Unit: mm

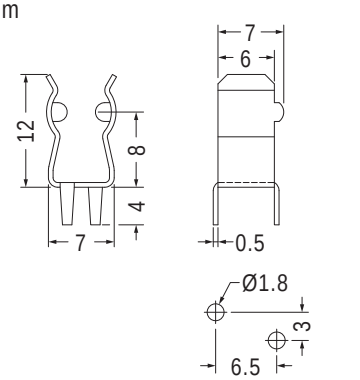


Part No.	適用保險絲 Cartridge Fuse	Package
FUC-09	Ø5.2	1000

保險絲座 FUSE HOLDER


用途：將保險絲固定於板座上，拆裝方便。

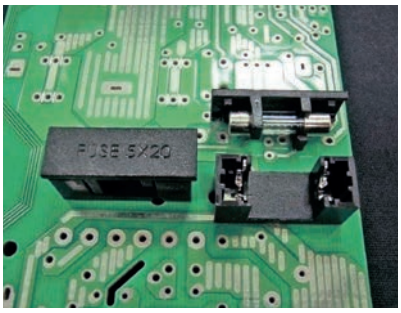


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Pin Material: Tin Plated Brass
- Color: Black
- Unit: mm




FUSE HOLDER



COVER




ASSEMBLE




MOUNTING HOLE

Part No.	Package
FUSEC-1	200

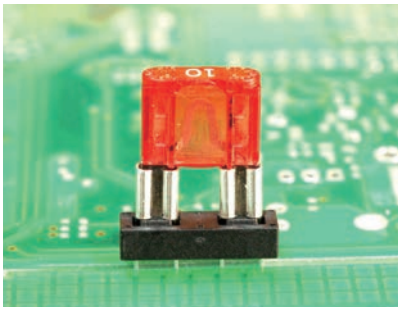


- Body Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Terminal Material: Tin Plated Brass
- Color: Natural/Black
- Unit: mm

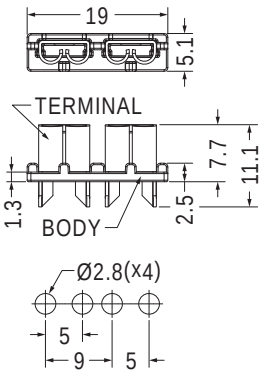


MOUNTING HOLE
THICKNESS 1.6~2.0

Part No.	Package
FUSCV-6F	1000

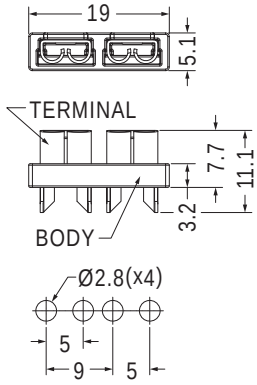


MOUNTING HOLE
THICKNESS 1.6~2.0

Part No.	Package
FUSCV-7F	1000

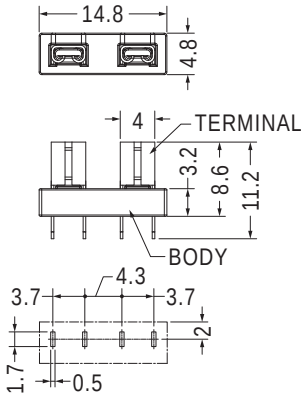


MOUNTING HOLE

Part No.	Package
FUSCV-8F	1000

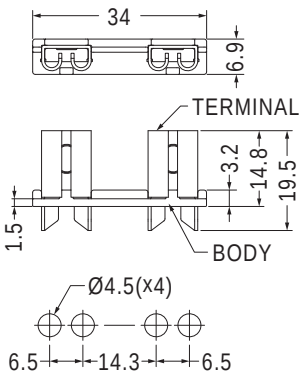


MOUNTING HOLE
THICKNESS 3.0

Part No.	Package
FUSCV-12F	1000

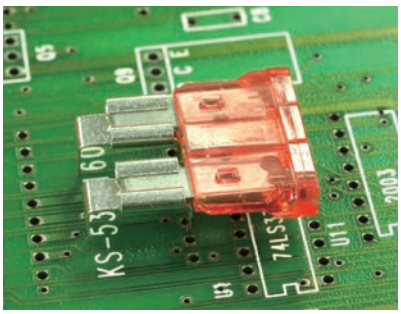


- Material: Bright Tin Plated Brass
- Unit: mm

用途：用於汽車保險絲。

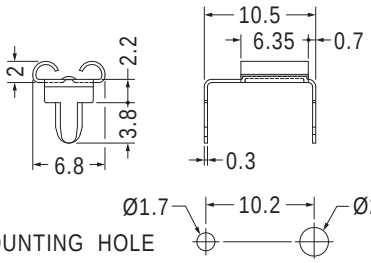


MOUNTING HOLE

Part No.	Package
FUC-5A	1000

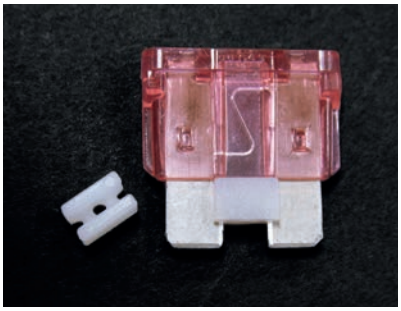

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


用途：用於汽車保險絲之間隔、墊高作用。




Part No.	Package
FUA-1	2000


PC板焊接端子 PCB TERMINAL

用途：PC板上之焊接電線端子，耐大電流，配合螺絲固定端子。

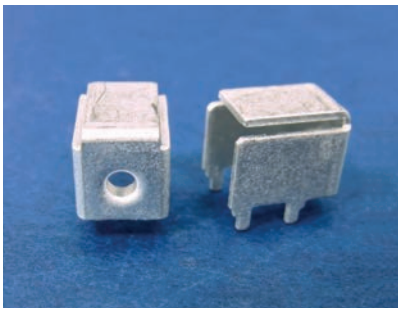


- Material: Tin Plated Brass
- Suggested Current: 15 Amps
- Unit: mm

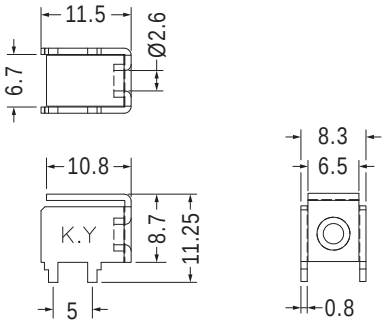





MOUNTING HOLE

Part No.	Package
PCB-34	1000

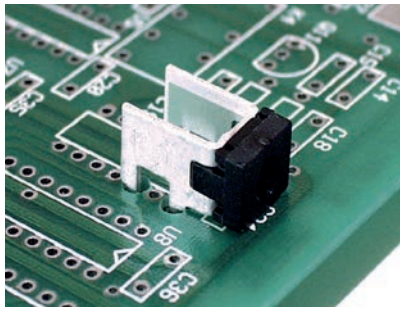


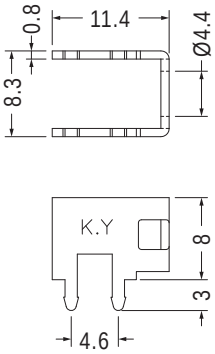




MOUNTING HOLE


Part No.	Package
PCB-21(4.4)	1000
組合件 (ASSY)	
PCB-21(4.4)F	PCB-21(4.4)+PCB-4CV



【 PCB-4F 】

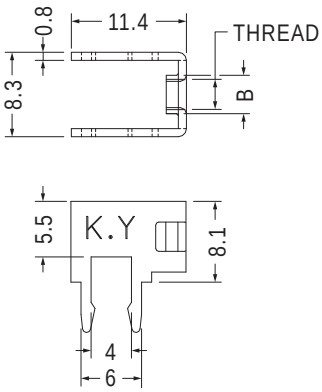


【 PCB-4 】



MOUNTING HOLE

Part No.	B	Thread	Package
PCB-4	3.5	M3x0.5P	1000
PCB-4(M4)	4.4	M4x0.7P	
PCB-4(632)	4.4	6-32 UNC	
組合件 (ASSY)			
PCB-4(M3)F	PCB-4+PCB-4CV		
PCB-4(M4)F	PCB-4(M4)+PCB-4CV		
PCB-4(632)F	PCB-4(632)+PCB-4CV		



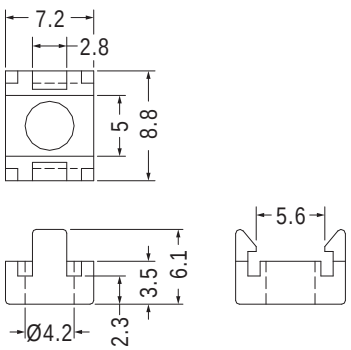


- Material: Nylon 66 (UL)
- Flame Class: 94V-2
- Color: Black


Part No.	Package
PCB-4CV	1000

PC板焊接端子 PCB TERMINAL


用途：PC板上之焊接電線端子，耐大電流，配合螺絲固定端子。

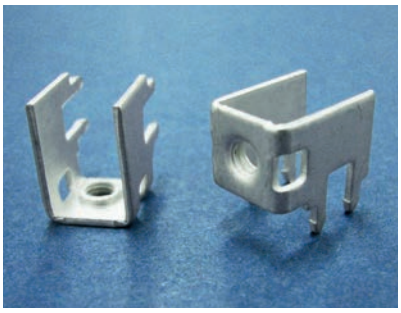


- Material: Tin Plated Brass
- Suggested Current: 15 Amps
- Unit: mm

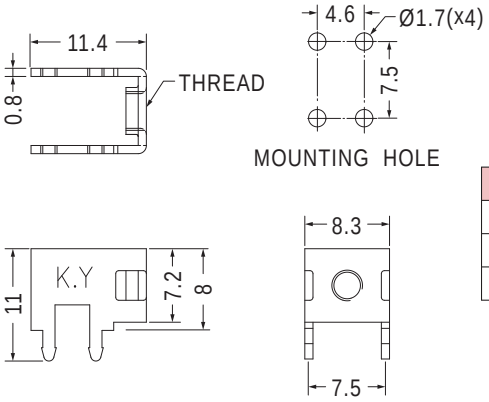



Part No.	Thread	Package
PCB-12	M3x0.5P	1000
PCB-12(M4)	M4x0.7P	
PCB-12(632)	6-32 UNC	

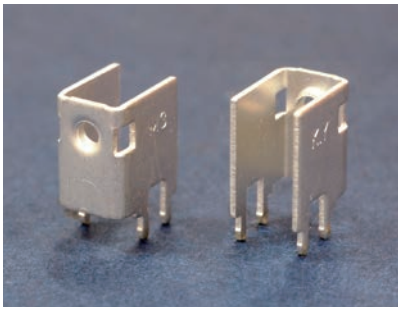

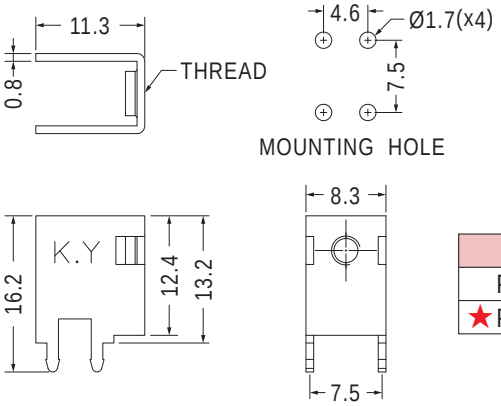



Part No.	Thread	Package
PCB-102	M3x0.5P	1000
★PCB-102(M4)	M4x0.7P	

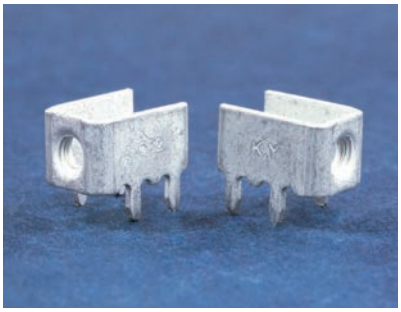

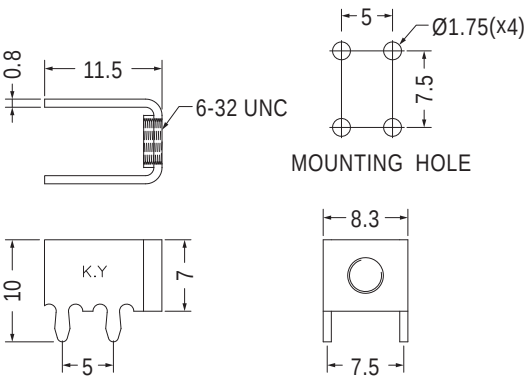

Part No.	Package
PCB-70	1000

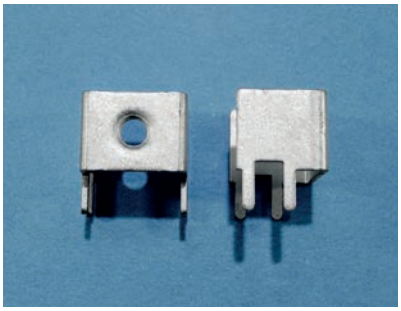


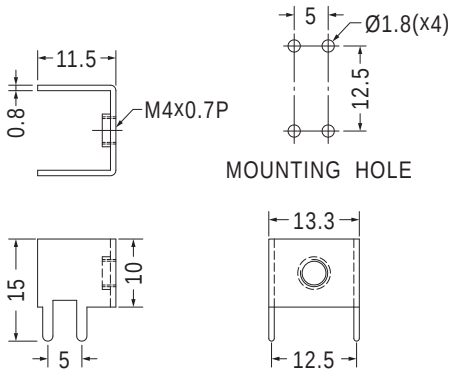


Part No.	Package
PCB-15(M4)	1000


PC板焊接端子 PCB TERMINAL

用途：PC板上之焊接電線端子，耐大電流，配合螺絲固定端子。

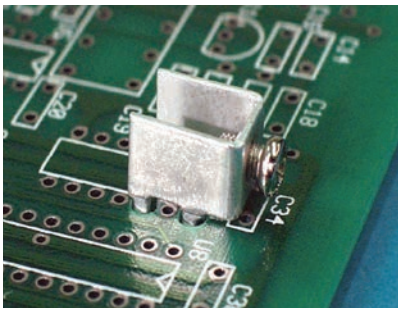


- Material: Tin Plated Brass
- Suggested Current: 15 Amps
- Unit: mm







Part No.	Thread	Package
PCB-2	M3x0.5P	1000
PCB-2(M4)	M4x0.7P	
PCB-2(6-32)	6-32 UNC	




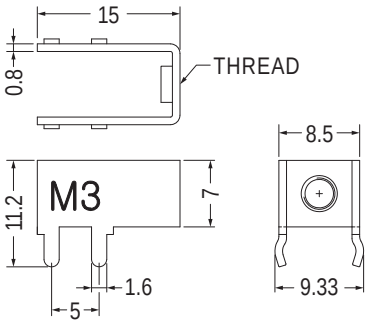




Part No.	Thread	Package
PCB-78	M3x0.5P	1000
★PCB-78(M4)	M4x0.7P	

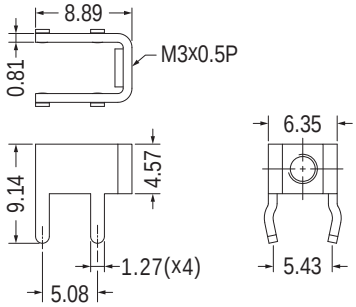




Part No.	Package
PCB-128	1000




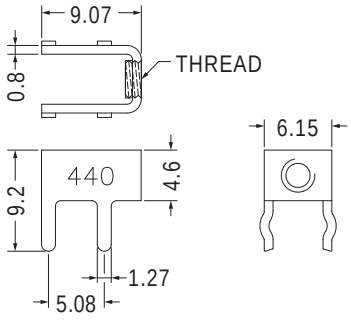



Part No.	Thread	Package
★PCB-47ST(M3)	M3x0.5P	1000
PCB-47ST(440)	4-40 UNC	



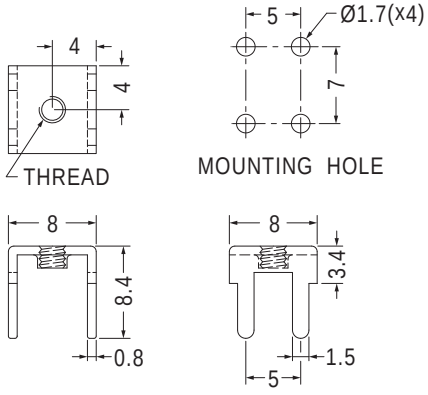


Part No.	Thread	Package
PCB-1	M3x0.5P	1000
PCB-1(M4)	M4x0.7P	
PCB-1(6-32)	6-32 UNC	

PC板焊接端子 PCB TERMINAL


用途：PC板上之焊接電線端子，耐大電流，配合螺絲固定端子。




- Material: Tin Plated Brass
- Suggested Current: 15 Amps
- Unit: mm

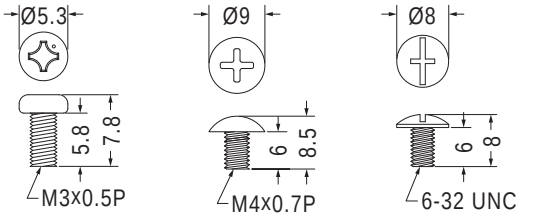


【 M3-5.8ST 】 【 M4-6ST 】 【 STP632-6-1 】

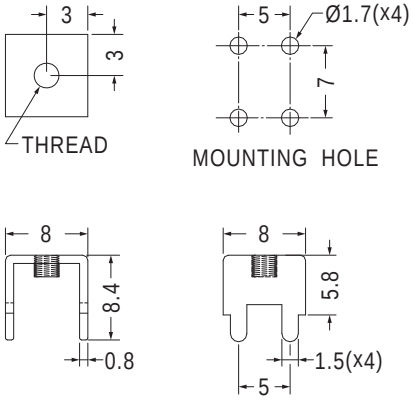


Part No.	Thread	Package
PCB-11	M3x0.5P	1000
PCB-11(M3.5)	M3.5x0.6P	
PCB-11(M4)	M4x0.7P	
PCB-11(632)	6-32 UNC	
組合件 (ASSY)		
PCB-11M3-5.8F	PCB-11+M3-5.8ST	
PCB-11M4-6F	PCB-11(M4)+M4-6ST	
PCB-11(632)F	PCB-11(632)+STP632-6-1	

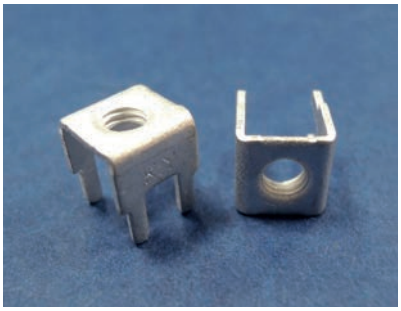

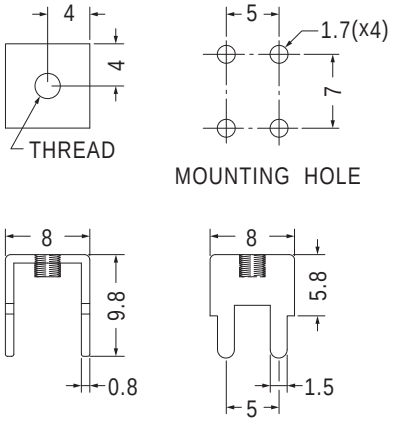

Part No.	Thread	Package
★PCB-66(M3)	M3x0.5P	1000
PCB-66(M4)	M4x0.7P	




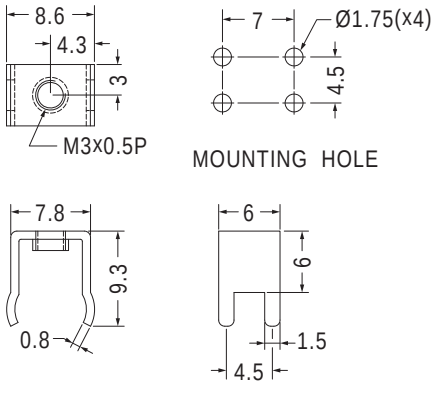


Part No.	Package
PCB-17	1000

PC板焊接端子 PCB TERMINAL


用途：PC板上之焊接電線端子，耐大電流，配合螺絲固定端子。

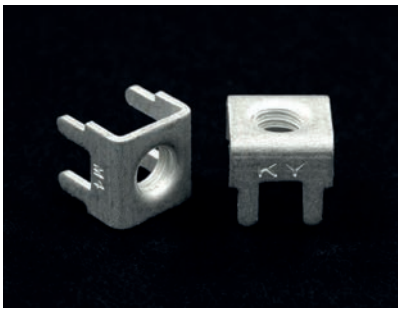

- Material: Tin Plated Brass
- Suggested Current: 15 Amps
- Unit: mm

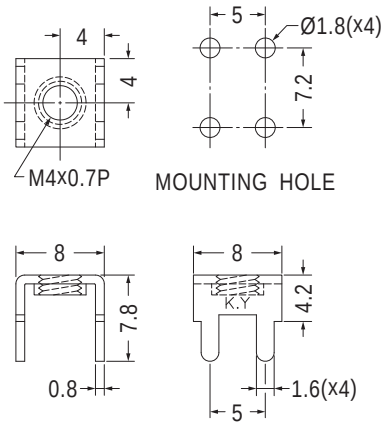


Part No.	Package
PCB-71	1000

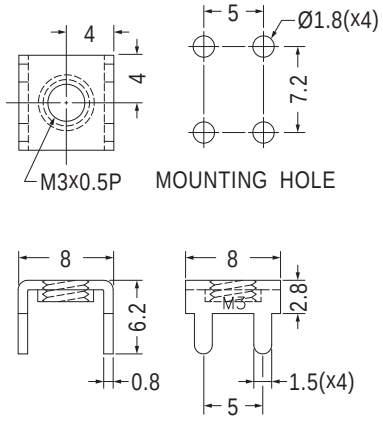


Part No.	Package
PCB-75	1000




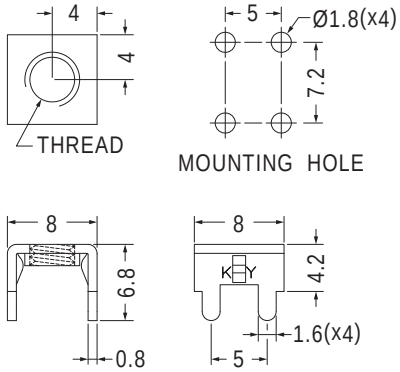


Part No.	Thread	Package
PCB-9-1	M3x0.5P	1000
PCB-9-1(M4)	M4x0.7P	
PCB-9-1(632)	6-32 UNC	

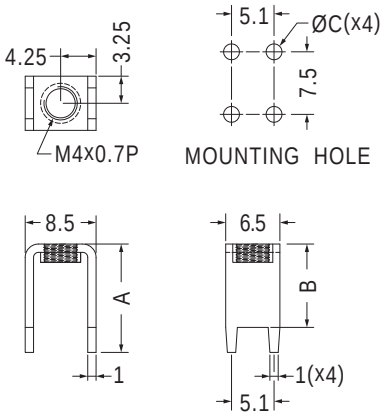

Part No.	A	B	C	Package
PCB-37M4	8.0	5.0	1.7	1000
PCB-58M4	13.0	10.0	1.9	

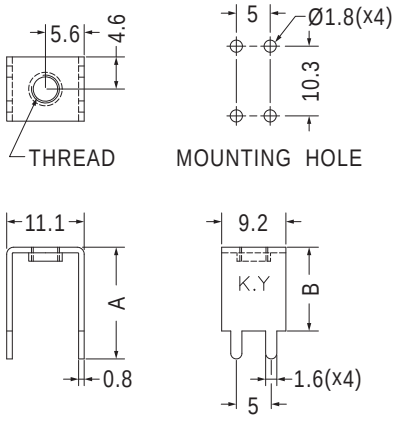


Part No.	A	B	Thread	Package
PCB-27(M3)	16.0	12.0	M3x0.5P	1000
PCB-27(M4)	16.0	12.0	M4x0.7P	
PCB-28(M3)	18.8	14.8	M3x0.5P	
PCB-28(M4)	18.8	14.8	M4x0.7P	

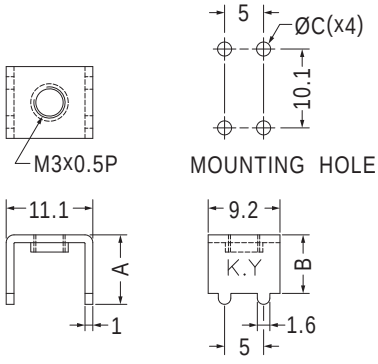


Part No.	A	B	C	Package
PCB-18	8.9	7.5	1.8	1000
PCB-106	22.25	18.25	1.9	500

PC板焊接端子 PCB TERMINAL

用途：PC板上之焊接電線端子，耐大電流，配合螺絲固定端子。

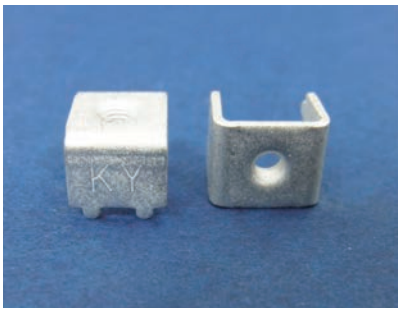

- Material: Tin Plated Brass
- Suggested Current: 20 Amps
- Unit: mm

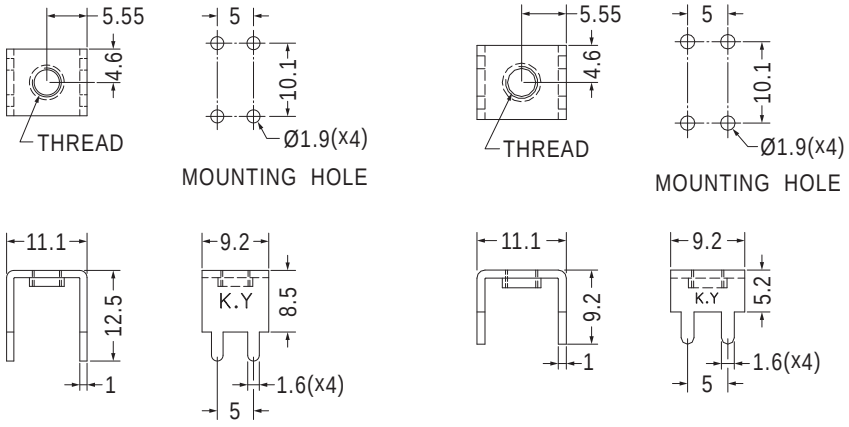

Part No.	Thread	Package
PCB-7	M3x0.5P	1000
PCB-7(M4)	M4x0.7P	
PCB-7(632)	6-32 UNC	


Part No.	Thread	Package
PCB-8	M3x0.5P	1000
PCB-8(M4)	M4x0.7P	
PCB-8(632)	6-32 UNC	

PC板焊接端子加螺絲(附四角華司) PCB TERMINAL


用途：PC板上之焊接電線端子，耐大電流，配合螺絲固定端子。



- Material: Tin Plated Brass
- Suggested Current: 15 Amps
- Unit: mm

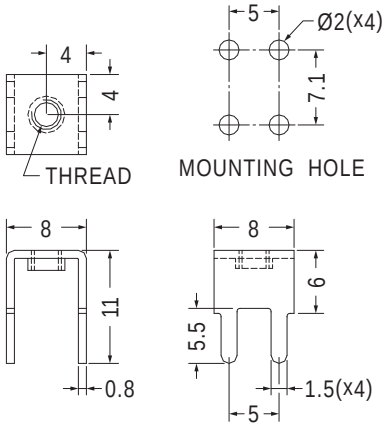


Part No.	Thread	Package
PCB-10A(M3)	M3x0.5P	1000
PCB-10A	M3.5x0.6P	
PCB-10AM4	M4x0.7P	
PCB-10A(632)	6-32 UNC	

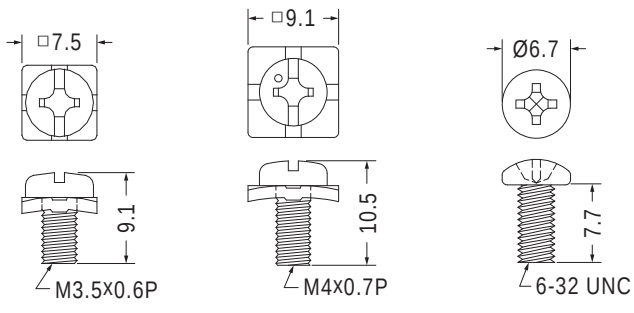


組合件 (ASSY)	
PCB-10	PCB-10A+PCB-10B
PCB-10M4F	PCB-10AM4+PCB-10BM4
PCB-10(632)F	PCB-10A(632)+632-8ST

PC板焊接端子 PCB TERMINAL

用途：PC板上之焊接電線端子，耐大電流，配合螺絲固定端子。

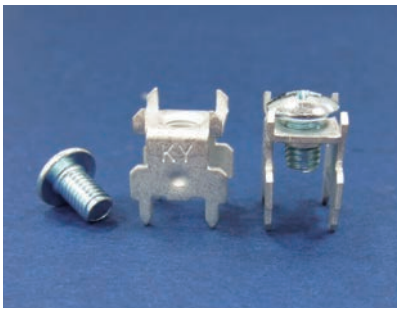


- Material: Tin Plated Brass
- Suggested Current: 20 Amps
- Unit: mm

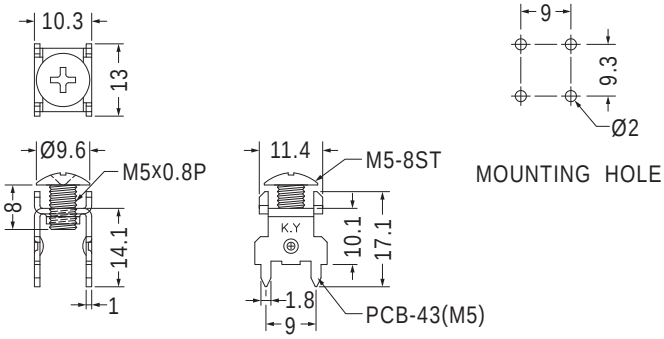


Part No.	組合件 (ASSY)	Package
PCB-43(M5)F	PCB-43(M5)+M5-8ST	500




- Material: Tin Plated Brass
- Suggested Current: 30 Amps
- Unit: mm

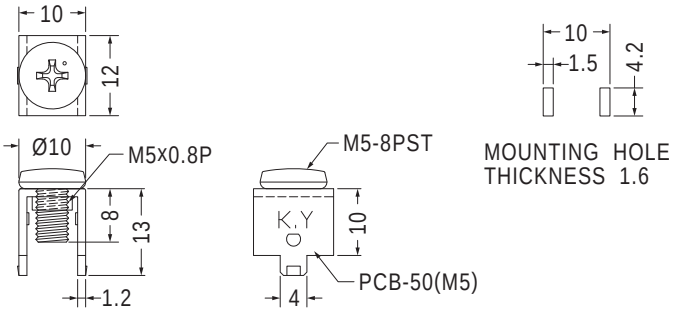


Part No.	組合件 (ASSY)	Package
PCB-50M5F	PCB-50(M5)+M5-8PST	500

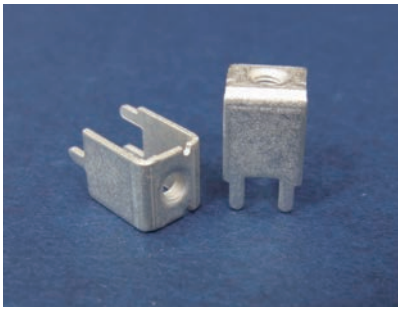


- Material: Tin Plated Brass
- Suggested Current: 15 Amps
- Unit: mm

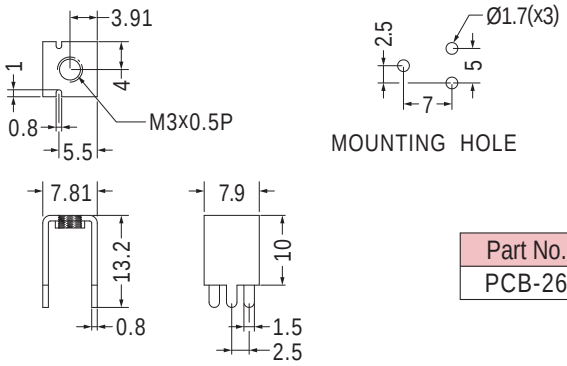

Part No.	Package
PCB-26	1000

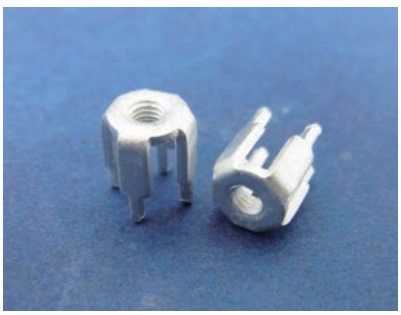


- Material: Tin Plated SPCC
- Suggested Current: 15 Amps
- Unit: mm

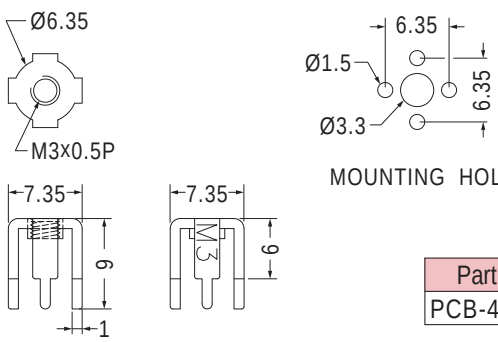


Part No.	Package
PCB-49(M3)	1000

PC板焊接端子 PCB TERMINAL


用途：PC板上之焊接電線端子，耐大電流，配合螺絲固定端子。

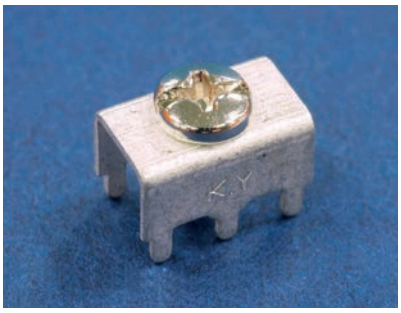


- Terminal Material: Tin Plated Brass
- Screw Material: Nickel Plated Steel
- Suggested Current: 30 Amps
- Unit: mm

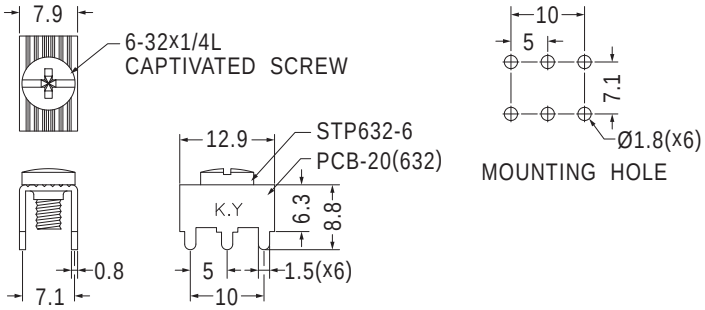


Part No.	組合件(ASSY)	Package
PCB-20(632)F	PCB-20(632)+STP632-6	1000

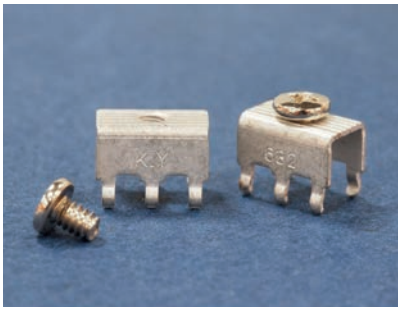


- Material: Tin Plated Brass
- Suggested Current: 30 Amps
- Unit: mm

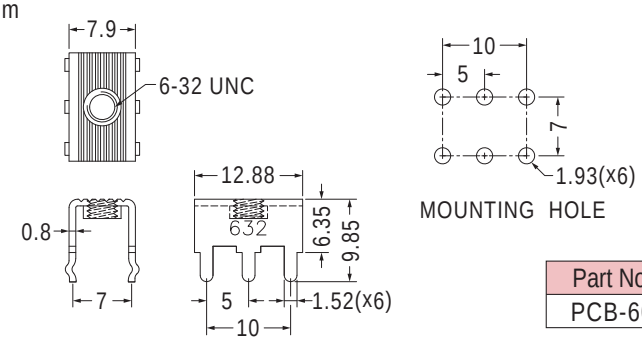


Part No.	Package
PCB-60	1000

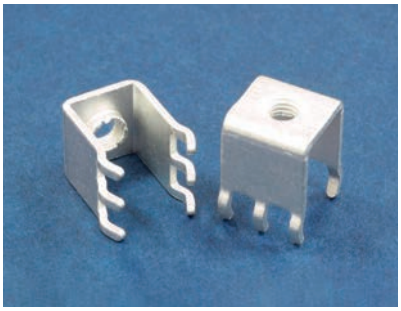


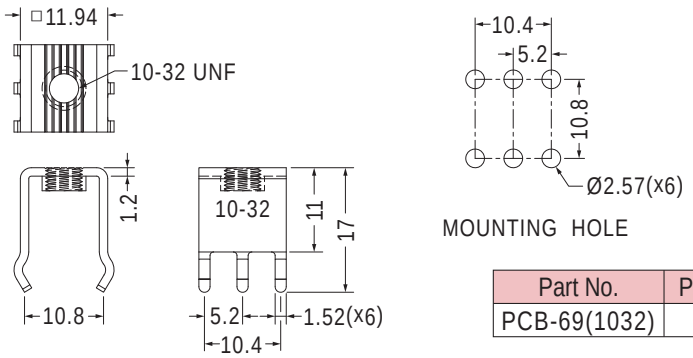

Part No.	Package
PCB-69(1032)	1000

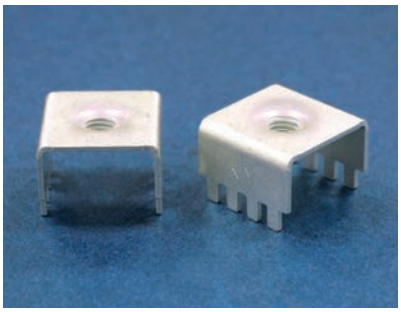


- Material: Tin Plated Copper
- Suggested Current: 50 Amps
- Unit: mm

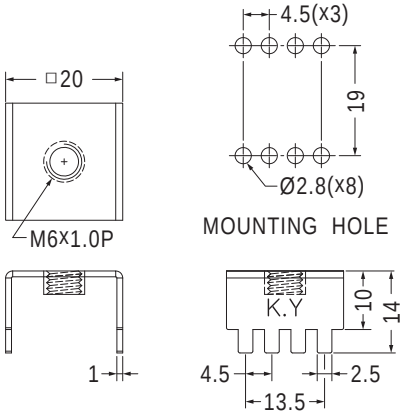

Part No.	Package
PCB-82	250

- Material: Tin Plated Copper
- Suggested Current: 125 Amps
- Unit: mm

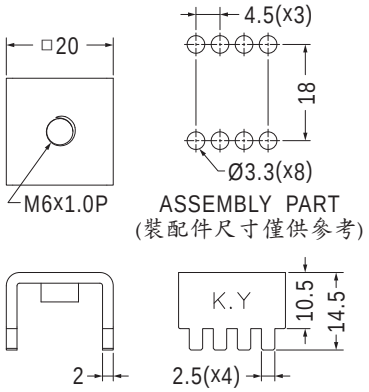


Part No.	Package
PCB-82-1	250


PC板焊接端子 PCB TERMINAL

用途：焊接於PC板上，另一端插接端子。



- Material: Tin Plated Brass
- Suggested Current: 15 Amps
- Unit: mm







Part No.	Package
PCRL250	1000





- Material: Tin Plated Brass
- Unit: mm

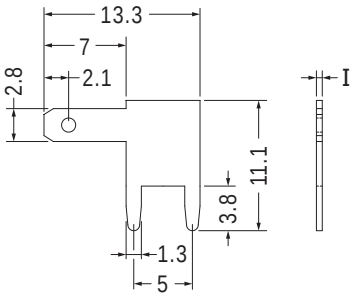



Part No.	I	Suggested Current	Package
PCF110	0.5	10 Amps	1000
PCF1108	0.8	15 Amps	

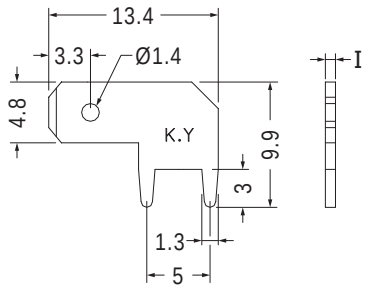






Part No.	I	Suggested Current	Package
PCF187(5)	0.5	10 Amps	1000
PCF187	0.8	15 Amps	




- Material: Tin Plated Brass
- Suggested Current: 15 Amps
- Unit: mm








Part No.	A	B	C	H	L	Package
PCF250	16.0	8.0	2.0	3.0	12.1	1000
PCF250-11	20.0	12.3	1.7	3.8	12.7	

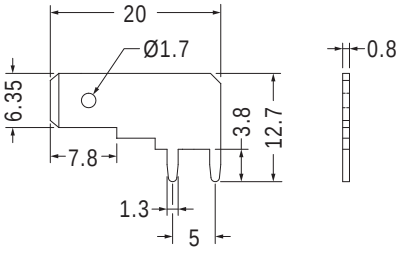




Part No.	Package
PCFL250	1000


PC板焊接端子 PCB TERMINAL

用途：PC板上之焊接端子。




- Material: Tin Plated Brass
- Suggested Current: 15 Amps
- Unit: mm

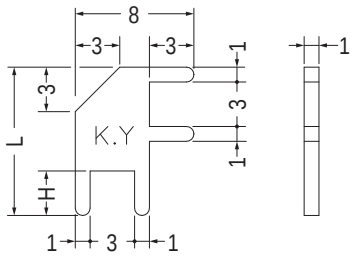





MOUNTING HOLE

Part No.	H	L	Package
PCLT-10	3.0	10.0	1000
PCLT-11	4.0	11.0	

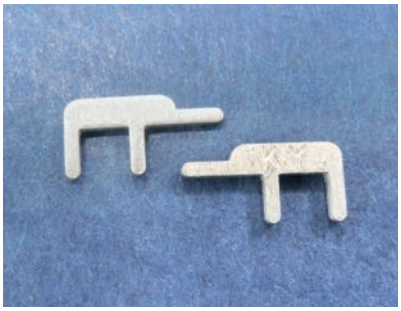


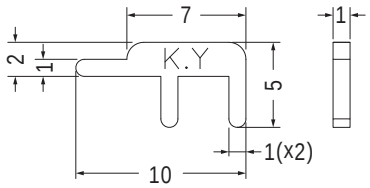




MOUNTING HOLE

Part No.	Package
PCLTA-1	1000

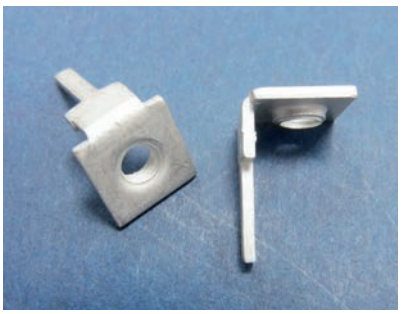


- Material: Tin Plated Brass
- Suggested Current: 25 Amps
- Unit: mm


用途：PC板上之焊接電線端子，美觀、牢固、耐電流大，配合螺絲固定端子。




MOUNTING HOLE Ø2.5



Part No.	Package
PCB-22(M4)	1000

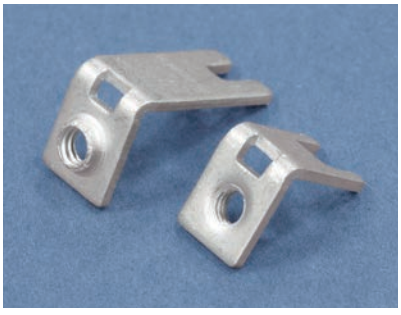


- Material: Tin Plated Brass
- Unit: mm

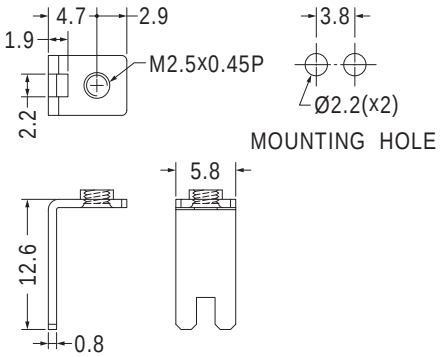

MOUNTING HOLE

Part No.	Suggested Current	Package
PCB-73	20 Amps	1000

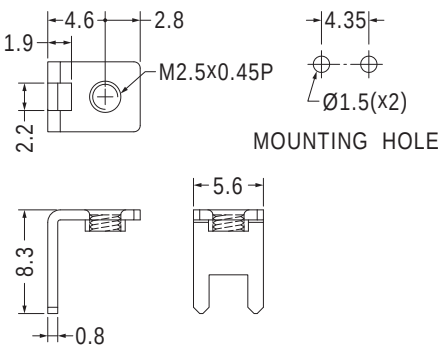


MOUNTING HOLE


Part No.	Suggested Current	Package
PCB-74	15 Amps	1000

PC板焊接端子 PCB TERMINAL


用途：PC板上之插接電線端子，美觀、牢固、耐電流大，配合螺絲固定端子。

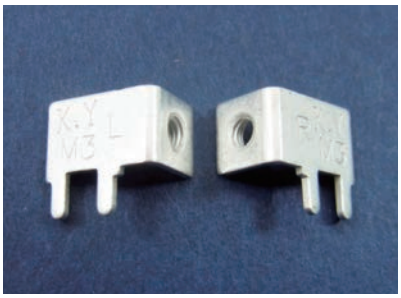


- Material: Tin Plated Brass
- Suggested Current: 15 Amps
- Unit: mm

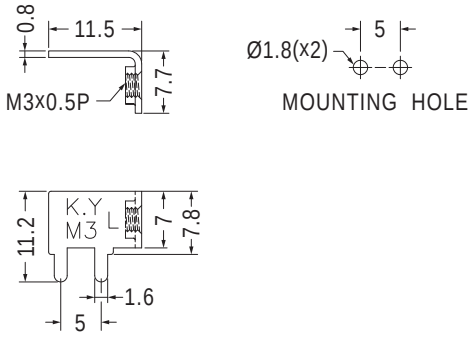


Part No.	Package
PCB-54L(M3)	1000

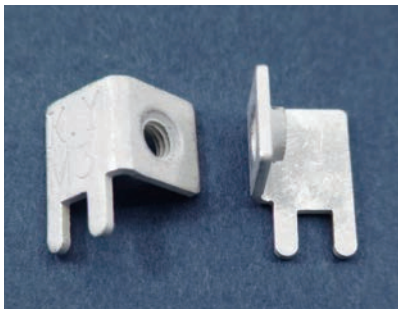

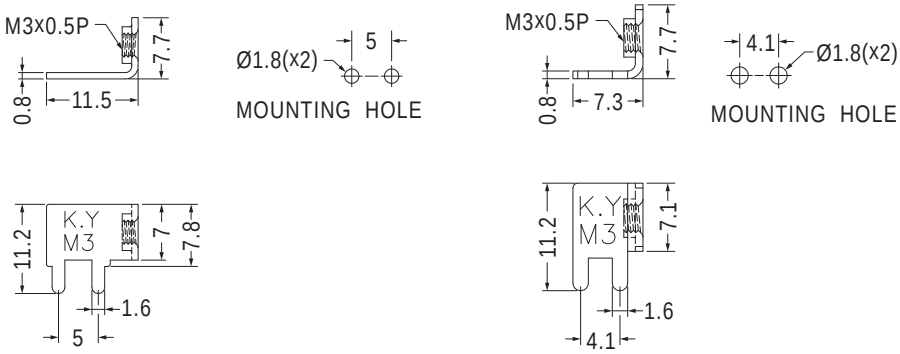


Part No.	Package
PCB-54R(M3)	1000


Part No.	Package
PCB-55(M3)	1000

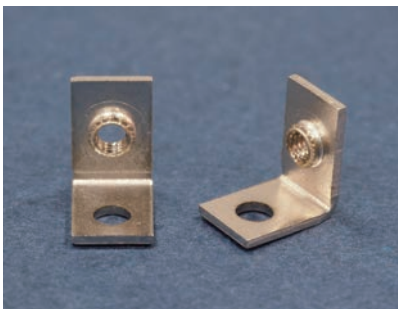


- Material: Nickel Plated Steel
- Unit: mm

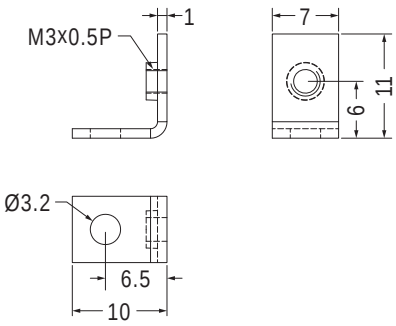

Part No.	Package
PCB-99	1000

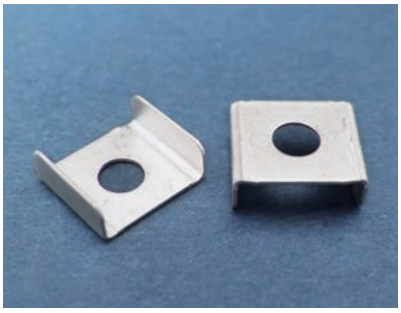


- Material: Tin Plated Brass
- Unit: mm




Part No.	Package
PCB-25(3.2)	1000


PC板焊接端子 PCB TERMINAL

用途：PC板上之焊接電線端子，美觀、牢固、耐電流大，配合螺絲固定端子。

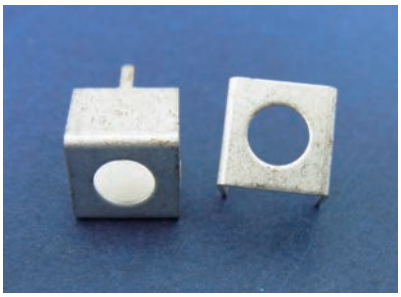


- Material: Tin Plated Brass
- Suggested Current: 10 Amps
- Unit: mm

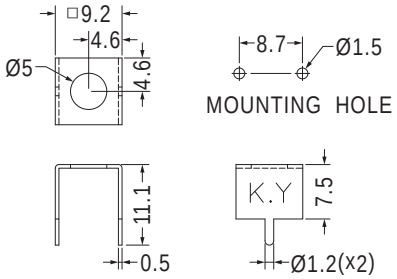

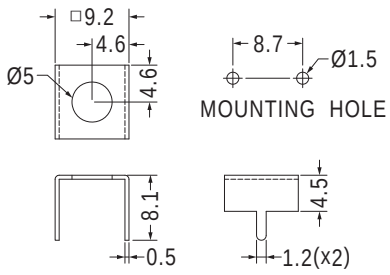


Part No.	Package
PCB-29	1000

Part No.	Package
PCB-44	1000

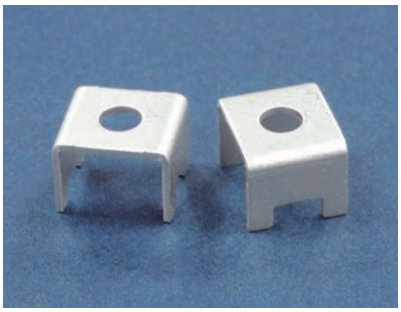


- Material: Tin Plated Brass
- Suggested Current: 30 Amps
- Unit: mm

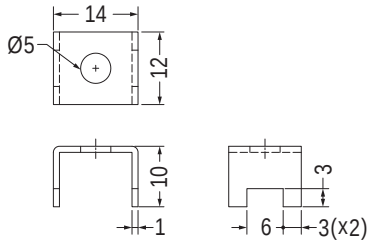


Part No.	Package
PCB-77	1000




- Material: Tin Plated Phosphor Bronze
- Suggested Current: 30 Amps
- Unit: mm

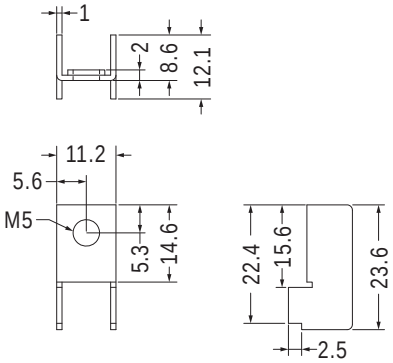




MOUNTING HOLE


Part No.	Package
PCB-23(M5)	1000

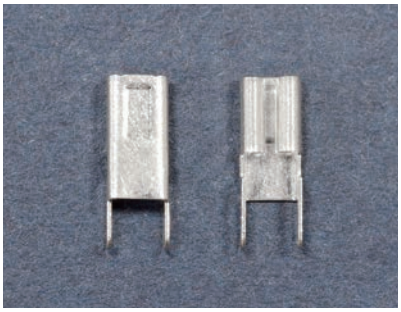

- Material: Tin Plated Brass
- Suggested Current: 10 Amps
- Unit: mm


用途：PC板上之焊接電線端子或汽車保險絲，耐電流大。






MOUNTING HOLE
THICKNESS 1.6

Part No.	Package
PCFS156A	1000

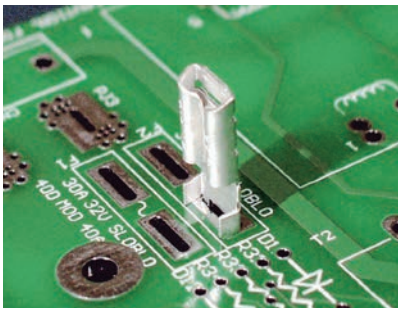


- Material: Tin Plated Brass
- Suggested Current: 10 Amps @ 500V AC
- Unit: mm

用途：焊接於PC板上，另一端插接公端，耐電流大。

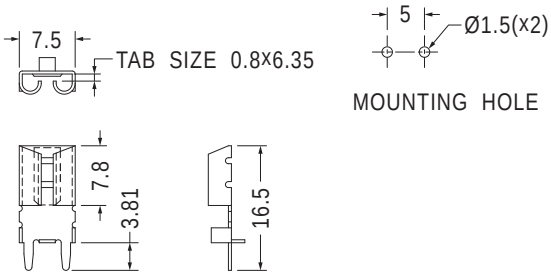


Part No.	Package
PCFS250L	1000

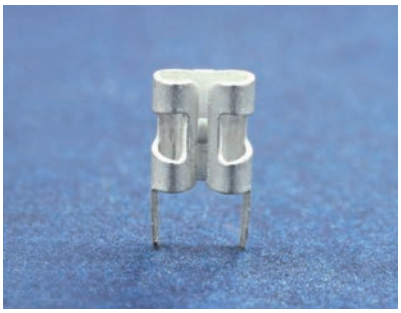

- Material: Tin Plated Brass
- Suggested Current: 10 Amps @ 500V AC
- Unit: mm


用途：PC板上之焊接電線端子或汽車保險絲，耐電流大。

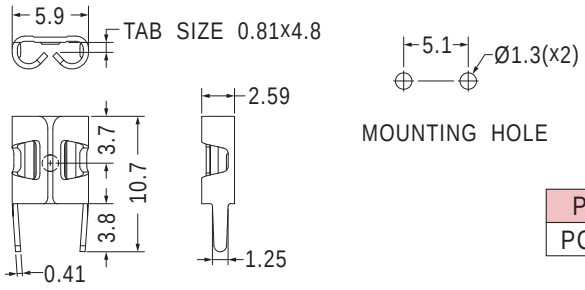

Part No.	Package
PCFS187	1000




- Material: Bright Tin Plated Brass
- Suggested Current: 30 Amps @ 500V AC
- Unit: mm

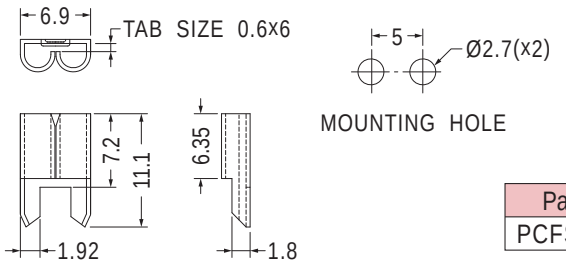


Part No.	Package
PCFS2509A	1000



- Material: Tin Plated Brass
- Suggested Current: 30 Amps @ 500V AC
- Unit: mm

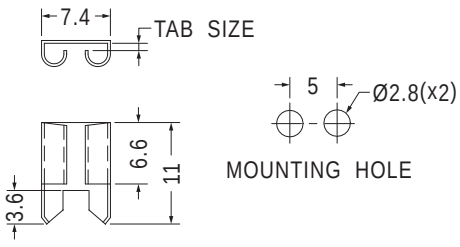




Part No.	Tab Size	Package
PCFS2505	0.5x6.35	1000
PCFS2508	0.8x6.35	


Part No.	Tab Size	Package
PCFS2505A	0.5x6.35	1000
PCFS2508A	0.8x6.35	


PC板焊接端子 PCB TERMINAL

用途：兩個端子對接焊於PC板上，牢固，不動搖。

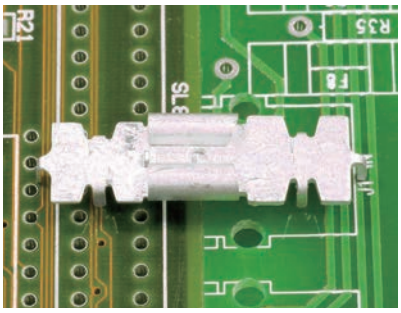


- Material: Tin Plated Brass
- Suggested Current: 10 Amps
- Unit: mm

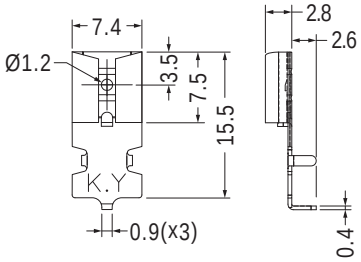

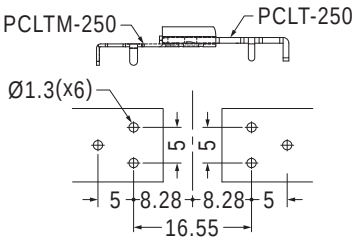


COMBINATION ILLUSTRATION DWG
MOUNTING HOLE

Part No.	Package
PCLTM-250	1000

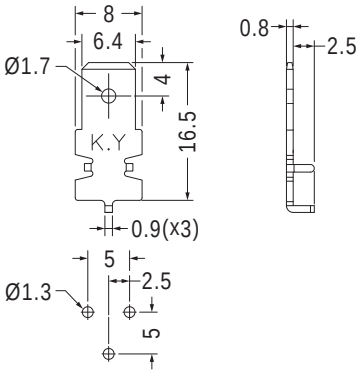

MOUNTING HOLE

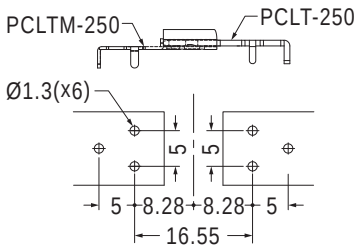

COMBINATION ILLUSTRATION DWG
MOUNTING HOLE


Part No.	Package
PCLT-250	1000

焊接端子 PIN TERMINAL

用途：PC板上之焊接電線端子，美觀、牢固。



- Material: Tin Plated Brass
- Suggested Current: 10 Amps
- Unit: mm




MOUNTING HOLE Ø1.2~Ø1.3

Part No.	Package
PIN-1	2000




- Material: Tin Plated Brass
- Suggested Current: 30 Amps
- Unit: mm




MOUNTING HOLE Ø3.0

Part No.	Package
PIN-2	2000

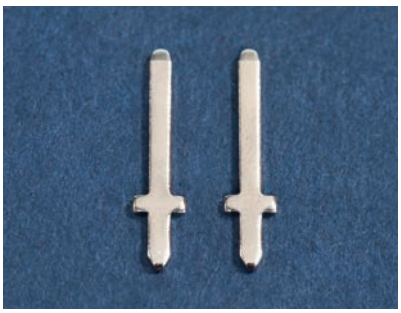

- Material: Nickel Plated Brass
- Suggested Current: 15 Amps
- Unit: mm



MOUNTING HOLE Ø1.7


Part No.	Package
PIN-9	2000

PC板焊接端子 PCB TERMINAL

用途：焊接於PC板上，另一端插接端子。



- Material: Tin Plated Brass
- Suggested Current: 10 Amps
- Unit: mm





MOUNTING HOLE Ø1.7

Part No.	Package
PC110	2000



- Material: Nickel Plated Brass/Tin Plated Brass
- Suggested Current: 15 Amps
- Unit: mm







MOUNTING HOLE

Part No.	A	Package
PC110-1	13.1	2000
PC110-4	12.1	



- Material: Tin Plated Brass
- Unit: mm







MOUNTING HOLE

Part No.	D	I	M	Suggested Current	Package
PC110D5	1.0	0.5	1.3	10 Amps	2000
PC110D5-1	1.3	0.5	1.3	10 Amps	
PC110D8	0.8	0.8	1.5	15 Amps	








MOUNTING HOLE


Part No.	A	B	I	M	Suggested Current	Package
PC187	13.0	3.4	0.5	1.4	10 Amps	2000
PC187(0.8)	13.0	3.4	0.8	1.5	15 Amps	
PC187-16-1	11.9	2.3	0.8	1.4	15 Amps	


PC板焊接端子 PCB TERMINAL

用途：焊接於PC板上，另一端插接端子。

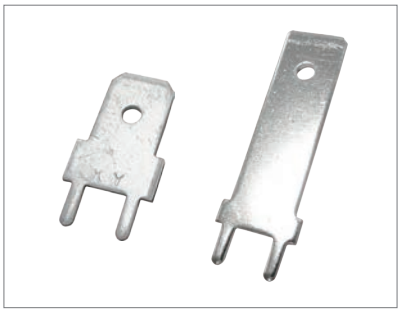


- Material: Tin Plated Brass
- Suggested Current: 15 Amps
- Unit: mm






MOUNTING HOLE

Part No.	Package
PC205	2000

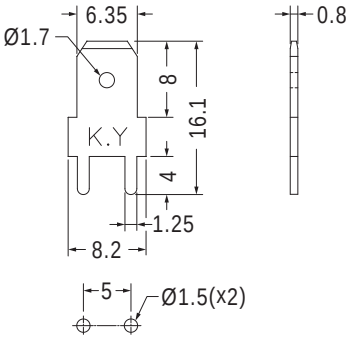


MOUNTING HOLE

Part No.	Package
PC250	1000

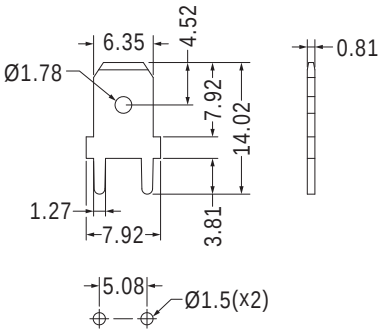

MOUNTING HOLE


Part No.	Package
PC250-8	1000

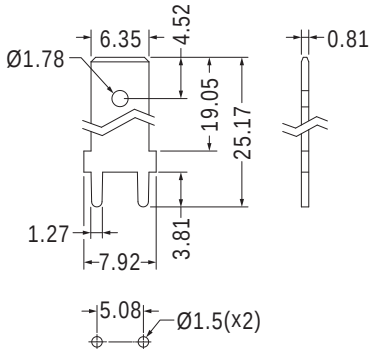



MOUNTING HOLE

- Material: Nickel Plated Brass

Part No.	Package
PC250-4	1000

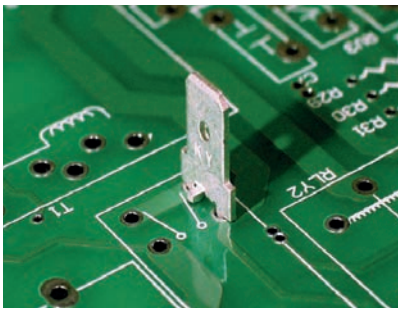


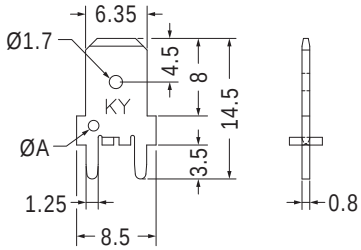





MOUNTING HOLE

Part No.	A	Package
PCH250		1000
PCH250-1	1.1	

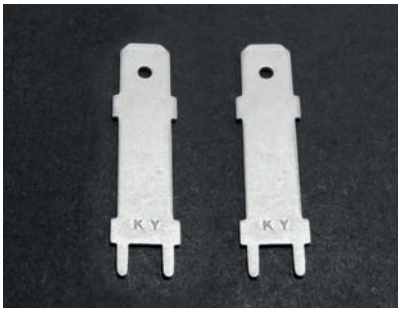

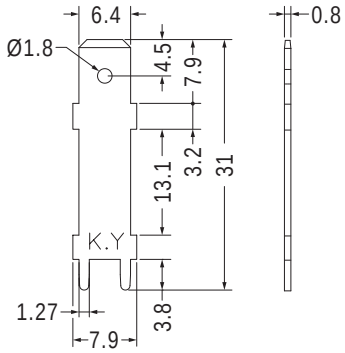



MOUNTING HOLE


Part No.	Package
PC250-11	1000

PC板焊接端子 PCB TERMINAL

用途：焊接於PC板上，另一端插接端子。




- Material: Tin Plated Brass
- Suggested Current: 15 Amps
- Unit: mm




MOUNTING HOLE

Part No.	Package
PCR250	1000





MOUNTING HOLE

Part No.	Package
PCR250-S	1000

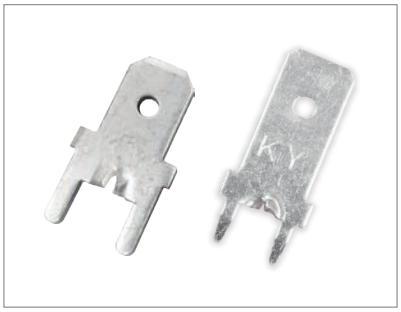


- Material: Tin Plated Brass
- Suggested Current: 15 Amps
- Unit: mm






MOUNTING HOLE

Part No.	I	Suggested Current	Package
PCR187	0.5	10 Amps	1000
PCR187(0.8)	0.8	15 Amps	

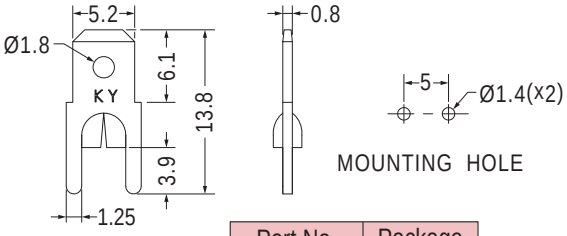


MOUNTING HOLE

Part No.	Package
PCRS205	1000

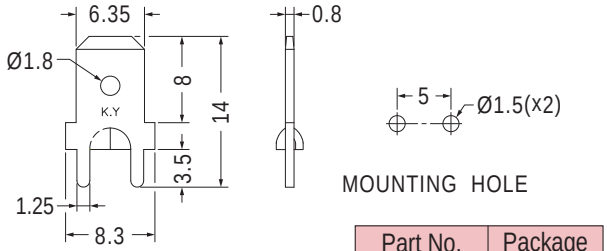


MOUNTING HOLE

Part No.	Package
PCRS250	1000

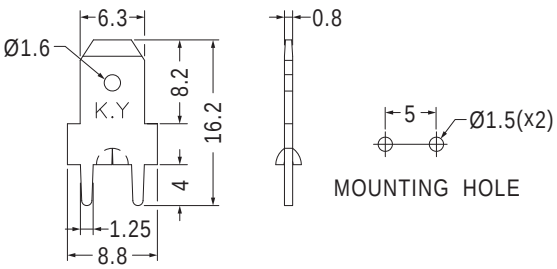

MOUNTING HOLE

Part No.	Package
PCRS250-1	1000

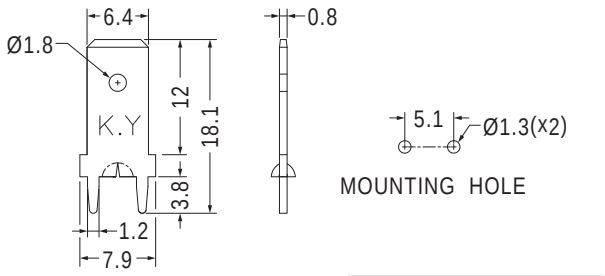


MOUNTING HOLE


Part No.	Package
PCRS250-2	1000

PC板焊接端子 PCB TERMINAL

用途：焊接於PC板上，另一端插接端子，牢固不動搖。

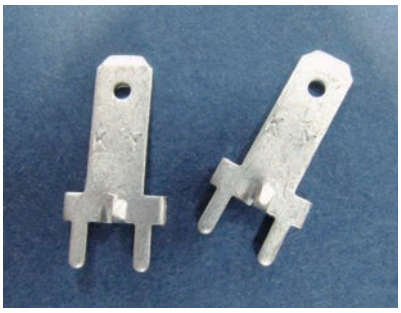

- Material: Tin Plated Brass
- Suggested Current: 15 Amps
- Unit: mm

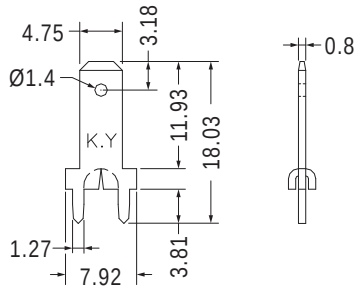


MOUNTING HOLE

Part No.	Package
PCRS187A	1000




- Material: Tin Plated Brass
- Suggested Current: 35 Amps
- Unit: mm

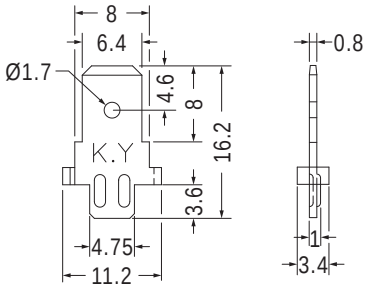


MOUNTING HOLE

Part No.	Package
PCRN250	1000

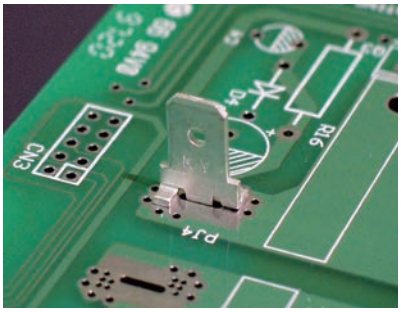


- Material: Tin Plated Brass
- Suggested Current: 25 Amps
- Unit: mm

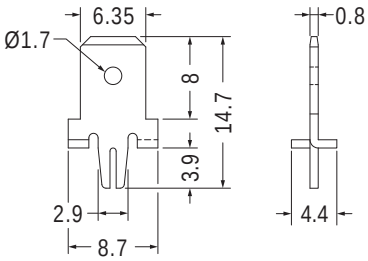


MOUNTING HOLE

Part No.	Package
PCK250	1000

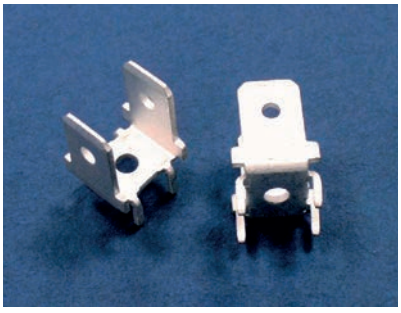

- Material: Tin Plated Brass
- Suggested Current: 20 Amps
- Unit: mm

用途：PC板上之焊接端子，美觀，牢固。

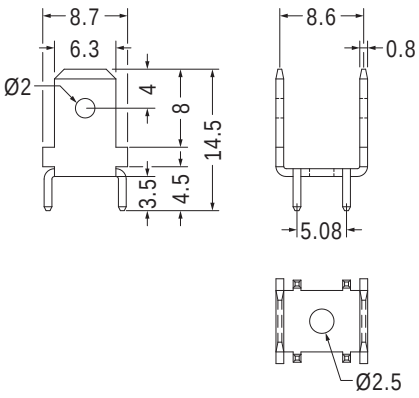


MOUNTING HOLE


Part No.	Package
PCU250	1000

PC板焊接端子 PCB TERMINAL


用途：PC板上之焊接端子，美觀，牢固。

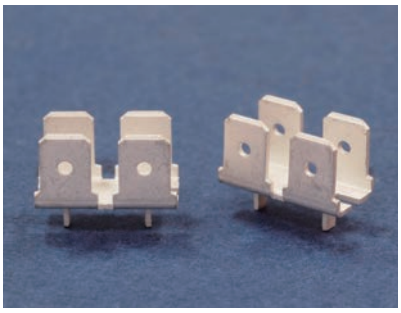

- Material: Tin Plated Brass
- Suggested Current: 20 Amps
- Unit: mm

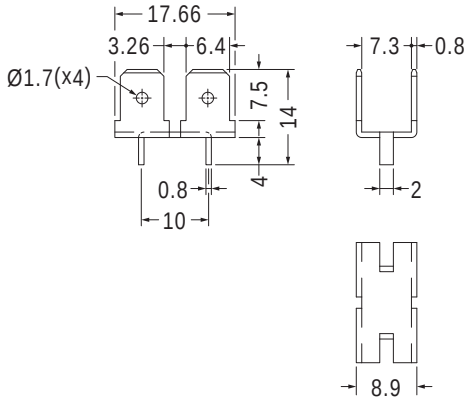



Part No.	Package
PCB-100	1000

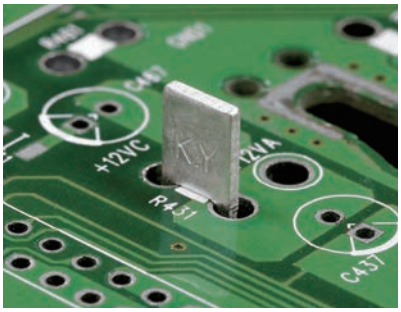


- Material: Tin Plated Brass
- Unit: mm

用途：焊接於PC板上，另一端插接端子。







Part No.	Package
PCLTA-2	1000

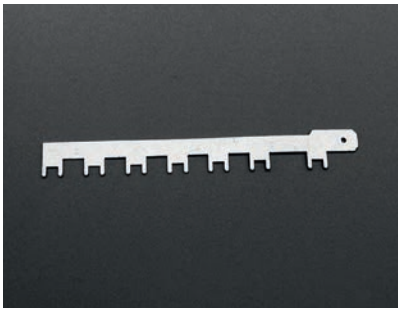

- Material: Tin Plated Brass
- Unit: mm

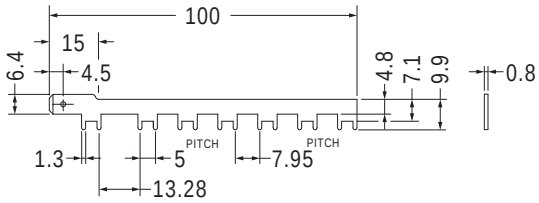





Part No.	Package
PCF250-7	500




- Material: Tin Plated Brass
- Suggested Current: 15 Amps
- Unit: mm

用途：PC板上之焊接電線端子，耐大電流。



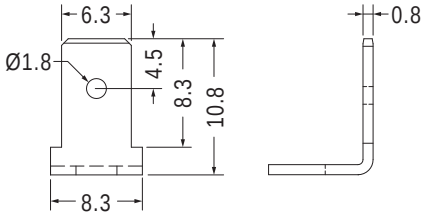




Part No.	Package
PC1L250-1A	1000


PC板焊接端子 PCB TERMINAL

用途：PC板上之焊接電線端子，耐大電流。




- Material: Tin Plated Brass
- Suggested Current: 15 Amps
- Unit: mm







Part No.	Package
PC1L250-7	1000

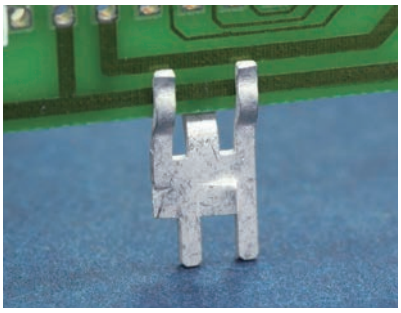

- Material: Tin Plated Brass
- Suggested Current: 5 Amps
- Unit: mm

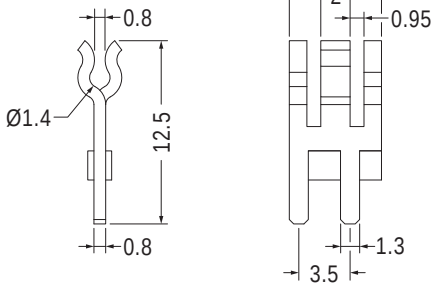


Part No.	Package
EM-408	1000

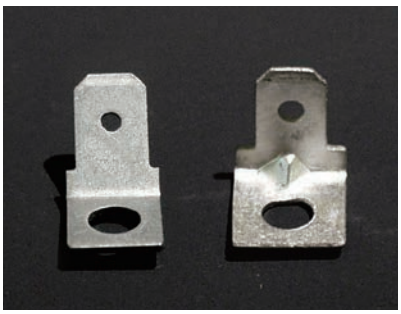


- Material: Tin Plated Brass
- Unit: mm


用途：可用螺絲鎖於PC板上，另一端插接端子。




Part No.	Package
PC1V18706	1000



Part No.	A	Package
PC1V187	3.7	1000
PC1V18704	4.3	
PC1V18705	5.3	




Part No.	A	Package
PC1L250	4.3	1000
PC1L25005	5.3	



- Material: Nickel Plated Steel

Part No.	Package
PC1L250-12	1000

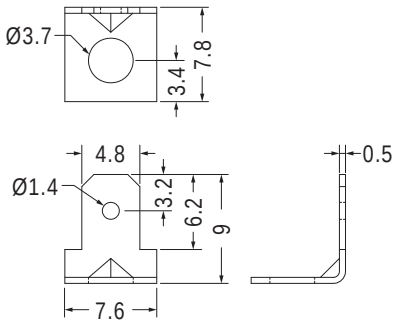


Part No.	Package
PC1L187	1000

PC板端子 PCB TERMINAL

用途：可用螺絲鎖於PC板上，另一端插接端子。




- Material: Tin Plated Brass
- Unit: mm

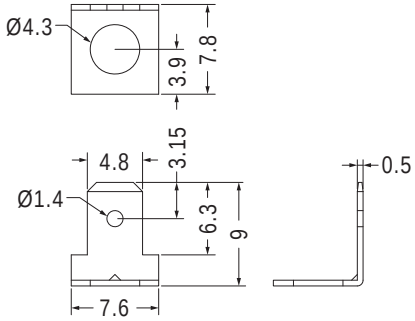


Part No.	Package
PC3L18704	1000




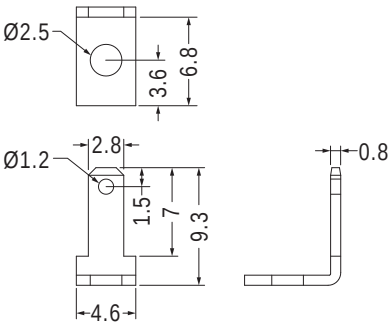


Part No.	Package
PC3L110028	1000

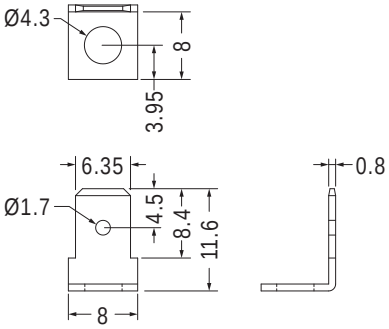


Part No.	Package
PC3L25004	1000



Part No.	Package
PC11187	1000

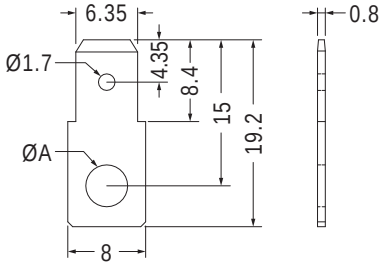


Part No.	A	Package
PC11250	4.3	1000
PC1125003	3.2	
PC1125035	3.5	
PC1125005	5.3	

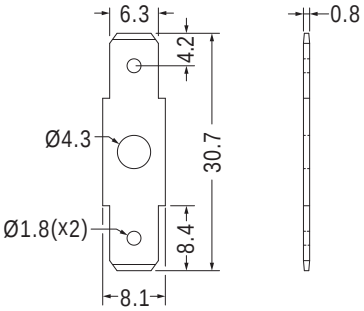


Part No.	Package
PC12250	1000





Part No.	Package
PC1L250-4	1000

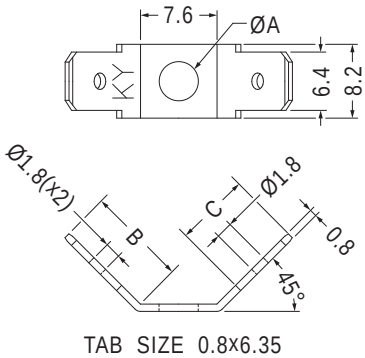


TAB SIZE 0.8x6.35


Part No.	A	B	C	Package
PC2L250	4.3	11.0	8.4	1000
PC2L25005	5.3	10.6	8.5	

PC板端子 PCB TERMINAL


用途：可用螺絲鎖於PC板上，另一端插接端子。

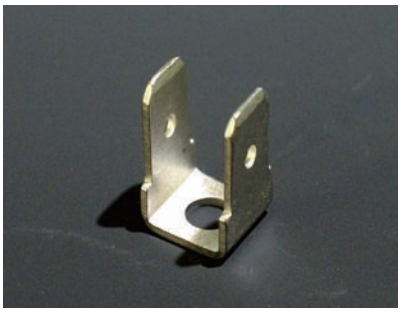


- Material: Tin Plated Brass
- Unit: mm

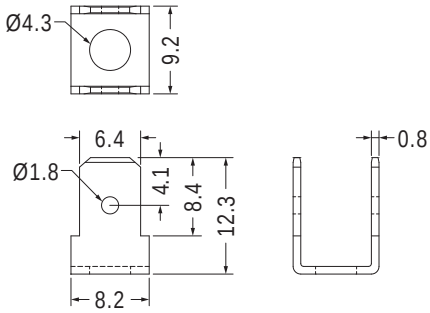

Part No.	Package
PC2L250-90	1000

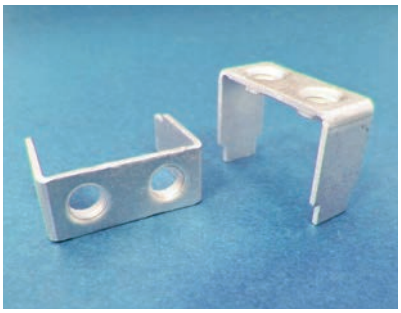


- Material: Tin Plated Phosphor Bronze
- Suggested Current: 25 Amps
- Unit: mm

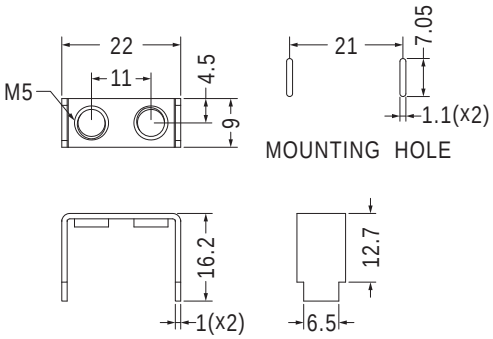


Part No.	Package
PCB-36	500

- Material: Tin Plated Brass
- Unit: mm

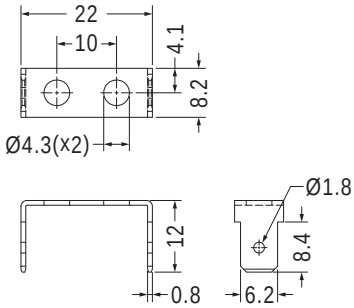


Part No.	Package
PCB-93	500

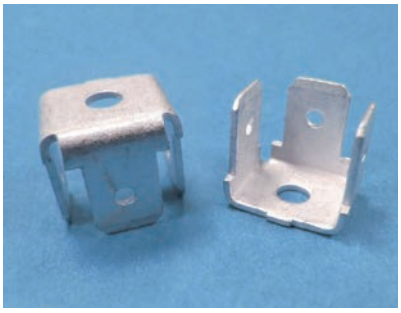


- Material: Tin Plated Brass
- Unit: mm

用途：PC板上之焊接電線端子，美觀、牢固，耐電流大，配合螺絲固定端子。

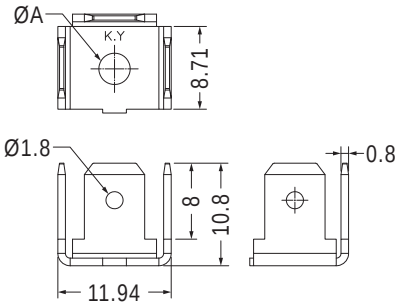


Part No.	A	Package
PC3L250-3	3.3	1000
PC3L250-4	4.3	

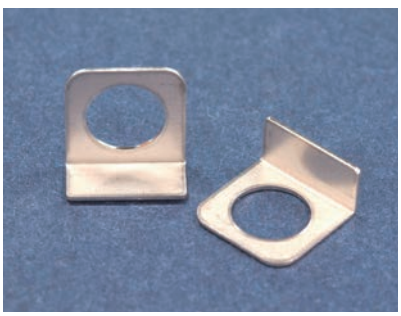

- Material: SUS
- Unit: mm


用途：PC板上之螺絲端子，美觀，牢固。




Part No.	Package
PCTL-2	1000

PC板端子 PCB TERMINAL

用途：PC板上之焊接電線端子，美觀、牢固，耐電流大，配合螺絲固定端子。

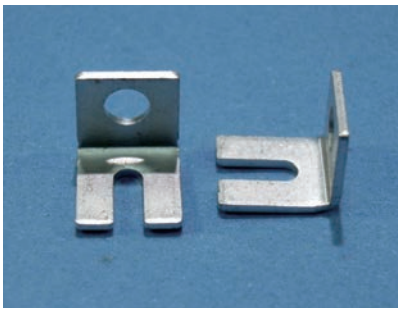

- Material: Tin Plated Brass
- Unit: mm

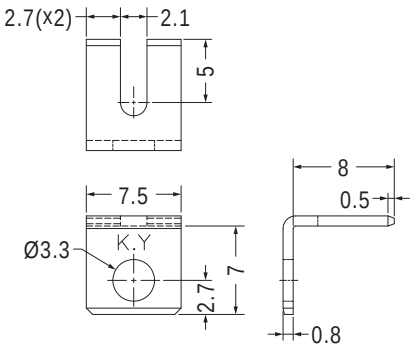


Part No.	Package
PCTL-3.5	1000

接地片 GROUND TERMINAL

用途：用於電子、電腦儀器接地端點，一端焊於接地線，另一端用螺絲鎖於機殼。




- Material: Tin Plated Brass
- Unit: mm



Part No.	Package
GND-24	1000




- Material: Nickel Plated Brass
- Unit: mm



Part No.	A	B	C	D	Package
GND-1	3.2	1.6	5.5	14.3	2000
GND-3A	4.1	2.4	6.5	15.5	




- Material: Brass
- Unit: mm

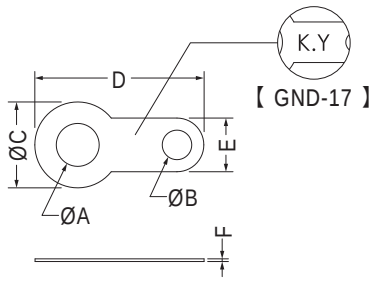


Part No.	A	B	C	D	E	F	Finish	Package
GND-2	3.2	2.1	6.4	12.6	4.0	0.25	Nickel Plated	2000
GND-3	4.3	2.0	8.0	17.7	4.6	0.3	Nickel Plated	
GND-4	5.2	2.1	9.9	19.6	5.1	0.3	Nickel Plated	1000
GND-5	8.3	1.9	10.0	15.0	4.0	0.3	Nickel Plated	
GND-6	9.7	2.0	13.0	21.5	4.0	0.4	Nickel Plated	
GND-10	6.3	2.1	10.0	19.9	5.1	0.3	Nickel Plated	2000
GND-11	9.0	2.0	13.0	30.0	4.0	0.3	Nickel Plated	1000
GND-17	4.2	1.6	6.8	12.9	3.2	0.4	Tin Plated	2000
GND-21	3.7	1.6	6.3	12.6	3.2	0.4	Tin Plated	
GND-41	3.2	1.5	4.5	12.6	3.0	0.25	Nickel Plated	
GND-42	2.2	1.5	4.5	12.6	3.0	0.25	Nickel Plated	

接地片 GROUND TERMINAL

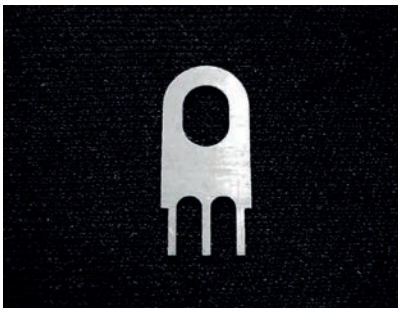

- Material: Tin Plated Brass
- Unit: mm




MOUNTING HOLE

用途：用於電子、電腦儀器接地端點，一端焊於接地線，另一端用螺絲鎖於機殼。

Part No.	Package
GND-34	1000



- Material: Tin Plated Brass
- Unit: mm

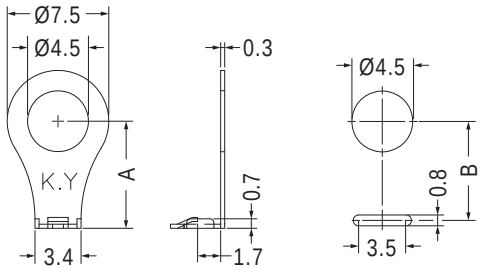


MOUNTING HOLE

用途：用於電子、電腦儀器接地端點，一端焊於PC板上，再用螺絲固定，接地效果佳。

Part No.	A	B	Package
GND-32	7.9	7.6	1000
GND-51	7.6	7.3	



- Material: SPCC
- Finish: Tin Plated Over Brass Base
- Unit: mm

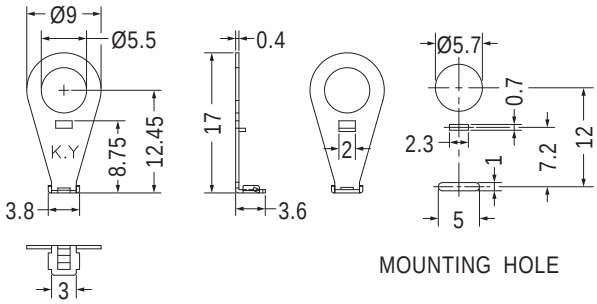


MOUNTING HOLE

Part No.	Package
GND-96	1000



- Material: Nickel Plated Phosphor Bronze
- Unit: mm

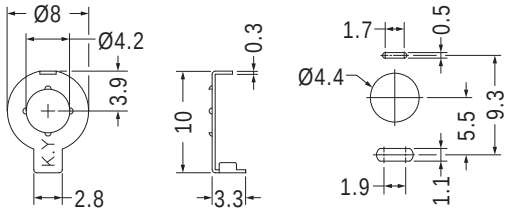


MOUNTING HOLE

Part No.	Package
GND-7	1000



- Material: Tin Plated Phosphor Bronze
- Unit: mm

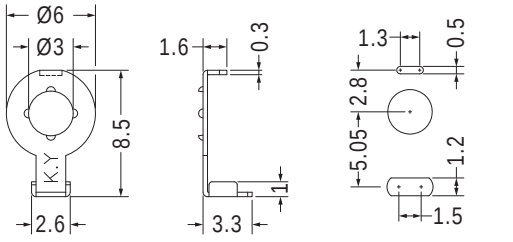

MOUNTING HOLE


Part No.	Package
GND-103	1000

接地片 GROUND TERMINAL

用途：用於電子、電腦儀器接地端點，一端焊於PC板上，再用螺絲固定，接地效果佳。




- Material: Nickel Plated Brass
- Unit: mm

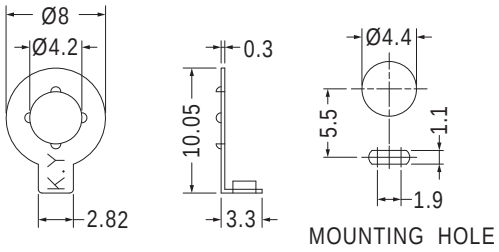


Part No.	Package
GND-14	1000

- Material: Tin Plated Brass/Nickel Plated Brass
- Unit: mm

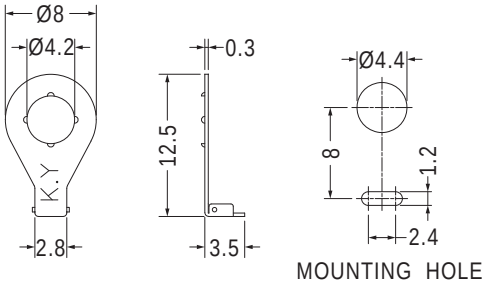

Part No.	Package
GND-8	1000


- Material: Nickel Plated Phosphor Bronze
- Unit: mm

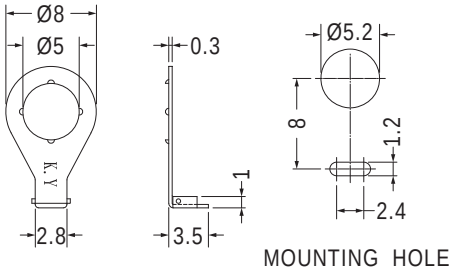


Part No.	Package
GND-20	2000



- Material: Nickel Plated Brass
- Unit: mm

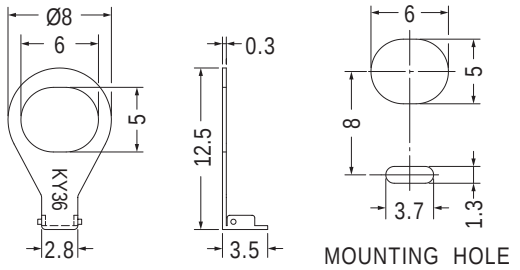


Part No.	Package
GND-36	1000

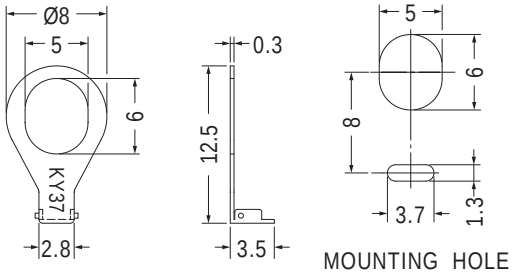

Part No.	Package
GND-37	1000



- Material: Tin Plated Brass
- Unit: mm

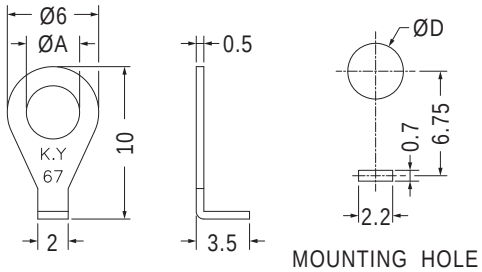


Part No.	A	D	Package
GND-67	3.5	3.6	1000
GND-67(4.0)	4.0	4.1	

接地片 GROUND TERMINAL

用途：用於電子、電腦儀器接地端點，一端焊於PC板上，再用螺絲固定，接地效果佳。




- Material: Tin Plated Brass
- Unit: mm

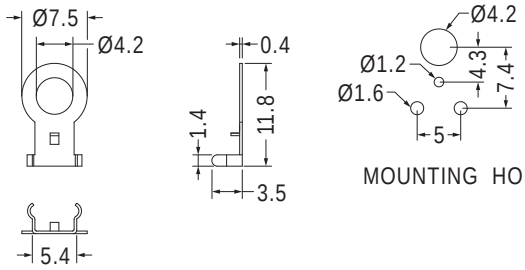


Part No.	Package
GND-13	1000



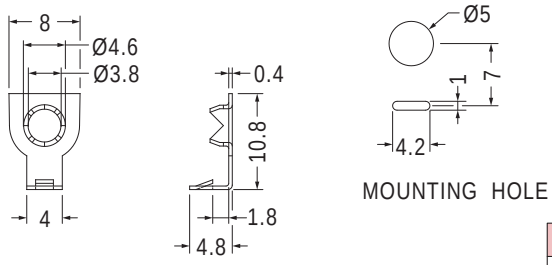


Part No.	Package
GND-12	1000



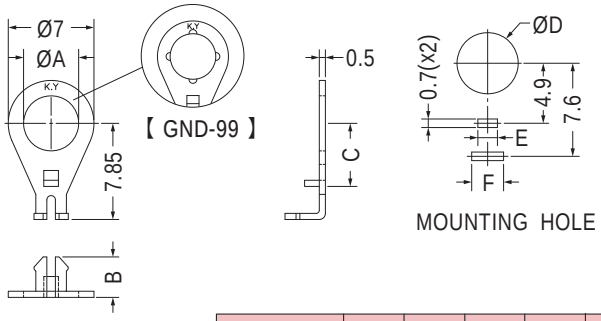

Part No.	A	B	C	D	E	F	Package
GND-15	3.5	4.6	5.1	4.0	1.5	2.7	2000
GND-35	4.5	4.6	5.1	4.5	1.5	2.7	
GND-39	4.5	3.3	5.15	5.0	1.6	2.6	1000
GND-99	4.5	3.3	5.15	5.0	1.6	2.6	



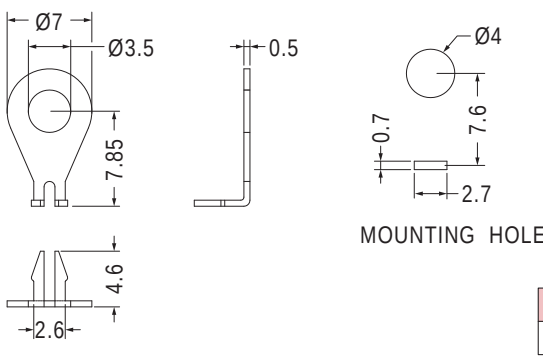


Part No.	Package
GND-23	1000

接地片 GROUND TERMINAL

用途：用於電子、電腦儀器接地端點，一端焊於PC板上，再用螺絲固定，接地效果佳。




- Material: Tin Plated SPTE
- Unit: mm

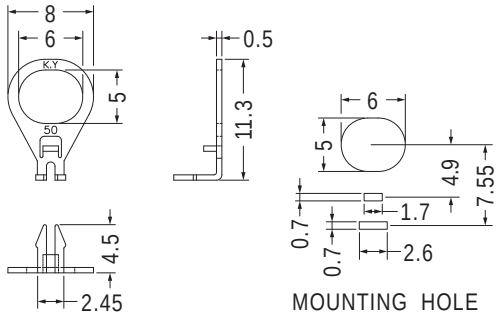

Part No.	Package
GND-50	1000


- Material: Tin Plated Brass
- Unit: mm

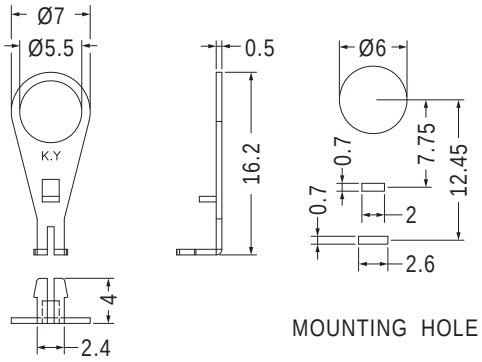


Part No.	Package
GND-55	1000



- Material: Tin Plated Phosphor Bronze
- Unit: mm

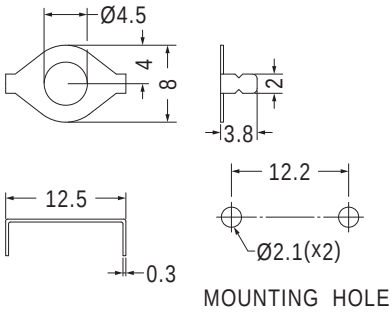


Part No.	Package
GND-44	1000

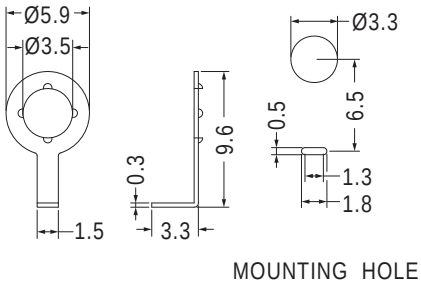


Part No.	Package
GND-49	1000

- Material: Nickel Plated Phosphor Bronze
- Unit: mm

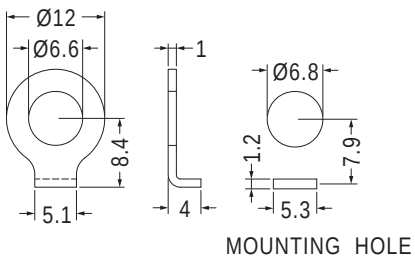


Part No.	Package
GND-52	1000

- Material: Tin Plated Brass
- Unit: mm



Part No.	Package
GND-54	1000

- Material: Tin Plated SPCC
- Unit: mm

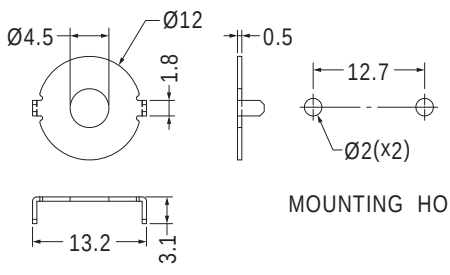


Part No.	Package
GND-56A	1000

接地片 GROUND TERMINAL

用途：用於電子、電腦儀器接地端點，一端焊於PC板上，再用螺絲固定，接地效果佳。




- Material: Tin Plated Phosphor Bronze
- Unit: mm

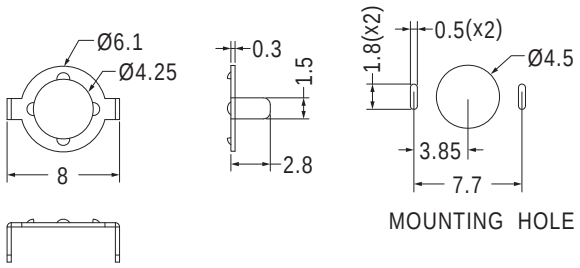


Part No.	Package
GND-74	1000

用途：用於電子、電腦儀器接地端點，一端焊於接地線，另一端用螺絲鎖於機殼。

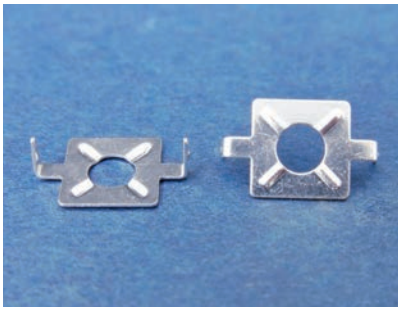


- Material: Tin Plated Brass
- Unit: mm

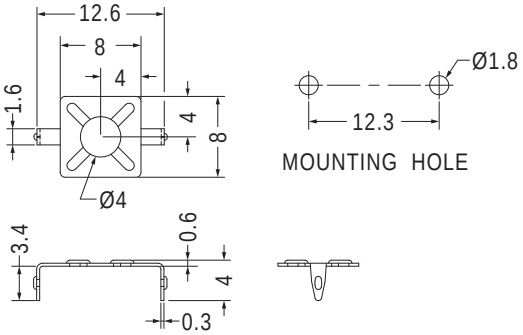


Part No.	Package
PCB-41A	1000

AAA電池彈片 POSITIVE AAA BATTERY CONTACT

用途：用於4號電池的彈片。

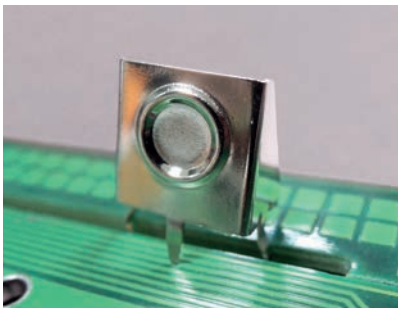


- Material: Nickel Plated Spring Steel
- Unit: mm

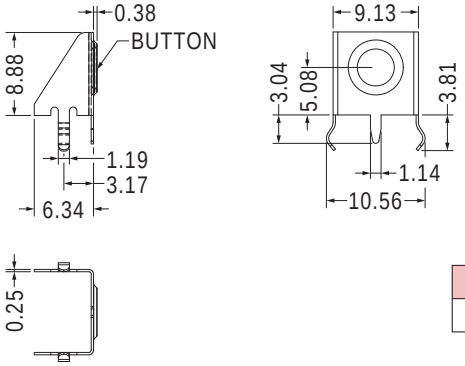


Part No.	Package
PCB-67	1000

AAA電池彈片 NEGATIVE AAA BATTERY CONTACT

用途：用於4號電池的彈片。

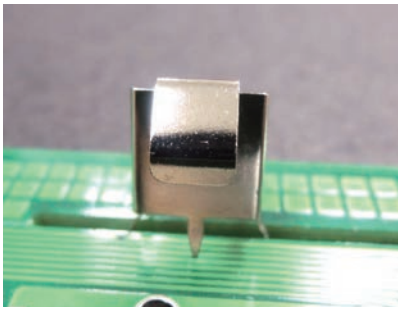


- Material: Nickel Plated Spring Steel
- Unit: mm

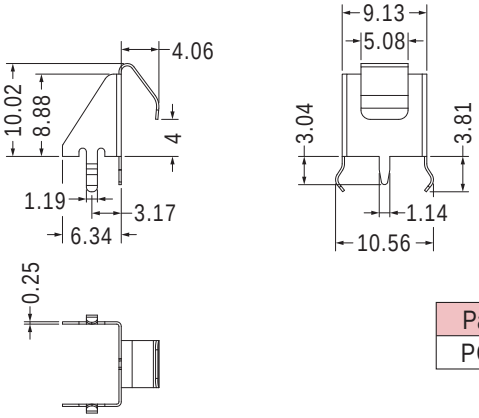


Part No.	Package
PCB-68	1000

塑膠齒輪 PLASTIC GEAR

用途：做為齒輪使用。

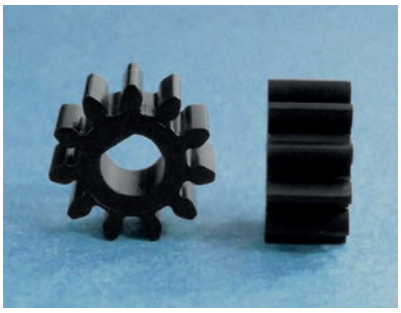

- Material: POM
- Color: Black
- Unit: mm

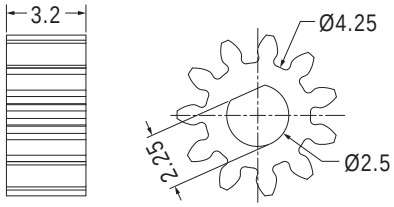


Part No.	Package
GRAP-1	1000

阻尼齒輪 DAMPER GEAR

用途：用於音響或電腦外殼使開關門平順緩慢，增加質感。



- Gear Material: POM (UL) 94HB
- Body Material: PC (UL) 94V-2
- Color: Black
- Unit: mm




Part No.	Package
DP023A	500

Module	0.8
Pitch Circle Diameter	Ø10.4
Teeth Number	13
Pressure Angle	20°



- Gear Material: POM (UL) 94HB
- Body Material: PC (UL) 94V-2
- Color: Black
- Unit: mm

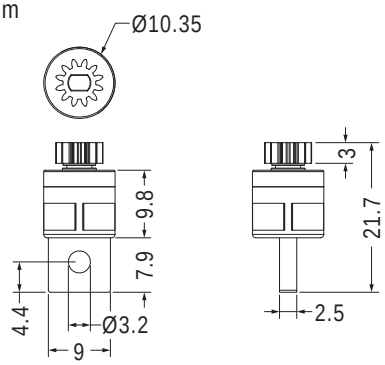


Part No.	Package
DP013A	500

Module	0.5
Pitch Circle Diameter	Ø6.0
Teeth Number	12
Pressure Angle	20°



- Gear Material: POM (UL) 94HB
- Body Material: PC (UL) 94V-2
- Gear Color: Black
- Body Color: Black/Transparent
- Unit: mm

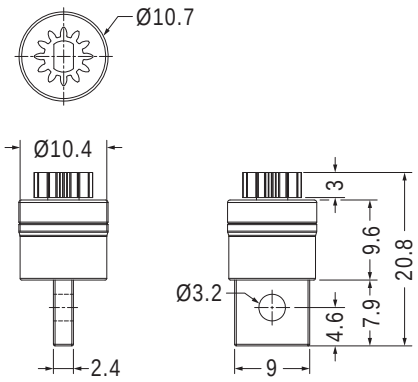

Part No.	Package
DP038A	500


Module	0.5
Pitch Circle Diameter	Ø6.0
Teeth Number	12
Pressure Angle	20°

阻尼齒輪 DAMPER GEAR


用途：用於音響或電腦外殼使開關門平順緩慢，增加質感。




- Gear Material: POM (UL) 94HB
- Body Material: ABS (UL) 94HB
- Color: Black
- Unit: mm




Part No.	Package
DP016A	500




Module	0.7
Pitch Circle Diameter	Ø9.1
Teeth Number	13
Pressure Angle	20°





Part No.	Package
DP028A	500


Module	1.0
Pitch Circle Diameter	Ø12.0
Teeth Number	12
Pressure Angle	20°

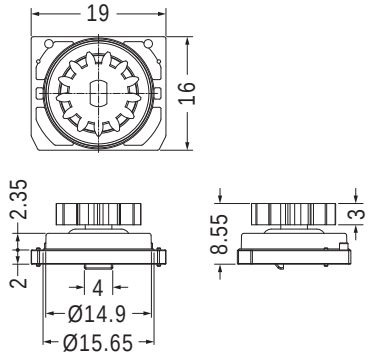

Part No.	Package
DP037A	500

Module	0.8
Pitch Circle Diameter	Ø10.4
Teeth Number	13
Pressure Angle	20°




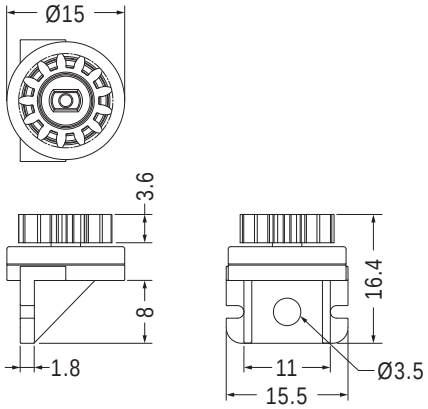

Part No.	Package
DP025A	500

Module	0.8
Pitch Circle Diameter	Ø10.4
Teeth Number	13
Pressure Angle	14.5°



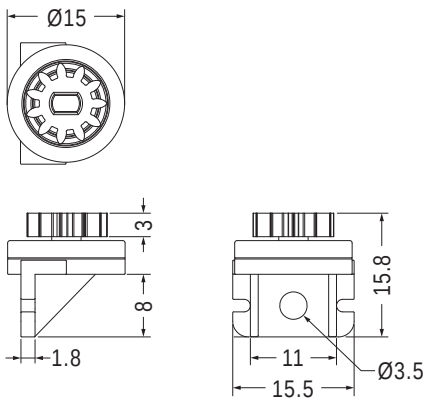


Part No.	Package
DP026A	500


Module	0.8
Pitch Circle Diameter	Ø8.8
Teeth Number	11
Pressure Angle	20°

阻尼齒輪 DAMPER GEAR

用途：用於音響或電腦外殼使開關門平順緩慢，增加質感。

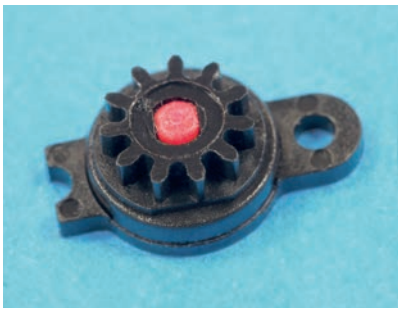


- Gear Material: POM (UL) 94HB
- Body Material: ABS (UL) 94HB
- Color: Black
- Unit: mm

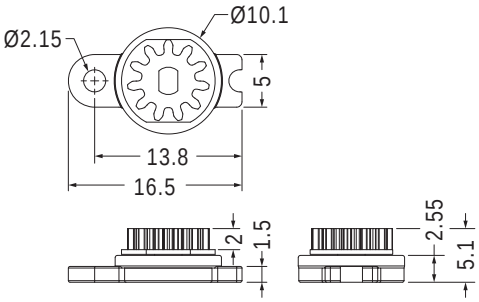

Part No.	Package
DP006A	500

Module	0.6
Pitch Circle Diameter	Ø6.6
Teeth Number	11
Pressure Angle	20°




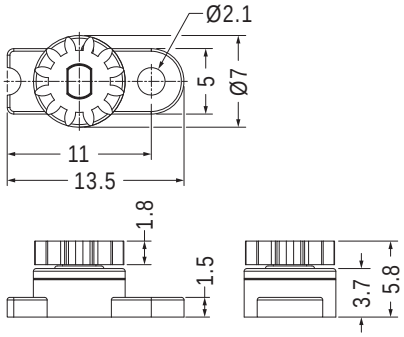

Part No.	Package
DP032A	500

Module	0.5
Pitch Circle Diameter	Ø6.0
Teeth Number	12
Pressure Angle	20°




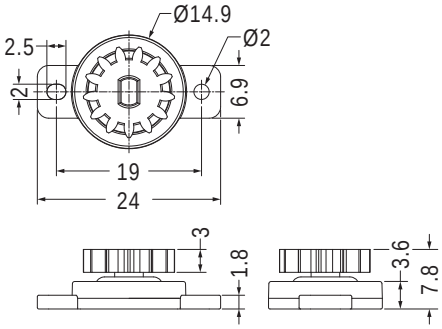

Part No.	Package
DP008A	500

Module	0.8
Pitch Circle Diameter	Ø10.4
Teeth Number	13
Pressure Angle	20°



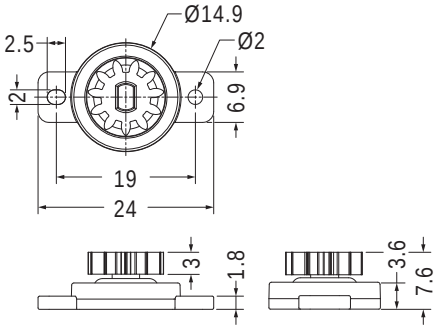

Part No.	Package
DP018A	500


Module	0.8
Pitch Circle Diameter	Ø8.8
Teeth Number	11
Pressure Angle	20°

阻尼齒輪 DAMPER GEAR

用途：用於音響或電腦外殼使開關門平順緩慢，增加質感。




- Gear Material: POM (UL) 94HB
- Body Material: ABS (UL) 94HB
- Color: Black
- Unit: mm

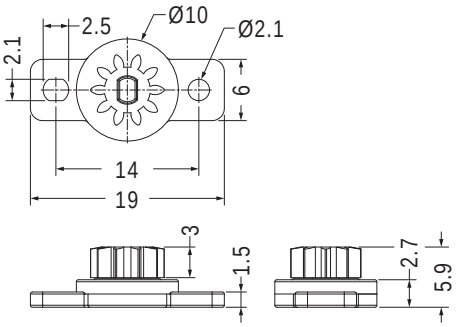

Part No.	Package
DP030A	500


Module	0.6
Pitch Circle Diameter	Ø6.0
Teeth Number	10
Pressure Angle	20°

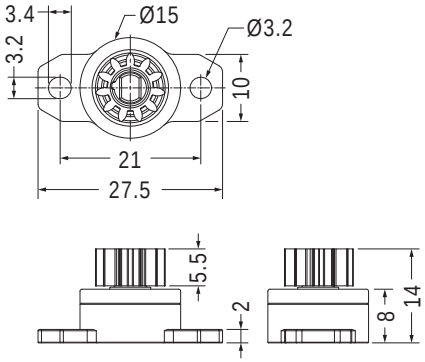

Part No.	Package
DP034A	500


Module	0.8
Pitch Circle Diameter	Ø8.8
Teeth Number	11
Pressure Angle	20°



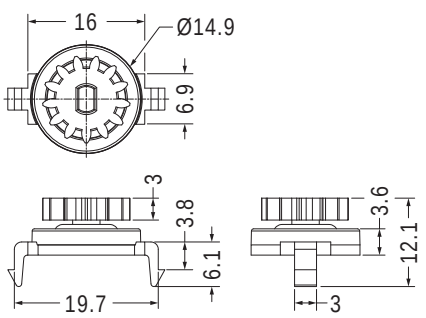

Part No.	Package
DP007A	500


Module	0.8
Pitch Circle Diameter	Ø10.4
Teeth Number	13
Pressure Angle	20°

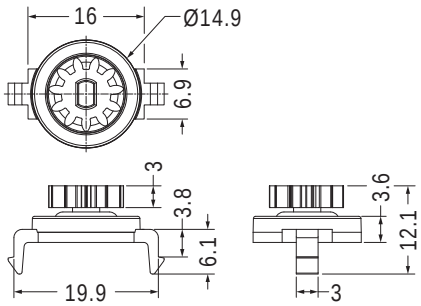

Part No.	Package
DP017A	500


Module	0.8
Pitch Circle Diameter	Ø8.8
Teeth Number	11
Pressure Angle	20°



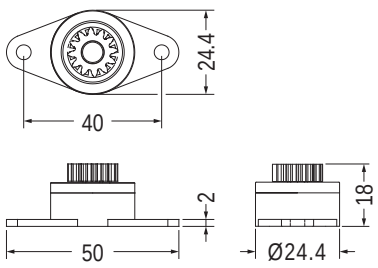

Part No.	Package
DP010A	500

Module	1.0
Pitch Circle Diameter	Ø12.0
Teeth Number	12
Pressure Angle	20°

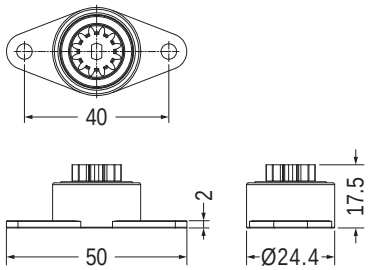

Part No.	Package
DP036A	500


Module	1.0
Pitch Circle Diameter	Ø12.0
Teeth Number	12
Pressure Angle	20°

連接器 MINI JUMPER

用途：讓連接器兩個端點導通。




- Housing Material: PBT(UL)
- Flame Class: 94V-0
- Terminal Material: Brass
- Finish: Gold Plated
- Unit: mm



Part No.	Color	Package
MINI-1	Black	2000
MINI-1(R)	Red	
MINI-1(Y)	Yellow	
MINI-1(G)	Green	
MINI-1(BU)	Blue	



- Material: Nylon 66(UL)
- Flame Class: 94V-0
- Terminal Material: Brass
- Color: Black
- Unit: mm



Part No.	Package
MINI-2	1000

索引
Index

	Part No.	Page
0	0.7-	1-100
	012-958	7-42
	0609C	5-2
	0811	5-1
	0813	5-1
	0813C	5-2
	010406	5-5
1	1.2-	1-100
	1.4-3	1-100
	1.6-	1-100
	1.7-11.3	1-100
	10-6	1-101
	12-19	1-101
	12.4-5	1-101
	12.8-20	1-101
	12.8-35	1-101
	13-5	1-101
	1012-26	1-101
	1014C	5-2
	1216	5-1
	1216C	5-2
	1419C	5-2
	10459	5-26
2	2-	1-101
	2-3-1.9	1-100
	2.05-3.5	1-100
	2.1-2.1	1-100
	2.2-	1-100
	2.3-	1-100
	2.4-9.4	1-100
	2.5-	1-100
	2.6-	1-102
	2.7-	1-100
	2.73-2.3	1-100
	2.8-3.8	1-100
	2.95-8	1-100
	20.5-9.5	1-101
	29-16	1-101
	2L-	4-118
	2P-1	5-31
	2P-4	5-32
	2WCA-2	4-135
3	3-	1-102
	3-5.8	1-100
	3-25-6	1-100
	3.1-	1-100
	3.2-	1-100
	3.35-5	1-100
	3.5-	1-103
	3.5-5.5	1-100
	3.55-	1-100
	3.56-	1-100
	3.6-	1-100
	3.7-	1-100
	3.8-	1-100
	3.9-5.3	1-100
	3.95-3.8	1-100
	312-3	5-1
	375-4	5-1
	3MB	10-1
3	3MR	10-1
	3MY	10-1
	3P-4	5-32
	3W-1	5-32
	3WC-2	4-135
	3WC-4	4-136
4	4-	1-103
	4-4.8	1-100
	4.1-2.5	1-100
	4.2-	1-100
	4.3-	1-100
	4.4-	1-100
	4.5-	1-100
	4.7-3.5	1-100
	4.9-	1-100
	4K-4	5-32
	4N-4	5-32
	4WC-4	4-136
5	5-	1-100
	5-	1-101
	5.1-12.7	1-100
	5.2-	1-100
	5.3-2.8	1-101
	5.4-122	1-101
	5.5-4	1-101
	5.55-11.8	1-101
	5.7-	1-101
	5.8-	1-101
	5N-4	5-32
	5P-4	5-32
	5WC-	4-136
6	6-	1-101
	6-3.1-7.5	1-100
	6-13A	1-97
	6.2-	1-101
	6.3-	1-101
	6.35-	1-101
	6.4-	1-101
	6.5-3	1-101
	6.8-5	1-101
	6.9-12.7	1-101
	6432-6.4	1-100
	6N-4	5-32
	6N3-4	5-32
	6P-4	5-32
	6P3-4	5-32
7	7-	1-101
	7.5-	1-101
	7N-2	5-32
	7P-2	5-32
8	8-1.6	1-101
	8-16	1-101
	8.2-5.5	1-101
	8.2-80	1-101
	8.4-5	1-101
	8.5-	1-101
	878008	10-1
9	9-	1-101
	9-15	1-97
	9.1-7.5	1-101
9	9.25-4	1-101
	9.5-34	1-101
A	ABSC-2318	6-83
	ACB-	1-61
	ACB-2.3	1-61
	ACB-2.5	1-61
	ACB-3	1-61
	ACBR-6	1-60
	ACBW-6.8	1-67
	ACSR-7	7-77
	ACSRA-4	5-26
	ACSRA-4.4	5-25
	ACSRB-	5-26
	ACSRC-4.1	5-25
	ACSRD-	5-27
	AIM25071	4-49
	ALACO-	4-34
	ALUCA-	1-129
	ANTCA-	4-53
	ANTCV-2	5-17
	ANTL-	4-54
	ASFF-1A	9-12
	ASFF-1B	9-12
	ASID-	7-17
	ASR-	1-77
	ASS-	1-79
	AST-7.2	1-77
	ASUS-	5-58
	ATFF-1	8-12
	AWB-1	4-26
	AWC-	4-25
	AWCA-1	4-27
	AWCB-1	4-27
	AWD-	4-87
	AWE-	4-26
	AWK-	4-87
	AWKA-	4-87
B	BASE-L5	6-67
	BCB-	6-67
	BCBA-	6-67
	BCC-	6-68
	BCC-18-20	6-68
	BCCA	6-68
	BCCA-1210	6-73
	BCD-10.3	6-68
	BCG-250	3-6
	BCG-450	3-6
	BCH13-	6-68
	BGC-8.5	6-49
	BGCA-22	6-50
	BGCB-30	6-50
	BGCC-22	6-50
	BGCV-	6-49
	BGCV-23	6-50
	BHP2-6	1-107
	BNC-	7-16
	BNCH-1	7-16
	BPLT-9	1-94
	BPLT-13	1-94
	BPLTA-3	7-77
B	BRP1-	7-69
	BS-	1-63
	BS-8	1-63
	BS-10-1	1-63
	BS-20-1	1-63
	BS-35.7	1-63
	BSB-6	1-64
	BSB-8.5	1-64
	BSB632-15.9	1-66
	BSC632-	1-66
	BSCB-	1-66
	BSCB-6	1-66
	BSCB-20	1-66
	BSCB4-	1-66
	BSCL-9.5	1-64
	BSCM4-	1-67
	BSD632-	1-67
	BSDM4-	1-67
	BSE-2.2	1-72
	BSS-	1-77
	BUB-	7-78
	BUB-	7-80
	BUB-	7-81
	BUB-7I	7-80
	BUB-16.7	7-84
	BUB-23I	7-80
	BUB-25.5I	7-80
	BUB-29	7-78
	BUB-30	7-78
	BUB-32	7-79
	BUB-45	7-81
	BUB-45I	7-82
	BUB-66	7-81
	BUB-79	7-81
	BUB-85I	7-82
	BUB-86I	7-85
	BUB-90	7-83
	BUB-95	7-83
	BUB-96	7-79
	BUB-97	7-79
	BUB-124	7-83
	BUB-126	7-79
	BUB-127	7-81
	BUB-130I	7-80
	BUB-132	7-84
	BUB-133	7-84
	BUB-136	7-83
	BUB-138	7-83
	BUB-139	7-84
	BUB-152	7-79
	BUB-155	7-83
	BUB-159	7-82
	BUB-161I	7-82
	BUB-171	7-84
	BUB-172	7-83
	BUB-175L	7-81
	BUB-177	7-84
	BUB-179	7-81
	BUB-180	7-79
	BUB-182	7-79
B	BUB-189	7-78
	BUB-194	7-79
	BUB-196	7-83
	BUB-202	7-79
	BUB-205	7-79
	BUB-209	7-80
	BUB-211I	7-82
	BUB-213	7-80
	BUB-217	7-84
	BUB-218	7-79
	BUB-219I	7-83
	BUB-225	7-82
	BUB-231	7-79
	BUB-233	7-84
	BUB-234	7-79
	BUB-235I	7-82
	BUB-243	7-79
	BUB-245	7-80
	BUB-251	7-79
	BUC-2	7-78
	BW-	6-33
	BWC-	6-50
C	C3	10-4
	C4	10-4
	C5	10-4
	C8	10-4
	CABOX-	3-46
	CAM-12	8-4
	CAPH-10	6-63
	CAPI-18	6-63
	CAPJ-18	6-63
	CAPL-3.5	6-63
	CAPR-10	7-59
	CAPX-6	7-48
	CAV-1	7-104
	CBCS-14	1-34
	CBLSS-	1-37
	CBS-	1-38
	CBSA-13	1-33
	CBSB-45	1-38
	CBSS-	1-37
	CC-	4-127
	CC-	4-128
	CCA-	4-130
	CCB-	4-130
	CCE-1	4-42
	CCF-1	4-128
	CCHD-	4-119
	CCM-1	4-124
	CCMA-	4-21
	CCMB-	4-21
	CCMC-1	4-21
	CCMD-1	4-21
	CCME-1	4-124
	CCMF-	4-123
	CCMG-1	4-131
	CCMH-	4-20
	CCMHA-6	4-20
	CCMI-1	4-85
	CCMJ-1	4-134

索引
Index

	Part No.	Page
	CCMK-	4-85
	CCML-1	4-85
	CCMN-1-C	4-147
	CCMO-1-CF	4-147
	CCMT-2	4-124
	CCMV-1	4-124
	CCMW-	4-124
	CCO-	4-129
	CCP-	4-128
	CCU-	4-126
	CD-	4-129
	CD-	4-130
	CDELT-	5-21
	CDELT-2	7-45
	CDELT-3	7-45
	CDK-	4-131
	CDK-2	4-132
	CDK-6	4-132
	CDKW-	4-129
	CDMCV-	7-21
	CDV-	4-130
	CE1	10-4
	CE2	10-4
	CE5	10-4
	CE8	10-4
	CFC-1	7-9
	CFMG-1	4-49
	CG-	3-3
	CG-	3-5
C	CG-9A	3-1
	CG-9AL	3-1
	CG-9B	3-2
	CG-9D	3-2
	CG-10A	3-2
	CG-15	3-4
	CG-25	3-2
	CG-26	3-2
	CG-30	3-11
	CG-38	3-3
	CG-38L	3-3
	CG-45	3-6
	CG-50	3-3
	CG-50S	3-3
	CG-63	3-4
	CG-77	3-4
	CG-90S	3-3
	CG-110	3-4
	CG-120	3-5
	CG-140	3-7
	CG-153	3-4
	CG-191	3-5
	CG-218	3-5
	CG-280	3-8
	CG-300L	3-3
	CG-450S	3-3
	CG-XXXA	3-5
	CGA-	3-8
	CGA-63	3-7
	CGA-76	3-7
	CGA-89	3-7

	Part No.	Page
	CGA-102	3-7
	CGA-140	3-9
	CGB-	3-1
	CGB-2	3-20
	CGB-3.2	3-20
	CGB-6	3-20
	CGB-100L	3-1
	CGBB-100	3-1
	CGBC-89	3-1
	CGC-1	3-18
	CGC-43	3-3
	CGDLA-57	3-9
	CGDLA-102	3-6
	CGDLA-102L	3-6
	CGDLA152L	3-10
	CGDLA-350	3-6
	CGDLB-57	3-9
	CGE-169	3-2
	CGF-218	3-5
	CGG-114	3-7
	CGH-1	3-16
	CGH-31	3-17
	CGH-31L	3-17
	CGH-37	3-18
	CGH-37L	3-18
	CGH-90	3-19
	CGH-130	3-19
	CGHA-65	3-18
	CGHB-65	3-19
C	CGHB-90	3-19
	CGHC-	3-17
	CGHE-	3-17
	CGHI-1	3-17
	CGL-4	3-10
	CGL-8	3-10
	CGLA-	3-9
	CGLA-10	3-9
	CGLA-11	3-9
	CGLC-8	3-10
	CGLC-30	3-10
	CGLC-32-1	3-10
	CGLC-32-2	3-10
	CGLC-50.8	3-11
	CGLC-120	3-11
	CGLC-120S	3-11
	CGLC-153	3-11
	CGLD-50	3-11
	CGLE-18	1-93
	CGLF-32	1-93
	CGLG-47	3-12
	CGLI-100	3-12
	CGLJ-110	3-6
	CGLM-1	3-13
	CGLM-1N	3-13
	CGLM-2	3-13
	CGLM-5	3-13
	CGLM-5-M2	3-13
	CGLM-7-M2	3-12
	CGLM-113	3-13
	CGLM-113-M2	3-13

	Part No.	Page
	CGLN-2	3-14
	CGLN-2-M2	3-14
	CGLN-3	3-14
	CGLN-5	3-15
	CGLN-6-M2	3-14
	CGLN-9	3-12
	CGLN-113	3-13
	CGLN-113-M2	3-13
	CGLP-3F	3-15
	CGLP-3F-M2	3-15
	CGLP-4F-M2	3-16
	CGLP-5F	3-15
	CGLP-5F-M2	3-15
	CGLP-8F-M2	3-16
	CGLQ-153	3-11
	CGQ-105	3-1
	CGS-280	3-8
	CH-	4-69
	CH-1	4-101
	CH-9	4-84
	CH-12	4-84
	CH-14	4-70
	CH-15	4-70
	CHA-	4-67
	CHA-10	4-68
	CHA-14	4-68
	CHAA-	4-72
	CHAB-	4-65
C	CHAC-	4-100
	CHACA-1	4-100
	CHACB-1	4-106
	CHAD-1	4-68
	CHAE-1	4-64
	CHAF-3	4-73
	CHAH-	4-71
	CHAJ-2	4-99
	CHAU-1	4-75
	CHAV-1	4-64
	CHAW-1	4-65
	CHB-1	4-52
	CHBA-	4-64
	CHBB-	4-52
	CHBB2-	4-52
	CHBD-1	4-53
	CHBE-1	4-52
	CHC-	4-102
	CHC-4	4-103
	CHC-6	4-103
	CHCA-1	4-104
	CHCK-	4-98
	CHCS-1	4-102
	CHD	4-71
	CHD-19	4-72
	CHE-	4-71
	CHF-	4-70
	CHH-	4-102
	CHH-3	4-101
	CHI-	4-97
	CHJ-3	4-101
	CHK-	4-97

	Part No.	Page
	CHKA-1	4-103
	CHKC-1	4-104
	CHKE-1	4-99
	CHL-3	4-101
	CHLB-1	4-104
	CHM-	4-102
	CHMK-	4-105
	CHN-	4-86
	CHNA-1	4-86
	CHO-	4-23
	CHP-	4-68
	CHPA-1	4-68
	CHPB-1	4-68
	CHQ-	4-84
	CHQC-1	4-84
	CHQE-1	4-84
	CHQF-1	4-84
	CHR-11	4-68
	CHS-	6-58
	CHSA-	6-69
	CHT-42	4-75
	CHU-1	4-40
	CHUA-	4-40
	CHUB-1	4-40
	CHUC-1	4-40
	CHUE-1	4-41
	CHUF-1	4-40
	CHUK-1	4-125
	CHUL-	4-41
C	CHV-59	4-75
	CHW-	4-106
	CHWA-2	4-98
	CHWB-	4-13
	CHWC-	4-12
	CHWE-	4-104
	CHWF-1	4-98
	CHWG-1	4-41
	CHWH-4.4	4-101
	CHWK-1	4-99
	CHWS-	4-99
	CHWT-	4-101
	CHX-1	4-68
	CHY-1	4-60
	CHZ-	4-103
	CHZA-	4-103
	CHZB-1	4-103
	CHZC-	4-70
	CJCV-	7-6
	CJCV-6	7-7
	CJCV-11	7-7
	CKS-	4-86
	CKSA-20-L	4-86
	CL-	4-55
	CLB-1	4-56
	CLDK-1	6-66
	CLE-1	4-55
	CLE-3	4-56
	CLF-	4-56
	CLG-	4-56
	CLH-6	4-132

	Part No.	Page
	CLI-	4-133
	CLIA-3	4-131
	CLK-	4-133
	CLM-7.5	4-138
	CLS-	4-138
	CLT-	4-137
	CLT-7	4-138
	CLT-9	4-138
	CLT-16	4-138
	CLU-1	4-134
	CM-	4-120
	CM-1	4-119
	CM-18	4-119
	CM-28S	4-119
	CM-38	4-119
	CMG-	4-48
	CMKB-	4-74
	CNPS8000	7-76
	COC	8-31
	COC8-5	2-38
	COCA2.2-3	8-31
	COCA3-0.6	8-31
	COCA3.5-2.3	8-31
	COCA4-0.6	8-31
	COCE-1	8-31
	COCF-1	8-22
	COILC-21	6-60
	COVER-	7-34
	COVER-1	7-5
C	COVER-3	7-24
	COVER-5	6-78
	COVER-11	7-24
	COVER-12	7-24
	COVER-25	7-32
	CP-15	3-20
	CP-20	3-21
	CP-25	3-21
	CP-30	3-21
	CP-35	3-22
	CP-37	3-21
	CP-38	3-21
	CP-38L	3-21
	CP-47	3-21
	CP-50	3-21
	CP-70	3-21
	CP-72	3-22
	CP-76	3-22
	CP-77	3-22
	CP-82	3-22
	CP-84	3-22
	CP-90	3-21
	CPU140920A	6-69
	CR	7-76
	CRCAM-1	7-13
	CRDCV-56	7-46
	CRG	9-25
	CRJ-11	7-17
	CRJ-11-	7-18
	CRJ-12	7-18
	CRK5-15	7-76

索引
Index

	Part No.	Page
	CSATA-1	7-25
	CSS-	1-78
	CSSA-2	1-78
	CTBX-1	3-47
	CTBXA-1	3-47
	CUS-5	1-72
	CV145107	7-47
	CVA-5	7-33
	CVA-8	7-40
	CVER-1	6-76
	CVP-250	7-34
	CVR-	7-40
	CVR-1394	7-35
	CVR-3012	7-47
	CVR-3213	7-39
	CVR-3413	7-39
C	CVR-3912	7-47
	CVR-5312	7-47
	CVR-6118	7-41
	CVR-6912	7-47
	CVRB-1394	7-35
	CVRD-1394	7-35
	CVSATA-	7-26
	CVSATAA-15	7-26
	CW-	6-62
	CWCA-	6-67
	CWCD-	6-64
	CWCF-8	6-66
	CWCK-10	6-66
	CWK-1	4-4
	CWL-	6-61
	CWT-	6-61
	CXP-	7-24
	DC-	4-97
	DCB-	1-56
	DCB-16DL	1-56
	DCB-20DL	1-56
	DCB-XXD	1-56
	DCBA-3.5	1-56
	DCBA-8	1-56
	DCC-	1-50
	DCCA-4.3	1-51
	DCCB-4.1	1-51
	DCE-4	1-51
	DCVER-1	7-5
	DDMC-5.5	1-93
D	DELT-	1-91
	DELT-20	6-65
	DELT-21	9-11
	DGB-	5-23
	DGB-25	5-24
	DGB-26	5-24
	DGB-40	5-24
	DGBB-1	5-24
	DGBD-12	5-23
	DGBE-1	5-23
	DKCV-1	7-33
	DKHR-	5-17
	DL-	7-55
	DLB-	7-59

	Part No.	Page
	DMSA-9	1-28
	DMSB-	1-23
	DMSC-4.5	1-25
	DMSP-	1-26
	DMSPS-	1-26
	DMSS-28	1-23
	DMSS-38	1-23
	DP006A	10-43
	DP007A	10-44
	DP008A	10-43
	DP010A	10-44
	DP013A	10-41
	DP016A	10-42
	DP017A	10-44
	DP018A	10-43
	DP023A	10-41
	DP025A	10-42
	DP026A	10-42
	DP028A	10-42
	DP030A	10-44
	DP032A	10-43
	DP034A	10-44
	DP036A	10-44
	DP037A	10-42
	DP038A	10-41
	DPC-	7-27
	DRAMCV-	7-46
	DRCB-18	1-11
	DRLC-	7-47
D	DT-	7-94
	DT-10	7-97
	DT-11	7-97
	DT-12	7-96
	DT-14	7-97
	DT-19	7-95
	DT-21	7-95
	DT-22	7-95
	DT-25	7-95
	DT-42	7-98
	DT-43	7-99
	DT-45	7-98
	DT-46	7-98
	DT-47B	7-99
	DT-48	7-97
	DT-49	7-98
	DT-50	7-97
	DTA-	7-96
	DTA-42	7-98
	DTB-1F	7-99
	DTC-	7-29
	DTC-20	7-30
	DTC-26	7-30
	DTC-37M	7-30
	DTC-37ML	7-30
	DTC-50M	7-30
	DTC-50S	7-30
	DTC-68M	7-30
	DTCB-1	7-30
	DTM-1	7-99
	DTM-2	7-100

	Part No.	Page
	DTTL-	7-91
	DTTL-4	7-92
	DTTL-5B	7-92
D	DTTL-7	7-92
	DVDS-	1-72
	DVI-	7-32
	DVIC-	7-31
	DVT-1	6-57
	EARC-3.5	7-42
	EDC-	1-2
	EDGE-1	4-73
	ELED-1	2-33
	ELH2-27	2-50
	EM-	4-55
	EM-18-	6-41
	EM-19	6-85
	EM-40-	6-41
	EM-45	2-51
	EM-45-	2-51
	EM-51	6-37
	EM-63	6-37
	EM-303	7-7
	EM-349	7-100
	EM-408	10-32
	EM-514H	4-138
	EM-528	8-12
	EM-535-	6-41
	EM-579	7-77
	EM-580	6-32
	EM-581	6-32
	EM-582	6-32
	EM-583	6-32
	EM-646	4-138
E	EM-682	1-90
	EM-710	7-100
	EM-733	1-98
	EMAC-463	6-85
	EMC-1	7-7
	EMC-40	8-3
	EMC-41	8-3
	EMD-	6-39
	EMD-	6-40
	EMD-10-	6-41
	EMD-42	6-37
	EMD-78-	6-41
	EMD-106	6-37
	EMD-108	6-37
	EMD-109	6-37
	EMD-141	2-32
	EMD-142	6-37
	EMD-260	6-37
	EMD-512	4-92
	EMF-6	4-85
	EML-	6-38
	EMP1-	2-63
	EMP1-XX-F	2-63
	EMP2-	2-64
	EMP3-	2-64
	EMP5-	2-63
	EMP5-2-	2-64

	Part No.	Page
	EMS-1	7-104
	EMU-5	7-93
	ES-1	1-70
	ES-2	1-70
	ESATA-7	7-26
	ESS-1	1-70
	ESS-2	1-71
	ESS-3	1-70
	ESS-4	1-70
E	ESS-5	1-71
	ESS-7.6	1-71
	ESS-19	1-72
	ESS6-2.5	1-71
	ETS-	1-71
	ETSA-3.5	1-71
	ETSB-6	1-72
	ETSS-6.5	1-71
	EVA120430	9-24
	EVA862	9-24
	F8040	6-76
	FANCA-	7-105
	FANCD-2	7-105
	FANCS-3	7-105
	FANCV-	7-106
	FANCV-1	7-105
	FANCV-5	7-107
	FBT-	4-146
	FC-19	4-1
	FCA-	4-1
	FCA-	4-2
	FCAB-	4-2
	FCAB-2	4-3
	FCAB-3	4-3
	FCAC-1	4-2
	FCAM-1	4-5
	FCB-	4-5
	FCC-	4-1
	FCCA-1	4-79
	FCCB-1	4-79
F	FCCD-1	4-80
	FCCT-12	4-80
	FCD-	4-19
	FCE-	4-6
	FCE-30	4-7
	FCE-40	4-7
	FCF-15	4-1
	FCG-15	4-80
	FCH-	4-4
	FCHA-1	4-4
	FCI-	4-5
	FCJ-30	4-14
	FCJ-40	4-3
	FCJA-1	4-14
	FCK-50	4-5
	FCL-33	4-6
	FCN-	4-1
	FCP-	4-32
	FCPT-1	4-81
	FCS-	4-6
	FCS-31	4-7

	Part No.	Page
	FCSA-	4-9
	FCT-	4-15
	FCT-1	4-14
	FCT-5	4-14
	FCT-7	4-16
	FCT-9	4-16
	FCT-11	4-16
	FCT-14	4-16
	FCTB-	4-15
	FCTC-	4-17
	FCTC-3	4-18
	FCTE-1	4-16
	FCTF-1	4-17
	FCTG-1	4-16
	FCTI-1	4-13
	FCU-	4-3
	FCUA-	4-8
	FCUB-	4-7
	FCUT-1	4-13
	FDT-	4-18
	FDT-4	4-19
	FF-	9-1
	FF-15	9-2
	FF-37	9-4
	FF-40F	9-2
	FF-46F	9-2
	FF-47F	9-3
	FF-52F	9-3
	FF-55F	9-3
F	FF-56	9-1
	FF-57	9-1
	FF-59F	9-3
	FF-60F	9-3
	FF-62F	9-3
	FF-63	9-2
	FFDA-9AY	9-12
	FFDA-10AY	9-12
	FFG-1	9-8
	FFG-1A	9-7
	FFG-1G(RU)	9-8
	FFG-1N	9-8
	FFG-2	9-8
	FFG-2(S)	9-8
	FFG-2A	9-8
	FFG-2AS(RU	9-8
	FFG-3	9-8
	FFG-3A	9-8
	FFG-3AN	9-8
	FFG-30(S)	9-8
	FFH-30S(RU)	9-7
	FFK-1	9-6
	FFK-1P	9-6
	FFK-2	9-6
	FFK-2P	9-6
	FFK-3	9-6
	FFK-3P	9-6
	FFK-4P	9-6
	FFK-5(RU)	9-6
	FFK-6I	9-6
	FFP-30	9-5

索引
Index

	Part No.	Page
F	FFP-40	9-5
	FFQ-1	9-6
	FFQ-2	9-6
	FFR-1	9-5
	FFS-1	9-5
	FFS-2	9-5
	FFS-5	9-5
	FFT-	9-4
	FFT-15	9-4
	FH-	6-72
	FH-13	6-72
	FH-17	6-72
	FHBBU-22	10-10
	FHC-	7-45
	FHC-5	6-72
	FHCA-1	7-45
	FHCV-52	7-44
	FIXE-1	5-19
	FR-190	3-6
	FR-250	3-6
	FR-1300	3-8
	FR2515N	7-48
	FSB-	4-146
	FSL-25	1-78
	FSP-	7-85
	FSP-9	7-85
	FSS-	1-78
	FSSA-15	1-78
	FUA-1	10-12
	FUC-	10-11
	FUC-01	10-11
	FUC-02	10-11
	FUC-09	10-11
	FUC-5A	10-12
	FUC-17A	10-11
	FUG-	6-28
	FUSCV-1	10-10
	FUSCV-2	10-10
	FUSCV-3	10-10
	FUSCV-4	10-10
	FUSCV-6F	10-12
	FUSCV-7F	10-12
	FUSCV-8F	10-12
	FUSCV-10	10-10
	FUSCV-12F	10-12
	FUSE-	7-44
	FUSE-5	6-72
	FUSE-6	6-72
	FUSEA-1	6-72
	FUSEC-1	10-12
	FWAS-	4-25
	FWC-	4-25
	FWD-1	4-26
	FWK-	4-88
	FWKA-1	4-88
	FWS-	4-25
	FWT-	4-86
	FWU-	4-25
G	GDBB-	5-24
	GDFC-	7-43

	Part No.	Page
G	GDFC-18N	7-44
	GDFC-84-2N	7-44
	GL-4	9-12
	GLIN-10	8-26
	GM-	5-6
	GM-	5-7
	GM-25	5-16
	GM-26	5-16
	GM-27	5-16
	GM-28	5-16
	GM-31	5-16
	GM-32	5-16
	GM-33	5-16
	GM-34	5-16
	GM-92	5-8
	GM-131	5-11
	GM-140	5-9
	GM-158	5-8
	GND-	10-35
	GND-1	10-35
	GND-3A	10-35
	GND-7	10-36
	GND-8	10-37
	GND-12	10-38
	GND-13	10-38
	GND-14	10-37
	GND-15	10-38
	GND-20	10-37
	GND-23	10-38
	GND-24	10-35
	GND-27	6-22
	GND-32	10-36
	GND-34	10-36
	GND-35	10-38
	GND-36	10-37
	GND-37	10-37
	GND-39	10-38
	GND-44	10-39
	GND-48	6-22
	GND-49	10-39
	GND-50	10-39
	GND-51	10-36
	GND-52	10-39
	GND-54	10-39
	GND-55	10-39
	GND-56A	10-39
	GND-67	10-37
	GND-67(4.0)	10-37
	GND-74	10-40
	GND-75	6-22
	GND-96	10-36
	GND-99	10-38
	GND-103	10-36
	GPE2-24	8-15
	GPE2-30	8-15
	GPE2.6-6	8-15
	GPE3-	8-15
	GPE4-8	8-16
	GPE4-8L	8-16
	GPE4-12-1	8-16

	Part No.	Page
G	GPE4-12L	8-16
	GPE4-13.5	8-17
	GPE4-42	8-17
	GPE5-20	8-17
	GPE8-21	8-16
	GPE8-32	8-16
	GPE44-1	8-17
	GPE632-5	8-18
	GPE632-6	8-17
	GPE632-9	8-18
	GPED3-6	8-16
	GPEE3-3.5	8-15
	GPEA3-6BN	8-13
	GPEA3-8BN	8-13
	GPIB-1	7-31
	GPM3-20	8-14
	GPM4-20	8-14
	GPM632-20	8-14
	GPR3-5.5	8-18
	GPR632-6	8-18
	GRAP-1	10-41
	GSS-	1-77
	GT-	5-46
	GTB-	5-54
	GTBA-	5-54
	GTP-	5-51
	GULY-1AB-XXF	4-139
	GULY-1CDE-XXF	4-144
	GULY-2AB-XXF	4-139
	GULY-3AB-XXF	4-139
	GULY-3CDE-XXF	4-144
	GULY-3FG-XXF	4-140
	GULY-3HI-XXCF	4-143
	GULY-3JK-XXCF	4-143
	GULY-5AB-XXF	4-140
	GULY-6AB-XXF	4-140
	GULY-7AB-XXF	4-141
	GULY-8AB-XXF	4-141
	GULY-9AB-XXF	4-141
	GULY-10-XXF	4-144
	GULY-11-XXF	4-145
	GULY-13AB-XXF	4-142
	GULY-15AB-XXF	4-142
	GULY-19-XXF	4-145
	GULY-29AB-XXF	4-143
	GULY-31AB-XXF	4-142
H	HANA-1	3-43
	HAND-	3-32
	HAND-1	3-44
	HAND-2	3-44
	HAND-7	3-43
	HAND-10	3-34
	HAND-12	3-44
	HAND-13	3-44
	HAND-14	3-45
	HAND-23	3-45
	HAND-26B	3-44
	HAND-27	3-34
	HAND-29	3-36
	HAND-30	3-36

	Part No.	Page
H	HAND-31	3-36
	HAND-34	3-34
	HAND-40	3-43
	HAND-50	3-35
	HAND-51	3-35
	HAND-53	3-32
	HAND-54	3-35
	HAND-55	3-35
	HAND-65	3-44
	HAND-70	3-34
	HAND-71	3-35
	HAND-73	3-33
	HAND-74	3-34
	HAND-75	3-46
	HAND-79	3-34
	HAND-80-1	3-34
	HAND-82	3-35
	HAND-84	3-36
	HAND-87	3-38
	HAND-99	3-35
	HAND-120A	3-45
	HAND-120B	3-45
	HANDN26A	3-44
	HANE18	3-24
	HANE-21	3-23
	HANE-22	3-29
	HANE-23	3-26
	HANE-24	3-24
	HANE-26	3-26
	HANE-27	3-28
	HANE29	3-24
	HANE-30	3-30
	HANE-32	3-24
	HANE-33	3-25
	HANE-34	3-30
	HANE-35	3-23
	HANE-36	3-25
	HANE-37	3-26
	HANE-38	3-27
	HANE-40	3-24
	HANE-41	3-29
	HANE-46	3-29
	HANE-48	3-25
	HANE-49	3-27
	HANE-53	3-31
	HANE-55	3-25
	HANE-58	3-25
	HANE-59	3-23
	HANE-63	7-44
	HANE-64	3-31
	HANE-67	3-32
	HANE-69	3-25
	HANE-72	3-28
	HANE-74	3-27
	HANE-75	3-26
	HANE-76	3-29
	HANE-77	3-23
	HANE-86	3-30
	HANE-97	3-28
	HANE-98	3-29

	Part No.	Page
H	HANE-103	3-30
	HANE-104	3-31
	HANE-108	3-29
	HANE-111	3-28
	HANE-113	3-25
	HANE-118	3-31
	HANE-120	3-27
	HANE-121	3-27
	HANI-90	3-42
	HANI-96	3-42
	HANI-119	3-42
	HANT-	3-42
	HANT-3	3-43
	HANT-3-1	3-43
	HANT-3-2	3-43
	HANU-	3-38
	HANU-27U	3-37
	HANU-30PN	3-39
	HANU-32	3-39
	HANU-34	3-37
	HANU-71	3-37
	HANU-73	3-33
	HANU-80	3-41
	HANU-82	3-33
	HANU-83	3-36
	HANU-91	3-33
	HANU-92	3-32
	HANU-102	3-40
	HANU-103	3-40
	HANU-108	3-38
	HANU-114	3-38
	HANU-117	3-41
	HANU-137	3-39
	HANU-138	3-37
	HANU-139	3-37
	HANU-142	3-39
	HANU-172	3-41
	HANU-173	3-41
	HANU-173M3	3-41
	HANUL-	3-40
	HASW3-	8-14
	HASW4-	8-14
	HASW5-	8-14
	HDMIC-	7-28
	HDMIC-3	7-29
	HDMIC-4	7-29
	HDMIT-1	7-29
	HFCC-12	4-82
	HFCD-29	4-82
	HLCS-	1-43
	HLS-	6-51
	HP-	1-109
	HP2-	1-108
	HP2.5-	1-109
	HP4-	1-111
	HP6-25	1-111
	HP44L-	1-112
	HP48-20	1-113
	HP48-32	1-113
	HP256-16	1-107

索引
Index

	Part No.	Page
H	HP440-7.9S	1-112
	HP440-9.5	1-112
	HP440-15.9S	1-112
	HP440-18	1-112
	HP632-	1-113
	HP632-64	1-112
	HP832-6.35	1-113
	HP832-12.7	1-113
	HP832-19.1	1-113
	HP832-25.4	1-113
	HP2050	1-107
	HPA3-22.6	1-110
	HPB2.5-10	1-120
	HPC-11.9	1-113
	HPC-15	1-113
	HPC-19	1-113
	HPC-21	1-113
	HPC-30	1-113
	HPC-45	1-113
	HPC-73	1-114
	HPC4-	1-114
	HPC44-21	1-114
	HPCA-21	1-114
	HPH-	1-110
	HPH-34	1-110
	HPI3-	1-124
	HPI4-	1-125
	HPIA4-2	1-125
	HPIB4-18.5	1-125
	HPID4-14	1-125
	HPIE4-3	1-125
	HPL-30	1-110
	HPL-40	1-110
	HPL-100	1-110
	HPL4-37	1-111
	HPP3-9	1-106
	HPP3-9.5	1-106
	HPP3-25	1-106
	HPP4-4.5	1-106
	HPP10-64	1-107
	HPP25-14.5	1-106
	HPP25-20	1-106
	HPP440-6.35	1-107
	HPP440-11.2	1-107
	HPP440-17.4	1-107
	HPP632-14	1-107
	HPP632-51	1-107
	HPR-8	1-110
	HPR-20	1-110
	HPR3-7	1-110
	HPR3-11	1-110
	HPR3-22	1-110
	HPR3-30	1-110
	HPR4-10	1-111
	HPR4-15	1-111
	HPR4-70L	1-111
	HPR5-25	1-111
	HPR5-45	1-111
	HPS-	1-109
	HPS2-	1-108

	Part No.	Page
H	HPS2.5-11	1-108
	HPS2.5-16.5	1-108
	HPS2.6-	1-109
	HPS4-	1-111
	HPS632-12	1-112
	HPS632-19.1	1-112
	HSR-	7-87
	HSR-	7-88
	HSR-1	7-89
	HSR-2	7-89
	HSR-8A	7-66
	HSR-36	7-89
	HSR-58	7-89
	HSR-74-201	7-89
	HSR-90	7-89
	HSR-103	7-88
	HSR-109	7-89
	HSRA-1	7-66
	HSRD-2	7-89
	HU-	6-73
	HW2839	1-93
I	ICV-	6-34
	IMN-1	4-39
	INTEC-1	3-20
	IPOD-	7-10
	IPWC-	7-10
	IRCV-1	2-55
	IRCV-2	2-55
	ISS-	1-77
J	JETM-	4-48
	JKCV-	7-14
	JPC-1	6-57
	JSS-	1-78
	JUMP-	10-8
	JUMP-10H	10-9
	JYCE-1	1-93
	JYCE-2	1-95
K	KE3.5-2	1-97
	KE4.1-8	1-97
	KEML-4	1-88
	KEML-10	1-88
	KEML-12	1-88
	KEMS-11.3	1-88
	KES-15	1-84
	KESS-19	1-88
	KG-	5-65
	KGA13-	5-64
	KGB	5-35
	KGC-	5-64
	KL-	4-117
	KLB-1	4-117
	KLC-1	4-117
	KLCBL-	1-42
	KLCBM-	1-42
	KLCBS-	1-42
	KLF-11	4-117
	KLH-330	2-19
	KLH-331	2-19
	KLH-340	2-20
	KLH-341	2-20

	Part No.	Page
K	KLH-342	2-20
	KLR-1	4-117
	KLS-1	4-117
	KMCC-	4-126
	KPGB	5-35
	KPS-	7-12
	KPS-4	7-12
	KPS-5	7-11
	KPS-6	7-11
	KPS-9	7-13
	KPS-12	7-13
	KPS-13	7-16
	KPS-15	7-14
	KPS-18	7-14
	KPS-19	7-14
	KPS-20	7-11
	KPS-21	7-11
	KPS-24	7-11
	KPS-29	7-13
	KPS-31	7-13
	KPS-32	7-4
	KPS-36	5-26
	KPS-37	7-27
	KPS-39	7-4
	KPS-42	7-34
	KPS-46	7-13
	KPSA-	7-12
	KS079132	6-74
	KSC256-8.4F	8-12
	KSK	6-74
	KSM-1A	8-12
	KSM-1B	8-12
	KSM4-5M	8-12
	KSM4-6F	8-12
	KST-	5-66
	KTCC-	4-126
	KVD-05	1-20
	KVD-10	1-20
	KVLM3-	1-59
	KVLM4-10	1-59
	KVLMA-10	1-58
	KVM-	7-9
	KWA3-0.7	8-20
	KWH2-	1-104
	KWH3-	1-104
	KWH3.5-	1-105
	KWH4-	1-105
	KWH5-	1-105
	KWH6-3.2	1-105
	KWH440-	1-106
	KWS	8-20
	KWS-	8-21
	KWS-2.6	8-20
	KWS-4.2-0.6	8-22
	KWS-6	8-22
	KWS2-	8-19
	KWS4-4	8-24
	KWS5-1.6	8-20
	KWS832-0.8	8-21
	KWSA-5	8-22

	Part No.	Page
K	KWSB2.5-2.2	8-19
	KWSP	8-19
	KYCB-129	5-52
	KYPC-40	6-65
	KYST-	5-66
	KYWS-3	8-20
	KYWS2-0.3	8-20
L	LAS-	1-47
	LASA-9.5	1-47
	LASB-3.7	1-46
	LASD-8.3	1-46
	LASE-	1-47
	LASF-18	1-48
	LASH-22	1-47
	LASJ-	1-47
	LASK-4	1-96
	LASK-5	1-96
	LASK-6	1-96
	LASL-4.8	1-47
	LASY-	1-47
	LBS-	1-46
	LC3-1	2-52
	LC3-2	2-54
	LC3-6	2-52
	LC3-7	2-54
	LC3-8	2-53
	LC3-12	2-54
	LC3-13	2-52
	LC3-14	2-53
	LC3-14L	2-53
	LC3-XT	2-52
	LC5-1	2-53
	LC5-1T	2-52
	LC5-2	2-53
	LC5-2T	2-52
	LC5-3	2-53
	LC5-4	2-53
	LC5-5	2-53
	LC5-6	2-53
	LC5-7	2-54
	LC5-8	2-54
	LC5-9	2-53
	LCA-	1-37
	LCAB-12	1-40
	LCAB-14	1-40
	LCB-	1-38
	LCBA-5.6	1-42
	LCBA-7.6	1-42
	LCBB-	1-39
	LCBC-8	1-42
	LCBD-12.7	1-35
	LCBF-7.4	1-36
	LCBJ-9	1-35
	LCBL-8	1-79
	LCBM-	1-31
	LCBM-19L	1-31
	LCBS-	1-39
	LCBSA-20L	1-38
	LCBSA-28.5	1-38
	LCBT-	1-41

	Part No.	Page
L	LCBU-	1-41
	LCBUA-13.9	1-41
	LCBY-	1-36
	LCBYR-4.8	1-36
	LCBZ-4.8	1-36
	LCBZ-6.4	1-36
	LCC-	1-30
	LCD-	1-34
	LCDCM-1	4-134
	LCDS3-	1-45
	LCDS4-	1-46
	LCEO-	1-36
	LCF-	1-33
	LCFB-8	1-35
	LCFO-	1-33
	LCG-	1-41
	LCGA-14	1-33
	LCGA-14S	1-33
	LCGB-17.5	1-41
	LCH-	1-37
	LCH-XXS	1-37
	LCHA-2.3	1-37
	LCI-	1-29
	LCIA-3.5	1-30
	LCJ-	1-29
	LCK-1	1-30
	LCL-3.2	1-38
	LCMA-	1-40
	LCMB-8	1-20
	LCMC-7	1-20
	LCMD-	1-40
	LCMM-	1-87
	LCMM-4	1-87
	LCO-	1-34
	LCOA-28.8	1-32
	LCP-	1-44
	LCPA-8.2	1-44
	LCPD-	1-44
	LCPL-6.4	1-32
	LCPLB-11	1-32
	LCS-	1-43
	LCSA-	1-43
	LCSD-	1-44
	LCSE-	1-43
	LCSF-15	1-33
	LCSH-9.5	1-43
	LCSI-10	1-45
	LCSJ-16	1-43
	LCSL-4.8	1-44
	LCSLR-9.5	1-44
	LCT-9	1-35
	LCTA-4.8	1-35
	LCTA-12.7	1-35
	LCU-18	1-88
	LCUA-11	1-84
	LCUAC-2L	1-85
	LCUAC-2R	1-85
	LCUAC-3L	1-85
	LCUAC-3R	1-85
	LCUAC-7L	1-86

索引
Index

	Part No.	Page
	LCUAC-7R	1-86
	LCUAC-8L	1-86
	LCUAC-8R	1-86
	LCUAC-9L	1-86
	LCUAC-9R	1-86
	LCUAC-11L	1-86
	LCUAC-11R	1-86
	LCUAD-1	1-84
	LCUAE-8L	1-86
	LCUAE-8R	1-86
	LCUAE-12L	1-87
	LCUAE-12R	1-87
	LCUAE-16LA	1-87
	LCUE-3.3	1-83
	LCV-	1-29
	LCVA-	1-29
	LCVU-	1-29
	LCX-31	1-29
	LCY-4.8	1-44
	LD54-10.5	2-47
	LDD-10	1-69
	LDD-10(2)	1-69
	LDE-33	1-30
	LEAH-4.5	2-7
	LEAK-17.5	2-5
	LEAK3-17.5	2-5
	LEC-1	2-50
	LECA-19.5	2-45
	LECC-8.5	2-45
L	LED-	2-34
	LED-208	2-49
	LED-301	2-1
	LED-301(B)	2-1
	LED-301A	2-1
	LED-305	2-16
	LED-306	2-15
	LED-306(A)	2-15
	LED-306(B)	2-15
	LED-307	2-15
	LED-307(A)	2-15
	LED-308	2-15
	LED-310	2-16
	LED-312	2-1
	LED-313	2-1
	LED-314	2-1
	LED-316	2-1
	LED-317	2-16
	LED-319	2-2
	LED-322	2-15
	LED-323	2-15
	LED-324	2-15
	LED-325	2-1
	LED-326	2-1
	LED-328	2-1
	LED-330	2-18
	LED-331	2-18
	LED-340	2-20
	LED-341	2-21
	LED-342	2-16
	LED-343	2-2

	Part No.	Page
	LED-344	2-2
	LED-345	2-20
	LED-501	2-8
	LED-502	2-7
	LED-502S	2-7
	LED-503	2-8
	LED-504	2-7
	LED-505	2-6
	LED-521	2-16
	LED-525	2-18
	LED-528	2-7
	LED-535	2-7
	LED-542	2-7
	LED-6301	2-2
	LED-6302	2-15
	LED-6303	2-15
	LED-6501	2-8
	LED1L-	2-13
	LED1L-2.5	2-7
	LED101	2-21
	LED2M-3.6	2-37
	LED2M-9.1	2-37
	LED2X7.5	2-47
	LED3-	2-28
	LED3-1	2-22
	LED3-1B	2-22
	LED3-2	2-22
	LED3-3	2-24
	LED3-4	2-22
L	LED3-5	2-22
	LED3-6	2-22
	LED3-7	2-22
	LED3-8	2-22
	LED3-14-3S	2-32
	LED3-14-4S	2-32
	LED3-16	2-28
	LED3-16M	2-28
	LED3-17	2-28
	LED3-17-0.6	2-29
	LED3-18	2-29
	LED3-18L	2-29
	LED3-19	2-23
	LED3-20	2-22
	LED3-21	2-2
	LED3-22	2-23
	LED3-23	2-23
	LED3-24	2-29
	LED3-25	2-28
	LED3-28	2-23
	LED3-29	2-22
	LED3-30	2-29
	LED3-31	2-29
	LED3-33	2-28
	LED3-34	2-23
	LED3-35	2-28
	LED3-37	2-23
	LED3-38	2-23
	LED3-40	2-29
	LED3-40S	2-29
	LED3-41	2-29

	Part No.	Page
	LED3-42	2-29
	LED3-43	2-29
	LED3-44	2-23
	LED3-45	2-24
	LED3-46	2-24
	LED3-47	2-32
	LED3-48	2-32
	LED3-49	2-30
	LED3-50	2-30
	LED3-50L	2-30
	LED3-53	2-24
	LED3-55	2-29
	LED3-59	2-29
	LED3-61	2-23
	LED3-64	2-29
	LED3-XXM	2-28
	LED3A-9	2-49
	LED3X	2-48
	LED3X1.5R	2-48
	LED3X6-1	2-48
	LED3X8R	2-48
	LED3X13-1	2-48
	LED3X16-1	2-48
	LED4AX5	2-49
	LED4X7	2-49
	LED5-	2-28
	LED5-1	2-25
	LED5-1S	2-25
	LED5-2	2-26
L	LED5-3	2-27
	LED5-4	2-27
	LED5-5	2-25
	LED5-5T	2-25
	LED5-6	2-25
	LED5-8	2-25
	LED5-8T	2-25
	LED5-9	2-26
	LED5-9S	2-26
	LED5-10	2-27
	LED5-11	2-27
	LED5-13	2-27
	LED5-14	2-27
	LED5-16S	2-26
	LED5-18L	2-28
	LED5-24	2-30
	LED5-24L	2-30
	LED5-24M	2-30
	LED5-25	2-27
	LED5-27T	2-26
	LED5-28	2-26
	LED5-28L	2-26
	LED5-29	2-26
	LED5-XXM	2-28
	LED5L-	2-13
	LED54-	2-47
	LEDA-2	2-8
	LEDA-2S	2-8
	LEDA-4	2-3
	LEDA-5	2-3
	LEDA-6	2-3

	Part No.	Page
	LEDA-7	2-8
	LEDA-15	2-35
	LEDA-17	2-6
	LEDA-17-1	2-6
	LEDAA-22	2-40
	LEDAC-14.5	2-43
	LEDAC-18	2-43
	LEDAJ-1.3	2-41
	LEDAJ-5	2-41
	LEDAJ-7.9	2-41
	LEDAK-9.5	2-43
	LEDBA-2.5	2-41
	LEDBB-3	2-41
	LEDBC-1.6	2-41
	LEDBD-4.8	2-41
	LEDBF-10	2-39
	LEDBJ-	2-50
	LEDBJ-2-15	2-51
	LEDD-12	2-38
	LEDE-17.5	2-35
	LEDEW-	2-35
	LEDF-2	2-37
	LEDF-3	2-38
	LEDG-3	2-42
	LEDG-4	2-42
	LEDG-10	2-42
	LEDH-	2-43
	LEDH-2S	2-42
	LEDHA-4	2-42
L	LEDHB-2.3	2-41
	LEDHC-4	2-42
	LEDHG-8	2-42
	LEDI3-3	2-51
	LEDJ-4	2-50
	LEDJ-4.5	2-50
	LEDJ-7.5	2-50
	LEDJ-8	2-50
	LEDJ-8.5	2-50
	LEDK-	2-44
	LEDK-4S	2-44
	LEDK-5	2-44
	LEDKB-17.7	2-45
	LEDKU-2	2-44
	LEDL-3	2-37
	LEDL-5.5	2-37
	LEDLA-9.8	2-35
	LEDM-	2-40
	LEDMK-1	2-30
	LEDMK-3	2-30
	LEDMK-5	2-30
	LEDMU-	2-46
	LEDMU-9	2-47
	LEDO-	2-40
	LEDP-	2-49
	LEDP3-6.4	2-50
	LEDQ-5	2-41
	LEDR-1	2-46
	LEDS-	2-36
	LEDS-XXS	2-36
	LEDSA-6	2-43

	Part No.	Page
	LEDSB-11	2-35
	LEDSC-2	2-47
	LEDSH-	2-43
	LEDSS-	2-52
	LEDSW-18.5	2-35
	LEDT-	2-43
	LEDT-6.4S	2-43
	LEDU-	2-46
	LEDU-1.5	2-46
	LEDU-2	2-46
	LEDUA-5.4	2-51
	LEDUA-6.5	2-51
	LEDUA-8	2-51
	LEDV-5.5	2-42
	LEDV-42	2-42
	LEDW-	2-34
	LEDW-20	2-34
	LEDWA-23.7	2-45
	LEDWK-	2-44
	LEDX3-1	2-39
	LEDX3-3	2-39
	LEDX5-1	2-39
	LEDX5-2	2-39
	LEDXA-15.6	2-40
	LEDXA5-2	2-39
	LEDXB-7.5	2-39
	LEDXK3-4.5	2-45
	LEDXK3-5.5	2-45
	LEDXV-	2-40
L	LEDZ3-9	2-38
	LEDZ5-	2-38
	LEF-1	2-34
	LEFS-2	7-66
	LEH3-16	2-37
	LEJ-	2-4
	LEJ-4M	2-4
	LEJ-4S	2-4
	LEJ3-5	2-4
	LEJA-5	2-4
	LEJB-4	2-11
	LEJN-4	2-4
	LEJT-4	2-4
	LEK-301	2-3
	LEK-302	2-3
	LEK-303	2-4
	LEK-303L	2-4
	LEK-304	2-5
	LEK-307	2-17
	LEK-310	2-5
	LEK-311	2-3
	LEK-312	2-6
	LEK-314	2-5
	LEK-315	2-20
	LEK-316	2-16
	LEK-320	2-17
	LEK-323	2-17
	LEK-325	2-17
	LEK-327	2-17
	LEK-330	2-19
	LEK-331	2-19

索引
Index

	Part No.	Page
L	LEK-340	2-21
	LEK-345	2-17
	LEK-348	2-19
	LEK-349	2-6
	LEK-350	2-6
	LEK-501	2-12
	LEK-502	2-10
	LEK-503	2-12
	LEK-505	2-12
	LEK-506	2-11
	LEK-507	2-11
	LEK-508	2-12
	LEK-509	2-9
	LEK-512	2-18
	LEK-513	2-9
	LEK-515	2-18
	LEK-516	2-10
	LEK-517	2-12
	LEK-518	2-14
	LEK-520	2-14
	LEK-525	2-9
	LEK-526	2-10
	LEK-528	2-11
	LEK-530	2-9
	LEK-531	2-9
	LEK-533	2-10
	LEK-534	2-10
	LEK-535	2-10
	LEK-539	2-10
	LEK-541	2-9
	LEK-545	2-9
	LEK-546	2-12
	LEK-547	2-10
	LEK-548	2-9
	LEK-549	2-11
	LEK-551	2-9
	LEK-555	2-5
	LEK-556	2-12
	LEK-560	2-11
	LEK-561	2-11
	LEK-3111	2-5
	LEK3X5.3	2-48
	LEK54-17	2-5
	LEK503-7	2-12
	LEK503-18	2-12
	LEKC-5.8	2-46
	LEKC-7	2-46
	LEKH-	2-14
	LEKH-4.5	2-14
	LEKH-4.5S	2-14
	LEKH-12	2-5
	LEKH-6301	2-14
	LEKHA-1	2-31
	LEKHD-1	2-31
	LEKHD-2	2-31
	LELG-1F	2-31
	LEM-1	2-58
	LEM-2	2-58
	LEM-3	2-58
	LEM-3L	2-58

	Part No.	Page
L	LEM-4	2-61
	LEM-5	2-62
	LEM-5-57	2-62
	LEM-6	2-60
	LEM-7	2-55
	LEM-7S	2-55
	LEM-9	2-58
	LEM-11	2-61
	LEM-12	2-59
	LEM-13	2-63
	LEM-16	2-58
	LEM-18	2-61
	LEM-20	2-62
	LEM-23	2-63
	LEM-24	2-62
	LEM-24-	2-62
	LEM-28	2-72
	LEM-29	2-55
	LEM-30	2-57
	LEM-33	2-62
	LEM-36	2-58
	LEM-40	2-60
	LEM-52	2-62
	LEM-53	2-65
	LEM-53-	2-65
	LEM-54	2-55
	LEM-55	2-57
	LEM-61	2-72
	LEM-62	2-58
	LEM-63	2-59
	LEM-67	2-65
	LEM-67-	2-65
	LEM-69	2-71
	LEM-70	2-68
	LEM-72	6-82
	LEM-73	2-59
	LEM-79	2-57
	LEM-87	2-64
	LEM-87-15	2-64
	LEM-88	2-66
	LEM-88-5	2-66
	LEM-90	2-66
	LEM-91	2-66
	LEM-92	2-61
	LEM-93	2-62
	LEM-95	2-68
	LEM-96	2-57
	LEM-97	2-66
	LEM-97S	2-66
	LEM-98	2-66
	LEM-99	2-68
	LEM-103	2-62
	LEM-106	2-71
	LEM-107	2-68
	LEM-108	2-59
	LEM-110	2-68
	LEM-113	2-72
	LEM-114	2-62
	LEM-115	2-68
	LEM-122	2-60

	Part No.	Page
L	LEM-123	2-54
	LEM-131	2-59
	LEM-132	2-64
	LEM-133	2-67
	LEM-135	2-66
	LEM-135-4.8	2-66
	LEM-136	2-73
	LEM-136-F	2-73
	LEM-137	2-60
	LEM-141	2-64
	LEM-144	2-63
	LEM-145	2-72
	LEM-149	2-53
	LEM-150	2-66
	LEM-150-	2-66
	LEM-151	2-58
	LEM-156	2-65
	LEM-161	2-55
	LEM-166	2-76
	LEM-167	2-66
	LEM-167-11	2-66
	LEM-167-15	2-66
	LEM-180	2-71
	LEM-184	2-71
	LEM-185	2-67
	LEM-188	2-68
	LEM-188-17	2-68
	LEM-189	2-66
	LEM-191	2-65
	LEM-191-	2-65
	LEM-192	2-66
	LEM-193	2-64
	LEM-195	2-73
	LEM-196	2-66
	LEM-197	2-66
	LEM-198	2-65
	LEM-199	2-64
	LEM-200	2-67
	LEM-202	2-65
	LEM-205	2-60
	LEM-207	2-73
	LEM-207B	2-73
	LEM-208	2-66
	LEM-210	2-59
	LEM-212	2-61
	LEM-213	2-61
	LEM-221	2-67
	LEM-223	2-67
	LEM-225	2-73
	LEM-225-F	2-73
	LEM-233	2-65
	LEM-235	2-64
	LEM-235-7.2	2-64
	LEM-240	2-66
	LEM-244	2-57
	LEM-248	2-65
	LEM-253	2-67
	LEM-260-F	2-73
	LEM-261	2-67
	LEM-262M	2-65

	Part No.	Page
L	LEM-266	2-65
	LEM-267	2-72
	LEM-269	2-73
	LEM-270	2-71
	LEM-289	2-71
	LEM-290	2-71
	LEM4W-	2-68
	LEMA-1	2-54
	LEMA-2	2-56
	LEMA-2F	2-56
	LEMA-3F	2-56
	LEMA-5	2-55
	LEMA-6F	2-83
	LEMB1-XX-F	2-69
	LEMB2-XX-F	2-70
	LEMB3-XX-F	2-70
	LEMB3.5-2-F	2-70
	LEMC1-	2-69
	LEMC2-	2-69
	LEMD1-	2-69
	LEMD2-	2-69
	LEQ-1	2-33
	LEQ-2	2-33
	LEQ-2T	2-33
	LEQ-3	2-33
	LEQU3-1	2-24
	LEQU3-2	2-24
	LEU-1	2-80
	LEU-2	2-80
	LEU-4	2-80
	LGT-	5-17
	LH-330	2-19
	LH-340	2-20
	LHC-8	1-69
	LHC-12	1-69
	LIES-1	1-69
	LIH-8	1-89
	LIJ-4	1-69
	LIO-8	1-69
	LIO-10	1-69
	LIO-10.5	1-69
	LLCB3-15	1-92
	LMSA-6	1-31
	LMSB-4	1-32
	LMSD-12	1-45
	LMSD-16	1-45
	LMSE-4.8	1-31
	LMSP-	1-32
	LO-	7-93
	LO-6052	7-92
	LO-6053A	7-92
	LOCK-	5-57
	LP-2	2-77
	LP-3F	2-76
	LP-3-1F	2-76
	LP-11F	2-75
	LP-14F	2-76
	LP-14-1F	2-76
	LPE1-5-	2-78
	LPE1-5-20.5	2-74

	Part No.	Page
L	LPE1-5-20.5S	2-74
	LPE1-10-	2-78
	LPE1-10.2-25.5	2-74
	LPE1-10.5-40	2-74
	LPE1-15-	2-78
	LPE2-5-	2-79
	LPE2-5-19C	2-78
	LPE2-10-	2-79
	LPE2-15-	2-79
	LPE3-5-	2-79
	LPE3-5-22C	2-78
	LPE3-7.8	2-75
	LPE3-10-	2-79
	LPE3-15-	2-79
	LPE4-3.6	2-75
	LPE4-5-	2-79
	LPE4-5-18	2-79
	LPE4-10-	2-79
	LPE4-10-24	2-79
	LPE4-15-	2-79
	LPEB3-1	2-75
	LPEB4-1	2-75
	LPED2-1	2-75
	LPED4-1F	2-75
	LPF1-517	2-74
	LPF1-518	2-74
	LPG-1	2-77
	LPG-2	2-77
	LPG-3	2-77
	LPH-2B	2-77
	LPH-4	2-78
	LPH-4-1	2-78
	LPZ-1	1-91
	LPZ-2	1-91
	LPZ-5	4-125
	LPZ-6	1-91
	LPZ-9	1-91
	LPZA-1	1-91
	LSF-002	9-20
	LUCE-1	1-90
	LUS-	1-98
	LUS2-8.2	1-99
	LUSA-11	1-99
	LUSB-10	1-99
	LUSS-	1-99
M	M	5-22
	M-	8-4
	M-3/8-27	1-112
	M-10	8-5
	M1.6-	8-6
	M2-	8-8
	M2-XF	8-9
M	M2.5-	8-8
	M2.5-XF	8-9
	M2.5L-13	8-8
	M2.6-	8-8
	M3-	8-8
	M3-XXF	8-9
	M3-XXFPK	8-10
	M3-XXPK	8-8

	Part No.	Page
M	M3.5-	8-8
	M4-	8-9
	M4-9NBD	8-11
	M4-XXF	8-9
	M5-	8-9
	M5-10F	8-9
	M5-15F	8-9
	M5A-65	8-11
	M6-4	8-11
	M6-8F	8-12
	M6-25F	8-9
	M8-7	8-11
	M12-2	8-4
	MA-	1-49
	MA-2.5S	1-49
	MA-2.8S	1-49
	MA-3S-1	1-49
	MA-XXDL	1-49
	MAB-4	1-49
	MABA-2.6	1-49
	MAC-40	1-17
	MAC-40S	1-17
	MAD-	1-14
	MAD1-3	1-13
	MAD1-19	1-13
	MAD1.2-6	1-14
	MAD1.2-8	1-14
	MAD1.2-12.9	1-13
	MAD1.7-9.8	1-13
	MAD3.5-12	1-19
	MADA-	1-16
	MADA-18S	1-15
	MADA-XXL	1-16
	MADAA-14	1-15
	MADAB-4.3	1-17
	MADB-3.5	1-14
	MADB-6	1-14
	MADD-2	1-18
	MADE-2.8	1-17
	MADG-5.4	1-36
	MADJ-6	1-15
	MADL-27.8	1-18
	MADM-	1-16
	MADM1-2.2	1-17
	MADMK-5	1-20
	MADN-24	1-18
	MADP-	1-36
	MADS-6.5	1-13
	MADS-19.2	1-13
	MADSA-3	1-13
	MADSB-3	1-13
	MADX-9.5	1-14
	MAE-	1-53
	MAE-7-440	1-54
	MAE-7-440T	1-54
	MAE-XXT	1-53
	MAE2.5-6.5	1-53
	MAE2.5-6.5T	1-53
	MAE4-	1-55
	MAE4-XXT	1-55

	Part No.	Page
M	MAE4D-6	1-54
	MAE4D-6T	1-54
	MAE43-	1-54
	MAE43-4.8LT	1-54
	MAE43-XXT	1-54
	MAEA-3.5	1-19
	MAEA-3.5L	1-19
	MAEA-3.5LS	1-19
	MAEA-3.5M	1-19
	MAEB-3.2	1-19
	MAEE-4.5	1-19
	MAF-	1-18
	MAFA-6	1-19
	MAFB5-0.8	1-19
	MAFB5-9.7	1-19
	MAHA-7	1-15
	MAHC-14.3	1-17
	MAHC-XXS	1-17
	MAL-8	1-48
	MAL-34	1-50
	MAM-	1-50
	MAMA-3.5	1-50
	MAMDA-	1-15
	MAMDC-12	1-18
	MAMDD-6	1-20
	MAMDF-7	1-16
	MAMDL-9	1-16
	MAMS-	1-49
	MAMS-7.5	1-49
	MAS-9	1-13
	MASD-0.8	1-48
	MASD-2	1-48
	MASL-5.4	1-48
	MASS-	1-48
	MASSD-14	1-13
	MASSD-18	1-13
	MAST-18	1-48
	MAST-6	1-48
	MB-	7-64
	MB-1	7-62
	MB-2	7-62
	MB-3	7-62
	MB-4	7-62
	MB-5	7-62
	MB-6	7-63
	MB-7	7-63
	MB-8	7-67
	MB-10	7-67
	MB-12	7-67
	MB-14	7-67
	MB-18	7-63
	MB-19	7-63
	MB-20	7-68
	MB-27	7-63
	MB-32	7-66
	MB-33	7-66
	MB-36	7-63
	MB-39	7-63
	MB-43	7-63
	MB-45	7-67

	Part No.	Page
M	MB-52	7-63
	MB-53	7-66
	MB-55	7-63
	MB-56	7-63
	MB-63	7-67
	MBB-	7-86
	MBC-11	1-61
	MBD-10	1-61
	MBE4-1.2	7-69
	MBG2-8.7	7-69
	MBH-1	5-19
	MBL3-	7-66
	MBL4.8-	7-67
	MBP-	5-20
	MBPP-	5-21
	MBS-	1-63
	MBS3-	7-65
	MBT	7-68
	MBT-	7-69
	MBT-1	7-65
	MBT-2	7-65
	MBT6	7-69
	MBT-7	7-68
	MBT-10	7-68
	MBT-14	5-21
	MBT-15	7-68
	MBT-17	7-68
	MBTA-1	7-90
	MBU3-3	7-65
	MBW-	7-70
	MBW-7	7-71
	MBW-9	7-71
	MBW-14	7-71
	MBW-18	7-72
	MBW-21	7-72
	MBW-22	7-74
	MBW-24	7-71
	MBW-27	7-71
	MBW-28	7-71
	MBW-29	7-71
	MBW-34	7-72
	MBW-36	7-72
	MBW-38	7-72
	MBW-40	7-72
	MBW-41	7-73
	MBW-46	7-74
	MBW-48	7-73
	MBW-51	7-71
	MBW-52	7-71
	MBW-55	7-71
	MBW-61	7-71
	MBW-71	7-71
	MBW-80	7-71
	MBW3-8	7-73
	MBW5-12	7-71
	MBW6-11	7-72
	MBW7-20	7-72
	MBWB-	7-74
	MBWC-	7-73
	MBWK	5-20

	Part No.	Page
M	MC-	1-57
	MC-	1-58
	MCB-6	1-61
	MCC-	7-86
	MCE-1.9	1-58
	MCEA-1.9	1-58
	MCF-1	1-133
	MCF-428	1-132
	MCF-2310	1-131
	MCF-2908	1-132
	MCF-3305	1-130
	MCF-3308	1-130
	MCF-4213	1-131
	MCFA-2508	1-130
	MCFA-2511	1-130
	MCFC-2508	1-130
	MCFD-1	1-132
	MCFD-2810	1-130
	MCFD-3210	1-130
	MCFF-	1-132
	MCFF-5	1-133
	MCFF-6	1-133
	MCFF-7	1-134
	MCFF-11	1-131
	MCFF-12	1-135
	MCFF-13	1-134
	MCFF-15	1-134
	MCFF-16	1-134
	MCFF-17	1-134
	MCFF-18	1-131
	MCFF-20	1-131
	MCFF-21	1-131
	MCFF-21L	1-131
	MCFF-24	1-132
	MCFF-25	1-130
	MCFG-3010	1-130
	MCFG-35810	1-130
	MCFJ-	1-131
	MCFJ-1	1-133
	MCFJ-2	1-133
	MCFL-3310	1-130
	MCFM-2807	1-132
	MCFO-	1-131
	MCFP-5	1-135
	MCFP-7	1-136
	MCFP-9	1-136
	MCFP-12	1-135
	MCFP-17-1	1-135
	MCFP-18	1-136
	MCFP-25	1-135
	MCFP-29	1-136
	MCFP-30	1-135
	MCFP-31	1-136
	MCFP-32	1-136
	MCFP-33	1-133
	MCFP-34	1-135
	MCFP-35	1-135
	MCFP-36	1-135
	MCH-	1-58
	MCI-4.7	1-55

	Part No.	Page
M	MCIA-12	1-59
	MCIA-16	1-59
	MCIO-1	7-9
	MCL-9	1-58
	MCL-16	1-58
	MCM-8	1-51
	MCM-14.5	1-51
	MCN-10	1-57
	MCO-16	1-51
	MCSH-7.2	1-55
	MDLS-4.5	1-19
	MEE-	7-86
	MGFA-2	9-7
	MGFF-4	9-7
	MGM-	5-1
	MHC-1	5-19
	MHCA5.5-5.6	5-19
	MHCA8.5-6.9	5-27
	MHD-	5-18
	MHDA	5-27
	MHDS-1	5-18
	MHE-11	5-19
	MHF-	5-19
	MHSC-	7-42
	MI1.2-XXNGF	8-6
	MI2-	8-7
	MI2-XXF	8-7
	MI2.5-4	8-7
	MI2.5-5	8-7
	MI2.5-12	8-7
	MI2.5-12S	8-7
	MI2.5-16	8-7
	MI3-	8-7
	MI3-6R	8-7
	MI3-XXPK	8-7
	MI4-	8-7
	MI420-25.4	8-10
	MIA6-16	8-13
	MIA8-20	8-13
	MIB-	4-45
	MIB-	4-46
	MIB-9	4-44
	MIB-10	4-44
	MIB-11	4-44
	MIB-17	4-44
	MIB-21	4-44
	MIB-32	4-10
	MIB-33	4-44
	MIB-34	4-44
	MIB-35	4-44
	MIBA-	4-82
	MIBA-4	4-11
	MIBB-	4-11
	MIBB-1	4-10
	MIBB-2	4-10
	MIBD-3	4-10
	MIBB-6	4-10
	MIBB-7	4-10
	MIBB-9	4-10
	MIBB-10	4-33

	Part No.	Page
M	MIBB-14	4-33
	MIBB-18	4-33
	MIC-	6-84
	MIC-31	6-85
	MIC-39	6-85
	MIDP-	7-27
	MIHDMI-	7-28
	MIL4-20	8-10
	MINI-1	10-45
	MINI-2	10-45
	MIOSD-1	7-48
	MIS-	4-77
	MIS-2	4-76
	MIS-3	4-76
	MIS-4	4-78
	MIS-5	4-76
	MIS-6	4-78
	MIS-9	4-76
	MIS-11	4-76
	MIS-18	4-81
	MIS-20	4-76
	MIS-23	4-78
	MIS-27	4-105
	MIS-28	4-78
	MISA-	4-79
	MISA-3	4-24
	MISA-4	4-83
	MISB-	4-78
	MISD-1	4-24
	MISE-1	4-79
	MO-	8-4
	MO-	8-5
	MO-6G-68	8-4
	MO-8G-85	8-4
	MO-12	8-5
	MO-32L	8-5
	MOA3	8-3
	MOB-2.5	8-5
	MOB-2.6	8-5
	MOC-12	8-5
	MOPG-	8-5
	MOR	5-36
	MOTA-	5-27
	MOTB-8	5-27
	MOU-01	1-89
	MOUC-1	7-15
	MP-	8-1
	MP-2.5	8-1
	MP-4-1	8-2
	MP-5	8-2
	MP-12	8-2
	MP-26	8-2
	MP-632	8-2
	MP5-1	8-2
	MP6-1	8-2
	MP16-1	8-2
	MR4-	8-11
	MRL4-3	8-11
	MRT-8	8-11
	MS-	1-52

	Part No.	Page
M	MSA-14.1	1-48
	MSA-24.3	1-48
	MSB-2.8	1-52
	MSM-2.5	1-52
	MSMA-3.5	1-52
	MSP-	1-26
	MSP1-	1-27
	MSP3-	1-24
	MSP3-8L	1-24
	MSPA-1.6	1-31
	MSPA-6.3L	1-31
	MSPA3-9.7	1-126
	MSPB-8	1-22
	MSPB-8L	1-22
	MSPB3.2-6.4	1-21
	MSPC3-3.2	1-21
	MSPC3-3.2L	1-21
	MSPC3-3.2M	1-21
	MSPCA-16	1-22
	MSPCA3.3-12	1-22
	MSPCA3.3-12S	1-22
	MSPD-	1-25
	MSPE-7	1-28
	MSPF3-	1-21
	MSPF3.3-8	1-22
	MSPF3.3-8L	1-22
	MSPF3.3-17.5	1-22
	MSPG3-	1-127
	MSPG4-	1-127
	MSPH-6.8L	1-26
	MSPH-7.5	1-26
	MSPK4.8-	1-28
	MSPK45-	1-27
	MSPL-11	1-24
	MSPM-5	1-27
	MSPM-24	1-27
	MSPMA-12	1-25
	MSPN-9	1-25
	MSPN-12	1-25
	MSPO-1216S	1-23
	MSPP-	1-21
	MSPQ-16	1-26
	MSPR-3	1-90
	MSPS-	1-127
	MSPS3-	1-24
	MSPS3S-7.5	1-23
	MSPV-3	1-27
	MSPW4-4	7-56
	MSPY-12.7	1-27
	MSQ-	5-23
	MTAB-	6-64
	MTAC-1	6-64
	MTD-11	1-63
	MTP4-12.7	1-124
	MTPA4-3-20	1-121
	MTPA4-15	1-121
	MTPA4-15L	1-121
	MTPA4-15-1	1-121
	MTPA4-50L	1-121
	MTPA5-4-50	1-122

	Part No.	Page
M	MTPA6-5-30	1-122
	MTPC4-20	1-121
	MTPC4-57	1-121
	MTPD632-11.9	1-122
	MTPF3-7	1-121
	MTPE3-12	1-120
	MTPG3-42	1-124
	MU-	4-47
	MU-01-8	4-46
	MU-02-10	4-46
	MUA-1	4-47
	MUB-	4-136
	MUC-1	4-47
	MUD-	4-49
	MUS2-10	8-13
	MUT-	4-50
	MUT-1	4-51
	MUT-3	4-51
	MUT-4	4-51
	MUT-8	4-51
	MUT-10	4-51
	MWA-1	4-43
	MWC-	4-67
	MWCA-1	4-69
	MWS-	4-59
	MWS-1	4-61
	MWS-2	4-30
	MWS-2D	4-30
	MWS-3	4-30
	MWS-4	4-81
	MWS-8	4-61
	MWS-9	4-39
	MWS-13	4-60
	MWS-14	4-60
	MWS-16	4-61
	MWS-17	4-61
	MWS-20	4-60
	MWS-22	4-31
	MWS-24	4-61
	MWS-25	4-60
	MWS-26	4-38
	MWS-27	4-30
	MWS-28	4-63
	MWS-30	4-30
	MWS-32	4-31
	MWS-33	4-31
	MWS-34	4-68
	MWS-37	4-28
	MWS-40	4-63
	MWS-42	4-31
	MWS-43	4-31
	MWS-44	4-61
	MWS-45	4-30
	MWS-46	4-30
	MWS-47	4-62
	MWS-49	4-31
	MWS-50	4-61
	MWS-52	4-31
	MWS-54	4-31
	MWS-55	4-61

	Part No.	Page
M	MWS-59	4-61
	MWS-60	4-60
	MWS-61	4-31
	MWS-62	4-31
	MWS-63	4-62
	MWSA-	4-66
	MWSB-1	4-69
	MWSC-	4-65
	MWSC-2	4-64
	MWSC-7	4-63
	MWSD-	4-62
	MWSD-2	4-62
	MWSE-	4-62
	MWSG-1	4-66
	MWSL-6	4-66
	MXXU	5-22
N	NB-	5-1
	NB-09	5-2
	NB-12	5-2
	NB-16	5-2
	NB-19	5-2
	NB-19.5T	5-3
	NB-22	5-2
	NB-22J	5-3
	NB-22U	5-3
	NB-25	5-2
	NBA-	5-3
	NBR-	5-4
	NBR-7530	5-5
	NBS-6423	5-5
	NB-XXA	5-2
	NB-XXC	5-2
	NB-XXT	5-2
	NC-	5-3
	NF-	9-4
	NF-002ST	9-14
	NF-004ST	9-14
	NF-005ST	9-15
	NF-011ST	9-15
	NF-012	9-15
	NF-012ST	9-15
	NF-015ST	9-15
	NF-016ST	9-15
	NF-030IST	9-15
	NF-031	9-16
	NF-035IST	9-15
	NF-039ST	9-14
	NF-045	9-16
	NF-047ST	9-15
	NF-050ST	9-15
	NF-051ST	9-15
O	OCC-	4-108
	OCC-4	4-107
	OCC-5	4-107
	OCC6.5-5	4-107
	OCCB-	4-108
	OCSH-14	4-107
	OFS-1	4-147
	OPC-	7-21
	OR	9-23

	Part No.	Page
O	OR-	9-23
	OR-31-1.8	9-23
	OR5.5-11.8	9-23
	OR6.07-1.63	9-23
	OR7-2	9-23
	OSFP-	7-24
P	P004	9-20
	P005	9-20
	P1	10-3
	P1B	10-3
	P2	10-3
	P3	10-3
	P3B	10-3
	P4	10-3
	PA11-2P	10-2
	PA11-3P	10-2
	PA7-	10-2
	PA7F-	10-2
	PA9-	10-2
	PA9F-12	10-2
	PA92	10-2
	PA93	10-2
	PAA-11	1-68
	PAD-1	6-62
	PC110	10-27
	PC110-1	10-27
	PC110-4	10-27
	PC110D5	10-27
	PC110D5-1	10-27
	PC110D8	10-27
	PC187	10-27
	PC187(0.8)	10-27
	PC187-16-1	10-27
	PC11187	10-33
	PC11250	10-33
	PC12250	10-33
	PC1125003	10-33
	PC1125005	10-33
	PC1125035	10-33
	PC1L187	10-32
	PC1L250	10-32
	PC1L250-1A	10-31
	PC1L250-4	10-33
	PC1L250-7	10-32
	PC1L250-12	10-32
	PC1L25005	10-32
	PC1V187	10-32
	PC1V18704	10-32
	PC1V18705	10-32
	PC1V18706	10-32
	PC205	10-28
	PC250	10-28
	PC250-4	10-28
	PC250-8	10-28
	PC250-11	10-28
	PC252	10-1
	PC253	10-1
	PC254	10-1
	PC255	10-1
	PC2L250	10-33

索引
Index

	Part No.	Page
P	PC2L250-90	10-34
	PC2L25005	10-33
	PC3L250-3	10-34
	PC3L250-4	10-34
	PC3L18704	10-33
	PC3L25004	10-33
	PC3L110028	10-33
	PCA-	7-101
	PCA-9	7-102
	PCB-1	10-15
	PCB-2	10-15
	PCB-4	10-13
	PCB-4CV	10-13
	PCB-7	10-18
	PCB-8	10-18
	PCB-9-1	10-17
	PCB-10	10-18
	PCB-10(632)F	10-18
	PCB-10A	10-18
	PCB-10AM4	10-18
	PCB-10M4F	10-18
	PCB-11	10-16
	PCB-12	10-14
	PCB-15(M4)	10-14
	PCB-17	10-16
	PCB-18	10-17
	PCB-20(632)F	10-20
	PCB-21(4.4)	10-13
	PCB-22(M4)	10-22
	PCB-23(M5)	10-24
	PCB-25(3.2)	10-23
	PCB-26	10-19
	PCB-27	10-17
	PCB-28	10-17
	PCB-29	10-24
	PCB-34	10-13
	PCB-36	10-34
	PCB-37M4	10-17
	PCB-41A	10-40
	PCB-43(M5)F	10-19
	PCB-44	10-24
	PCB-47ST	10-15
	PCB-49(M3)	10-19
	PCB-50M5F	10-19
	PCB-54L(M3)	10-23
	PCB-54R(M3)	10-23
	PCB-55(M3)	10-23
	PCB-58M4	10-17
	PCB-60	10-20
	PCB-66	10-16
	PCB-67	10-40
	PCB-68	10-40
	PCB-69(1032)	10-20
	PCB-70	10-14
	PCB-71	10-17
	PCB-73	10-22
	PCB-74	10-22
	PCB-75	10-17
	PCB-77	10-24
	PCB-78	10-15

	Part No.	Page
P	PCB-82	10-20
	PCB-82-1	10-20
	PCB-93	10-34
	PCB-99	10-23
	PCB-100	10-31
	PCB-102	10-14
	PCB-106	10-17
	PCB-128	10-15
	PCBS-	1-9
	PCBT-4.8	1-9
	PCBT-10	1-9
	PCBTA-4.8	1-9
	PCC-6	1-68
	PCC-11	1-68
	PCF110	10-21
	PCF187	10-21
	PCF250	10-21
	PCF250-7	10-31
	PCF250-11	10-21
	PCF1108	10-21
	PCFL250	10-21
	PCFS156A	10-24
	PCFS187	10-25
	PCFS250L	10-25
	PCFS2505	10-25
	PCFS2505A	10-25
	PCFS2508	10-25
	PCFS2508A	10-25
	PCFS2509A	10-25
	PCH250	10-28
	PCH250-1	10-28
	PCIE-	7-41
	PCIEC-1	7-32
	PCIEX-1	7-10
	PCK250	10-30
	PCLS-25	1-52
	PCLT-10	10-22
	PCLT-11	10-22
	PCLT-250	10-26
	PCLTA-1	10-22
	PCLTA-2	10-31
	PCLTM-250	10-26
	PCMIC-	7-46
	PCR187	10-29
	PCR187(0.8)	10-29
	PCR250	10-29
	PCR250-S	10-29
	PCRL250	10-21
	PCRN250	10-30
	PCRS187A	10-30
	PCRS205	10-29
	PCRS250	10-29
	PCRS250-1	10-29
	PCRS250-2	10-29
	PCTL-2	10-34
	PCTL-3.5	10-35
	PCTT-	6-76
	PCU250	10-30
	PDC-	1-56
	PDC-4.5D	1-56

	Part No.	Page
P	PDC-5	1-57
	PDC-9	1-57
	PDC-10	1-57
	PDC-XXD	1-57
	PEB3-25	7-102
	PEB4-	7-103
	PEB4-20	7-102
	PEB5-40.5	7-102
	PEB6-	7-102
	PEB8-38	7-103
	PEBR-1	7-102
	PEC5-	7-102
	PENCOMC-1	6-81
	PH-	6-17
	PH-2	6-18
	PH-2A	6-18
	PH-13	6-19
	PH-15	6-21
	PH-16	6-18
	PH-18	6-18
	PH-20	6-18
	PH-21	6-19
	PH-22	6-18
	PH-23	6-19
	PH-25	6-78
	PH-26	6-59
	PH-27	6-19
	PH-28	6-21
	PH-30	6-19
	PH-31	6-19
	PH-34	6-21
	PH-37	6-20
	PH-40	6-18
	PH-41	6-78
	PH-43	6-21
	PH-44	6-6
	PH-48	6-21
	PH-50	6-18
	PHC-	6-59
	PHC-13	6-60
	PHC8NNHA	6-59
	PHG-	6-20
	PHG-7	6-21
	PHG-15	6-21
	PHK-1	6-19
	PIC-	7-76
	PIN	7-77
	PIN-1	10-26
	PIN-2	10-26
	PIN-9	10-26
	PJB-45	7-19
	PJBA-45	7-19
	PJC-45	7-20
	PJCV-	7-11
	PJD-45	7-20
	PJR-45	7-20
	PJRA-45	7-21
	PJS-45	7-20
	PJSA-45	7-19
	PJT-45	7-19

	Part No.	Page
P	PJU-45	7-19
	PJV-45	7-20
	PL1-	2-70
	PL2-XX-F	2-70
	PLC-1	7-38
	PLC-2	7-39
	PLC-3	7-38
	PLC-5	7-25
	PLCC-	7-36
	PLCC-2	7-37
	PLCC-3	7-37
	PLCC-5	7-38
	PLCC-7	7-39
	PLCC-16	7-38
	PLCD-	7-37
	PLT130T	6-56
	PMB-1	1-92
	PMB-2	1-92
	PMR-1	2-80
	PMR-2	2-80
	PMR-3	2-81
	PMR-6	2-82
	PMR-7	2-82
	PMR-8	2-32
	PMR-10	2-81
	PMR-11	2-80
	PMR-12-1F	2-83
	PMR-12F	2-83
	PMR-13	2-81
	PMR-14	2-82
	PMR-15	2-32
	PNL-	7-75
	PNLA-	7-75
	PNLS-	7-75
	PNLSA-8	7-75
	PR-	7-58
	PR-1	7-59
	PS-16	1-87
	PSR	7-61
	PSR-	7-60
	PSR-8	7-60
	PSR5-7	7-60
	PSR5.1-7	7-60
	PSR5.5-	7-60
	PSR64-25	7-62
	PSRB-1	7-62
	PT	9-22
	PT-1762	9-22
	PUCP-1	2-51
	PVC套管	5-62
	PW-	6-58
	PWIC-	7-41
Q	QCL-	6-60
	QW-	6-61
	QW-4	6-62
R	R	6-76
	R3	10-4
	R6	10-4
	R7-13	1-97
	RA-35	9-9

	Part No.	Page
R	RA-40	9-10
	RA-40S(RU)	9-10
	RA-45	9-10
	RA-45-1(RU)	9-10
	RA-45S	9-10
	RA-45S-1	9-10
	RA-45S-1(RU)	9-10
	RA-45S-3	9-10
	RA-57	9-10
	RA-57S(RU)	9-10
	R440-	8-9
	R632-	8-9
	RAD-	1-1
	RAFF-40	9-10
	RAM-	1-1
	RAM-13.5L	1-1
	RAMA-	1-1
	RAMB-9	1-3
	RAMC-	1-2
	RAMD-15.5	1-3
	RAML-	1-1
	RAS-	1-2
	RBS-	1-11
	RBT-	1-11
	RBT-XXL	1-11
	RCA-	1-4
	RCAB-	1-12
	RCAB-4.5S	1-12
	RCAC-	1-12
	RCB-	1-6
	RCBC-12	1-8
	RCBL-6	1-6
	RCBS-	1-8
	RCC-	1-4
	RCCA-8	1-5
	RCD-	1-6
	RCEA-	6-54
	RCEB-	6-55
	RCEC-2	6-54
	RCEE-7	6-55
	RCEF-1	6-54
	RCEH-1	6-56
	RCF-	1-7
	RCFA-7	1-10
	RCFB-10	1-10
	RCFL-	1-10
	RCG-	1-5
	RCH-	1-5
	RCI-2.6	1-3
	RCI-5	1-6
	RCJ-	1-11
	RCM-	1-7
	RCMA-3	1-5
	RCMB-2.8	1-5
	RCMD-6	1-7
	RCO-2.5	1-3
	RCO-2.5L	1-3
	RCQC-7	1-23
	RCR-3.2	1-8
	RCR-12.7	1-9

索引
Index

	Part No.	Page
R	RCRA-9.5	1-9
	RCS-	1-6
	RCSL5-10	1-97
	RCSL6-8.5	1-97
	RCT-4.5	1-10
	RCT-8	1-10
	RCTA-4.5	1-10
	RCTL-	1-11
	RCV-11.1	1-8
	RCW-	1-8
	RCWA-	1-8
	RCWB-21	1-8
	RCXL-1	1-96
	RCXL-14	1-96
	RECA-	6-52
	RECC-	6-52
	RECD-1	6-56
	RECD-3	6-51
	RECE-	6-52
	RECG-	6-52
	RECI-1	6-52
	RF	9-18
	RF-	9-17
	RF-	9-18
	RF-004	9-17
	RF-016	9-16
	RF-017	9-16
	RF-018	9-16
	RF-029	9-16
	RF-031	9-16
	RF-1094A	9-17
	RF3.8-2	9-18
	RF3.8-2.5A	9-17
	RF4-	9-18
	RF4.5-	9-18
	RF4.8-1	9-18
	RF5-	9-18
	RF5.3-0.7	9-18
	RF5.5-1.6	9-18
	RF5.6-2	9-18
	RF5.8-4A	9-16
	RF6-	9-18
	RF6-5	9-17
	RF6-8.4A	9-17
	RF6.4-2.6	9-18
	RF6.5-	9-18
	RF6.6-	9-18
	RF7-	9-18
	RF7-3.2A	9-17
	RF7-4.2A	9-17
	RF7.2-1.5	9-18
	RF7.5-2	9-18
	RF7.8-2.9A	9-17
	RF8-	9-18
	RF8-3.5	9-16
	RF8-5.5A	9-17
	RF8-6.5A	9-17
	RF8-XA	9-17
	RF8.2-5	9-16
	RF8.5-	9-18

	Part No.	Page
R	RF8.8-2.9A	9-17
	RF9-	9-18
	RF9-3.5	9-16
	RF9.5-	9-18
	RF9.5-3.9A	9-17
	RF9.7-4.2A	9-16
	RF10-	9-18
	RF10-6.2A	9-17
	RF10.5-	9-18
	RF11-3.2A	9-17
	RF11-5	9-17
	RF12-	9-18
	RF12-8.5A	9-17
	RF12-27A	9-17
	RF12.5-1	9-18
	RF12.7-6.2A	9-17
	RF13-	9-18
	RF14-4	9-18
	RF14-5A	9-17
	RF14-8A	9-17
	RF14.5-4	9-18
	RF15-11A	9-17
	RF15-13.5A	9-17
	RF15.5-5A	9-16
	RF16.5-3	9-18
	RF17-11A	9-17
	RF18-	9-18
	RF18-5A	9-17
	RF19-	9-18
	RF19-4A7	9-16
	RF20-	9-18
	RF20-5	9-17
	RF20-10	9-16
	RF21-	9-17
	RF21.6-11A	9-17
	RF22-	9-16
	RF22-2	9-18
	RF22-2.5	9-18
	RF22.1-10.4	9-18
	RF22.8-5	9-16
	RF24-8	9-17
	RF24.6-3	9-18
	RF25-2.3	9-18
	RF27-3	9-18
	RF27-7AC-1	9-17
	RF28-3.2	9-18
	RF30-2	9-18
	RF40-1	9-18
	RF58-	9-18
	RF64.7-2.5S	9-18
	RJ-22	7-18
	RJ-45	7-19
	RLA-1	1-94
	RLA-12.7	1-94
	RLL-	1-96
	RML-1	1-94
	RML-25	1-94
	RMM-	1-95
	ROFF-10F	10-9
	RPCL-9	6-58

	Part No.	Page
	RPCL-11	6-58
	RR-1	1-98
	RS-28	9-8
	RS-28(N)N	9-8
	RS-28N(RU)	9-8
	RS-28S(RU)	9-8
	RS-40	9-8
	RS-40S(RU)	9-8
	RS-45	9-9
	RS-45(S)I	9-9
	RS-45S(RU)	9-9
	RS-50	9-9
	RS-50-2	9-9
	RS-50N	9-9
	RS-50S(RU)	9-9
	RS-55	9-9
	RS-55S(RU)	9-9
	RS-60	9-9
	RS-60N	9-9
R	RS-61N	9-7
	RS-61S	9-7
	RSS-	1-95
	RSUA-1	1-94
	RSUS632	8-18
	RSUS632-6	8-18
	RU1420-8	8-12
	RWF3.5-	9-23
	RWF4.5-	9-23
	RWF5.1-2.1	9-23
	RWF7.2-2.8N	9-23
	RWF7.6-1.7N	9-23
	RWF8.5-3N	9-23
	RWF10.2-2	9-23
	RWF18-8.5-15	9-23
	RWF20-1.5	9-23
	RWF25-2	9-23
	RWF40-2	9-23
	RWF43-2	9-23
	RXL-	1-96
	RXS-1	1-95
	RXS-13.5	1-95
S	S	6-75
	S4-40	8-4
	S6-32	8-4
	S440-	8-8
	S632-	8-8
	SATAC-	7-25
	SATAC-7	7-26
	SATAC-15	7-26
	SB-2	5-3
S	SB4F-	5-33
	SB4F-2	5-29
	SB4F-9	5-29
	SB4L-4	5-31
	SB4L-6	5-29
	SB5F-	5-30
	SB5L-4	5-31
	SB5P-2	5-29
	SB5R-2	5-29
	SB5R-4	5-30

	Part No.	Page
	SB5R-5	5-33
	SB6L-6	5-31
	SB6P4-4	5-30
	SB6R-6	5-30
	SB7L-2	5-31
	SB7R-7	5-32
	SB8R-2	5-30
	SB9R-2	5-30
	SBA-1	5-5
	SBB-1	5-34
	SBCR-	5-35
	SBQC-1	5-34
	SBU-	5-34
	SBU4-	5-33
	SBUT-1	5-43
	SC-	5-4
	SCAB-	7-49
	SCAB-2F	7-49
	SCB-	1-128
	SCB-6SM3	1-128
	SCB-8.5S	1-128
	SCB-10SA	1-128
	SCB3-	1-127
	SCB3-38	1-127
	SCB4-	1-128
	SCB832-	1-128
	SCBA-	1-125
	SCBB-3	1-126
	SCBC-	1-126
S	SCBD-8	1-126
	SCBS632-	1-126
	SCB-XXS	1-128
	SCCVA-	7-35
	SCD-	6-77
	SCMB-	1-90
	SCT-	6-71
	SCW-	8-1
	SCW-3	8-1
	SCW-5	8-1
	SCWA-6	8-1
	SD-	7-48
	SF	9-19
	SF	9-20
	SF	9-21
	SF-	9-19
	SF-	9-20
	SF-	9-21
	SF14722	9-22
	SF28722	9-22
	SF141410	9-22
	SF202013	9-21
	SFA-1	5-58
	SFPC-	7-22
	SFPC-5	7-23
	SFPC-9	7-23
	SFPC-12	7-23
	SFPC-15	7-23
	SFPC-17	7-23
	SFPC-19	7-23
	SFPC-21	7-21

	Part No.	Page
	SFPC-23	7-9
	SI	9-24
	SI3030-1	9-24
	SI8925H5	9-24
	SI30172H	9-24
	SI34132H	9-24
	SI12243H6A	9-24
	SI335125H2	9-24
	SLC-	4-111
	SLC-17	4-110
	SLCA-15	4-112
	SLCB-8	4-110
	SLCC-	4-111
	SLCD-9.5	4-111
	SLCE-13	4-111
	SLCPA-	4-111
	SLP-3	2-74
	SM3-	8-6
	SM4-	8-6
	SM632-	8-6
	SMAP-	4-145
	SMHC-1	1-89
	SMO-	8-6
	SOR-1	1-73
	SOR-2	1-73
	SOR-3	1-73
	SP1-4.8	1-27
	SPK-	7-90
	SPLK-1	7-90
S	SPLK-2	7-91
	SPM-16	5-28
	SPMA-	5-28
	SPMA-12LF	5-28
	SPMB-	5-28
	SQA-	5-40
	SQB-	5-38
	SQCP-3.4	6-57
	SQD-1	5-38
	SQE-	5-37
	SQE-5	5-37
	SQF-	5-37
	SQG-	5-41
	SQG-5	5-42
	SQG-12	5-42
	SQG-13	5-42
	SQG-14	5-42
	SQH-	5-43
	SQHB-	5-44
	SQHB-8	5-45
	SQHB-9	5-45
	SQHB-10	5-43
	SQHB-13	5-45
	SQHB-14	5-43
	SQI-1	5-40
	SQJ-	5-39
	SQJA-	5-39
	SQK-1	5-38
	SQL-1	5-38
	SQM-	5-43
	SQN-	5-42

索引
Index

	Part No.	Page
S	SQR-1	5-40
	SQS-	5-45
	SR	7-50
	SR3-4.7F	7-51
	SR3-13F	7-51
	SR4-	7-51
	SR4-XXF	7-51
	SR4.3-5	7-51
	SR4.5-21.3	7-51
	SR5-	7-51
	SR5-4.5F	7-51
	SR6-	7-51
	SRB-1	7-54
	SRCC-	7-57
	SRCC-12	7-56
	SRCC-16F	7-56
	SRE2.6-4.8	7-52
	SRE3-	7-52
	SRF3.5-	7-53
	SRF4-	7-52
	SRF4-4.6F	7-54
	SRFA3-	7-52
	SRH4.2-8	7-53
	SRLA-29.5	1-65
	SRLA-31.5	1-65
	SRLCB-	1-64
	SRMA-	1-89
	SRMA-2	1-89
	SRMA-2F	1-89
	SRMK-	7-89
	SRMKA-8	7-86
	SRR2-	7-53
	SRR3.5-7.5	7-53
	SRR4.5-	7-52
	SRRH4.5-	7-53
	SRS3-13P	7-54
	SRS3.5-	7-54
	SRS3.5-5P	7-55
	SRS4-	7-55
	SRT	6-71
	SRT-	6-70
	SRTA-1	6-71
	SRU3.5-4.5	7-58
	SS-	1-74
	SS1-	1-73
	SS1-XXL	1-73
	SS1-XXS	1-73
	SS2-	1-74
	SS2-2.5U	1-74
	SS2-XXS	1-74
	SS3-7(1.3)	1-73
	SS3.5-	1-75
	SS4-	1-75
	SSA-12.7	1-74
	SSA4-5.5	1-74
	SSDU1-3.5	1-28
	SSDU-9.2	1-28
	SSDU-9.6	1-28
	SSDUA-16.5	1-28
	SSU4-	1-74

	Part No.	Page
S	SSUA4-6.3L	1-75
	SSUL-8	1-73
	ST-	5-53
	ST-9	5-54
	ST-19	5-54
	ST-23	5-54
	STAT-CV24	7-41
	STB-	5-60
	STC-	5-55
	STCA-	5-56
	STCB-110	5-56
	STCC-123	5-51
	STCL-100	5-56
	STGM-	5-9
	STL-	5-61
	STM3-	8-10
	STM4-	8-10
	STM5-	8-10
	STM6-12	8-10
	STM632-	8-10
	STO-	5-54
	STP-3.5	7-101
	SUM-6	6-48
	SUMA-6	6-48
	SUS632	8-18
	SUS832	8-18
	SVDOC-	7-15
	SVDOC-1S	7-15
	SVDOC-2	7-15
	SWB-	5-66
	SWC-	6-78
	SWCL-	6-82
	SWCM-1	4-96
	SWKL-	4-96
	SWPC-	4-96
	SWPK-15F	5-57
	SWPL-	4-89
	SWPL-2	4-90
	SWPL-11	4-90
	SWPL-15S	4-91
	SWPL-16	4-93
	SWPL-18	4-93
	SWPL-19	4-92
	SWPL-20	4-93
	SWPL-21	4-93
	SWPL-23	4-94
	SWPL-27	4-90
	SWPL-37	4-91
	SWPL-43	4-94
	SWPL-46	4-94
	SWPL-50	4-95
	SWPL-52	4-95
	SWPL-55	4-95
	SWPL-59	4-95
	SWPL-64	4-94
	SWPL-65	4-90
	SWPL-66	4-90
	SWPL-69	4-93
	SWPL-72	4-92
	SWPL-73	4-90

	Part No.	Page
S	SWPL-76	4-91
	SWPL-78	4-94
	SWPL-82	4-93
	SWPL-87	4-95
	SWPL-88	4-90
	SWPL-94	4-91
	SWPL-96	4-90
	SWPL-98	4-95
	SWPL-100	4-90
	SWPL-101	4-94
	SWPL-103	4-90
	SWPL-105	4-92
	SWPL-106	4-92
	SWS311030	6-61
	SWV-4	8-3
	SWVB-1	8-2
T	TC-	6-1
	TC-	6-2
	TC-2	6-3
	TC-3	6-3
	TC-8	6-4
	TC-13	6-4
	TC-19	6-3
	TC-20	6-4
	TC-23	6-3
	TC-24	6-7
	TC-25	6-7
	TC-26	6-6
	TC-28-	6-7
	TC-30	6-7
	TC-31	6-6
	TC-35	6-4
	TC-38	6-4
	TC-39	6-5
	TC-40	6-4
	TC-41	6-5
	TC-42	6-6
	TC-45	6-3
	TC-47	6-6
	TC-48	6-3
	TC-52	6-5
	TC-54	6-7
	TC-59	6-6
	TC-60	6-3
	TC-61	6-4
	TC-62	6-5
	TC-63	6-6
	TC-65	6-8
	TC-67	6-3
	TC-68	6-3
	TC-72	6-3
	TC-73	6-3
	TC-74	6-3
	TC-78	6-7
	TC-79	6-5
	TCBA-	1-51
	TCBC-8.7	1-59
	TCBC-13.7	1-59
	TCBD-4.8	1-60
	TCBE-8.7	1-60

	Part No.	Page
T	TCBE-13.7	1-60
	TCBH-17F	1-60
	TCBS-	1-62
	TCBS-18	1-62
	TCBT-	1-62
	TCBT-3.6	1-62
	TCBT-19	1-62
	TCEA-1	1-92
	TCEB3-	1-65
	TCEB3-9.5	1-65
	TCEB3-11.1	1-65
	TCEB4-	1-65
	TCEB4-9.5	1-65
	TCEB4-11.1	1-65
	TCEB632-	1-65
	TCEB632-9.5	1-65
	TCEB632-11.1	1-65
	TCEH-	1-129
	TCEP4-	1-129
	TCP-1	6-22
	TCSE-	6-8
	TCSF-	6-10
	TERBL-6	10-3
	TERBL-33	10-3
	TEST-1	10-5
	TEST-2	10-6
	TEST-3	10-6
	TEST-3S	10-6
	TEST-4	10-7
	TEST-5	10-7
	TEST-6	10-7
	TEST-7	10-6
	TEST-7CN	10-6
	TEST-8	10-7
	TEST-9	10-8
	TEST-10	10-7
	TEST-12	10-8
	TEST-22	10-7
	TEST-23	10-8
	TEST-24	10-8
	TEST-25	10-8
	TEST-26	10-8
	TEST-27	10-8
	TEST-28	10-8
	TEST-31	10-7
	TEST-34	10-7
	TEST-55	10-6
	TEST-87	10-6
	TEST-114	10-9
	TEST-115	10-9
	TEST-129	10-6
	TEST-136	10-8
	TEST-140	10-8
	TEST-159	10-7
	TF-	5-24
	TF-1	7-100
	TF-017	9-11
	TF-018	7-107
	TF-041	9-14
	TF-143	7-107

	Part No.	Page
T	TF-144	7-107
	TF-147	7-107
	TF-222	5-25
	TF-246	7-23
	TF-250	8-3
	TF-263	2-30
	TF-268I	7-82
	TF-283	9-14
	TF-346	5-8
	TF-356	9-12
	TF-395	5-17
	TF-444	2-30
	TF-448	9-11
	TF-546	9-14
	TF-561	9-11
	TF-568	7-104
	TF-589	7-12
	TF-605	9-5
	TF-1198	6-84
	TF-1298	2-21
	TF-1333	5-9
	TF-1575	6-85
	TF-1596	9-22
	TF-1627	9-22
	TF-1639	6-85
	TF-1643	5-25
	TF-1654	5-9
	TF-1679	6-84
	TF-1698	9-21
	TF-1750	5-8
	TF201113	9-22
	TFA-2	7-101
	TFF-	9-11
	TGM-	5-10
	TGM-	5-11
	TGM-10SW	5-15
	TGM-13SW	5-15
	TGM-17SW	5-15
	TGM-49	5-12
	TGM-58	5-14
	TGM-67	5-12
	TGM-69	5-14
	TGM-71	5-12
	TGM-73	5-13
	TGM-74	5-14
	TGM-76	5-12
	TGM-88	5-12
	TGM-96	5-13
	TGM-112	5-14
	TGM-117	5-13
	TGM-123	5-12
	TGM-124	5-12
	TGM-126	5-14
	TGM-128A	5-15
	TGM-132	5-14
	TGM-140	5-12
	TGM-141	5-12
	TGM-149	5-12
	TGM-152	5-12
	TGM-166	5-12

索引
Index

	Part No.	Page
T	TGM-174	5-12
	TGM-176	5-14
	TGM3-	5-15
	TGM4-	5-15
	TGM632-10	5-15
	TGU-1	5-11
	TH-	4-121
	TH-2	4-122
	THA-	4-113
	THC-	4-113
	THC-5	4-114
	THCA-1	4-115
	THCC-1	4-63
	THCS-1F	1-129
	THCS-2	1-129
	THD-	4-114
	THE-	4-112
	THEL-41	4-112
	THF-1	4-116
	THFA-1	4-116
	THG-	4-115
	THH-	4-115
	THI-4	4-114
	THJ-15	4-115
	THJA-1	4-118
	THL-4.8	4-114
	THM-1	4-118
	THMA-1	4-122
	THMB-	6-65
	THMC-1	6-65
	THMK-1	6-65
	THN-1	4-113
	THP-1	4-74
	THR5-8	8-14
	THRI3-6	8-13
	THRI4-7	8-13
	THRI6-	8-14
	THRIA3-2.4	8-13
	THU-	4-122
	THV-	4-109
	THV-11	4-108
	THV-14	4-110
	THV-15	4-110
	THV-16	4-110
	THV-17	4-110
	THVA-1	4-107
	THVB-1	4-107
	THVC-1	4-43
	THVD-1	4-109
	THW-	4-110
	TL-	4-118
	TM-	4-122
	TNF-1	9-14
	TNF-2	9-13
	TNF-3	9-14
	TNF-5	9-13
	TNF-6	9-13
	TNF-7	9-13
	TNF-9	9-14
	TNF-15	9-14

	Part No.	Page
T	TNF-19	9-14
	TNF-40	9-13
	TNF-41	9-13
	TNF-44	9-13
	TNF-46	9-14
	TNF-47	9-14
	TNFF-1	9-13
	TNFF-2	9-13
	TNFF-3	9-13
	TNFF-4	9-13
	TO-	6-70
	TO-3APF	6-36
	TO-3PAWO	6-69
	TO-3PCV	6-70
	TO-5	6-35
	TO-05	6-33
	TO-18	6-33
	TO-66	6-36
	TO-92	6-34
	TO-220AWO	6-69
	TO-220CV	6-70
	TO-220ST	6-14
	TOA-92-9.5	6-34
	TP-	1-116
	TP-10BA	1-122
	TP-10.8	1-116
	TP-11.2	1-116
	TP-23-1	1-117
	TP-25ST	1-122
	TP-32.7L	1-116
	TP-XXS	1-116
	TP-XXSUS	1-122
	TP2-	1-115
	TP2-XXS	1-115
	TP2L-4	1-114
	TP2.5-	1-115
	TP2.5-2-6	1-115
	TP2.5-6L	1-115
	TP2.6-	1-115
	TP3-2.5-6	1-116
	TP3-6	1-116
	TP3-7.5	1-116
	TP3-9ST	1-123
	TP3-45ST	1-123
	TP3-45LST	1-123
	TP3-XXL	1-117
	TP3.5-3-8	1-117
	TP4-	1-118
	TP4-XXL	1-118
	TP4-XXR	1-118
	TP-5S	1-116
	TP-5SM	1-116
	TP-6S	1-116
	TP-6ST	1-123
	TP-6ST-1	1-123
	TP-7-4	1-116
	TP-8L	1-117
	TP-9-4	1-116
	TP5-60	1-118
	TP440-	1-119

	Part No.	Page
T	TP632-	1-119
	TP632-17	1-119
	TP632-19.05BA	1-123
	TP632-25.4BA	1-123
	TP632-M310	1-119
	TP632-XXL	1-120
	TP632-XXS	1-119
	TP832-	1-120
	TP832-9.5	1-120
	TPA-4	1-114
	TPB3-20NI	1-123
	TPB3-40NI	1-123
	TPD-19	1-117
	TPIM2.5-3-42	1-124
	TPIM4-90	1-124
	TPR4-15	1-114
	TPS-	1-116
	TPS3-7ST	1-123
	TPS4-	1-118
	TPS4-XXL	1-118
	TPS44-11	1-117
	TPS632-6	1-117
	TR-	6-42
	TR-	6-43
	TR-3	6-47
	TR-4	6-36
	TR-6	6-36
	TR-9	6-46
	TR-12	6-47
	TR-18	6-44
	TR-19	6-47
	TR-24	6-44
	TR-25	6-44
	TR-31	6-47
	TR-32	6-48
	TR-33	6-48
	TR-37	6-44
	TR-41	6-48
	TR-42	6-48
	TR-43	6-48
	TR-46	6-53
	TR-50	6-47
	TR3-	6-47
	TR3-11-1	6-34
	TRA-1	6-53
	TRAB-1	6-53
	TRAC-	6-53
	TRAD-0.9	6-53
	TRAE-2.35	6-53
	TRB-	6-35
	TRB-3	6-64
	TRB-4	6-64
	TRB-12	6-63
	TRC-1	6-35
	TRCMP-	6-15
	TRD-1	6-45
	TRE-1-1	6-51
	TRF-1	6-45
	TRG-	6-44
	TRGB-1	6-49

	Part No.	Page
T	TRGC-4.5	6-48
	TRGL-1	6-45
	TRGS-9	6-44
	TRGV-	6-44
	TRK-	6-11
	TRK-8	6-12
	TRK-9	6-12
	TRK-10	6-12
	TRK-12	6-12
	TRK-16F	6-9
	TRK-17AF	6-9
	TRK-22	6-12
	TRK-35	6-9
	TRK-40	6-12
	TRMC-	6-13
	TRMC-5	6-14
	TRMC-6	6-14
	TRMC-8	6-14
	TRMC-10	6-16
	TRMC-11	6-16
	TRMC-12	6-16
	TRMC-35	6-14
	TRMC-49	6-14
	TRMC-53	6-15
	TRMC-68	6-16
	TRMC-76	6-14
	TRMC-77	6-14
	TRMC-78	6-14
	TRMC-121	6-14
	TRMC-122	6-14
	TRMC-123	6-14
	TRMC-124	6-14
	TRMC-126	6-14
	TRMC-135	6-15
	TRMH-20	7-104
	TRO-7.5	6-44
	TRS-	6-45
	TRU-	6-45
	TRW-	6-46
	TRW3-	6-46
	TRW3-3	6-47
	TRW3-4	6-47
	TRW3-5	6-47
	TRW3-7	6-47
	TRWA-1	6-46
	TRWF-	6-46
	TSC-	6-79
	TSC-3	6-82
	TSC-4	6-80
	TSC-5	6-80
	TSC-6	6-80
	TSC-7	6-83
	TSC-9	6-81
	TSC-18	6-82
	TSC-20	6-81
	TSC-22	6-78
	TSC-23	6-78
	TSC-24	6-83
	TSC-25	6-80
	TSC-26	6-80

	Part No.	Page
T	TSC-27	6-83
	TSC-28	6-80
	TSC-29	7-49
	TSC-36	6-82
	TSC-38	6-82
	TSC-40	6-80
	TSC-42	6-81
	TSC-45	6-80
	TSC-49	6-80
	TW-	6-23
	TW-	6-24
	TW-	6-25
	TW-	6-26
	TW-72	6-30
	TW-94	6-30
	TW-95	6-30
	TW-112	6-30
	TW-121	6-30
	TW-122	6-30
	TW-125	6-28
	TW-133	6-28
	TW-147	6-27
	TW-180	6-27
	TW-190	6-30
	TW-191	6-30
	TW-236	6-27
	TW-241	6-27
	TW-248	6-30
	TW-277	6-27
	TW-285	6-30
	TW-290	6-30
	TW-297	6-27
	TW-298	6-28
	TW-299	6-28
	TW-312	6-27
	TWC-	6-28
	TWC-1	8-27
	TWC-2	8-28
	TWC-4	8-25
	TWC-8	8-28
	TWC-14	8-24
	TWC-15	8-27
	TWC-17	8-24
	TWC-19	8-27
	TWU-	8-26
U	U-	6-31
	UB-3S	1-76
	UB-4	1-76
	UB-6	1-76
	UB-6D	1-76
	UB-6E	1-75
	UB-14D	1-76
	UB-XXA	1-75
	UBD-1	1-75
	UBD-2	1-75
	UCBS-	1-44
	UCBS-5A	1-44
	UCBSL-9	1-45
	UCBSL-10	1-45
	ULCB-	1-85

索引
Index

	Part No.	Page
U	ULCB-9S	1-85
	ULCB-15	1-85
	ULCB-38	1-85
	ULCBA-5	1-82
	ULCBA-7.8	1-83
	ULCBB-7.9	1-84
	ULCBB-12.7L	1-84
	ULCBM4-9.5	1-81
	ULCC-	1-80
	ULCD-7.8	1-80
	ULCE-9	1-83
	ULCF-	1-76
	ULCG-1	3-19
	ULCG-2	3-20
	ULCH-1	1-81
	ULCH-2	1-80
	ULCH-2S	1-80
	ULCI-11	1-80
	ULCIJ-4	1-80
	ULCK-6.4	1-79
	ULCKA-15.6	1-79
	ULCN-1	1-137
	ULCN-3	1-137
	ULCN1.7-2.4	1-137
	ULCN2.2-1.2	1-137
	ULCN2.5-	1-137
	ULCN2.5-1.2	1-137
	ULCN3.4-	1-137
	ULCN6.3-1.6	1-137
	ULCN6.6-1.2	1-138
	ULCN6.6-1.6	1-138
	ULCNA2.5-1.8	1-139
	ULCNA2.5-1.8S	1-139
	ULCNA2.5-4.3	1-139
	ULCNA4-1.8	1-139
	ULCND1.5-1.1	1-139
	ULCND2.5-1.6	1-141
	ULCNF2.5-1.2	1-139
	ULCO2.1-2	1-137
	ULCO2.4-	1-137
	ULCO2.4A-3.1	1-137
	ULCO2.5-	1-137
	ULCO3.8-1.6	1-138
	ULCO3.8-1.6S	1-138
	ULCO6.6-	1-138
	ULCO6.6-2.6	1-137
	ULCO6.6-3.1S	1-138
	ULCOA5-1.6A	1-139
	ULCOB-1	1-138
	ULCOB-2	1-138
	ULCOB3.3-2.3	1-138
	ULCOB3.4-1.6	1-139
	ULCOB6-1.6	1-138
	ULCOB6-2.3	1-138
	ULCOC-1	1-140
	ULCOC-2	1-140
	ULCOC-2L	1-140
	ULCOC-4	1-141
	ULCOC-7L	1-140
	ULCOC-8	1-141

	Part No.	Page
U	ULCOC-9	1-140
	ULCOC-12	1-141
	ULCOC-14	1-140
	ULCOC2.4-2.6	1-141
	ULCOD-1	1-141
	ULCOD1.5-1.6	1-141
	ULCOE-3ST	1-140
	ULCOE-4ST	1-140
	ULCOF-2F	1-143
	ULCOF-6F	1-144
	ULCOF-6LF	1-144
	ULCOF-6SF	1-144
	ULCOF-7F	1-144
	ULCOF-7LF	1-144
	ULCOF-9F	1-142
	ULCOF-9MF	1-142
	ULCOF-9SF	1-142
	ULCOF-10F	1-143
	ULCOF-14LF	1-144
	ULCOF-17F	1-144
	ULCOF-19F	1-142
	ULCOF-20F	1-143
	ULCOF-21LF	1-144
	ULCOF-23F	1-143
	ULCOG2.5-1.6	1-138
	ULCOG6.3-1.6	1-138
	ULCOI-3F	1-146
	ULCOI-5F	1-146
	ULCOI-6(BU2)F	1-145
	ULCOI-6S(BU2)F	1-145
	ULCOI-8BU2F	1-145
	ULCOI-9F	1-146
	ULCOI-XXF	1-145
	ULCOI3-6.6F	1-146
	ULCOJ-1	1-138
	ULCOM-1	1-142
	ULCON-1-6F	1-147
	ULCON-1F	1-147
	ULCON-1M-6F	1-147
	ULCON-3F	1-148
	ULCON-7F	1-148
	ULCON-8F	1-147
	ULCOP-6.6F	1-147
	ULCSA-8	1-81
	ULCSA-8S	1-81
	ULCSA-16	1-81
	ULCSA-16S	1-81
	ULCSA-28.8S	1-82
	ULCSD-5	1-82
	ULCSE-	1-83
	ULCSE-7	1-83
	ULCSF-6.6	1-82
	ULCW2.5-1.6	1-137
	ULCY-1	1-139
	ULCY-2	1-139
	ULCY3.9-1.6	1-139
	ULCZ-1.6	7-54
	ULD-1	1-142
	ULF-1(BU)F	1-148
	ULF-3.6(BU)F	1-149

	Part No.	Page
U	UNCV-	1-149
	UPA-	6-32
	UPB-1	6-32
	UPC-	8-25
	UPD-1	8-28
	USB3C-	7-8
	USBC-	7-1
	USBC-1	7-2
	USBC-3	7-2
	USBC-7	7-2
	USBC-8	7-2
	USBC-9	7-3
	USBC-10	7-3
	USBC-13	7-3
	USBC-15	7-3
	USBC-16	7-4
	USBC-17	7-5
	USBC-21	7-8
	USBC-25	7-4
	USBC-30	7-5
	USBC-31	7-3
	USBC-34	7-2
	USBC-42	7-2
	USBH-1	7-8
	UT-	6-29
	UT-14	6-32
V	V-	6-75
	VC	6-73
	VCBA-14.4F	1-40
	VCBS-	1-39
	VCBSL-	1-39
	VCO	5-59
	VCP	6-74
	VGAB-	7-33
	VGAC-1	7-31
	VRCV-1	6-51
	VRCVA-	6-78
W	W2LK-1	4-58
	WAK-1	4-135
	WAL-	4-135
	WAS-1	4-76
	WBH-	1-68
	WBHB-1.8	1-68
	WBHC-6.4	1-67
	WC-	4-28
	WC-1	4-27
	WC-4	4-30
	WCA-1	4-23
	WCC-	4-23
	WCC-5	4-24
	WCC-6	4-24
	WCC-7	4-24
	WCC-9	4-24
	WCD-	4-22
	WCL-	4-29
	WCL-1	4-28
	WCL-2	4-132
	WCL-3	4-132
	WCL-11	4-28
	WCL-12	4-28

	Part No.	Page
W	WCL-13	4-28
	WCL-15	4-28
	WCL-23	4-28
	WCL-29	4-28
	WCL-30	4-27
	WCLA-1	4-30
	WCLB-1	4-78
	WCLL-1	4-33
	WCM-	4-33
	WCM-10	4-34
	WCM-11	4-34
	WCS-	4-32
	WCT-	4-28
	WDF-	4-22
	WDT-20	4-18
	WKA-1	4-83
	WKL-10	4-116
	WKM-	4-83
	WL-	4-88
	WL3-XXH	10-5
	WL3-XXT	10-4
	WL4-XXH	10-5
	WL4-XXT	10-4
	WL5-70H	10-5
	WL5-70T	10-4
	WL6-78H	10-5
	WL6-78T	10-4
	WLB-	4-58
	WLC-1	10-5
	WLCF-	1-76
	WLD-XXH	10-5
	WLD-XXT	10-5
	WLF-	4-57
	WLG-1	4-37
	WLL-	4-35
	WLL-2	4-36
	WLL-3	4-36
	WLL-6	4-36
	WLL-8	4-39
	WLL-9	4-36
	WLL-10	4-36
	WLL-11	4-39
	WLL-12	4-39
	WLL-17	4-36
	WLL-18	4-36
	WLL-21	4-36
	WLL-22	4-36
	WLL-23	4-36
	WLL-26	4-39
	WLL-27	4-38
	WLL-28	4-39
	WLL-29	4-39
	WLL-32	4-38
	WLL-33	4-38
	WLL-35	4-39
	WLL-36	4-36
	WLLC-1	6-66
	WLLD-14	4-38
	WLLT-	4-43
	WLLT-1	4-42

	Part No.	Page
W	WLM-1	4-57
	WLN-	4-57
	WLO-	4-85
	WLT-	4-58
	WLU-	4-37
	WMEA-1	7-103
	WMEZ-	7-103
	WPBT-1	6-57
	WPEG-	4-81
	WPEM-	4-80
	WRA-	4-27
	WS	8-29
	WS	8-30
	WSA6-	8-28
	WSB-	4-30
	WSBC-1	4-83
	WSBH-	4-66
	WSC-1	8-26
	WSF-3	8-26
	WSG-1	8-25
	WSH-1	8-28
	WSK-1	4-23
	WSQ4-2	5-13
	WSR9.1-8.6-1	8-28
	WSS-1	4-30
	WSS-2	4-76
	WSSA-1	4-73
	WSU-1	8-24
	WSU-515	8-27
	WSUA-	8-23
	WSUB-	8-27
	WSUC-	8-23
	WSW8-3.4-0.5	8-22
	WT-	4-35
	WT-11	4-42
	WT-2	4-34
	WTC-	4-42
	WTL-	4-116
	WUCD-100	4-75
	WUCD-36	4-72
	WUCDF-100	4-75
	WUD-1	4-43
X	XLR-	7-16
Y	YES-	1-70
	YJ-	5-49
	YJ-	5-50
	YJ-123	5-52
	YJ-98X	5-50
	YJECL-	4-125
	YJHH-4.8	5-58
	YJ-R	5-47
	YJ-R	5-48
	YJ-R151	5-52
	YJ-R191	5-52
	YJ-R231	5-52
	工具	5-67
	熱縮套管	5-63
	黏貼標誌貼紙	5-66
	織布管	5-64

ISO證書
ISO Certificates

ISO 9001 / ISO 14001 / ISO 45001 /
ISO 14064-1 / QC 080000 / IATF 16949



















































台北總公司 Taipei Headquarters
221014 新北市汐止區環河街187號
No. 187, Huanhe St., Xizhi Dist.,
New Taipei City, 221014
TEL：+886-2-2692-1498 FAX：+886-2-2692-2498
E-mail：kangyang@kangyang.com.tw

中國東莞廠 Dong Guan Factory, China
523878 廣東省東莞市長安鎮上角社區紅棉路2號
No. 2, Hong Mian Rd., Shang Jiao Management Dist.,
Chang An Town, Dong Guan City,
Guang Dong Prov., 523878, China
TEL：+86-769-8530-5187 FAX：+86-769-8541-1815
E-mail：kysales@dg-kangyang.com

中國蘇州廠 Suzhou Factory, China
215200 江蘇省蘇州市吳江區松陵鎮花港路877號
No. 877, Hua Gang Rd., Song Ling Town, Wujiang Dist.,
Suzhou City, Jiang Su Prov., 215200, China
TEL：+86-512-8067-0100 FAX：+86-512-6343-4598~9
E-mail：kywj@kangyang.net.cn

www.kangyang.com.tw

泰國廠 Thailand Factory
589 M.4, Phraeksa Sub-district,
Mueang Samut Prakarn District,
Samut Prakarn Province 10280 Thailand
TEL：+66-2-323-0588
E-mail：service@th.kangyang.com

越南廠 Vietnam Factory
Lot CN5-1, Yen Phong Industrial Park Expansion,
Yen Trung Commune, Yen Phong Dist.,
Bac Ninh Prov., Vietnam
TEL：+84-222-222-0598
E-mail：service@vn.kangyang.com

美國 USA
Kang Yang International
TEL：+1 847-258-3339
E-mail：solutions@kangyang-usa.com

荷蘭 The Netherlands
Kang Yang Europe B.V.
TEL：+31 (0)345-651937
E-mail：info@kangyang-europe.com

MS CERT ISO 9001 MS CERT ISO 14001 ARES QC 080000 nqa. IATF 16949 ISO 14064 CERTIFICATION INTERCERT SGS ISO 45001 RoHS COMPLIANT